(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 989 241 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
12.01.2005 Bulletin 2005/02

(51) Int Cl.[7]: **E02D 5/36**

(21) Application number: **98203265.8**

(22) Date of filing: **24.09.1998**

(54) **Method for forming concrete piles in the ground**

Verfahren zum Herstellen eines Ortbetonpfahles im Boden

Procédé pour la fabrication de pieux en béton dans le sol

(84) Designated Contracting States:
BE DE FR GB IT NL

(43) Date of publication of application:
29.03.2000 Bulletin 2000/13

(73) Proprietor: **HARENINVEST**
B-2110 Wijnegem (BE)

(72) Inventor: **Cortvrindt, Guy Adolf August**
1790 Affligem (BE)

(74) Representative: **Van Reet, Joseph et al**
Gevers & Vander Haeghen,
Intellectual Property House,
Brussels Airport Business Park
Holidaystraat 5
1831 Diegem (BE)

(56) References cited:
CH-A- 336 337
GB-A- 2 064 627
NL-A- 6 405 193
NL-A- 9 000 865
US-A- 4 180 350

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 989 241 B1

Printed by Jouve, 75001 PARIS (FR)

Description

[0001] The present invention relates to a method for installing concrete piles in the soil, wherein a hole is made in the soil by forcing a soil displacement head, fixed to a tubular rod, into the soil thereby laterally displacing the soil, the tubular rod having a diameter smaller than the diameter of said hole so that a cavity is formed by the hole around the tubular rod, at least the tubular rod is withdrawn from the hole, and, when withdrawing the tubular rod, concrete is injected through this rod into the hole to form the concrete pile therein.

[0002] In practice there exist different methods of the above type for making in situ concrete piles in the soil. First of all, the soil displacement head and the tubular rod can be rammed in the soil to make the required hole therein. When withdrawing the tubular rod, the soil displacement head, which is in fact a relatively simple base plate closing off the lowermost end of the tubular rod, is left in the ground and concrete is injected in the hole through the tubular rod. In this way a so-called ramming pile is formed. In order to avoid the vibrations caused by ramming the tubular rod in the soil, use is usually made in practice of soil displacement auger heads which are screwed in the soil. Examples thereof are the so-called Atlas pile described in FR-B-2 215 075 and the Omega pile described in WO95/12050 in the name of the present applicant. Other soil displacement auger heads are for example disclosed in WO94/02687, US-A-4 458 765, EP-B-0 228 138 and in various other patent publications.

[0003] A problem of these methods for installing concrete piles according to the aforementioned method is that they may cause pollution of the underground, in particular of ground water layers. This problem arises especially in case the hole is to be made through different soil layers comprising a relatively water impermeable layer, for example a clay containing layer, covered by a permeable layer containing just above the water impermeable layer, a layer of polluted water. Since the water impermeable layer does not provide a sufficient bearing capacity, the pile has to extend through this layer into the bearing layer situated thereunder. This bearing layer is, however, permeable for water. Due to the fact that when making the hole, a hollow cavity is formed around the tubular rod, the polluted water can easily penetrate into the bearing layer which is normally not yet polluted. It is clear that a pollution of such deeper ground layers is to be avoided especially since they are often exploited for drinking-water winning.

[0004] An object of the present invention is therefore to propose a new method of the above type which allows installing concrete piles in the soil whilst avoiding possible penetration of pollutants into deeper soil layers.

[0005] To this end, the method according to the invention is characterized in that when forcing the soil displacement head into the soil and forming said cavity around the tubular rod, a liquid material is injected in this cavity, at the bottom thereof, to keep it filled with the liquid material from the soil displacement head upto the soil level.

[0006] Due to the fact that the cavity around the tubular rod is constantly filled with the liquid material, any possible polluted water is prevented from flowing into this cavity when the tubular rod is either screwed or rammed in the soil. It should be noted that WO94/02687 and US-A-4 458 765 also discloses a method wherein a liquid material, in particular concrete, is injected at the bottom in said cavity but the injected concrete is subsequently immediately laterally displaced to reinforce the wall of the hole while this hole is still being made. At the level of a polluted water layer, the reinforced wall will quickly be penetrated by the polluted water, due to the hydrostatic pressure thereof, which water will then meet no further obstacle for flowing to the deeper soil layers. US-A-4 458 765 further also discloses a method wherein the cavity around the tubular rod is filled from the soil surface with concrete when the auger head is screwed in the soil. This concrete is not laterally displaced when screwing the auger head in the soil but instead when it is screwed out of the soil to form a hole with a reinforced wall therein. This method, however, also does not solve the problem of polluted water penetrating to deeper soil layers since it has been found that, by feeding the concrete from the soil surface, the cavity cannot be filled sufficiently completely with concrete to prevent penetration of water to the deeper soil layers. Moreover, when the auger head has been withdrawn from the soil, water can penetrate through the wall of the formed hole and can subsequently easily flow therethrough to the deeper soil layers since the bottom end of this hole is even not covered with concrete.

[0007] In an advantageous embodiment of the method according to the invention, said liquid material has a specific weight and a viscosity higher than that of water.

[0008] In this way, the liquid material will keep the cavity around the tubular rod filled down to the bottom thereof and cannot be urged upwards by penetration of water into this cavity. Due to the higher viscosity, local mixing of the liquid material with possibly polluted water is also prevented.

[0009] In a preferred embodiment of the method according to the invention, said liquid material comprises an aqueous slurry of a clay, in particular of bentonite.

[0010] Other particularities and advantages of the invention will become apparent from the following description of some particular embodiments of the method for installing concrete piles in the soil according to the present invention. This description is only given by way of illustrative example and is not intended to limit the scope of protection. The reference numerals relate to the annexed drawings wherein:

[0011] Figure 1 shows schematically a side elevational view of a drill rig for installing concrete piles in the soil in accordance with the present invention.

[0012] Figure 2 shows schematically the different

steps for installing a pile in the soil by means of the drill rig shown in Figure 1 and in accordance with the method according to the invention.

[0013] The drill rig or installation for installing concrete piles in the soil as illustrated in Figure 1 comprises a crane 1 with a vertical mast 2 provided with an auger motor 3 or drill table which is slidably mounted onto the mast 2. In a variant embodiment, the motor 3 could also be fixed at the bottom of the mast 2. The installation further comprises a bentonite reclaiming unit 4, a bentonite mixing installation 5 and a bentonite pump 6.

[0014] The different steps for installing a concrete pile in the soil are schematically shown in Figure 2. The illustrated soil shows three different soil layers, namely an incoherent top layer 7, a non-bearing, water impermeable intermediate layer 8, and a bearing layer 9. Such a soil profile is for example typical in polders raised by means of dredged materials, the original polder clay forming the intermediate layer 8. Due to contaminants present in the dredged materials or originating from the industry which has developed in these area's, a polluted water layer 10 is often situated on top of the water impermeable layer 8. A problem with such soils is that the polluted water may not be allowed to penetrate to deeper soil layers when installing concrete piles in the soil.

[0015] In the method according to the invention, a hole is made in the soil by forcing a soil displacement head 11, fixed to a tubular rod 12 in the soil so that the soil is displaced laterally over a distance larger than the diameter of the tubular rod 12. In this way, a cavity 13 is thus formed around the tubular rod 12. In the illustrated embodiment, the soil displacement head is a soil displacement auger head 11 which comprises a screw blade 14 so that it can be screwed in and out of the soil. However, if necessary, an additional push down force can further be exerted onto the drill table 3 to enhance the penetration of the auger head 11 into the soil.

[0016] The illustrated auger head corresponds to the auger head disclosed in FR-A-2,215,075 and comprises a lower displacement body part 15 for displacing the soil when screwing in and an upper displacement body part 16 for displacing the soil again when screwing out. An other possible type of auger head is for example disclosed in WO95/12050, the description of which is incorporated herein by way of reference.

[0017] In Figure 2a, the auger head 11 has been screwed according to arrows 17 over a certain distance into the top soil layer 7. An essential feature of the present invention is that a liquid material 18, preferably water-bentonite, is injected at the bottom in the cavity 13 formed along the tubular rod or drill stem 12. In the illustrated embodiment, this is done through two ducts 19 welded or otherwise fixed along the outer side of the tubular rod 12. Alternatively, the ducts 19 could also be provided within the tubular rod 12, preferably integrated into the wall thereof in order not to hamper the possible later insertion of a reinforcement.

[0018] The bentonite slurry is preferably injected so that the cavity is kept filled therewith up to the soil level. On top of the soil, an enclosure 20 is placed around the tubular rod 12 on the soil surface and pushed somewhat in the soil to collect the possible excess of water-bentonite which could flow out of the hole.

[0019] Figure 2b shows the situation wherein the hole has been drilled through the polluted water layer 10. As can be seen, no substantial amount of polluted water has entered the cavity 13 around the tubular rod 12. This can be explained by the fact that the injected water-bentonite has a somewhat higher specific weight than water so that it cannot be urged upwards by the water pressure and by the fact that it is relatively viscous so that the polluted water does not easily mix with the bentonite. In fact, in area's where the bentonite is not stirred, it will quickly form a kind of a rather solid cake.

[0020] In Figure 2c, the hole has been made sufficiently deep into the bearing soil layer 9, a reinforcement 21 has been inserted through the interior of the tubular rod 12 and a concrete mixture is injected also through this tubular rod 12 into the hole, the tip 22, which closed off the concrete channel when screwing in, remaining on the bottom of the hole. Instead of inserting the reinforcement 21 into the tubular rod 12 before injecting the concrete, the reinforcement 21 could also be inserted in the hole after having filled it with concrete. In this way, the ducts 19 could be mounted within the tubular rod 12 without hampering the insertion of the reinforcement 21.

[0021] When injecting the concrete, the auger head 11 is screwed out of the soil according to arrows 23, i. e. in opposite direction of arrows 17. However, in case use is made of an auger head 11 as disclosed in WO95/12050, the auger head could be rotated in the same direction as when screwing in.

[0022] As can be seen in Figures 2c and 2d, the bentonite slurry which has been injected into the cavity 13 is urged out of the hole when screwing the auger head 11 out and is gradually replaced by concrete. At the level of the polluted water layer 10, penetration of water in the hole is thus continuously avoided namely successively by the presence of the bentonite slurry around the tubular rod and subsequently by the concrete which entirely fills the hole.

[0023] During screwing out, the bentonite slurry is mainly urged out of the hole to the soil surface and is collected there in the enclosure 20. As shown in Figure 1, the collected bentonite is pumped through a tubing 24 to the bentonite reclaiming unit 4 wherein sand and other coarse materials are filtered out. The reclaimed bentonite is then pumped through a tubing 25 to the bentonite mixing installation 5 wherein further dry bentonite and water may be added to compensate for the amount of bentonite which may be left in the soil. When making a new hole, the bentonite mixture can be fed through an outlet 26 to the bentonite pump 6, which pumps the bentonite through a tubing 27 into the ducts 19. Since this has to be done when the tubular rod 12 is rotating, an injection ring 28 is provided on top of the tubular rod 12.

This injection ring 28 has not been shown in detail but can easily be designed by a skilled person. It comprises for example a stationary annular space extending around the tubular rod 12 and comprising a fitting for connecting the tubing 27. The bottom of the annular space may consist of a disk, provided with a central opening for the tubular rod, which is rotatably mounted to the stationary part of the injection ring and which comprises two fittings for connecting the ducts 19.

[0024] In the above described embodiment, an aqueous slurry of bentonite was injected in the cavity 13 around the tubular rod 12. This slurry usually contains about 20 to 40 kg dry matter (bentonite) per cubic meter. Instead of bentonite, which forms a relatively solid cake but which does not harden, it is also possible to inject a hardening mixture in the cavity around the tubular rod 12, in particular a mixture comprising water, cement, sand and optionally gravel. As hardening mixture, preference is given to a grout containing water, cement and sand, since such a grout can be injected through relatively narrow ducts 19 and substantially does not increase the frictional resistance against the tubular rod 12. When using a mixture of water, cement, sand and gravel, i.e. a concrete, as hardening mixture, one could consider omitting the ducts 19 and providing instead one or more holes in the tubular rod above the soil displacement head 11 so that, when making the hole, concrete can be injected through the interior of the tubular rod itself.

[0025] When using a hardening mixture and a soil displacement auger head, this auger head has preferably a top portion provided for displacing this hardening mixture at least partially laterally into the soil during screwing out so that a pile with an increased bearing power is obtained. On the other hand, when use is made of a bentonite slurry, this bentonite is preferably removed as much as possible from the hole.

[0026] As mentioned already here before, the present invention is not only applicable to so-called screw piles but also to ramming piles. These piles are in particular made by ramming a steel tube, which is closed off at its lowermost extremity, into the soil. The base plate or head used for closing the tube, also displaces the soil laterally over a distance larger than the diameter of the tube so that, in this case also, a cavity is formed around the tube or tubular rod. When the hole is made, the tube is withdrawn from the hole and concrete is simultaneously poured through the tube into the hole, the head which closed off the tube, remaining in the bottom of the hole.

[0027] Just like described hereinabove for the screw piles, one or more ducts 19 can also be provided along or within the tube or tubular rod 12 of a ramming pile for filling the cavity around this tube with a liquid material. This liquid material may also be bentonite slurry. When withdrawing the tubular rod, this bentonite slurry will indeed be urged to the rod surface by the concrete poured through the tubular rod in the hole. In case of ramming piles, preference is however given to the use of a hardening mixture, in particular of concrete, for filling the cavity. Indeed, due to the fact that the soil displacement head remains in the soil, this hardening mixture has not to be displaced laterally in the soil when withdrawing the tubular rod and will form the outer portion of the pile. Further, no separate injection ducts 19 have to be provided but it is sufficient to provide one or more openings underneath in the tubular rod so that the hardening mixture can be injected through the interior of the tubular rod itself.

[0028] From the above description of some particular embodiments of the method according to the invention, it will be clear that many modifications can still be applied thereto without leaving the scope of the invention as defined by the appended claims.

[0029] In particular, it should be noted that the liquid material which is injected in the cavity around the tubular rod, should not necessarily be injected above the soil displacement head but could also be injected at the level of the soil displacement head itself, but then above the portion of this head showing the maximum diameter. Indeed, when injecting the liquid material below this maximum diameter, it has to be injected in the soil at a relatively high pressure so that this soil is disintegrated and mixed with the liquid material. Since this mixture is further laterally displaced, it will be difficult to obtain in this way an effective seal against penetration of the polluted water along the tubular rod into deeper layers.

Claims

1. A method for installing concrete piles in the soil, wherein a hole is made in the soil by forcing a soil displacement head (11), fixed to a tubular rod, (12) into the soil thereby laterally displacing the soil, the tubular rod (12) having a diameter smaller than the diameter of said hole so that a cavity (13) is formed by the hole around the tubular rod (12), at least the tubular rod (12) is withdrawn from the hole, and, when withdrawing the tubular rod (12), concrete is injected through this rod (12) into the hole to form the concrete pile therein, **characterized in that** when forcing the soil displacement head (11) into the soil and forming said cavity (13) around the tubular rod (12), a liquid material (18) is injected in this cavity (13), at the bottom thereof, to keep it filled with the liquid material (18) from the soil displacement head (11) up to the soil level.

2. A method according to claim 1, **characterized in that** said soil displacement head (11) is a soil displacement auger head and is screwed in the soil to make said hole therein.

3. A method according to claim 1, **characterized in that** said soil displacement head (11) and the tubu-

lar rod (12), to which the soil displacement head (11) is fixed, are rammed in the soil.

4. A method according to any one of the claims 1 to 3, **characterized in that** when withdrawing the tubular rod (12) the liquid material (18) injected into said cavity (13) is urged at least partially out of the hole.

5. A method according to claim 4, **characterized in that** the liquid material (18) urged out of the hole is collected at the soil surface and is reclaimed for use when installing a further concrete pile in the soil.

6. A method according to any one of the claims 1 to 5, **characterized in that** said liquid material (18) has a specific weight and a viscosity higher than that of water.

7. A method according to any one of the claims 1 to 6, **characterized in that** said liquid material (18) comprises an aqueous slurry of a clay, in particular of bentonite.

8. A method according to any one of the claims 1 to 6, **characterized in that** said liquid material (18) comprises a hardening mixture, in particular a mixture comprising water, cement, sand and optionally gravel.

9. A method according to claim 8, **characterized in that** said soil displacement head (11) is a soil displacement auger head which is screwed in the soil when making said hole therein and which is screwed out of the hole when withdrawing the tubular rod (12), at least a portion of said hardening mixture (18) being displaced laterally in the soil when screwing the soil displacement auger head out of the hole.

Patentansprüche

1. Ein Verfahren zur Anbringung von Betonpfählen im Boden, wobei ein Loch in den Boden getrieben wird, indem ein Bodenverdrängungskopf (11), befestigt an einer Rohrstange (12), in den Boden getrieben wird, wodurch der Boden seitlich verdrängt wird, wobei die Rohrstange (12) einen Durchmesser hat, der geringer als der Durchmesser des erwähnten Loches ist, sodass ein Hohlraum (13) durch das Loch um die Rohrstange (12) geformt wird, zumindest wenn die Rohrstange (12) aus dem Loch gezogen ist, und, beim Herausziehen der Rohrstange (12) Beton durch diese Stange (12) in das Loch injiziert wird, um darin den Betonpfahl zu bilden, **dadurch gekennzeichnet, dass**, wenn der Bodenverdrängungskopf (11) in den Boden getrieben wird und der erwähnte Hohlraum (13) um die Rohrstange (12) gebildet wird, ein flüssiges Material (18) in diesen Hohlraum (13) injiziert wird, an dessen Boden, damit er mit dem flüssigen Material (18) vom Bodenverdrängungskopf (11) bis hinauf zum Bodenniveau gefüllt bleibt.

2. Ein Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** der erwähnte Bodenverdrängungskopf (11) ein Bodenverdrängungsbohrkopf ist und in den Boden geschraubt wird, um das erwähnte Loch zu machen.

3. Ein Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** der erwähnte Bodenverdrängungskopf (11) und die Rohrstange (12), an der der Bodenverdrängungskopf (11) befestigt ist, in den Boden gerammt werden.

4. Ein Verfahren nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** das flüssige Material (18), das in den erwähnten Hohlraum (13) injiziert wurde, beim Herausziehen der Rohrstange (12), zumindest teilweise aus dem Loch gedrängt wird.

5. Ein Verfahren nach Anspruch 4, **dadurch gekennzeichnet, dass** das flüssige Material (18), das aus dem Loch gedrängt wird, auf der Bodenoberfläche gesammelt und bei der Anbringung eines weiteren Betonpfahls im Boden wiederverwendet wird.

6. Ein Verfahren nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** das erwähnte flüssige Material (18) ein spezifisches Gewicht und eine Viskosität hat, die höher als jene von Wasser sind.

7. Ein Verfahren nach einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** das erwähnte flüssige Material (18) einen wässrigen Schlamm eines Tons, insbesondere von Bentonit, umfasst.

8. Ein Verfahren nach einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** das erwähnte flüssige Material (18) eine aushärtende Mischung umfasst, insbesondere eine Mischung, die Wasser, Zement, Sand und optional Kies umfasst.

9. Ein Verfahren nach Anspruch 8, **dadurch gekennzeichnet, dass** der erwähnte Bodenverdrängungskopf (11) ein Bodenverdrängungsbohrkopf ist, der in den Boden geschraubt wird, wenn das erwähnte Loch angelegt wird, und der aus dem Loch heraus geschraubt wird, wenn die Rohrstange (12) herausgezogen wird, wobei zumindest ein Teil der erwähnten aushärtenden Mischung (18) seitlich in den Boden gedrängt wird, wenn der Bodenverdrängungsbohrkopf aus dem Loch heraus geschraubt wird.

Revendications

1. Procédé pour l'installation de pieux en béton dans le sol, dans lequel un trou est réalisé dans le sol par le forçage d'une tête de déplacement de sol (11) fixée à une tige tubulaire (12) dans le sol déplaçant latéralement de cette manière le sol, la tige tubulaire (12) présentant un diamètre inférieur au diamètre dudit trou de sorte qu'une cavité (13) soit formée par le trou autour de la tige tubulaire (12), au moins la tige tubulaire (12) est retirée du trou et, lors de l'enlèvement de la tige tubulaire (12), du béton est injecté par cette tige (12) dans le trou pour former le pieu en béton dans celui-ci, **caractérisé en ce que**, lors du forçage de la tête de déplacement de sol (11) dans le sol et de la formation de ladite cavité (13) autour de la tige tubulaire (12), un matériau liquide (18) est injecté dans cette cavité (13), au bas de celle-ci, pour la maintenir remplie de matériau liquide (18) de la tête de déplacement de sol (11) jusqu'au niveau de sol.

2. Procédé suivant la revendication 1, **caractérisé en ce que** ladite tête de déplacement de sol (11) est une tête de tarière de déplacement de sol et est vissée dans le sol pour réaliser ledit trou dans celui-ci.

3. Procédé suivant la revendication 1, **caractérisé en ce que** ladite tête de déplacement de sol (11) et la tige tubulaire (12), à laquelle la tête de déplacement de sol (11) est fixée, sont damées dans le sol.

4. Procédé suivant l'une quelconque des revendications 1 à 3, **caractérisé en ce que**, lors de l'enlèvement de la tige tubulaire (12), le matériau liquide (18) injecté dans ladite cavité (13) est chassé au moins partiellement hors du trou.

5. Procédé suivant la revendication 4, **caractérisé en ce que** le matériau liquide (18) chassé hors du trou est récolté à la surface du sol et est récupéré pour une utilisation lors de l'installation d'un autre pieu en béton dans le sol.

6. Procédé suivant l'une quelconque des revendications 1 à 5, **caractérisé en ce que** ledit matériau liquide (18) présente un poids spécifique et une viscosité supérieurs à ceux de l'eau.

7. Procédé suivant l'une quelconque des revendications 1 à 6, **caractérisé en ce que** ledit matériau liquide (18) comprend une suspension aqueuse d'une argile, en particulier de bentonite.

8. Procédé suivant l'une quelconque des revendications 1 à 6, **caractérisé en ce que** ledit matériau liquide (18) comprend un mélange durcissant, en particulier un mélange comprenant de l'eau, du ciment, du sable et éventuellement du gravier.

9. Procédé suivant la revendication 8, **caractérisé en ce que** ladite tête de déplacement de sol (11) est une tête de tarière de déplacement de sol qui est vissée dans le sol lors de la fabrication dudit trou dans celui-ci et qui est vissée hors du trou lors de l'enlèvement de la tige tubulaire (12), au moins une partie dudit mélange durcissant (18) étant déplacée latéralement dans le sol lors du vissage de la tête de tarière de déplacement de sol hors du trou.

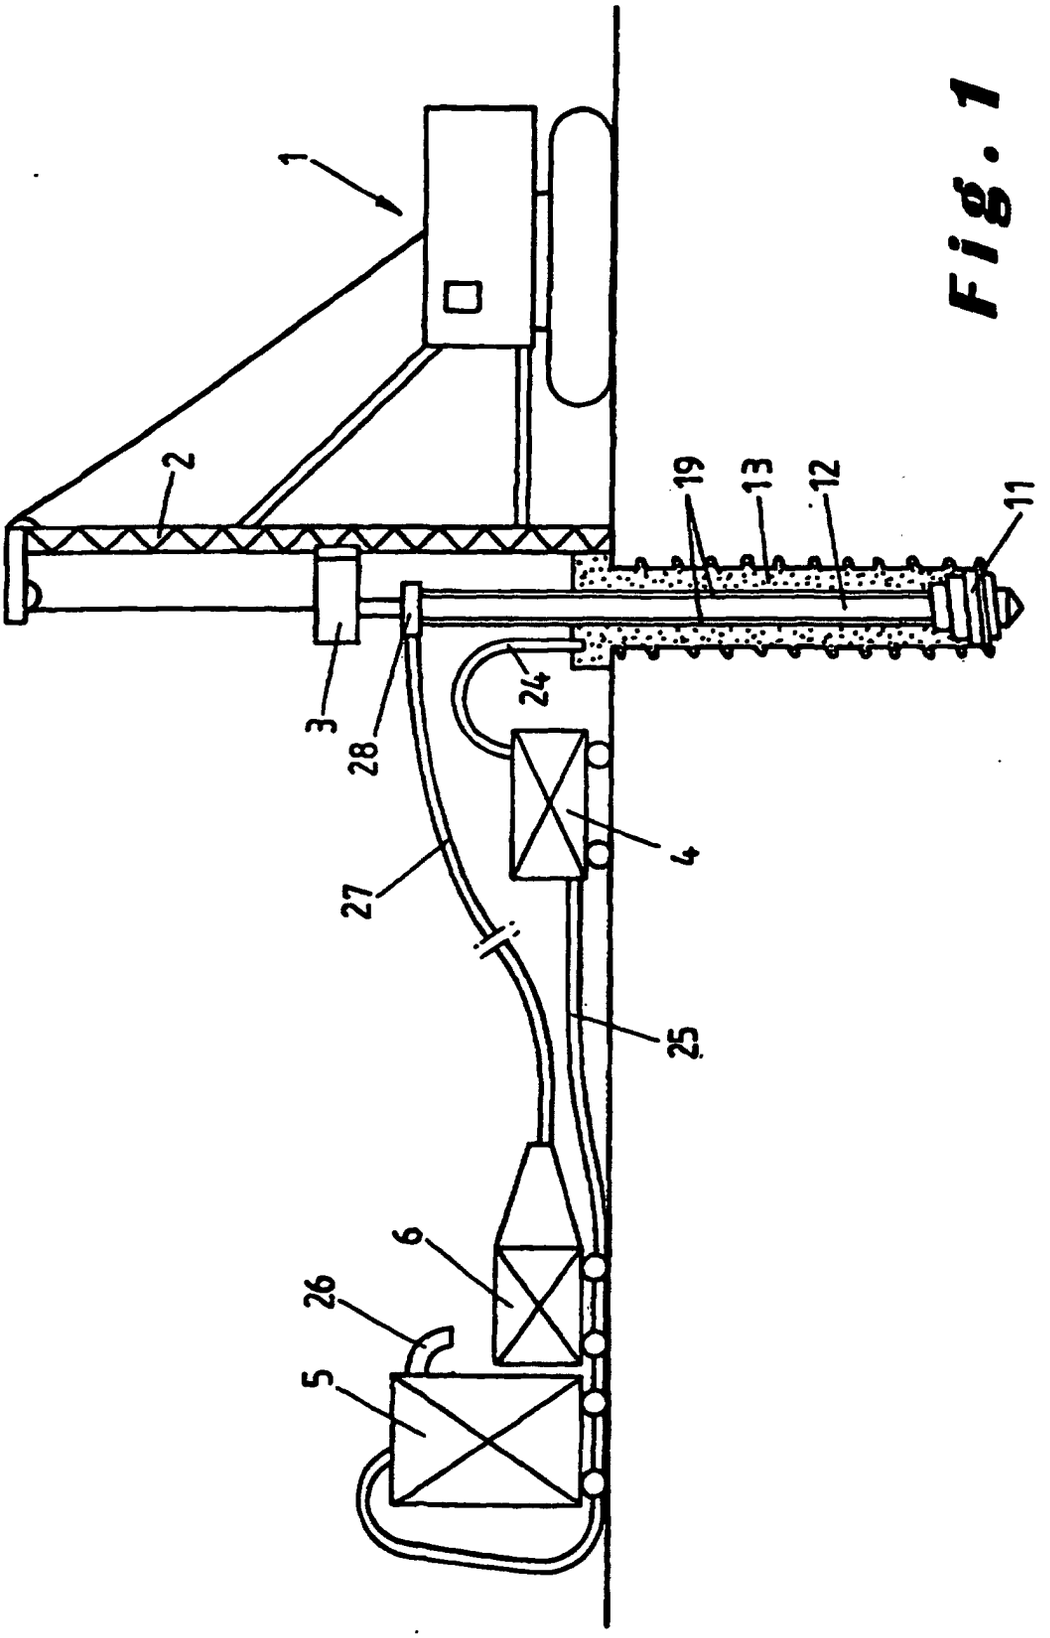


Fig. 1

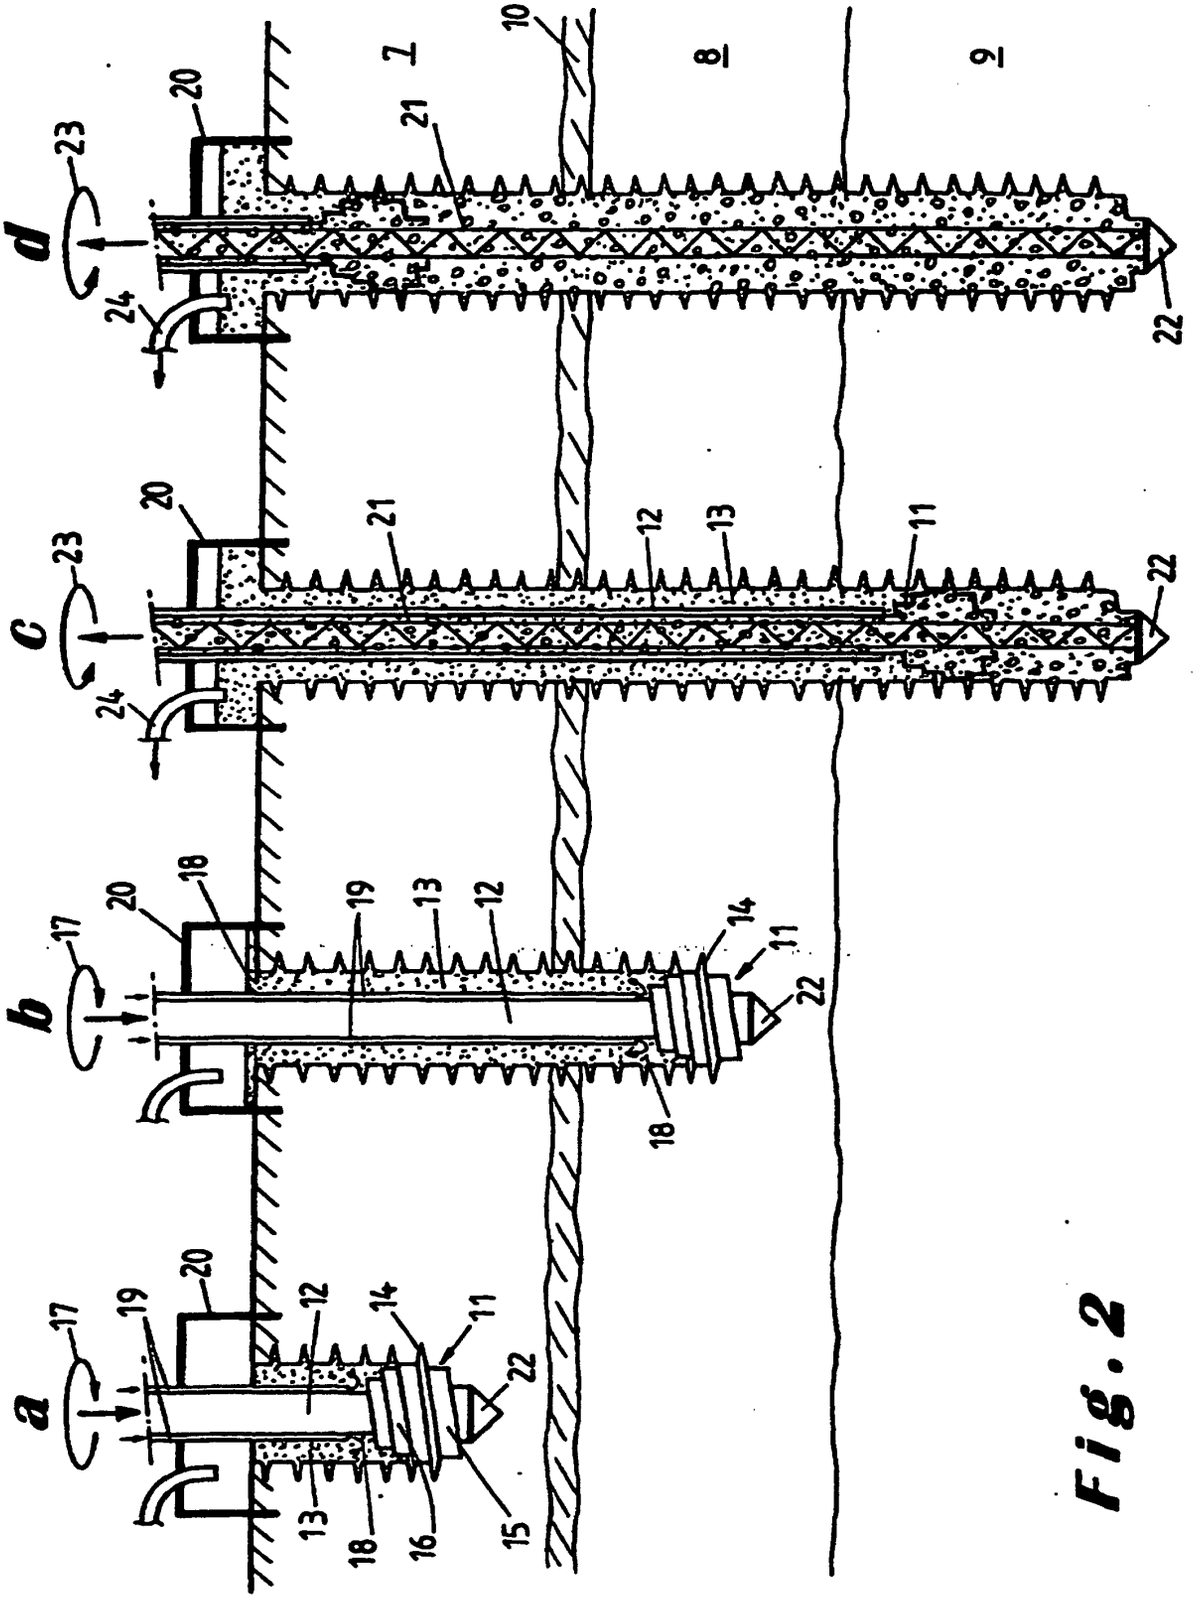


Fig. 2