

12

EUROPEAN PATENT APPLICATION

21 Application number: 81305862.5

51 Int. Cl.³: H 02 M 3/315

22 Date of filing: 14.12.81

30 Priority: 19.12.80 US 218253

43 Date of publication of application:
14.07.82 Bulletin 82/28

84 Designated Contracting States:
DE FR GB IT

71 Applicant: WEBSTER ELECTRIC COMPANY, INC.
1900 Clark Street
Racine Wisconsin 53403(US)

72 Inventor: Francis, Ralph M. Jr.,
2937 Washington Avenue
Racine Wisconsin 53405(US)

74 Representative: Billington, Lawrence Emlyn et al,
HASELTINE LAKE & CO Hazlitt House 28 Southampton
Buildings Chancery Lane
London WC2A 1AT(GB)

54 An electrical power supply.

57 A power supply circuit comprises: an input choke (30) having one end connected to one side (28) of a DC supply source connection from a bridge (20); a transformer (34); and a circuit loop connected between another end of said input choke (30) and another side (38) of said DC supply source connection. This circuit loop includes a series connection of a capacitor (36), a switching device (44) and a primary winding (32) of the transformer (34). The switching device (44) includes a controlled conduction path and a control input (49) for rendering the conduction path conductive. The capacitor (36) is arranged to be charged primarily by the DC supply source bridge (20). There is provided a resistive-

capacitive trigger circuit (54, 56, 58) connected between the DC supply source bridge (20) connection and the control input (49) for repetitively rendering the switching device (44) conductive at a predetermined repetitive rate so as to repetitively discharge the capacitor (36) through the primary winding (32). The transformer (34) includes a secondary winding (64) and has a predetermined turns ratio between the secondary winding (64) and the primary winding (32). The power supply circuit further comprises output circuit means (72, 78) for rectifying and filtering the output of the secondary winding (64) to provide the output of the power supply circuit.

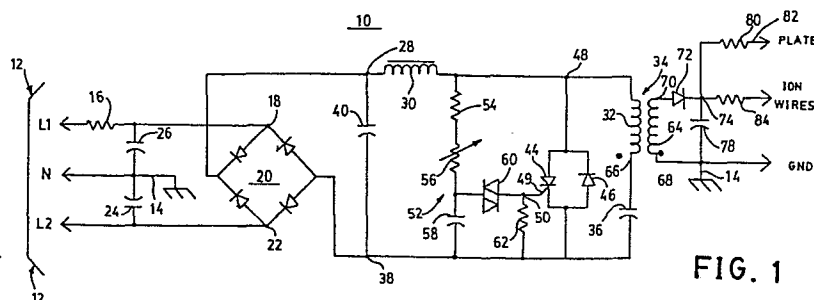


FIG. 1

-1-

AN ELECTRICAL POWER SUPPLY

The present invention relates generally to the field of electrical power supplies, and more particularly to a power supply that operates on a repetitive pulse basis. The invention is particularly, but not necessarily exclusively, applicable to a power supply suitable for use where power requirements are small, for example with electrostatic apparatus.

Low power apparatus utilizing, for example, electrostatically charged components conventionally utilize a standard core and coil type high voltage transformer, and a solid state voltage doubler and filter. The transformer is large, heavy and rather expensive and the voltage doubler circuit with required components is also large and relatively costly. Further, the operation of this type of power supply circuit is usually of relatively low efficiency and of poor power factor correction.

According to the present invention there is provided a power supply circuit comprising:

an input choke having one end connected to one side of a DC supply source connection;

a transformer;

a circuit loop connected between another end of said input choke and another side of said DC supply source connection, said circuit loop including a series connection of a capacitor, a switching device and a primary winding of said transformer, said switching device including a controlled conduction path and a control input for rendering said conduction path conductive, said capacitor being arranged to be charged primarily by said DC supply source;

-2-

a resistive-capacitive trigger circuit connected between said DC supply source connections and said control input for repetitively rendering said switching device conductive at a predetermined repetitive rate so as to repetitively discharge said capacitor
5 through said primary winding;

said transformer including a secondary winding and having a predetermined turns ratio between said secondary winding and said primary winding; and the power supply circuit further comprising

10 output circuit means for rectifying the output of said secondary winding to provide the output of said power supply circuit.

Although low power, e.g. electrostatic, power supplies of the prior art are generally suitable for their intended use, it
15 is always desirable to provide more cost effective and energy efficient power supplies.

A preferred embodiment of the present invention may provide a power supply suitable for example for electrostatic apparatus which is more efficient and more cost effective than
20 power supplies of the prior art.

A preferred embodiment may further provide a power supply suitable for example for electrostatic apparatus that operates on a pulse repetitive basis having a relatively short durational pulse output relative to the period of the repetitive pulse,
25 the repetitive pulse frequency being substantially higher than the operating frequency of conventional supplies.

A preferred embodiment may also provide a power supply suitable for example for electrostatic apparatus wherein, in use, a capacitor is discharged through the primary winding of a high
30 voltage pulse transformer wherein the inductive collapse of the output transformer results in a recovery pulse that is half wave rectified and filtered to provide the output of the power supply at a secondary winding of the high voltage transformer.

One preferred embodiment described in this paragraph
35 may provide a power supply suitable for example for electrostatic apparatus that generates a high voltage output, the high voltage output being provided by the half wave rectification and filtering


-3-

of a pulse signal from a secondary winding of a high voltage pulse transformer. The filtering for most electrostatic applications is primarily accomplished by the capacitance of the electrostatic apparatus. The primary winding side of the high voltage pulse transformer is connected in a series loop circuit with a capacitor and a switching device. The capacitor is charged through an input choke connected to a DC supply source. The DC supply source is commonly achieved by full wave rectification and filtering from a 120 or 240 volt AC power source. The switching device is triggered after the capacitor is charged such that the capacitor is discharged during a firing pulse through the primary winding of the high voltage transformer. The inductive collapse of the high voltage output transformer provides for the turnoff of the switching device and also serves to partially recharge the capacitor. The half wave rectified high voltage output of the power supply is obtained from the recovery pulse of the high voltage pulse transformer. The efficiency of the power supply is improved since ringing in the transformer is dampened due to the extraction of energy from the recovery pulse. The secondary recovery pulse is much higher in amplitude than the firing pulse. The power supply in one arrangement operates to generate repetitive pulses at a frequency of 1-3 KHz. During each repetitive period, the capacitor is charged, the switching device discharges the capacitor, and a short durational recovery pulse is generated, and the capacitor is partially recharged. Several independent outputs with independent output energy of the power supply are obtained by providing respective, independent series combinations of transformers and capacitors with the series combinations being connected in parallel across the switching device. Various outputs may be individually switched without affecting the output of the other independent outputs. The electrostatic apparatus operable by the power supply includes electrostatic air cleaners or filters and electrostatic charging apparatus in office copying equipment.

In many electrostatic applications, the transformer does not require a magnetic core.

For a better understanding of the invention and to show how it may be put into effect reference will now be made by way of example to the accompanying drawings in which:

Fig. 1 is an electrical schematic representation of an embodiment of power supply of the present invention suitable for example for use in operating electrostatic apparatus;

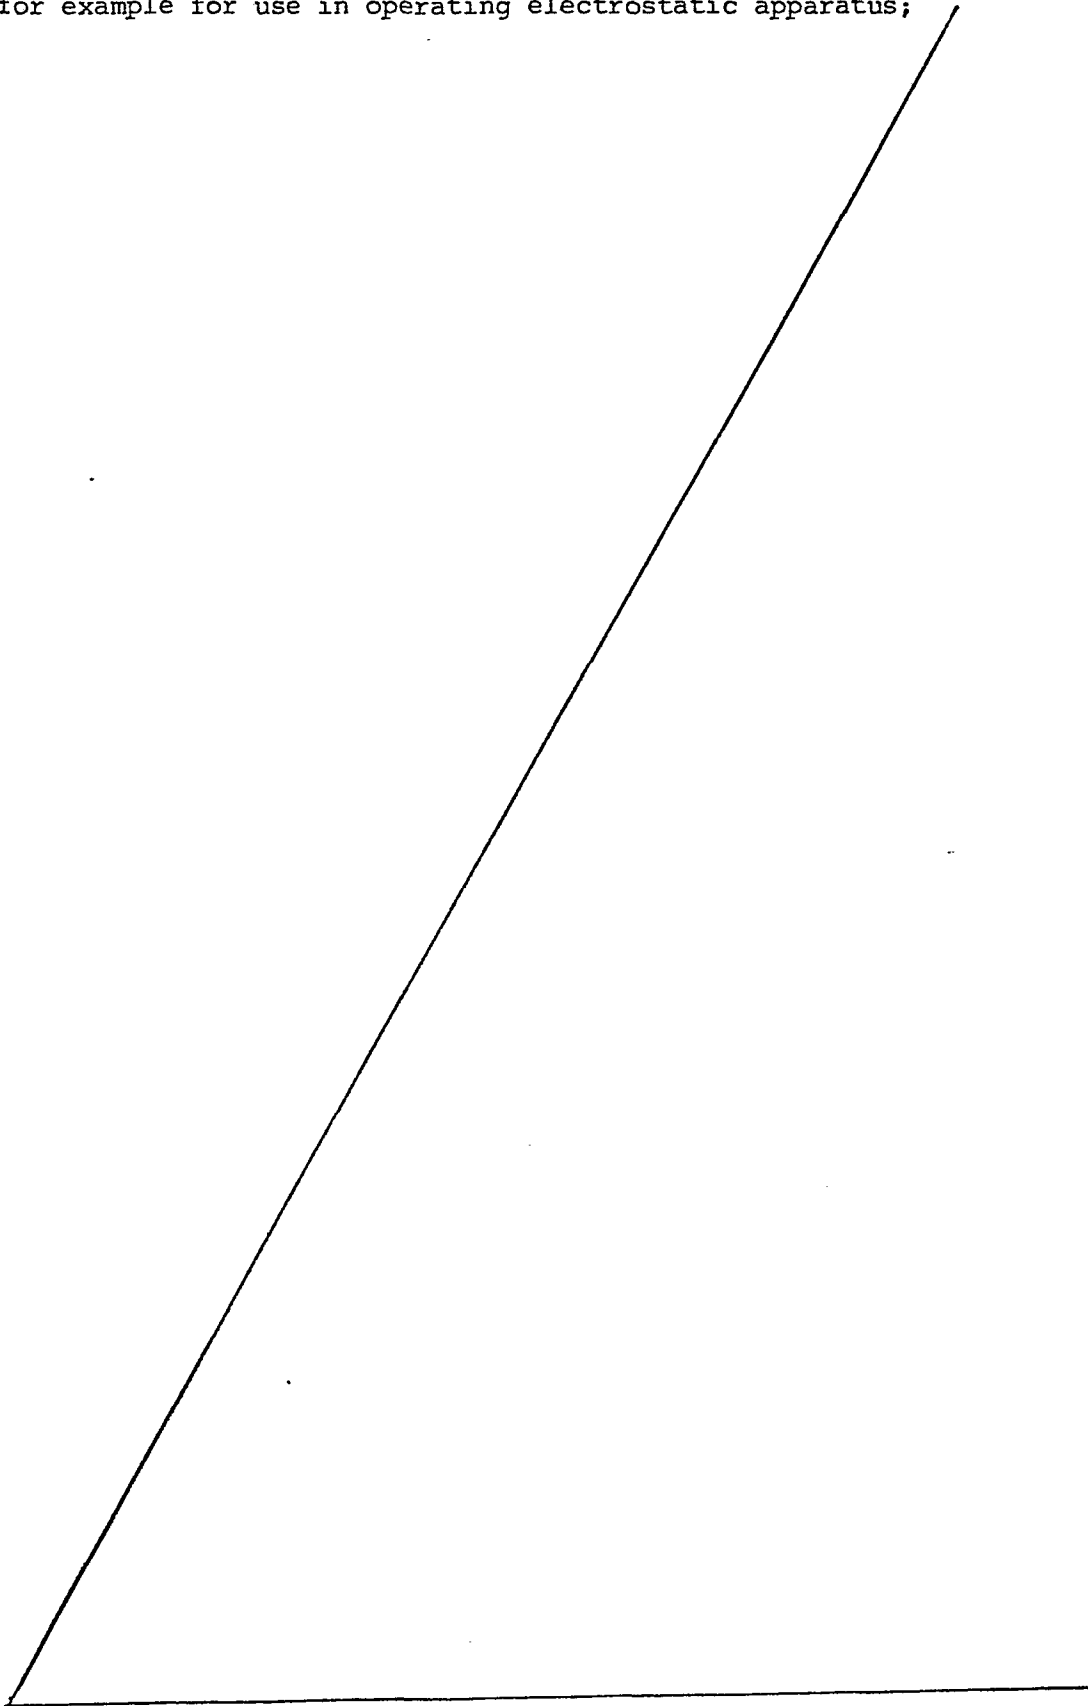

5

10

15

20

25

30

-6-

primary winding 32. Further the cathode of the SCR 44 and the anode of the diode 46 are connected to the low reference output 38. The gate lead 49 of the SCR 44 is connected to an output 50 of a triggering network generally referred to at 52.

5 The triggering network 52 includes the series combination of a fixed resistor 54, a variable resistor 56 and and is a capacitor 58/connected between the circuit nodes 48 and 38. The triggering circuit includes a triggering device 60, a DIAC in one specific embodiment, that is connected between the
10 output 50 of the triggering circuit and the junction of the resistor 56 and the capacitor 58. Further a resistor 62 is connected between the output 50 of the triggering arrangement and the reference point 38.

 The high voltage pulse transformer 34 includes a
15 secondary winding 64 that can be air coupled to the primary winding 32; the transformer 34 not requiring a ferromagnetic core in many low power applications. The polarity dots of FIG. 1 indicate the coil ends of the primary winding 32 and the secondary winding 64 that are simultaneously at common
20 potential. Thus when a positive voltage is present at the coil end 66 of the primary winding 32, a positive voltage is also present at the lower winding end 68 of the secondary winding 64. There is a predetermined turns ratio between the primary and secondary windings.

 The upper winding end 70 of the secondary winding 64
25 is connected through a diode 72 poled anode to cathode to an output 74 of the power supply 10. The coil winding end 68 of the secondary winding 64 is connected to the ground reference potential 14 and forms a ground reference output 76 of the power supply 10. A filter capacitor 78 is connected across
30 the output terminals 74 and 76.

-7-

It should be understood that in various other specific embodiments and applications, the output of the secondary winding 64 is utilized directly or through appropriate rectification to provide appropriate positive and/or negative output voltages.

Considering an application of the power supply circuit 10 for an electrostatic air cleaner or filter, the output 74 is connected through a resistor 80 to the positive plate connections 82 of the electrostatic filter apparatus (not shown). The output 74 is also connected through a resistor 84 to the ion wires connection 86. The output 76 is connected to the ground plate connections of the electrostatic air cleaner. Conventionally, electrostatic air cleaners or filters include a number of ion wires at the air flow entrance of the air cleaner that are arranged transverse to the direction of air flow through the filter. The filter includes positively charged plates alternated with ground reference plates with the plates being arranged generally parallel to the direction of the air flow and disposed downstream of the ion wires. Thus air cleaners of this general type ionize particulate matter in the air flow with the plates causing the ionized particulate matter to be deposited on the plates of the air cleaner. Electrostatic air cleaners of this type exhibit across their grid input supply terminals a large capacitance at relatively high frequencies. A typical example of an electrostatic air cleaner includes a grid current of approximately .4 milliamps at 5000 volts to the ion wires and a plate current of approximately 3-4 microamps.

-8-

In operation, the resistor 16 functions as a line fuse and can also function as a dropping resistor for 220 volt operation. The input choke 30 is preferably approximately 200 millihenrys with any suitable resistance value. The triggering network of resistors 54, 56 and the capacitor 58 determine the time constant for the trigger pulse for the SCR 44. In a suitable specific embodiment, circuit values of the triggering network 52 have been found suitable to result in repetitive triggering of the SCR 44 at a rate in the range of 1 KHz to 3 KHz. Resistor 62 functions to improve turnoff characteristics of the SCR 44. The relationship between the component values of the choke 30, the capacitor 36 and the primary winding 32 as well as the coupling between the primary winding 32 and the secondary winding 64 are interrelated to provide appropriate operation of the present embodiment. Further, the component values of the circuit 10 avoid the necessity of elaborate turnoff circuits for the SCR 44.

With the SCR 44 in the off nonconducting state, the capacitor 36 is charged through the primary winding 32. When the SCR 44 is triggered by the triggering circuit 52, the capacitor 36 is discharged through the primary winding 32 and through the SCR 44. Referring now to FIG. 2, the waveform 89 represents the signal versus time across the secondary winding 64 referenced to winding end 68. The curve portion 90 represents the voltage waveform across the secondary winding 64 during the time that the capacitor 36 discharges through the transformer 32 and while the SCR 44 is conductive. The inductive collapse of the transformer 34 turns off the SCR 44 at a time shortly after the curve point 92. Further, during the recovery pulse 94,

-9-

energy from the transformer 34 is diverted through the fast recovery diode 46 to partially recharge the capacitor 36. The collapse recovery pulse 94 of the transformer 34 and the recharging of the capacitor 36 through the primary winding 32 and the input choke 30 improves the efficiency of the circuit 10. The diode 46 also functions to protect the SCR 44 from excess reverse voltages allowing stable and safe operation under adverse conditions such as an open or shorted secondary winding 64.

The recovery pulse 94 provides a large positive voltage pulse across the secondary winding 64 at winding end 70 with respect to winding end 68. The diode 72 half wave rectifies the output of the secondary winding 64 and charges the capacitor 78 and the grid network of the electrostatic air cleaner apparatus connected at 82, 86. The DC output at 74 remains relatively constant between the repetitive pulses of relatively short duration due to the relatively high frequency of operation, the capacitor 78, and the capacitance of the electrostatic apparatus.

It should be understood that in various specific embodiments and applications, outputs from the secondary winding 64 can be provided including positive and/or negative voltages derived from the discharge pulse 90 and/or the recovery pulse 94.

The resistor 84 functions to current limit the output at 74 under short circuit conditions such as are encountered when a large conductive particle or mass lodges between the plates of the electrostatic air cleaner apparatus. The resistor 80 functions to current limit the output 86 and also to provide a voltage divider for the plate network connected at 82. In many forms of electrostatic air cleaner

-10-

apparatus, the plate network connected across points 82 and 76 is operated at a lower potential than the ion wires at 86.

In some forms of electrostatic air cleaners, the plate network may be directly connected to the ion output at the same potential.

The waveform 89 of FIG. 2 at portion 96 shows the high frequency ringing of the circuit and the transformer 34 that occurs after the recovery pulse 94. The ringing at 96 is dampened and greatly reduced with resultant improved efficiencies since the supply circuit 10 extracts energy for the output at 74 and the partial charging of the capacitor 36 from the recovery pulse curve portion 94.

The characteristics of the high voltage pulse transformer 34 are important to achieve the low cost features and high efficiency of the power supply circuit 10. Thus for many applications of low power requirements, the high voltage transformer 34 does not utilize a magnetic core but instead provides air coupling of the primary winding 32 and the secondary winding 64 and operates as a coreless pulse transformer. In the preferred embodiment, the primary and secondary windings have the same winding widths or traverse. Further additional interlayer insulation is provided to reduce interlayer capacitance to improve output voltage. Thus the transformer 34 of the power supply circuit 10 of the present embodiment with the noted characteristics results in operation of the circuit 10 in accordance with the waveform 89 of FIG. 2.

-11-

Considering electrostatic apparatus for use with the power supply circuit 10 in addition to electrostatic air precipitators, any apparatus that requires a high voltage electrostatic charge for operation at relatively high voltages and low currents may be suitably operated from the power supply circuit 10. For example in office copier machines, electrostatic arrangements are utilized for the charging and discharging of paper or other copying medium. The electrostatic charging arrangements of such office copiers can be appropriately supplied by the power supply circuit 10 of the present embodiment.

Referring now to FIG. 3 and considering an alternate embodiment of the power supply circuit of FIG. 1, the capacitor 36, the SCR 44 and the primary winding 32 of the high voltage transformer 34 are arranged in a series circuit loop as in FIG. 1. However, in FIG. 3 the capacitor 36 is connected between the junction 48 and the low DC supply reference 38 of the bridge 20. Further the series combination of the primary winding 32 and the SCR 44 are connected between the junction point 48 and the low DC supply reference output 38. Operation of the alternate arrangement of FIG. 3 is similar to that of FIG. 1 with triggering of the SCR causing the discharge of the capacitor 36 through the primary winding 32 of the transformer 34.

Referring now to FIG. 4, the power supply circuit 10 is capable of being arranged to provide multiple independent outputs by the provision of additional parallel circuit branches including the series combination of a capacitor and a transformer.

For example, in FIG. 4, the series combination of a capacitor 136 and a primary winding 132 of a transformer 134 is connected in parallel with the SCR 44 and in parallel with the series combination of the primary winding 32 and the capacitor 36.

5 The transformer 134 is similar in structure to the transformer 34. Thus, the additional output 174 of the power supply circuit may be obtained from the secondary winding 164 through a diode 172. Further, the outputs at 74 and 174 may be independently controlled by the provision of a switch 140 in the series
10 circuit branch with the capacitor 136 and the primary winding 132. The operation of the switch controlling the on or off state of the output 174 does not have any appreciable effect on the output 74. It should be understood that any desired number of multiple outputs may be supplied in this manner. Further,
15 it should also be understood that the various output branches allow independent selection of component values of the capacitors 36, 136 and transformers 34, 134 to provide desired output levels at the independent outputs.

While there has been illustrated and described
20 several embodiments of the present invention, it will be apparent that various changes and modifications thereof will occur to those skilled in the art. For example, by variations of the resistance of component 56, the output voltage may be suitably varied as desired. Further, in
25 order to stabilize the output voltage for variations in input supply voltages, a zener diode ^{may be} / added having a cathode connected to the junction of resistors 54 and 56 and an anode connected to the reference 38 to provide a stable reference voltage to the triggering arrangement 52. Although the

power supply circuit of the present invention is generally intended for electrostatic applications, it should also be understood that the present invention is also applicable to general power supply applications where power requirements are small.

In general terms there has been illustrated and
5 described a power supply/^{suitable}for electrostatic apparatus which provides a high voltage output. The high voltage output is provided by the half wave rectification and filtering of a pulse signal from a secondary winding of a high voltage pulse transformer. The filtering for most electrostatic applications is primarily
10 accomplished by the capacitance of the electrostatic apparatus. The primary winding side of the high voltage pulse transformer is connected in a series loop circuit with a capacitor and a switching device. The capacitor is charged through an input choke connected to a DC supply source. The DC supply source is
15 commonly achieved by full wave rectification and filtering from a 120 or 240 volt AC power source. The switching device is triggered after the capacitor is charged such that the capacitor is discharged through the primary winding of the high voltage transformer. The inductive collapse of the high voltage output
20 transformer provides for the turnoff of the switching device and also serves to partially recharge the capacitor. The half wave rectified high voltage output of the power supply is obtained from the recovery pulse of the high voltage pulse transformer. The efficiency of the power supply is improved since ringing
25 in the transformer is dampened due to the extraction of energy from the recovery pulse. The recovery pulse is much higher in amplitude than the firing pulse during which the switching device discharges the capacitor through the primary winding of the pulse transformer. The power supply in one arrangement operates to
30 generate repetitive pulses at a frequency of 1-3 KHz. During each repetitive period, the capacitor is charged, the switching device discharges the capacitor, and a short durational recovery pulse is generated. Several independent outputs of the power supply may be obtained by providing respective, independent
35 series combinations of transformers and capacitors with the series combinations being connected in parallel across the switching

-14-

device. Various outputs may be individually switched without affecting the output of the other independent outputs. The electrostatic apparatus operable by the power supply includes electrostatic air cleaners or filters and electrostatic charging apparatus in office copying equipment. In many electrostatic applications, the transformer does not require a magnetic core.

It is intended in the appended claims to cover all such changes and modifications as fall within the true spirit and scope of the present invention.

-15-

Claims:

1. A power supply circuit comprising:
 - an input choke having one end connected to one side of a DC supply source connection;
 - a transformer;
 - a circuit loop connected between another end of said input choke and another side of said DC supply source connection, said circuit loop including a series connection of a capacitor, a switching device and a primary winding of said transformer, said switching device including a controlled conduction path and a control input for rendering said conduction path conductive, said capacitor being arranged to be charged primarily by said DC supply source;
 - a resistive-capacitive trigger circuit connected between said DC supply source connection and said control input for repetitively rendering said switching device conductive at a predetermined repetitive rate so as to repetitively discharge said capacitor through said primary winding;
 - said transformer including a secondary winding and having a predetermined turns ratio between said secondary winding and said primary winding; and the power supply circuit further comprising
 - output circuit means for rectifying the output of said secondary winding to provide the output of said power supply circuit.
2. The power supply circuit of claim 1 wherein said transformer comprises an air core with coupling of said primary and secondary windings being through the ambient air.
3. The power supply circuit of claim 1 or 2, which is such that when the circuit is in use the power supply circuit output is obtained from a recovery pulse in said primary winding of said transformer occurring after said capacitor is discharged and subsequent to the occurrence of a signal across said primary winding that is in response to the discharge of said capacitor, said recovery pulse in said primary winding being of opposite polarity to said signal occurring in response to the discharge of said capacitor.

4. The power supply circuit of any preceding claim, wherein said output circuit means comprises a diode rectifier having an anode connected to a first end of said secondary winding, the power supply circuit output being provided between the cathode of said diode rectifier and a second end of said secondary winding.

5. The power supply circuit of claim 4, which is such that when the circuit is in use the discharge of said capacitor through said primary winding results in a positive voltage being developed across said primary winding referenced to a first end of said primary winding, said primary and secondary windings being wound and disposed relative to each other such that said first end of said primary winding is of opposite polarity with respect to said first end of said secondary winding.

6. The power supply circuit of any preceding claim, wherein said primary winding and said capacitor are connected in series with each other and the series combination of said capacitor and said primary winding is connected in parallel with said switching device.

7. The power supply circuit of any preceding claim 1 to 5, wherein said primary winding and said switching device are connected in series with each other and the series combination of said switching device and said primary winding is connected in parallel with said capacitor.

8. The power supply circuit of any preceding claim, wherein said switching device is an SCR having an anode lead connected to said other end of said input choke and a cathode lead connected to said other side of said DC supply source connection.

9. The power supply circuit of any preceding claim, further comprising means responsive to an AC power source for providing DC power across said DC supply source connection.

10. The power supply circuit of any preceding claim, wherein said transformer comprises predetermined characteristics that are related to said power supply circuit such that when the circuit is in use a high voltage recovery pulse is produced due to the inductive collapse of said transformer after said capacitor is discharged.

11. The power supply circuit of claim 10, which is such that when the circuit is in use said recovery pulse is opposite in

-17-

polarity to a signal resulting from the discharge of said capacitor as referenced to a common end of said primary winding, and said recovery pulse is of a high peak amplitude than said signal resulting from the discharge of said capacitor.

12. The power supply circuit of claim 6, or any one of claims 7 to 11 when appendent either directly or indirectly to claim 6, further comprising at least one additional series combination of a second capacitor and a second primary winding of a second transformer connected in parallel with said switching device to provide at least one respective additional output of said power supply circuit.

13. The power supply circuit of claim 12 further comprising switch means additionally connected in series with said second capacitor and said second primary winding for controlling operation of said additional output of said power supply circuit independent of said one or more other outputs of said power supply circuit.

14. The power supply circuit of any preceding claim, when in combination with electrostatic air cleaner apparatus operably connected to said output of said power supply circuit, said electrostatic air cleaner apparatus including a plate connection, an ion wire connection and a reference connection, said output circuit means further comprising means for providing a current limited ion wire output, a plate output having a predetermined output potential equal to or less than said ion wire output, and a reference output connection.

15. The power supply circuit of any preceding claim, wherein said switching device comprises an SCR.

16. The power supply circuit of claim 15, further comprising a fast recovery diode connected across said SCR and oppositely poled with respect to said SCR.

17. The power supply circuit of any preceding claim, wherein said output circuit means comprises filter means for filtering the output of the circuit.

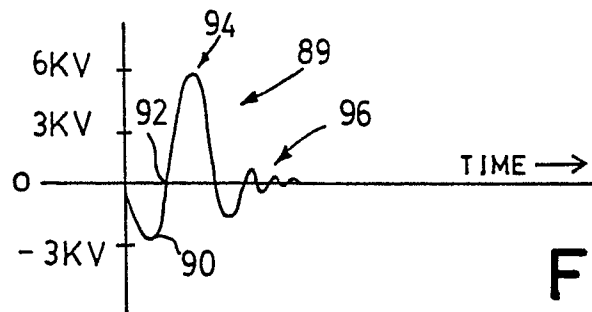


FIG.2

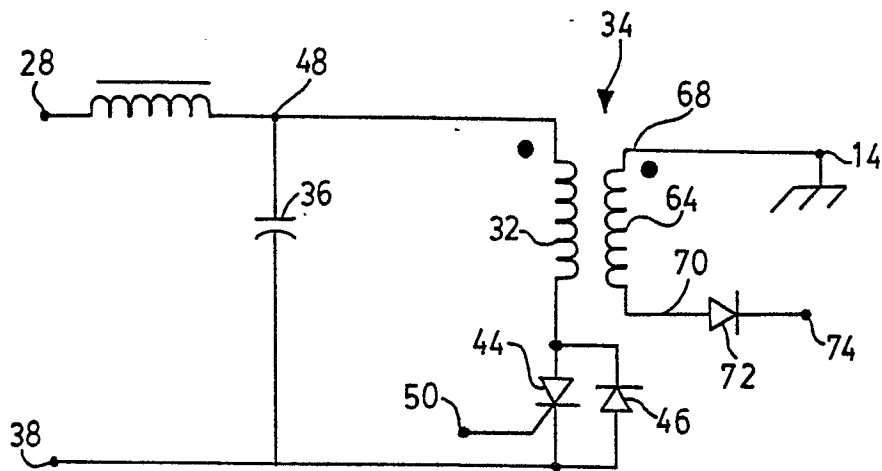


FIG.3

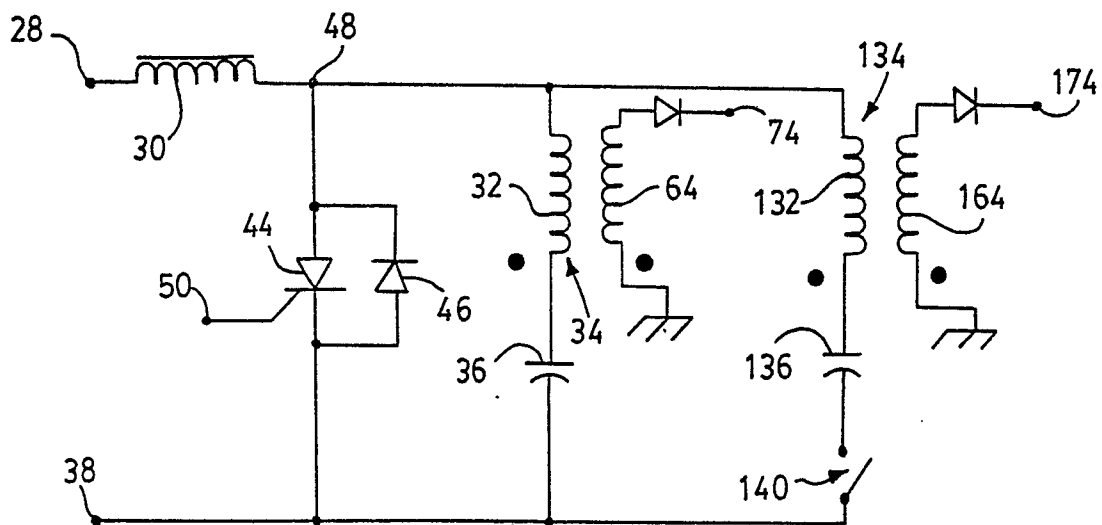


FIG.4



European Patent
Office

EUROPEAN SEARCH REPORT

0055903

Application number

EP 81 30 5862.5

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
Y	US - A - 3 900 789 (M. KOUBEK) * claims 1, 2; fig. 1, 2 *	1,4,6, 8,9,15, 16,17	H 02 M 3/315
Y	US - A - 4 055 791 (R.J. BLAND et al.) * abstract; column 1, lines 11 to 22; fig. 1 *	1,7,8, 9,15, 16,17	
Y	FR - A - 2 315 192 (TOCCO-STEL) * page 1, lines 11 to 25; fig. 1, 4.*	1,6,8, 9,15, 16	TECHNICAL FIELDS SEARCHED (Int.Cl. 3)
A	ELECTRONIC ENGINEERING, Vol. 50, No. 603 March 1978 London P.J. FITZ "Inverter Circuits and Control Techniques" pages 59 to 64 * page 60, right-hand column to page 64 *		B 03 C 3/00 H 02 M 3/00 H 02 M 5/00 H 02 M 7/00
			CATEGORY OF CITED DOCUMENTS
			X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons
☒ The present search report has been drawn up for all claims			&: member of the same patent family, corresponding document
Place of search Berlin		Date of completion of the search .15-03-1982	Examiner FAORO