(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number : **0 465 225 B1**

(12) # EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification : **08.11.95 Bulletin 95/45**

(51) Int. Cl.[6] : **H04N 5/44**

(21) Application number : **91306002.6**

(22) Date of filing : **02.07.91**

(54) **Video signal processing apparatus.**

(30) Priority : **03.07.90 JP 176022/90**

(43) Date of publication of application : **08.01.92 Bulletin 92/02**

(45) Publication of the grant of the patent : **08.11.95 Bulletin 95/45**

(84) Designated Contracting States : **DE FR GB**

(56) References cited :
**EP-A- 0 163 513**
**EP-A- 0 213 912**
**5.CONFERENCE AND EXHIBITION ON TELEVISION TECHNIQUES,12-14 JUNE1990,VOL.2, BUDAPEST(HU) 'J-C GUILLON:"MULTI-FEATURE,MULTIFORMAT 16/9 TV SET",P.55-62'**

(73) Proprietor : **MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.**
**1006, Oaza Kadoma**
**Kadoma-shi, Osaka-fu, 571 (JP)**

(72) Inventor : **Kawakami, Toshikatsu**
**5-14-402, Wakayamadai-1-chome, Shimamotocho**
**Mishima-gun, Osaka-fu (JP)**
Inventor : **Fujimori, Toshimitsu**
**6-9, Miyanokawara-4-chome**
**Takatsuki-shi (JP)**

(74) Representative : **Votier, Sidney David et al**
**CARPMAELS & RANSFORD**
**43, Bloomsbury Square**
**London WC1A 2RA (GB)**

EP 0 465 225 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

### BACKGROUND OF THE INVENTION

The invention relates to a video signal processing apparatus in an image display apparatus which can display a video image having a different aspect ratio onto a screen or a cathode ray tube (hereinafter, abbreviated to a CRT) of a wide aspect of 9 : 16 of a high definition television receiver, a video projection system (hereinafter, abbreviated to a VPS), or the like. When a video image having such a different aspect ratio is displayed, the invention enables such a video image to be displayed as large as possible.

In recent years, as the number of video softwares, particularly, softwares of movies has been increased, the number of softwares of the vista size or cinema size also increases. If such a video software is displayed onto the CRT having an aspect ratio of 3 : 4 of the television receiver of the NTSC system, blanks occur in the upper and lower portions of the screen. The number of video images of the wide aspect ratio for the high definition television receiver or the like will increase in future. Therefore, an efficient display method is being examined.

Fig. 1 is a schematic block diagram of a clear vision (EDTV: Extended Definition Television).

In the diagram, reference numeral 1 denotes a selector for selecting and outputting one of a plurality of video sources $V_1$ to $V_4$; 2 an AGC circuit to always keep an amplitude of a video (luminance) signal constant; 3 a chroma demodulating circuit to demodulate a chrominance signal included in the video signal; 4 an A/D converting circuit to analog-digital convert the video (luminance) signal and the chrominance signals; 5 a signal processing circuit to produce interpolation signals which are necessary for the three-dimensional Y/C separation, motion detection, and double-speed sequential scan which are needed to the EDTV; 6 a memory circuit to execute the double-speed sequential scan; 7 a PLL circuit to generate clocks for the A/D conversion and clocks necessary for the double-speed sequential scan; 8 a control circuit which receives an output of the PLL circuit 7 and produces various kinds of control signals; 9 a D/A converting circuit to convert a digital video signal which has been converted into a double-speed signal by the memory circuit 6 into an analog signal; and 10 a matrix circuit to convert D/A converted luminance signal (2Y) and chrominance signals (2I, 2Q) into primary color signals of R, G, and B.

The operation of the EDTV constructed as mentioned above will now be briefly described hereinbelow.

One of the video signals in the video source selected by the selector 1 is supplied as a luminance signal to the AGC circuit 2 and is subjected to the AGC so as to make an output amplitude constant and, thereafter, the signal is sent to the A/D converter 4. The one of the video signals is supplied as a chrominance signal (C signal) to the chroma demodulating circuit 3 and is demodulated into an I (R-Y) signal and a Q (B-Y) signal. The I and Q signals are similarly sent to the A/D converting circuit 4.

The one of the video signals is supplied as a sync signal to the PLL circuit 7, by which the oscillation is executed at a frequency of 28.6 MHz (= $8f_{sc}$: $f_{sc}$ = 3.579545 MHz) as fundamental clocks which are necessary for the double-speed sequential scan, thereby accomplishing the phase lock with a horizontal sync signal.

The A/D converting circuit 4 quantizes and converts the luminance signal into the digital signal at 14.3 MHz ($4f_{sc}$) on the basis of 8 bits and 256 gradations. The A/D converting circuit 4 quantizes and converts the C signal into the digital signal at 3.58 MHz ($f_{sc}$) on the basis of 7 bits and 128 gradations. The signal processing circuit 5 receives output signals of the A/D converting circuit 4 and executes various kinds of processes to realize a high picture quality and produces interpolation signals which are necessary for the three-dimensional Y/C separation, motion detection, and double-speed sequential scan. In the above case, the signal processing circuit 5 generates the luminance signal and the chrominance signal of the present line and the luminance signal and the chrominance signal of the interpolation line. The horizontal frequency until the above stage is set to 15.75 kHz.

The memory circuit 6 is a circuit which is necessary to execute the double-speed sequential scan by receiving the processes of the signal processing circuit 4. The writing operation into the memory is executed every scan (1H) by the clocks of 14.3 MHz. The reading operation from the memory is performed at a frequency of 28.6 MHz by alternately reading out data from the present line and the interpolation line. By synthesizing both of the data which have been read out, the double-speed sequential scan is realized. In the above process, the horizontal frequency is set to 31.5 kHz.

The control circuit 8 generates various control signals to execute the above operations.

The digital data of the video signal whose speed has been doubled by the memory circuit 6 is supplied to the D/A converting circuit 9 and is converted into the analog signal, so that the luminance signal 2Y and the chrominance signals 2I and 2Q are generated. By receiving those signals, the matrix circuit 10 converts them into the primary color signals of R, G and B.

By supplying those RGB output signals to the screen of the CRT or VPS, a clear video image without a line flicker and a dot interference is displayed.

The EDTV as mentioned above can have the following functions.

Ordinarily, in the video signal of the NTSC system, the aspect ratio is set to 4 : 3. However, there is

considered a function such that the size in the horizontal direction of the video image is compressed into 12/16 as shown in Fig. 2 and the video image having the aspect ratio of 4 : 3 is displayed on the CRT or screen which has been deflected at a wide aspect ratio such as 9 : 16 or the like. If the video signal of the aspect ratio of 4 : 3 is directly displayed by the TV receiver having the aspect ratio of 9 : 16, the video image which has been compressed in the vertical direction is displayed.

As such compressing means can be realized by changing a horizontal deflection current (changing an amplitude) or can be also electrically realized by using memories.

Fig. 3 shows a block diagram of a compression processing circuit using memories. Explanation will now be made with respect to the luminance signal. The same shall also apply to the chrominance signal.

Reference numerals 61 and 64 denote simple memories for the double-speed scan. The memory circuit 6 in Fig. 1 has the above construction. Reference numerals 62, 63, 65, and 66 denote memories to further compress the double-speed data. The reason why two memories are provided for each of the memories 61 and 64 is because the data is divided into the halves and processed since the operating speed cannot be accomplished by the single memory (the reading speed is higher than the writing speed). Reference numeral 67 denotes a control circuit to control the writing and reading operations for the memories 62, 63, 65, and 66; 68 a synthesizing circuit to synthesize outputs of the memories 62, 63, 65, and 66; and 69 a switching circuit for switching the double-speed data from the memories 61 and 64 and the compression data from the synthesizing circuit 68 and for generating either of the those data.

The operation will now be briefly explained hereinbelow with reference to timing charts of Figs. 5 and 6.

First, as a memory, there is used a line memory of the FiFo type of (910 bits x 8) of μPD42101C made by NEC Corporation shown in Fig. 4 in which the writing and reading operations can be fundamentally asynchronously executed. In Fig. 4, WCK denotes a write clock signal; RCK a read clock signal; WE a write enable signal; RE a read enable signal; WRST a write reset signal; and RRST a read reset signal. Those signals are obtained from the control circuits 67 and 80.

The relation between the quantizing frequency ($4f_{sc}$) and a horizontal frequency ($f_h$ = 15.75 kHz) is set to just 910. Address counters are independently provided for writing and for reading and are reset to 0 by the reset signals (write: WRST, read: RRST) and automatically count clocks until 910. The ordinary double-speed conversion is executed in the following manner. As shown in Fig. 6, after the address counters of the memories 61 and 64 were reset by the write reset signals WRST, the present line signal (present·Y) of a 15.75 kHz rate is written into the memory 61 and the interpolation line signal (interpolation·Y) is written into the memory 64 by the clocks WCK of 14.3 MHz ($4f_{sc}$) by the signal processing circuit 5. On the other hand, after the memories 61 and 64 were reset by the read reset signal RRST with a delay time of 0.5H, the reading operations are alternately performed by the clocks RCK of 28.6 MHz ($8f_{sc}$) and the present read enable signal REAL and the interpolation read enable signal REAL. 2 present·$Y_s$ and 2 interpolation·$Y_s$ are obtained for 1H period of time and are synthesized, thereby obtaining a double-speed converted luminance signal $2Y_s$.

Fig. 6 shows the case of further compressing. The double-speed converted luminance signals (2 present·$Y_s$, 2 interpolation·$Y_s$) are written by the clocks of $8f_{sc}$ = 28.6 MHz (actually, the clock frequency is set to $4f_{sc}$ = 14.3 MHz in consideration of the speed of the memory and, as mentioned above, the memory for the present line and the memory for the interpolation line are independently provided and the processes are executed) and are read out by the clocks $f_w$ higher than the above frequency. To display the video image of the aspect ratio of 4 : 3 as shown in Fig. 2, the reading clock $f_w$ is set to $8f_{sc}$ x 16/12 [MHz]. Further, by controlling by the read enable signal present RE and read enable signal interpolation RE each having a width of 910 bits in a manner such that the read-out image is located at the center of the screen of the CRT, a luminance signal $2Y_w$ whose time base has been compressed can be obtained.

In the conventional example, the reason why the circuit for the double-speed sequential scan and the circuit for the time base compression are independently provided is because there is a limitation in the reading speed in order to execute the reading operation earlier than the writing operation (so that the reading operation doesn't outrun the writing operation). The number of memories is large and a peripheral construction is also complicated.

European patent application EP-A-0 163 513 describes a video signal processing apparatus comprising the features defined in the preamble of claim 1.

European patent application EP-A-0 213 912 describes a video display system for wide and standard aspect ratio video signals. The system comprises a signal processor which, in response to a video signal representative of a standard aspect ratio image, produces, for driving a wide aspect ratio display, a processed video signal such as to cause the image to be displayed centrally.

In an article by R. Grigat *et al.* entitled "Schlüsseltechnologie Mikroelektronik 26.Teil: Bildspeicher für die Videotechnik (Elektronik 1/5.1.1990, pages 44-51), there is disclosed a time-base compression which uses the memory associated with an entire video field.

In consideration of the above, it would be desir-

able to provide a video signal processing apparatus in which a circuit for providing the double-speed scanning is arranged additionally to effect the time-base compression, thereby to reduce the number of memories required and to simplify the circuit construction.

In accordance with the present invention, there is provided a video signal processing apparatus as defined by claim 1.

Thus, the writing operation into a memory is processed every 2H and the reading operation from the memory is also processed every 2H, so that the circuit for the simple double-speed and the circuit for the time base compression which have independently been executed can be constructed as a single circuit, the number of memories which are used can be reduced, and the peripheral circuit construction can be simplified.

According to the invention, by using the above construction, the number of memories which are used is reduced, the peripheral circuit construction can be efficiently realized, and it is possible to contribute to a decrease in costs.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic diagram of an EDTV of a conventional example;

Fig. 2 is a concept diagram in the case where a picture plane of an aspect ratio of 3 : 4 has been displayed on a screen of an aspect ratio of 9 : 16;

Fig. 3 is a practical circuit diagram;

Fig. 4 is a terminal diagram of a memory;

Fig. 5 is a timing chart of a double scan conversion in the conventional example;

Fig. 6 is a timing chart of a compression scan higher than the double scan in the conventional example;

Fig. 7 is a schematic block diagram of a video signal processing apparatus in an embodiment of the invention;

Fig. 8 is a timing generating circuit diagram in a control circuit; and

Figs. 9 and 10 show a timing chart of the video signal processing apparatus.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

An embodiment of the invention will be described hereinbelow with reference to the drawings.

Fig. 7 is a block diagram of a video signal processing apparatus in an embodiment of the invention.

Reference numerals 61 and 62 denote the 1-line memories for speed conversion of a present line signal; 63 and 64 the 1-line memories for speed conversion of an interpolation line signal; 685 a synthesizing circuit of outputs of the memories 61 and 62; 686 a synthesizing circuit of outputs of the memories 63 and 64; 687 a synthesizing circuit of outputs of the synthesizing circuits 685 and 686; 70 a variable oscillating circuit to variable generate the read clocks $f_w$; and 80 the control circuit to control the memories 61 to 64.

Even-number designated bits in the digital data of the present line signal are written into the memory 61, for instance, while odd-number designated bits are written into the memory 62. The same shall also apply to the memories 63 and 64 for the interpolation line signal. Control signals from the control circuit 80 are derived from a circuit construction as shown in Fig. 8. Reference numeral 81 denotes a frequency divider to divide a horizontal sync signal H into 1/2; 82 to 85 shift registers to shift an output of the frequency divider 81 at a period which is twice as large as that of the horizontal sync signal H; 86 a circuit to produce the write reset signal WRST; 87 a circuit to produce the read reset signal RRST of the present line data; and 88 the circuit to produce the read reset signal RRST of the interpolation line data. Those signal producing circuits produce the respective signals in accordance with the use of the memory. Reference numeral 89 denotes an RE signal generating circuit to produce the read enable (RE) signal to control the reading operations of the memories 61 to 64.

The operation of the video signal processing apparatus constructed as mentioned above will now be described hereinbelow on the basis of timing charts shown in Figs. 8 and 10. Fig. 9 shows waveforms in the prior art case where, for instance, a video image of the aspect ratio of 4 : 3 is double-speed converted and is fully displayed onto the CRT screen of the aspect ratio of 9 : 16.

The present line signal (present Y) and the interpolation line signal (interpolation Y) which have been processed and generated by the signal processing circuit 5 are written into the memories 61 to 64, which are reset by the write reset signal WRST every 2H, by the clocks of 14.3 MHz (= $4f_{sc}$) (actually, 7.15 MHz in consideration of the relation of the operating frequency of the memory).

The reading operations of the memories 61 to 64 are executed by using the present read reset signal present RRST which is generated every 2H with a delay time of 1H from the write reset signal WRST and by using the interpolation read reset signal interpolation RRST which is further delayed by 0.5H from the present RRST. At this time, since the present line data and the interpolation line data are controlled by the read enable signals RE (present 2RES and interpolation 2RES), they are read out by the clock frequency $f_w$ = 28.6 MHz ($8f_{sc}$) or 14.3 MHz every 910 dots and every 0.5H and are synthesized by the synthesizing circuits 685 and 686. Thus, the present line signal (present $2Y_s$) and the interpolation line signal (interpolation $2Y_s$) which have been double-speed converted can be obtained as outputs. Further, by synthesizing them by the synthesizing circuit 687, the final vid-

eo signal $2Y_s$ can be obtained.

According to the invention, by changing the frequency of the read clocks $f_w$, the video signal can be compressed and displayed. Fig. 10 shows waveforms in the case where the read clock frequency $f_w$ is set to ($f_w = 8f_{sc} \times 16/12$) and the video image of the aspect ratio of 4 : 3 is compressed and displayed onto the screen of the aspect ratio of 9 : 16 as shown in, for example, Fig. 2.

The read clock frequency $f_w$ is different from that in Fig. 9 and the widths and the generating positions of the read enable signals (present 2REW, interpolation 2REW) differ from those in Fig. 9. The write reset signal WRST and the read reset signals (present RRST, interpolation RRST) are similar to those in Fig. 9.

The processes such that after the video data was written, it is read out 1H later denote that the data has already been written by an amount of 1H. Therefore, even if the data is compressed and read out, no problem will occur.

On the other hand, the read enable signal for the present line signal and the read enable signal for the interpolation line signal are alternately generated. The read enable signals RE are obtained by counting 910 clocks. As the clock frequency rises, the widths of the read enable signals RE are narrowed. Therefore, by making the count start position variable, the picture plane is always located at the center of the CRT irrespective of the clock frequency.

By synthesizing the data from the memories 61 to 64 by the synthesizing circuits 685, 686, and 687, the double-speed converted video signal $2Y_s$ or the video signal $2Y_w$ which had been double-speed converted and, further, has been compressed thereafter is obtained.

By the above construction, the number of memories can be reduced and not only the simple double-speed but also the further compression can be executed. Since the compression is performed by also including the sync signal, it is impossible to set to 31.5 kHz in such a state. Therefore, only the video signal component in the compressed data is left and the sync signal and the portion which lacked due to the compression are replaced to the other data.

In the embodiment, four 1-line memories have been used. However, if one 2-line memory is used for the present line signal and one 2-line memory is used for the interpolation signal, the number of memories can be further reduced. there is no need to use the synthesizing circuits 65 and 66 and the circuit construction can be further simplified.

As described above, according to the invention, the double-speed scan conversion and, further, the compression conversion at an arbitrary reading speed can be realized by the same circuit. The number of memories can be reduced and the peripheral circuit construction can be simplified.

## Claims

1. A video signal processing apparatus comprising:

   a signal processing circuit (5) for processing a video signal so as to obtain, for each current line, a current line signal and an interpolation line signal, each having a predetermined horizontal scan period (H);

   memory means (61-64) for storing said current and interpolation line signals;

   clock generating means (70) for causing the stored signals to be read out from the memory means (61-64); and determining the reading speed from the memory means (61-64); and

   control means (80) for executing a writing operation of said current and interpolation line signals into said memory means (61-64) once in every two horizontal scan periods (2H) and a reading operation out of said memory means (61-64) of said current and interpolation line signals once in every two horizontal scan periods (2H), the reading speed being higher than twice the writing speed, the current and interpolation line being alternately read from said memory means;

   characterized in that said apparatus further comprises:

   an analog-to-digital converter (4) for converting an analog video signal into a digital video signal which constitutes the video signal processed by said signal processing means (5);

   and wherein said clock generating means (70) is operable at an arbitrary frequency, thereby enabling the said signals stored in said memory means (61-64) to be read out at said arbitrary frequency, to permit a time base compression ratio for the reading operation to be set arbitrarily.

2. A video signal processing apparatus according to claim 1, wherein said memory means (61-64) has first and second memories (61,62) for storing said current line signal which is generated from said signal processing circuit (5) and third and fourth memories (63, 64) for storing said interpolation line signal, said clock generating means (70) and said control means (80) being arranged to generate write clocks and first read clocks, said first read clocks having a frequency higher than twice the frequency of said write clocks.

3. A video signal processing apparatus according to claim 1 or claim 2, wherein said control means (80) is arranged to adjust a position in the horizontal direction of the video signal which has been read out for a display.

## Patentansprüche

1. Videosignalverarbeitungsschaltung mit:

einer Signalverarbeitungsschaltung (5) zum Verarbeiten eines Videosignals, um für jede momentane Zeile ein Momentanzeilensignal und ein Interpolationszeilensignal mit jeweils einer vorbestimmten Horizontalrasterperiode (H) zu erhalten;

einer Speichereinrichtung (61-64) zum Speichern des Momentan- und des Interpolationszeilensignals;

einer Takterzeugungseinrichtung (70) zum Bewirken des Auslesens der gespeicherten Signale aus der Speichereinrichtung (61-64); und Bestimmen der Auslesegeschwindigkeit aus der Speichereinrichtung (61-64); und

einer Steuereinrichtung (80) zum Ausführen einer Einschreiboperation der Momentan- und der Interpolationszeilensignale in die Speichereinrichtung (61-64) einmal in jeweils zwei Horizontalrasterperioden (2H) und einer Ausleseoperation aus der Speichereinrichtung (61-64) des Momentan- und des Interpolationszeilensignals einmal in jeweils zwei Horizontalrasterperioden (2H), wobei die Auslesegeschwindigkeit größer als die doppelte Einschreibgeschwindigkeit ist und die Momentan- und die Interpolationszeile alternierend aus der Speichereinrichtung ausgelesen werden;

dadurch gekennzeichnet, daß die Vorrichtung ferner aufweist:

einen Analog-zu-Digitalwander (4) zum Wandeln eines Analogvideosignals in ein Digitalvideosignal, das das von der Signalverarbeitungseinrichtung (5) verarbeitete Videosignal bildet;

und wobei die Takterzeugungseinrichtung (70) bei einer beliebigen Frequenz betreibbar ist, wodurch das Auslesen der in der Speichereinrichtung (61-64) gespeicherten Signale bei der beliebigen Frequenz ermöglicht wird, um ein beliebiges Einstellen eines Zeitbasiskompressionsverhältnisses für die Ausleseoperation zu erlauben.

2. Videosignalverarbeitungsvorrichtung nach Anspruch 1, bei der die Speichereinrichtung (61-64) einen ersten und einen zweiten Speicher (61,62) zum Speichern des von der Signalverarbeitungsschaltung (5) erzeugten Momentanzeilensignals und einen dritten und einen vierten Speicher (63, 64) zum Speichern des Interpolationszeilensignals aufweist, wobei die Speichererzeugungseinrichtung (70) und die Steuereinrichtung (80) zum Erzeugen von Einschreibtakten und ersten Auslesetakten ausgelegt sind, wobei die ersten Auslesetakte eine höhere Frequenz als die doppelte Frequenz der Einschreibtakte aufweisen.

3. Videosignalverarbeitungsvorrichtung nach Anspruch 1 oder 2, bei der die Steuereinrichtung (80) zum Einstellen einer Position in der Horizontalrichtung des für eine Anzeige ausgelesenen Videosignals ausgelegt ist.

## Revendications

1. Appareil de traitement de signaux vidéo comprenant :

un circuit de traitement de signaux (5) pour traiter un signal vidéo de manière à obtenir, pour chaque ligne courante, un signal de ligne courante et un signal de ligne d'interpolation, chacun ayant une période de balayage horizontal (H) ;

des moyens de mémorisation (61-64) pour mémoriser lesdits signaux de ligne courante et de ligne d'interpolation ;

des moyens d'élaboration de signaux d'horloge (70) pour engendrer la lecture des signaux mémorisés à partir des moyens de mémorisation (61-64) et déterminer la vitesse de lecture à partir des moyens de mémorisation (61-64) ; et

des moyens de commande (80) pour exécuter une opération d'écriture desdits signaux de ligne courante et de ligne d'interpolation dans lesdits moyens de mémorisation (61-64) une fois toutes les deux périodes de balayage horizontal (2H), et une opération de lecture desdits signaux de ligne courante et de ligne d'interpolation à partir desdits moyens de mémorisation (61-64) une fois toutes les deux périodes de balayage horizontal (2H), la vitesse de lecture étant supérieure à la vitesse d'écriture, la ligne courante et la ligne d'interpolation étant lues alternativement à partir desdits moyens de mémorisation,

caractérisé en ce qu'il comprend en outre :

un convertisseur analogique/numérique (4) pour convertir un signal vidéo analogique en un signal vidéo numérique qui constitue le signal vidéo traité par lesdits moyens de traitement de signaux (5) ;

et en ce que lesdits moyens d'élaboration de signaux d'horloge (70) peuvent fonctionner à une fréquence arbitraire pour permettre un rapport de compression de base de temps en en vue de l'opération de lecture devant être établie arbitrairement, ce qui autorise ainsi lesdits signaux mémorisés dans lesdits moyens de mémorisation (61-64) à être lus à ladite fréquence arbitraire.

2. Appareil de traitement de signaux vidéo selon la revendication 1, dans lequel lesdits moyens de mémorisation (61-64) comportent des première et seconde mémoires (61,62) pour mémoriser le-

dit signal de ligne courante qui est engendré par ledit circuit de traitement de signaux (5), et des troisième et quatrième mémoires (63,64) pour mémoriser ledit signal de ligne d'interpolation, lesdits moyens d'élaboration de signaux d'horloge (70) et lesdits moyens de commande (80) étant adaptés pour engendrer des signaux d'horloge d'écriture et des premiers signaux d'horloge de lecture, lesdits premiers signaux d'horloge de lecture ayant une fréquence deux fois supérieure à la fréquence desdits signaux d'horloge d'écriture.

3. Appareil de traitement de signaux vidéo selon la revendication 1 ou 2, dans lequel lesdits moyens de commande (80) sont adaptés pour régler une position dans la direction horizontale du signal vidéo qui a été lu en vue d'un affichage.

FIG. 1
PRIOR ART

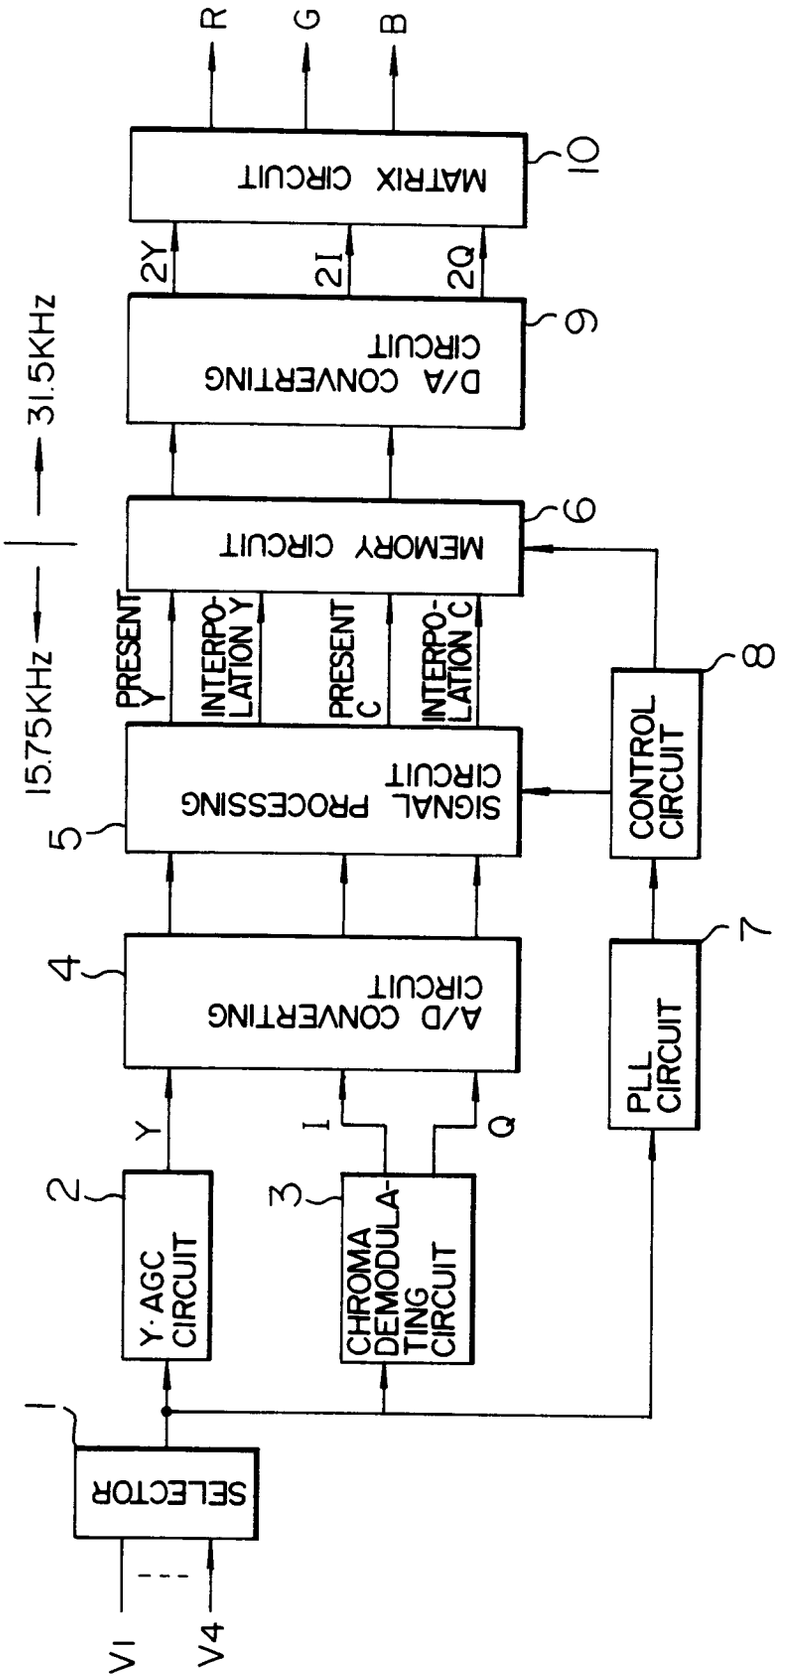


FIG. 2

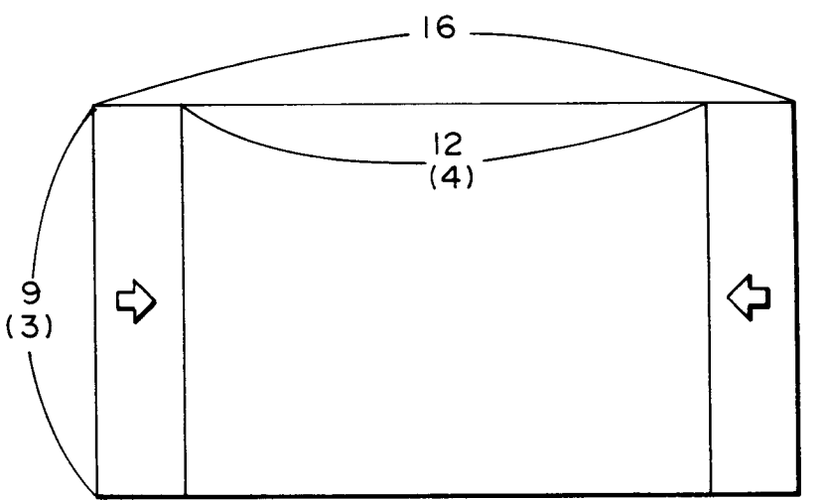


FIG. 3

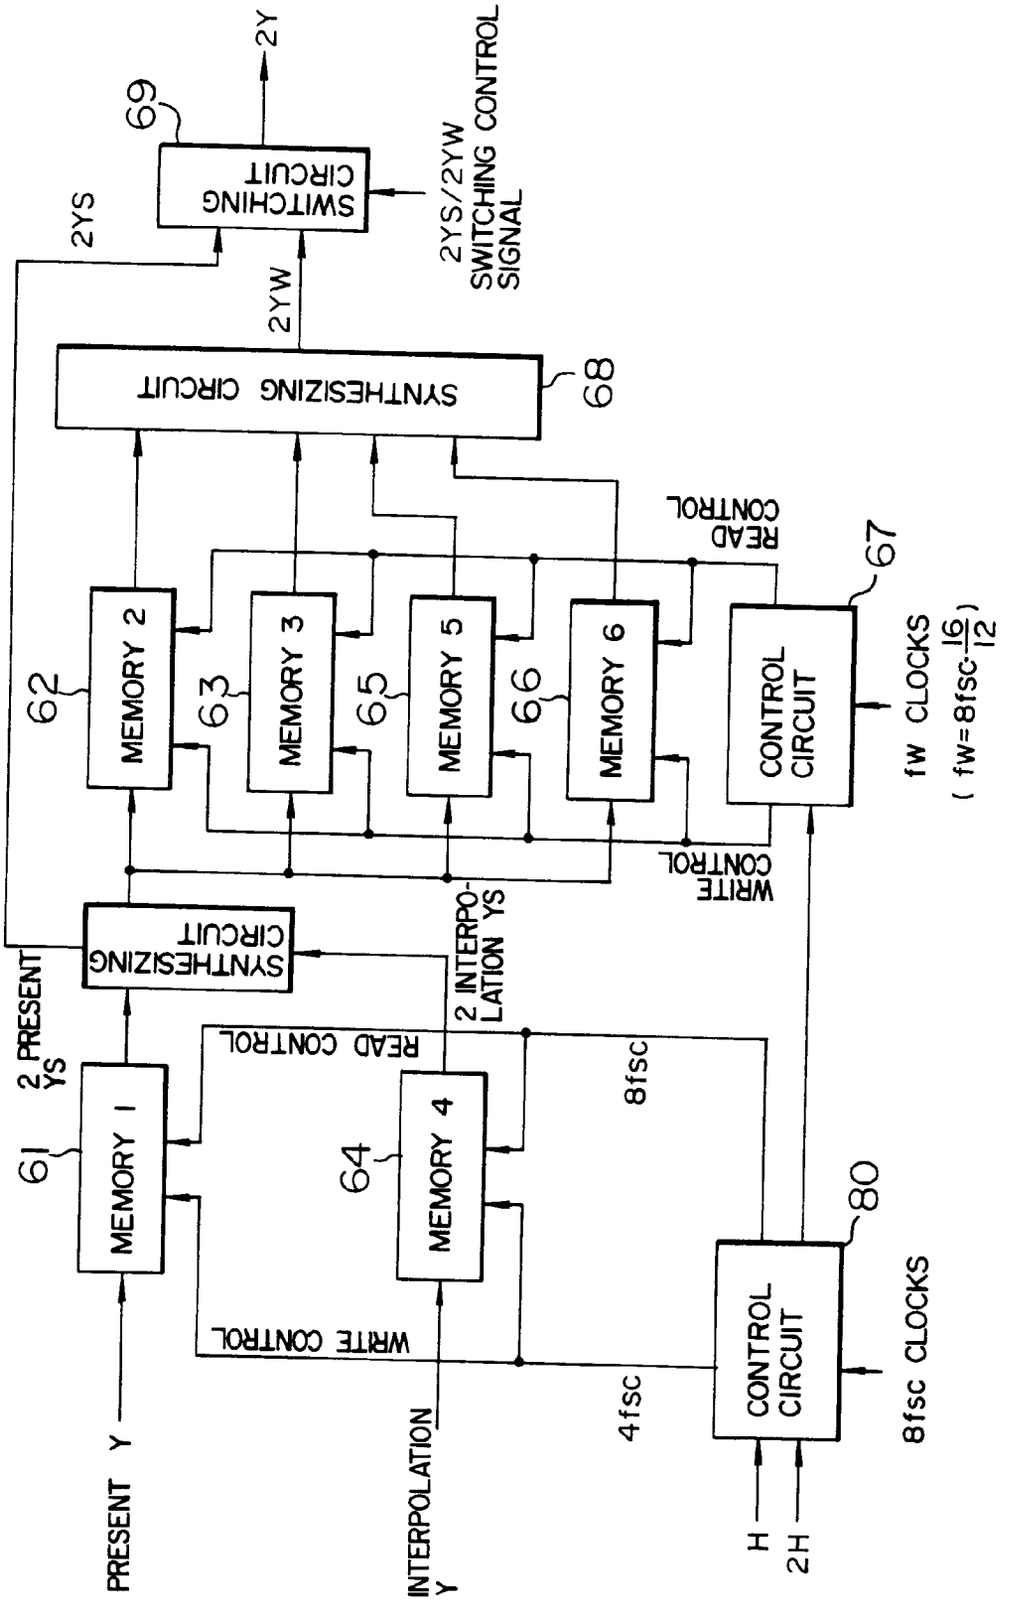

2Y
69
SWITCHING CIRCUIT
2YS/2YW SWITCHING CONTROL SIGNAL
2YS
2YW
SYNTHESIZING CIRCUIT
68
READ CONTROL
67
62
MEMORY 2
63
MEMORY 3
65
MEMORY 5
66
MEMORY 6
CONTROL CIRCUIT
fW CLOCKS
( fW=8fsc 16/12 )
WRITE CONTROL
2 INTERPOLATION YS
SYNTHESIZING CIRCUIT
2 PRESENT YS
READ CONTROL
8fsc
61
MEMORY 1
64
MEMORY 4
80
WRITE CONTROL
4fsc
CONTROL CIRCUIT
8fsc CLOCKS
PRESENT Y
INTERPOLATION Y
H
2H

FIG. 4

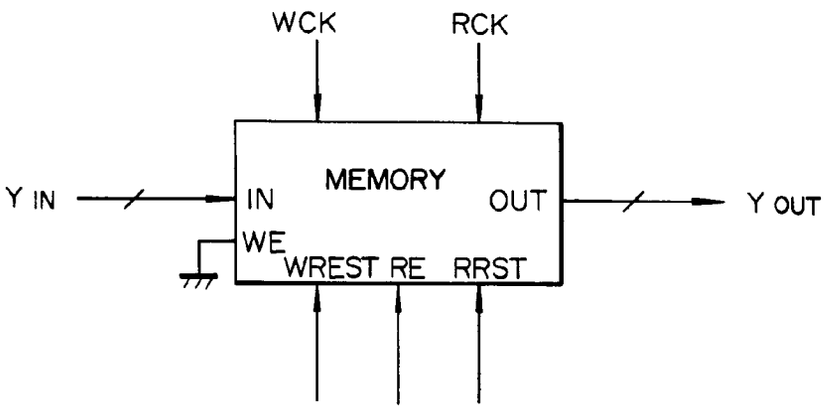



FIG. 5 PRIOR ART

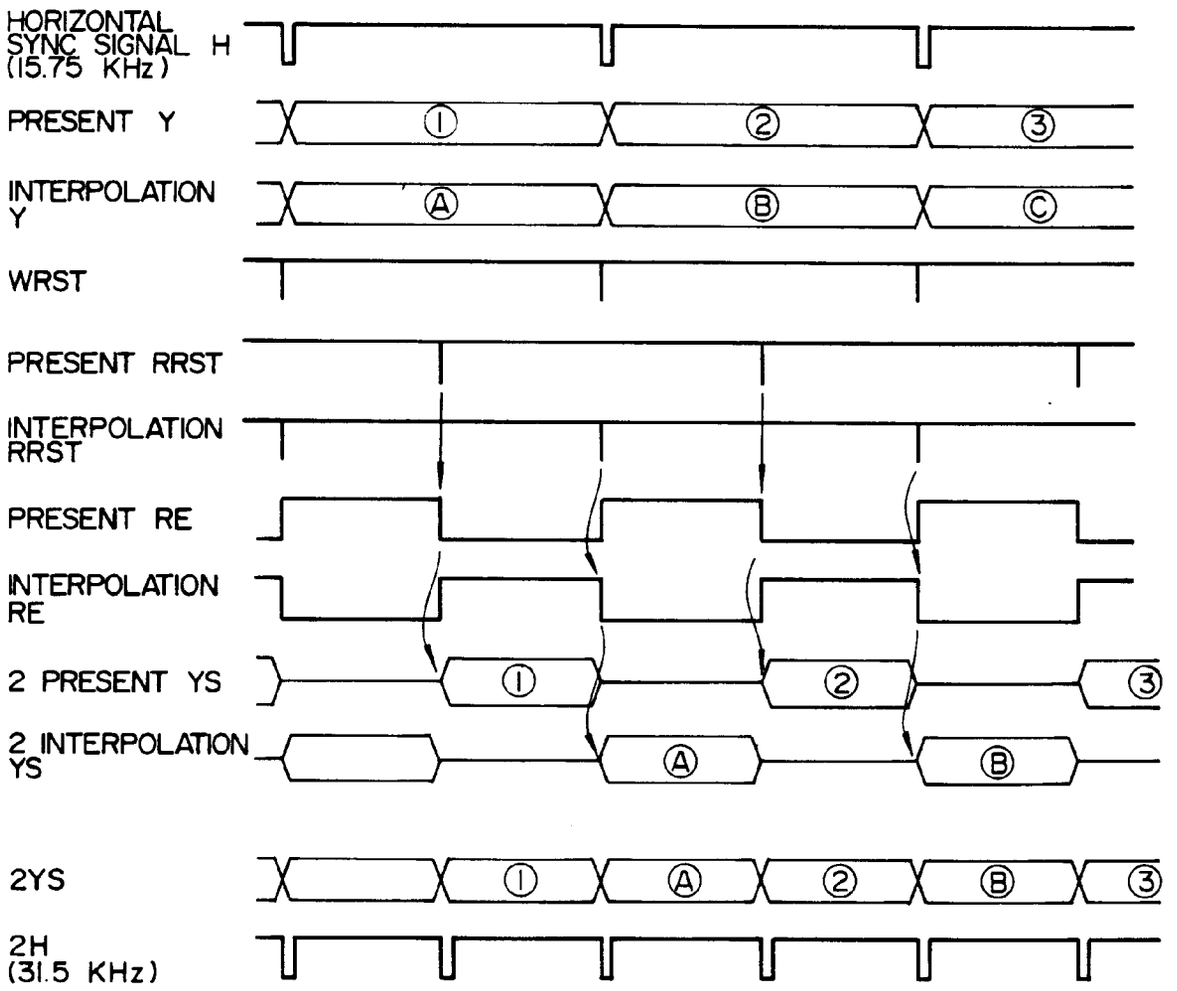


FIG. 6
PRIOR ART

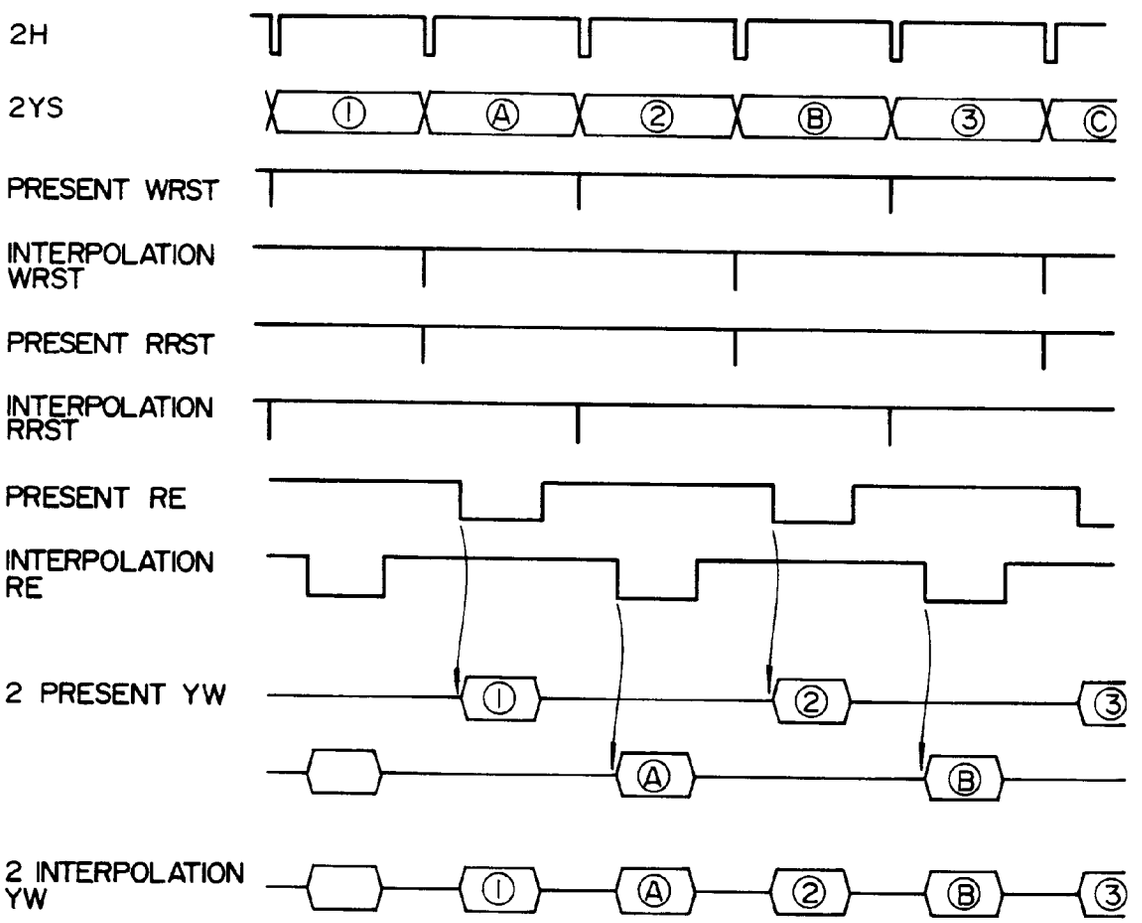


FIG. 7

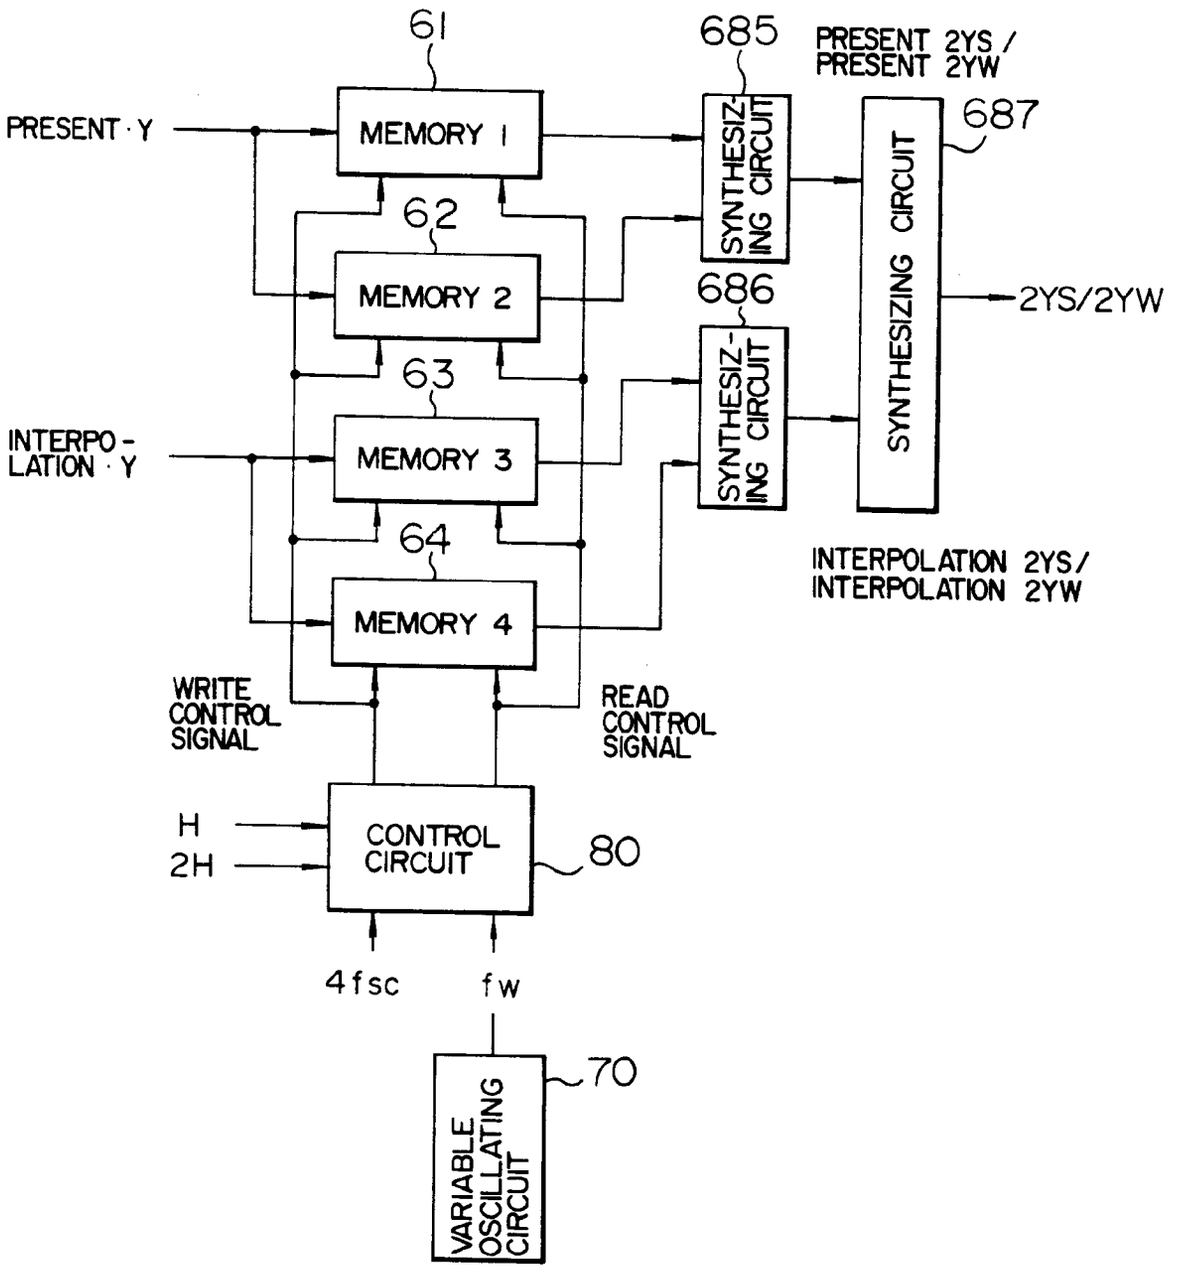

61
685
PRESENT 2YS / PRESENT 2YW
PRESENT · Y
MEMORY 1
SYNTHESIZ-ING CIRCUIT
687
62
MEMORY 2
686
2YS/2YW
63
INTERPO-LATION · Y
MEMORY 3
SYNTHESIZ-ING CIRCUIT
SYNTHESIZING CIRCUIT
64
MEMORY 4
INTERPOLATION 2YS/ INTERPOLATION 2YW
WRITE CONTROL SIGNAL
READ CONTROL SIGNAL
H
2H
CONTROL CIRCUIT
80
4fsc
fw
70
VARIABLE OSCILLATING CIRCUIT

FIG. 8

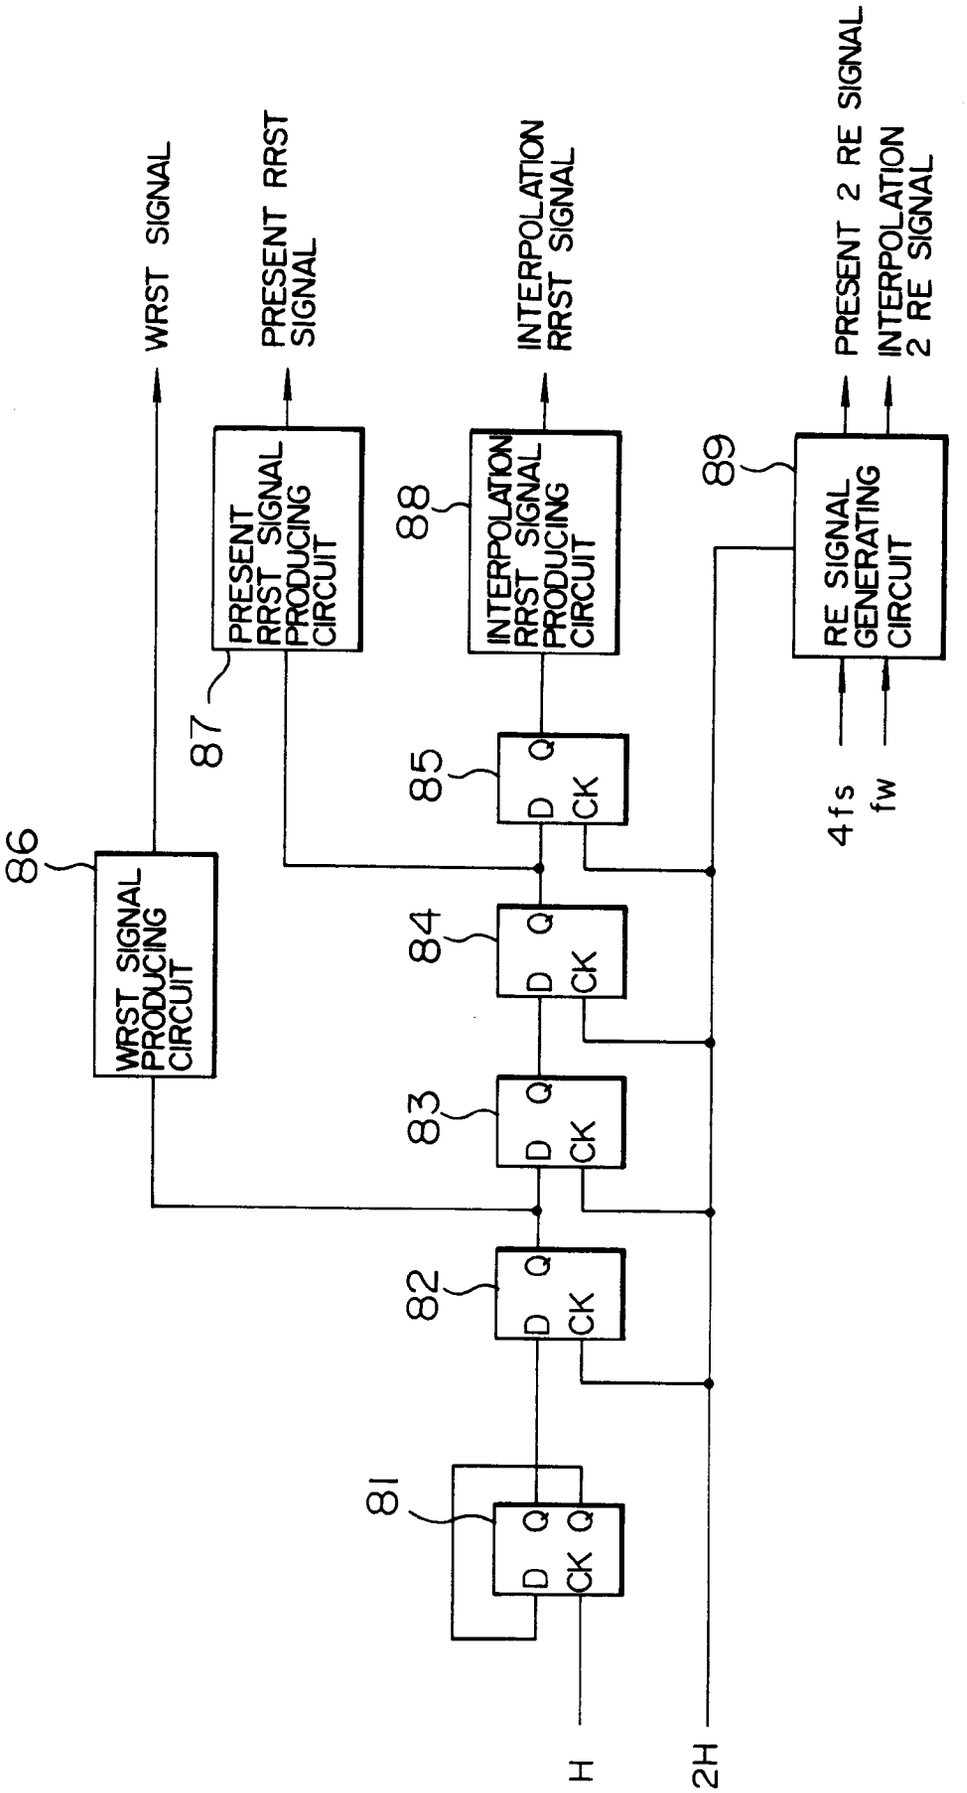

WRST SIGNAL
PRESENT RRST SIGNAL
INTERPOLATION RRST SIGNAL
PRESENT 2 RE SIGNAL
INTERPOLATION 2 RE SIGNAL
WRST SIGNAL PRODUCING CIRCUIT
PRESENT RRST SIGNAL PRODUCING CIRCUIT
INTERPOLATION RRST SIGNAL PRODUCING CIRCUIT
RE SIGNAL GENERATING CIRCUIT
86
87
88
89
85
84
83
82
81
D
Q
CK
4fs
fw
H
2H

FIG. 9

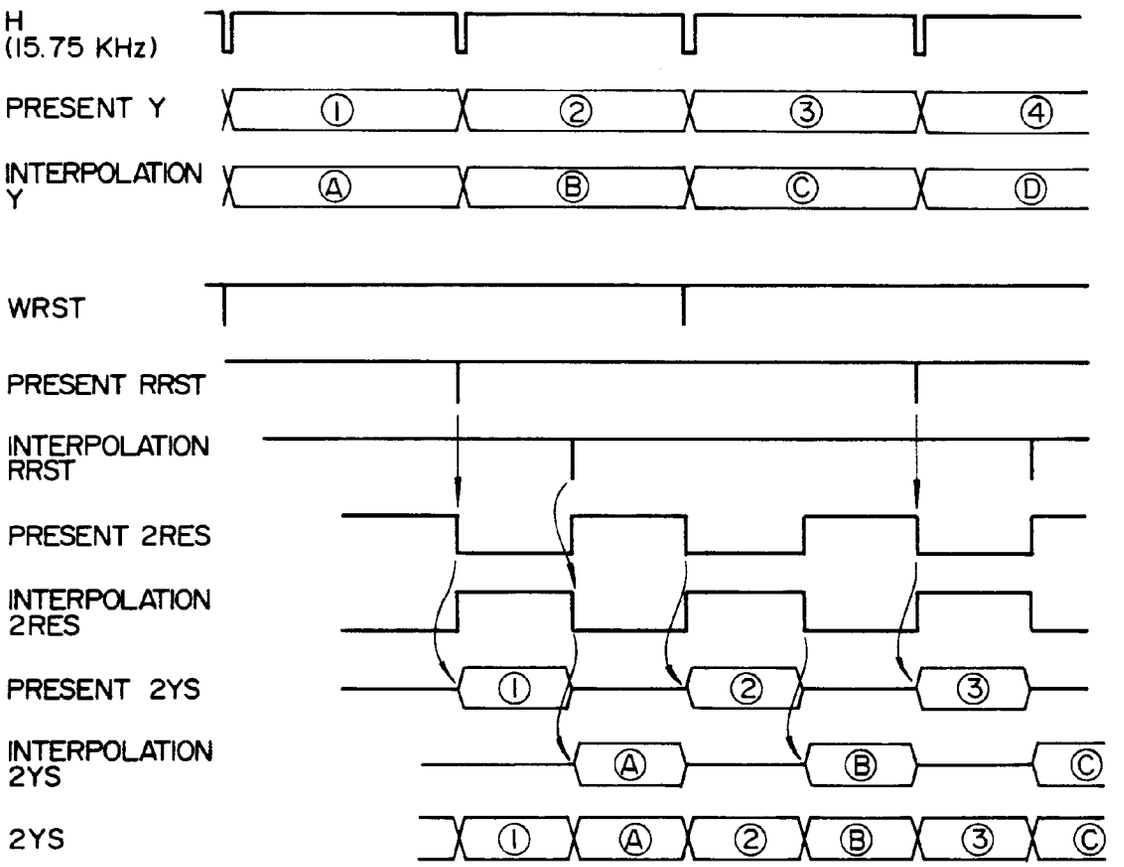
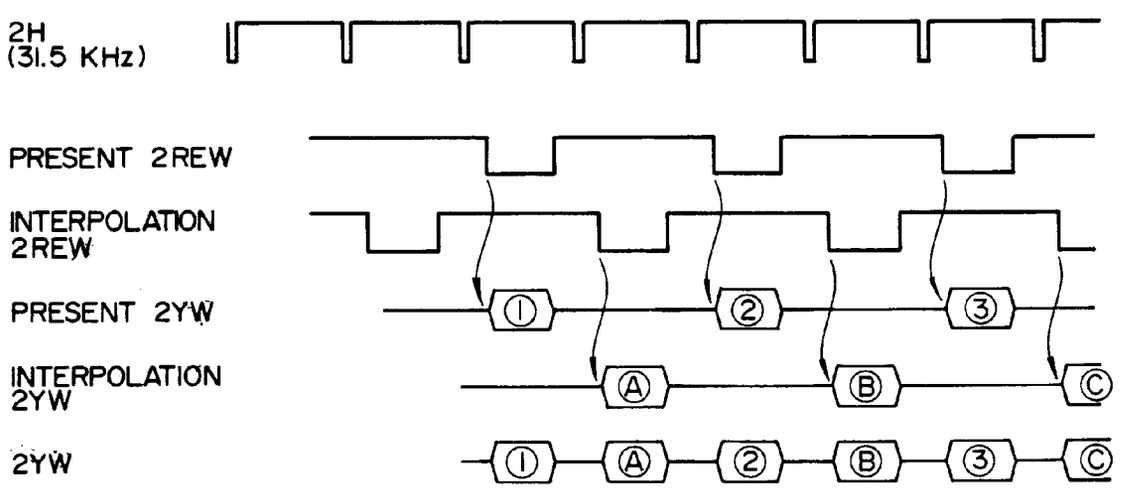

H
(15.75 KHz)
PRESENT Y
INTERPOLATION Y
WRST
PRESENT RRST
INTERPOLATION RRST
PRESENT 2RES
INTERPOLATION 2RES
PRESENT 2YS
INTERPOLATION 2YS
2YS

FIG. 10


2H
(31.5 KHz)
PRESENT 2REW
INTERPOLATION 2REW
PRESENT 2YW
INTERPOLATION 2YW
2YW