



(11)

**EP 1 211 798 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**10.01.2018 Bulletin 2018/02**

(51) Int Cl.:  
**H02P 21/02** <sup>(2006.01)</sup> **H02P 21/06** <sup>(2016.01)</sup>  
**H02P 6/10** <sup>(2006.01)</sup>

(21) Application number: **01126007.2**

(22) Date of filing: **31.10.2001**

**(54) Motor control apparatus and motor control method**

Methode und Vorrichtung zur Motorsteuerung

Méthode et dispositif de contrôle d'un moteur

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **22.11.2000 JP 2000356117**  
**16.02.2001 JP 2001040550**  
**12.09.2001 JP 2001276887**

(43) Date of publication of application:  
**05.06.2002 Bulletin 2002/23**

(73) Proprietor: **NISSAN MOTOR CO., LTD.**  
**Yokohama-shi,**  
**Kanagawa (JP)**

(72) Inventors:  
• **Kitajima, Yasuhiko**  
**Kamakura-shi,**  
**Kanagawa (JP)**

- **Tsukamoto, Masahiro**  
**Yokohama-shi, Kanagawa (JP)**
- **Yonekura, Kouichirou**  
**Kamakura-shi,**  
**Kanagawa (JP)**
- **Yoshimoto, Kantaro**  
**Yokohama-shi, Kanagawa (JP)**

(74) Representative: **Hoefer & Partner Patentanwälte**  
**mbB**  
**Pilgersheimer Straße 20**  
**81543 München (DE)**

(56) References cited:  
**EP-A- 0 982 844 EP-A- 1 087 517**  
**WO-A-99/31793 US-A- 4 980 617**  
**US-A- 5 485 071 US-A- 6 025 691**

**EP 1 211 798 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description****BACKGROUND OF THE INVENTION**

## 1. Field of the Invention

[0001] The present invention relates to an apparatus and a method adopted to control the drive of an AC motor.

## 2. Description of the Related Art

[0002] A current control circuit that controls the current in a three-phase alternating current motor normally performs the control arithmetic operation by converting a three-phase alternating current to a direct current in order to facilitate the arithmetic operation (see Japanese Laid-Open Patent Publication No. H 08-331885). FIG. 33 shows the structure adopted in a three-phase alternating current motor control apparatus which constitutes the related art. In the control arithmetic operation performed in this motor control apparatus, a rotating orthogonal coordinate system (dq-coordinate system) is used. In the rotating orthogonal coordinate system, the direction of the exciting current component in the current flowing through the three-phase alternating current motor is set along the d-axis and the direction of the torque current component in the current flowing through the three-phase alternating current motor is set along the q-axis perpendicular to the d-axis. The current control arithmetic operation is performed using a direct current value obtained by converting the three-phase alternating current value in the rotating orthogonal coordinate system to reduce the current control deviation.

[0003] Miniaturization and higher efficiency are achieved with regard to an AC motor by providing a rotor having internally embedded magnets, as shown in FIG. 34 and a stator assuming a concentrated windings structure. The rotor is able to effectively utilize the magnetic torque and the reluctance torque. A motor having this type of rotor is called an IPM (interior permanent magnet motor). The stator is capable of greatly reducing the coil end. A motor provided with the rotor and the stator having structures described above, which is called a concentrated winding IPM motor, has been attracting a great deal of interest as a motor capable of realizing miniaturization and a high degree of efficiency.

[0004] EP 0 982 844 A1 discloses to control a motor current as output of a three-phase AC calculating section based on a torque control value as output of a torque control section and an output of a third harmonic generation section. The torque control section, the third harmonic generation section and the three-phase AC calculating section respectively correspond to the fundamental current command value determining means, the higher harmonics current command value determining means and the a current control means according to the preamble part of claim 1.

**SUMMARY OF THE INVENTION**

[0005] However, since the concentrated winding IPM motor described above, in which significant space harmonics manifest, poses various problems as detailed below. The space harmonics in a motor assuming a concentrated winding structure such as a concentrated winding IPM motor becomes significant because the small number of slots at each pole results in a more uneven distribution of the magnetic flux compared to that in a motor assuming a distributed winding structure. An explanation is given below as to why a uniform magnetic flux distribution cannot be achieved.

[0006] FIG. 35 shows an SPM motor assuming a surface magnet structure achieved by covering the surface of the rotor with magnets. Unlike in the SPM motor shown in FIG. 35; areas where magnets are embedded and areas where no magnet is embedded are present along the circumference of the rotor in the IPM motor with the internally embedded magnets shown in FIG. 34. Accordingly, while a uniform magnetic flux distribution is achieved in the SPM motor having a rotor, the surface of which is covered with magnets, a greater degree of change in the magnetic flux manifests in the IPM motor to result in a greater space harmonics component.

[0007] Greater space harmonics in the motor leads to a greater higher harmonics component in the current flowing to the motor, and thus, problems arise in that the extent to which the motor efficiency is improved is compromised and in that the extent of torque ripple becomes significant. In addition, since the harmonics component is superimposed on the fundamental wave component in the current, another problem manifests in that the current peak value increases. Namely, the motor control performance becomes poor due to the adverse effect of the space harmonics.

[0008] An object of the present invention is to provide a motor control apparatus and a motor control method that improve control performance in a motor with significant space harmonics.

[0009] The motor control apparatus according to the present invention comprises a fundamental current command value determining means for determining a fundamental current command value for a motor current, a higher harmonics current command value determining means for determining a higher harmonics current command value for the motor current and a current control means for controlling the current flowing to the AC motor based upon the fundamental current command value and the higher harmonics current command value.

**[0010]** In the motor control method according to the present invention, a fundamental current command value for a motor current is determined, a higher harmonics current command value for the motor current is determined and the current flowing to the AC motor is controlled based upon the fundamental current command value and higher harmonics current command value.

## BRIEF DESCRIPTION OF THE DRAWINGS

### **[0011]**

FIG. 1 shows the structure adopted in a first embodiment of the motor control apparatus according to the present invention;

FIG. 2 shows the armature flux linkage (U-phase winding) formed by the magnets in an IPM motor when no space harmonics are present;

FIG. 3 shows the armature flux linkage (U-phase winding) formed by the magnets in the IPM motor when a fifth-order space harmonics are present;

FIG. 4 shows the relationship between the higher harmonics current component and the combined efficiency achieved by setting the dq-axis currents  $i_d$  and  $i_q$ , which are the fundamental current components at constant values;

FIG. 5 shows in detail the structure adopted in the torque control unit in the motor control apparatus in the first embodiment;

FIG. 6 shows in detail the structure adopted in the torque control unit in the motor control apparatus in a second embodiment;

FIG. 7 shows the motor output characteristics;

FIG. 8 shows in detail the structure adopted in the torque control unit in the motor control apparatus in a third embodiment;

FIG. 9 shows in detail the structure adopted in the torque control unit in the motor control apparatus in a fourth embodiment;

FIG. 10 shows in detail the structure adopted in the torque control unit in the motor control apparatus in a fifth embodiment;

FIG. 11 is a diagram provided to facilitate an explanation of the operation performed to select the optimal current command value corresponding to a given motor operating state;

FIG. 12 shows the structure adopted in the motor control apparatus in a sixth embodiment;

FIG. 13A presents a diagram of the current waveform manifesting in a motor driven by a motor control apparatus in the related art; and FIG. 13B presents a diagram of the current waveform manifesting in a motor driven by the motor control apparatus in the sixth embodiment;

FIG. 14 shows the structure adopted in the motor control apparatus in a seventh embodiment;

FIG. 15 shows the structure adopted in the motor control apparatus in an eighth embodiment;

FIG. 16 shows the structure adopted in the motor control apparatus in a ninth embodiment;

FIG. 17 shows the structure adopted in the motor control apparatus in a tenth embodiment;

FIG. 18 is a block diagram of the structure adopted in the higher harmonics current detection unit in the motor control apparatus in the tenth embodiment;

FIG. 19 is a block diagram of the structure adopted in a higher harmonics current detection unit constituted by using a low pass filter in the current response estimating unit;

FIG. 20 is a block diagram of the structure adopted in the higher harmonics current detection unit when the time constant at the low pass filter is variable;

FIG. 21 shows the d-axis current command value and q-axis current command value;

FIG. 22 shows the q-axis higher harmonics current detected by the motor control apparatus in the first embodiment in correspondence to the current command value in FIG. 21;

FIG. 23 shows the q-axis higher harmonics current detected by the motor control apparatus in the tenth embodiment in correspondence to the current command value in FIG. 21;

FIG. 24 shows the d-axis current response value and q-axis current response value corresponding to the current command values shown in FIG. 21;

FIG. 25 is a partial enlargement of FIG. 24;

FIG. 26 shows the structure adopted in the motor control apparatus in an eleventh embodiment;

FIG. 27 is a block diagram of the structure adopted in the higher harmonics current detection unit in the motor control apparatus in the eleventh embodiment;

FIG. 28 is a block diagram of the structure adopted in the higher harmonics current detection unit in the eleventh embodiment when the time constant at the low pass filter is variable;

FIG. 29 shows the structure adopted in the motor control apparatus in a twelfth embodiment;

FIG. 30 is a block diagram of the structure adopted in the higher harmonics current detection unit in the motor control apparatus in the twelfth embodiment;

FIG. 31 is a block diagram of the structure adopted in the higher harmonics current detection unit in the twelfth embodiment when the time constant at the low pass filter is variable;

FIG. 32 shows the structure adopted in the motor control apparatus in a thirteenth embodiment;

FIG. 33 shows the structure adopted in a three-phase alternating current motor control apparatus in the related art;

FIG. 34 shows the structure of an IPM motor; and

FIG. 35 shows the structure of an SPM motor.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

### (First Embodiment)

**[0012]** Now, an explanation is given on the motor control apparatus achieved in the first embodiment to improve the motor efficiency and the motor output. FIG. 1 shows the structure of the motor control apparatus in the first embodiment. The motor control apparatus in the first embodiment implements vector control on a three-phase alternating current motor to realize torque control equivalent to the control achieved on a DC motor.

**[0013]** The motor control apparatus in the first embodiment is provided with a fundamental current control circuit and a higher harmonics current control circuit. The fundamental current control circuit implements control on the fundamental wave components of motor currents  $i_u$ ,  $i_v$  and  $i_w$  by using a dq coordinate system. The dq coordinate system, which is constituted with a d-axis corresponding to the exciting current components of the three-phase currents  $i_u$ ,  $i_v$  and  $i_w$  flowing to a three-phase alternating current motor M and a q-axis corresponding to the torque current components of the currents  $i_u$ ,  $i_v$  and  $i_w$ , rotates in synchronization with the motor rotation.

**[0014]** The higher harmonics current control circuit controls the higher harmonics components contained in the motor currents  $i_u$ ,  $i_v$  and  $i_w$  by using a higher harmonics coordinate system. The higher harmonics coordinate system is an orthogonal coordinate system that rotates with the frequency of a higher harmonics component of a specific order manifesting when the motor currents  $i_u$ ,  $i_v$  and  $i_w$  are controlled by engaging the fundamental current control circuit alone, and it rotates with a frequency which is an integral multiple of the frequency of fundamental wave components of the motor currents  $i_u$ ,  $i_v$  and  $i_w$ .

**[0015]** The fundamental current control circuit includes a torque control unit 1, a fundamental current control unit 2, a dq / three-phase conversion unit 3, a power conversion unit 4, a phase speed calculation unit 5 and a three-phase / dq conversion unit 8. It is to be noted that the structure of the fundamental current control circuit is identical to the structure adopted in the motor control apparatus in the related art illustrated in FIG. 33.

**[0016]** The torque control unit 1 calculates a d-axis current command value  $i_d^*$  and a q-axis current command value  $i_q^*$  in the dq coordinate system and also calculates dh-axis current command values  $i_{dh}^*$  and a qh-axis current command value  $i_{qh}^*$  in the higher harmonics coordinate system  $dhqh$  by using current command value tables, based upon the torque command value  $T_e^*$  and a motor rotating speed  $\omega_e$ , as detailed later in reference to FIG. 5. The resulting current command values  $i_d^*$  and  $i_q^*$  are provided to the fundamental current control unit 2, whereas the current command values  $i_{dh}^*$  and  $i_{qh}^*$  that have been calculated are provided to a higher harmonics current control unit 11.

**[0017]** The fundamental current control unit (dq-axis current control unit) 2 calculates fundamental wave voltage command values  $v_d^*$  and  $v_q^*$  corresponding to the d-axis and the q-axis in order to match the actual currents  $i_d$  and  $i_q$  along the d-axis and the q-axis respectively with the current command values  $i_d^*$  and  $i_q^*$ . The dq / three-phase conversion unit 3 converts voltage command values ( $v_d^* + v_d'$  and  $v_q^* + v_q'$ ) along the d-axis and the q-axis to three-phase alternating current voltage command values  $v_u^*$ ,  $v_v^*$  and  $v_w^*$  based upon the phase  $\theta_e$  of dq coordinate system viewed from the three-phase AC coordinate system. The voltage command values ( $v_d^* + v_d'$ ) and ( $v_q^* + v_q'$ ) corresponding to the d-axis and the q-axis are to be detailed later. The three-phase AC voltage command values  $v_u^*$ ,  $v_v^*$  and  $v_w^*$  resulting from the conversion are provided to the power conversion unit 4.

**[0018]** The power conversion unit 4 employs a power conversion element such as an IGBT to switch the DC voltage from a DC source (not shown) which may be a battery based upon the three-phase AC voltage command values  $v_u^*$ ,  $v_v^*$  and  $v_w^*$  and applies three-phase AC voltages U, V and W to the three-phase alternating current motor M. An encoder PS linked to the three-phase alternating current motor M detects the rotating position  $\theta_m$  of the motor M. The rotating position  $\theta_m$  thus detected is provided to the phase speed calculation unit 5. The phase speed calculation unit 5 calculates the rotating speed  $\omega_e$  of the motor M and the phase  $\theta_e$  of the dq coordinate system viewed from the three-phase AC coordinate system based upon the rotating position signal  $\theta_m$  provided by the encoder PS.

**[0019]** Current sensors 6 and 7 respectively detect the actual currents  $i_u$  and  $i_v$  at the U-phase and the V-phase in the three-phase alternating current motor M. The detected U-phase current  $i_u$  and V-phase current  $i_v$  are provided to the three-phase / dq conversion unit 8. The three-phase / dq conversion unit 8 converts the actual currents  $i_u$ ,  $i_v$  and  $i_w$  ( $= -i_u - i_v$ ) at the three-phase alternating current motor M to the actual current  $i_d$  along the d-axis and the actual current

iq along the q-axis based upon the phase  $\theta_e$  of the dq coordinate system viewed from the three-phase AC coordinate system.

[0020] The higher harmonics current control circuit includes the three-phase / dq conversion unit 8, a high pass filter 9, a dq / dhqh conversion unit 10, the higher harmonics current control unit 11 and a dhqh / dq conversion unit 12. The high pass filter 9 extracts higher harmonics components  $id\_h$  and  $iq\_h$  by filtering the actual current  $id$  along the d-axis and the actual current  $iq$  along the q-axis based upon the motor rotating speed  $\omega_e$ . The dq / dhqh conversion unit 10, which has the higher harmonics coordinate system dhqh mentioned earlier, converts the higher harmonics components  $id\_h$  of the actual current  $id$  along the d-axis and  $iq\_h$  of the actual current  $iq$  along the q-axis to actual currents  $idh$  and  $iqh$  in the higher harmonics coordinate system dhqh. When  $\theta_{eh}$  represents the phase of the dhqh coordinate system viewed from the dq coordinate system, the actual currents  $idh$  and  $iqh$  in the dhqh coordinate system are calculated through the following expression (1).

$$\begin{bmatrix} idh \\ iqh \end{bmatrix} = \begin{bmatrix} \cos \theta_{eh} & \sin \theta_{eh} \\ -\sin \theta_{eh} & \cos \theta_{eh} \end{bmatrix} \begin{bmatrix} id\_h \\ iq\_h \end{bmatrix} \quad \dots \quad (1)$$

[0021] It is to be noted that if the higher harmonics components in the three-phase AC coordinate system are of the fifth order,  $\theta_{eh} = -6\theta_e + \theta_{eo}$  (with  $\theta_{eo}$  representing the phase difference between  $\theta_e = 0$  and  $\theta_{eh} = 0$ ).

[0022] The higher harmonics current control unit (dhqh axis current control unit) 11 calculates higher harmonics voltage command values  $vdh^*$  and  $vqh^*$  respectively corresponding to the dh-axis and the qh-axis so as to match the actual currents  $idh$  and  $iqh$  along the dh-axis and the qh-axis with current command values  $idh^*$  and  $iqh^*$ . The dhqh / dq conversion unit 12 converts the higher harmonics voltage command values  $vdh^*$  and  $vqh^*$  along the dh-axis and the qh-axis to higher harmonics voltage command values  $vd'$  and  $vq'$  along the d-axis and the q-axis respectively. This conversion may be achieved by reversing conversion in expression (1). The voltage command values  $vd'$  and  $vq'$  resulting from the conversion are provided to adders 13 and 14. The adders 13 and 14 obtain the ultimate d-axis voltage command value ( $vd^* + vd'$ ) and q-axis voltage command value ( $vq^* + vq'$ ) by adding the higher harmonics voltage command values  $vd'$  and  $vq'$  generated at the higher harmonics current control circuit to the fundamental voltage command values  $vd^*$  and  $vq^*$  generated at the fundamental current control unit 2.

[0023] Now, the fundamental coordinate system dq and the higher harmonics coordinate system dhqh are explained by using an IPM motor in which significant space harmonics manifests as an example. FIG. 2 shows the armature flux linkage (U-phase winding) formed by the magnets in the IPM motor when there is no space harmonic present. FIG. 3 shows the armature flux linkage (U-phase winding) formed by the magnets in the IPM motor when there are fifth order space harmonic components.

[0024] The magnetic flux changes by achieving the shape of a sine wave relative to the change in the rotating angle of the motor. Normally, the direction of the armature flux linkage vector is represented by the d-axis and the direction perpendicular to the d-axis is represented by the q-axis. Under normal circumstances, physical quantities such as the voltages, the currents or the like in the three-phase AC coordinate system are converted to physical quantities in the dq coordinate system (fundamental coordinate system) and motor control is implemented in the dq coordinate system. In the motor control apparatus in this embodiment, the fundamental wave components in the physical quantities such as voltages or currents are handled in the dq coordinate system whereas the higher harmonics components are handled in the dhqh coordinate system (higher harmonics coordinate system) by assuming the direction of the armature flux linkage vector along the dh-axis and assuming the direction perpendicular to the dh-axis along the qh-axis for each order.

[0025] As shown in FIG. 3, if a fifth-order higher harmonics component is contained, the armature flux linkage is divided into a fundamental wave component magnetic flux and a fifth-order higher harmonics component magnetic flux, with the direction of the armature flux linkage vector of the fundamental wave component assumed along the d-axis and with the direction perpendicular to the d-axis assumed along the q-axis, and the direction of the armature flux linkage vector of the fifth-order higher harmonics component assumed along the dh-axis and the direction perpendicular to the dh-axis assumed along the qh-axis. Accordingly, the fundamental coordinate system dq constitutes a coordinate system that rotates in synchronization with the fundamental wave component of the armature flux linkage and the higher harmonics coordinate system dhqh constitutes a coordinate system that rotates in synchronization with the higher order harmonics component of the armature flux linkage.

[0026] Since the dq coordinate system rotates in synchronization with the motor rotation, the fundamental current in the motor can be handled as a DC quantity in the dq coordinate system. When  $\omega_{eh}$  represents the angular frequency of the higher harmonics current and  $\omega_e$  represents the base angular frequency of the motor current, the angular frequency  $\omega_{eh\_dq}$  of the higher harmonics current in the dq coordinate system is expressed through the following equation (2).

$$\omega_{eh\_dq} = \omega_{eh} - \omega_e \dots (2)$$

As mathematical expression (2) clearly indicates, the higher harmonics component of the motor current cannot be handled as a DC quantity even in the dq coordinate system. Because of this, when the motor rotating speed increases to result in an increase in the frequency of the motor current, the frequency of the higher harmonics component of the motor current becomes higher in correspondence to the motor rotating speed, and thus, the actual current cannot conform to the current command value in a control method in which only the dq coordinate system is used.

[0027] In contrast, in the motor control apparatus in the embodiment in which the fundamental wave component of the motor current is controlled by using the dq coordinate system and the higher harmonics component of the motor current is controlled by using the dhqh coordinate system, the higher harmonics component is allowed to conform to the current with higher accuracy. A higher harmonics current contains higher harmonics components of a plurality of orders. For purposes of achieving simplification, it is assumed in the following explanation that a kth-order higher harmonics component, which manifests a greater degree of influence among the higher harmonics components contained in the higher harmonics current represents the control target.

[0028] Now, an explanation is given on the efficiency and the output of a motor upon which drive control is implemented by a motor control apparatus in the related art that controls the motor torque based upon the fundamental wave component magnetic flux and the fundamental wave component current. The output torque  $T_e$  of the motor that contains a space harmonic component is expressed as in the following expression (3).

$$\begin{aligned} T_e &= P(\phi_d \cdot i_d + \phi_q \cdot i_q) \\ &= P\{(\phi_{d\_1} + \phi_{d\_h})(i_{q\_1} + i_{q\_h}) + (\phi_{q\_1} + \phi_{q\_h})(i_{d\_1} + i_{d\_h})\} \\ &= P\{(\phi_{d\_1} \cdot i_{q\_1} + \phi_{q\_1} \cdot i_{d\_1}) + (\phi_{d\_h} \cdot i_{q\_h} + \phi_{q\_h} \cdot i_{d\_h}) \\ &\quad + (\phi_{d\_h} \cdot i_{q\_1} + \phi_{q\_h} \cdot i_{d\_1}) + (\phi_{d\_1} \cdot i_{q\_h} + \phi_{q\_1} \cdot i_{d\_h})\} \dots (3) \end{aligned}$$

In the expression presented above,  $P$  represents the polar logarithm,  $\phi_d$  represents the d-axis armature flux linkage,  $\phi_{d\_1}$  represents the fundamental wave component of the d-axis armature flux linkage,  $\phi_{d\_h}$  represents the higher harmonics component of the d-axis armature flux linkage,  $\phi_q$  represents the q-axis armature flux linkage,  $\phi_{q\_1}$  represents the fundamental wave component of the q-axis armature flux linkage and  $\phi_{q\_h}$  represents the higher harmonics component of the q-axis armature flux linkage. In addition,  $i_d$  represents the d-axis current,  $i_{d\_1}$  represents the fundamental wave component of the d-axis current,  $i_{d\_h}$  represents the higher harmonics component of the d-axis current,  $i_q$  represents the q-axis current,  $i_{q\_1}$  represents the fundamental wave component of the q-axis current and  $i_{q\_h}$  represents the higher harmonics component of the q-axis current.

[0029] It is to be noted that with  $i_{d\_1}$  representing the fundamental wave component of the d-axis current  $i_d$  and  $i_{d\_h}$  representing the higher harmonics component of the d-axis current  $i_d$  in the fundamental coordinate system dq, the relationship as expressed in the following expression (4) is achieved.

$$i_d = i_{d\_1} + i_{d\_h} \dots (4)$$

[0030] In addition, with  $i_{q\_1}$  representing the fundamental wave component of the q-axis current  $i_q$  and  $i_{q\_h}$  representing the higher harmonics component of the q-axis current  $i_q$  in the fundamental coordinate system dq, the relationship as expressed in the following expression (5) is achieved.

$$i_q = i_{q\_1} + i_{q\_h} \dots (5)$$

[0031] In the following explanation, the fundamental currents  $i_{d\_1}$  and  $i_{q\_1}$  and the higher harmonics currents  $i_{d\_h}$  and  $i_{q\_h}$  are handled in the fundamental coordinate system dq and ultimately, the d-axis higher harmonics current  $i_{d\_h}$  and the q-axis higher harmonics current  $i_{q\_h}$  are converted to the dh-axis higher harmonics current  $i_{dh}$  and the qh-axis higher harmonics current  $i_{qh}$  to facilitate understanding thereof.

[0032] The first term in the right member in expression (3) represents the torque generated based upon the motor armature flux linkage fundamental wave components and the current fundamental wave components. The second term

represents the torque generated based upon the motor armature flux linkage higher harmonics components and the current higher harmonics components. The third term represents the torque generated based upon the motor armature flux linkage higher harmonics components and the current fundamental wave components. The fourth term represents the torque generated based upon the motor armature flux linkage fundamental wave components of and the current higher harmonics components.

**[0033]** Since the torques expressed in the third term and the fourth term in the right member in expression (3) each contain the product of an armature flux linkage component and a current component, the order of which is different from that of the armature flux linkage component, their time averages are both 0. Accordingly, the torques expressed in the third term and the fourth term do not constitute a contributing factor in the average torque output from the motor. However, the torque expressed in the first term is constituted of the product of the fundamental wave components of the armature flux linkage and the fundamental wave components of the corresponding currents, and thus, it constitutes a contributing factor in the average torque. The torque expressed in the second term, too, which contains the products of the higher harmonics components of an armature flux linkage and the higher harmonics components of the corresponding currents of the same order, constitutes a contributing factor in the average torque. The motor control apparatus in the related art implements fundamental wave current control in the dq coordinate system, i.e., control for eliminating current distortion, and accordingly, only utilizes the torque expressed in the first term of the right member in expression (3). As a result, the motor efficiency is compromised and the output value is lowered in the control apparatus in the related art.

**[0034]** In the motor control apparatus in the first embodiment, the motor torque is controlled based upon the magnetic flux higher harmonics components and the current higher harmonics components as well as implementing motor torque control based upon the magnetic flux fundamental wave components and the current fundamental wave components. Thus, the motor efficiency is improved and a better output is achieved.

**[0035]** Now, the effect of the higher harmonics currents flowing to the motor on the motor efficiency is examined. FIGS. 4A and 4B each show the relationship between the higher harmonics current component and the combined motor efficiency achieved with the d-axis current  $i_d$  and q-axis current  $i_q$  corresponding to the fundamental current components both set at a constant level. FIG. 4A shows the combined efficiency relative to the dh-axis current  $i_{dh}$  achieved by setting the qh axis current  $i_{qh}$  to 0, whereas FIG. 4B shows the combined efficiency relative to the qh-axis current  $i_{qh}$  achieved by setting the dh-axis current  $i_{dh}$  to 0. As the figures clearly indicate, the maximum efficiency is not achieved when the higher harmonics current  $i_{dh}$  or  $i_{qh}$  is set to 0 and the efficiency is maximized when there is some higher harmonics current flowing. In other words, the combined efficiency is improved by adopting a control method in which the higher harmonics currents are superimposed on the fundamental currents over a control method achieved by implementing motor drive control using the fundamental currents alone.

**[0036]** FIG. 5 shows in detail the structure adopted in the torque control unit 1 in the first embodiment. The torque control unit 1 calculates a d-axis current command value  $i_d^*$  corresponding to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  by looking up a maximum efficiency  $i_d$  map 1a. In the maximum efficiency  $i_d$  map 1a, d-axis current command value data relative to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  are stored. In addition, the torque control unit 1 calculates a q-axis current command value  $i_q^*$  corresponding to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  by looking up a maximum efficiency  $i_q$  map 1b. In the maximum efficiency  $i_q$  map 1b, q-axis current command value data relative to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  are stored.

**[0037]** Likewise, the torque control unit 1 calculates a dh-axis current command value  $i_{dh}^*$  corresponding to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  by looking up a maximum efficiency  $i_{dh}$  map 1c. In the maximum efficiency  $i_{dh}$  map 1c, dh-axis current command value data relative to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  are stored. The torque control unit 1 also calculates a qh -axis current command value  $i_{qh}^*$  corresponding to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  by looking up a maximum efficiency  $i_{qh}$  map 1d. In the maximum efficiency  $i_{qh}$  map 1d, qh-axis current command value data relative to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  are stored.

**[0038]** In the maps 1a ~ 1d, the fundamental current command values and the higher harmonics current command values that achieve the maximum combined efficiency among combinations of current command values for matching the motor torque  $T_e$  to the torque command value  $T_e^*$  are stored.

**[0039]** The combined motor efficiency is maximized in the motor control apparatus in the first embodiment by ensuring that the torque  $T_e$ , which matches the torque command value  $T_e^*$  with a high degree of efficiency is output from the motor at any motor rotating speed  $\omega_e$ .

(Second Embodiment)

**[0040]** A motor control apparatus achieved in the second embodiment that minimizes the extent of motor torque rippling is now explained. It is to be noted that since the motor control apparatus in the second embodiment assumes a structure identical to the structure of the motor control apparatus in the first embodiment illustrated in FIG. 1 except for the structure

adopted in the torque control unit 1, an explanation of the overall structure is omitted and the following explanation focuses on the difference.

[0041] While the torques expressed in the third term and the fourth term of the right member in expression (3), which each contain the product of an armature flux linkage and currents of different orders do not constitute contributing factors in the average torque, they constitute torque ripple components. In the motor control apparatus in the related art, in which the fundamental current control is implemented in dq coordinate system, i.e., control is implemented by assuming that there is no higher harmonics component in the current, the value of the fourth term is 0, but the value of the third term is not 0, thereby constituting a torque ripple component. In other words, the motor control apparatus in the related art is not capable of reducing the torque ripple in a motor manifesting a significant space harmonic. Since the torque ripple in the motor causes discomfort to passengers in an electric car, it is crucial to reduce the extent of torque ripple.

[0042] In the motor control apparatus in the second embodiment, current requirements for completely eliminating torque ripple are ascertained by analyzing the relationship between the current in an IPM motor in which space harmonics are present and the output torque of the IPM motor.

[0043] The output torque  $T_e$  of an IPM motor may be expressed as the sum of the magnet torque  $T_{em}$  and the reluctance torque  $T_{er}$ .

$$T_e = T_{em} + T_{er}$$

$$= P(\phi_{dm} \cdot i_q - L_{qd} \cdot i_d \cdot i_q) \quad \dots \quad (6)$$

[0044] In the expression given above,  $T_{em}$  represents the magnet torque,  $T_{er}$  represents the reluctance torque  $\phi_{dm}$  represents the armature flux linkage (corresponding to the magnets) and  $L_{qd}$  represents the difference between the d-axis inductance and the q-axis inductance ( $= L_q - L_d = L_{qd\_1} + L_{qd\_h}$ ).

[0045] The magnet torque  $T_{em}$  is calculated through the following expression (7).

$$T_{em} = P \cdot \phi_{dm} \cdot i_q$$

$$= P(\phi_{dm\_1} + \phi_{dm\_h})(i_{q\_1} + i_{q\_h})$$

$$= P(\phi_{dm\_1} \cdot i_{q\_1} + \phi_{dm\_h} \cdot i_{q\_1} + \phi_{dm\_1} \cdot i_{q\_h} + \phi_{dm\_h} \cdot i_{q\_h})$$

$$= P \cdot \phi_{dm\_1} \cdot i_{q\_1} + P(\phi_{dm\_h} \cdot i_{q\_1} + \phi_{dm\_1} \cdot i_{q\_h} + \phi_{dm\_h} \cdot i_{q\_h}) \quad \dots \quad (7)$$

With  $\phi_{dm\_1}$  representing the fundamental wave component (corresponding to the magnets) of the armature flux linkage and  $\phi_{dm\_h}$  representing the higher harmonics component (corresponding to the magnets) of the armature flux linkage. The first term in the right member in expression (7) represents the fundamental wave component torque and the second term represents the torque ripple component. Accordingly, by controlling the current to set the value of the second term to 0, the ripple component in the magnet torque can be eliminated. In other words, the following equation (8) must be true.

$$\phi_{dm\_h} \cdot i_{q\_1} + \phi_{dm\_1} \cdot i_{q\_h} + \phi_{dm\_h} \cdot i_{q\_h} = 0 \quad \dots \quad (8)$$

[0046] By modifying expression (8), expression (9) is obtained.

$$i_{q\_h} = -\phi_{dm\_h} \cdot i_{q\_1} / (\phi_{dm\_1} + \phi_{dm\_h}) \quad \dots \quad (9)$$

[0047] If the fundamental wave component of the armature flux linkage formed by the magnets is sufficiently larger than the higher harmonics component ( $\phi_{dm\_1} \gg \phi_{dm\_h}$ ), expression (9) can be approximated to the following expression (10).



$$i_{q\_h} = -\phi_{dm\_h} \cdot i_{q\_1} / \phi_{dm\_1} \quad \dots \quad (10)$$

[0048] Thus, by implementing control so as to set the higher harmonics component  $i_{q\_h}$  of the q-axis current to the value expressed in expression (10), the ripple in the magnet torque

[0049]  $T_{em}$  can be eliminated.

[0050] The reluctance torque  $T_{er}$  is expressed as in the following expression (11).

$$\begin{aligned} T_{er} &= -P \cdot L_{qd} \cdot i_d \cdot i_q \\ &= P(L_{qd\_1} + L_{qd\_h})(i_{d\_1} + i_{d\_h})(i_{q\_1} + i_{q\_h}) \\ &= P(L_{qd\_1} \cdot i_{q\_1} + L_{qd\_h} \cdot i_{q\_1} + L_{qd\_1} \cdot i_{q\_h} + L_{qd\_h} \cdot i_{q\_h})(i_{d\_1} + i_{d\_h}) \\ &= P \cdot L_{qd\_1} \cdot i_{q\_1} \cdot i_{d\_1} \\ &\quad + P(L_{qd\_h} \cdot i_{q\_1} + L_{qd\_1} \cdot i_{q\_h} + L_{qd\_h} \cdot i_{q\_h})i_{d\_1} \\ &\quad + P(L_{qd\_1} \cdot i_{q\_1} + L_{qd\_h} \cdot i_{q\_1} + L_{qd\_1} \cdot i_{q\_h} + L_{qd\_h} \cdot i_{q\_h})i_{d\_h} \quad \dots \quad (11) \end{aligned}$$

[0051] The first term in the right member in expression (11) represents the fundamental wave component of the reluctance torque and the second term and the third term in the right member each represent a torque ripple component. Accordingly, by implementing control on the currents so as to ensure that the sum of the second term and the third term is 0, the overall ripple component in the reluctance torque can be eliminated.

$$\begin{aligned} &(L_{qd\_1} \cdot i_{q\_1} + L_{qd\_h} \cdot i_{q\_1} + L_{qd\_1} \cdot i_{q\_h} + L_{qd\_h} \cdot i_{q\_h})i_{d\_h} \\ &= - (L_{qd\_h} \cdot i_{q\_1} + L_{qd\_1} \cdot i_{q\_h} + L_{qd\_h} \cdot i_{q\_h})i_{d\_1} \\ \therefore i_{d\_h} &= - (L_{qd\_h} \cdot i_{q\_1} + L_{qd\_1} \cdot i_{q\_h} + L_{qd\_h} \cdot i_{q\_h})i_{d\_1} / (L_{qd\_1} \cdot i_{q\_1} + L_{qd\_h} \cdot i_{q\_1} + L_{qd\_1} \cdot i_{q\_h} + L_{qd\_h} \cdot i_{q\_h}) \quad \dots \quad (12) \end{aligned}$$

[0052] By assuming that the higher harmonics components are sufficiently smaller than the fundamental wave components with regard to the motor parameters and the motor currents, expression (12) can be approximated to the following expression (13).

$$i_{d\_h} = - (L_{qd\_h} \cdot i_{q\_1} + L_{qd\_1} \cdot i_{q\_h})i_{d\_1} / (L_{qd\_1} \cdot i_{q\_1}) \quad \dots \quad (13)$$

[0053] Thus, by implementing control so as to set a higher harmonics component  $i_{d\_h}$  of the d-axis current to the value expressed in expression (13), the ripple in the reluctance torque can be eliminated.

[0054] As explained above, by implementing control so as to set the q-axis higher harmonics component current  $i_{q\_h}$  to the value expressed in expression (10) and implementing control so as to set the d-axis higher harmonics component current  $i_{d\_h}$  to the value expressed in expression (13), the torque ripple in the motor can be reduced. Since the higher harmonics components  $i_{d\_h}$  and  $i_{q\_h}$  in the dq-axis coordinate system can be converted to higher harmonics component currents along the dh-axis and the qh-axis in the higher harmonics coordinate system through expression (1), a dh-axis current command value  $idh^*$  and a qh-axis current command value  $iqh^*$  are calculated by incorporating expressions (10) and (13) into expression (1). By implementing control through the higher harmonics current control unit 11 so as to match the higher harmonics currents  $i_{d\_h}$  and  $i_{q\_h}$  to the current command values  $idh^*$  and  $iqh^*$  respectively, the torque ripple in the motor can be minimized.

**[0055]** FIG. 6 shows in detail the structure adopted in a torque control unit 1A in the second embodiment. In the motor control apparatus in the second embodiment, the torque control unit 1A is employed instead of the torque control unit 1 shown in FIG. 1. The torque control unit 1A calculates a d-axis current command value  $i_d^*$  corresponding to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  by looking up a maximum efficiency  $i_d$  map 1e. In the maximum efficiency  $i_d$  map 1e, d-axis current command value data relative to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  are stored. In addition, the torque control unit 1A calculates a q-axis current command value  $i_q^*$  corresponding to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  by looking up a maximum efficiency  $i_q$  map 1f. In the maximum efficiency  $i_q$  map 1f, q-axis current command value data relative to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  are stored.

**[0056]** The torque control unit 1A also calculates a dh-axis current command value  $i_{dh}^*$  corresponding to d-axis and q-axis current command values  $i_d^*$  and  $i_q^*$  by looking up a minimum torque ripple  $i_{dh}$  map 1g. In the minimum torque ripple  $i_{dh}$  map 1g, dh-axis current command value data corresponding to the d-axis and q-axis current command values are stored. Likewise, the torque control unit 1A calculates a qh-axis current command value  $i_{qh}^*$  corresponding to the d-axis and q-axis current command values  $i_d^*$  and  $i_q^*$  by looking up a minimum torque ripple  $i_{qh}$  map 1h. In the minimum torque ripple  $i_{qh}$  map 1h, qh-axis current command value data relative the d-axis and q-axis current command values are stored.

**[0057]** In the maps 1e ~ 1h, the fundamental current command values and the higher harmonics current command values that minimize the torque ripple while satisfying expressions (10) and (13) among combinations of current command values for matching the motor torque  $T_e$  to the torque command value  $T_e^*$  are stored. Since an error occurs if these command values are ascertained through an arithmetic operation, data of measured values obtained by measuring the fundamental currents and the higher harmonics currents that achieve the minimum torque ripple in advance may be used.

**[0058]** In the motor control apparatus in the second embodiment, the torque  $T_e$  that matches the torque command value  $T_e^*$  can be output from the motor while minimizing the torque ripple at any motor rotating speed  $\omega_e$ . As a result, the motor vibration and the motor noise attributable to the torque ripple can be reduced. In addition, by adopting the motor control apparatus in the second embodiment in conjunction with an electric car using the motor as a drive source, the passenger comfort is improved.

(Third Embodiment)

**[0059]** The motor control apparatus achieved in the third embodiment minimizes the voltage ripple. It is to be noted that since the motor control apparatus in the third embodiment assumes a structure identical to the structure of the motor control apparatus in the first embodiment illustrated in FIG. 1 except for the structure adopted in the torque control unit 1, an explanation of the overall structure is omitted and the following explanation focuses on the difference.

**[0060]** FIG. 7 shows the relationship of the torque  $T_e$  to the rotating speed  $\omega_e$  of the motor M, i.e., the output characteristics of the motor M. The maximum torque of the motor M within the range over which the rotating speed  $\omega_e$  is between the base rotating speed  $-\omega_b$  and the base rotating speed  $+\omega_b$  is indicated by the bold line ① representing the maximum torque line. The maximum torque of the motor M in the range over which the rotating speed  $\omega_e$  exceeds the base rotating speed  $\pm\omega_b$  is identified by the dotted line ② representing the maximum output line.

**[0061]** Since the rated current of the power element at the power conversion unit 4 is determined in conformance to the maximum torque line ① under normal circumstances, a fundamental current up to 600A can be supplied in correspondence to, for instance, a 600A rated current. However, if the motor current contains a higher harmonics current, the peak value of the motor current becomes higher than the peak value of the fundamental current, and accordingly, the fundamental current must be set lower than 600A, i.e., the rated current. This presents a problem in that the efficiency becomes poor due to increases in the core loss and the copper loss as well as the reduced maximum motor torque. If a higher harmonics component is contained in the motor voltage, the peak value of the motor voltage becomes higher than the peak value of the fundamental voltage and, accordingly, the fundamental voltage must be set lower than the rated voltage of the motor and the power element. This poses a problem in that due to an insufficient voltage, a predetermined level of electrical current cannot be supplied to result in a reduced output.

**[0062]** An explanation is given first on the voltage ripple manifesting in a motor in which space harmonics are present. A circuit equation of the motor M may be expressed as follows.

$$\begin{aligned}
v_d &= R \cdot i_d + d(\phi_d)/dt - \omega_e \cdot \phi_q \\
&= R \cdot i_d + d(\phi_{dm} + L_d \cdot i_d)/dt - \omega_e \cdot L_q \cdot i_q, \\
v_q &= \omega_e \cdot \phi_d + R \cdot i_q + d(\phi_q)/dt \\
&= \omega_e (\phi_{dm} + L_d \cdot i_d) + R \cdot i_q + d(L_q \cdot i_q)/dt \quad \dots (14)
\end{aligned}$$

With  $v_d$  representing the d-axis voltage,  $v_q$  representing the q-axis voltage,  $R$  representing the phase winding resistance,  $\phi_d$  representing the d-axis armature flux linkage,  $\phi_q$  representing the q-axis armature flux linkage,  $\phi_{dm}$  representing the armature flux linkage (corresponding to the magnets),  $L_d$  representing the d-axis inductance and  $L_q$  representing the q-axis inductance.

**[0063]** By rewriting expression (14) with each of the individual magnetic fluxes, inductances and currents as the sum of a fundamental wave component and a higher harmonics component, the d-axis voltage  $v_d$  is expressed as follows.

$$\begin{aligned}
v_d &= R(i_{d1} + i_{dh}) \\
&+ d\{(\phi_{dm1} + \phi_{dmh}) + (L_{d1} + L_{dh})(i_{d1} + i_{dh})\}/dt \\
&- \omega_e(L_{q1} + L_{qh})(i_{q1} + i_{qh}) \\
&= R(i_{d1} + i_{dh}) \\
&+ d\{(\phi_{dm1} + L_{d1} \cdot i_{d1}) + (\phi_{dmh} + L_{dh} \cdot i_{d1} + L_{d1} \cdot i_{dh} + L_{dh} \cdot i_{dh})\}/dt \\
&- \omega_e(L_{q1} \cdot i_{q1} + L_{qh} \cdot i_{q1} + L_{q1} \cdot i_{qh} + L_{qh} \cdot i_{qh}) \\
&= \{R \cdot i_{d1} + d(\phi_{dm1} + L_{d1} \cdot i_{d1})/dt + \omega_e \cdot L_{q1} \cdot i_{q1}\} \\
&+ [R \cdot i_{dh} + d(\phi_{dmh} + L_{dh} \cdot i_{d1} + L_{d1} \cdot i_{dh} + L_{dh} \cdot i_{dh})/dt - \omega_e(L_{qh} \cdot i_{q1} + L_{q1} \cdot i_{qh} + L_{qh} \cdot i_{qh})] \quad \dots (15)
\end{aligned}$$

**[0064]** In expression (15), the first term represents the fundamental wave component and the second term represents the voltage ripple component. The voltage ripple may be eliminated by ensuring that the value of the second term is 0. In other words, the relationship expressed in the following expression (16) must be achieved.

$$\begin{aligned}
&R \cdot i_{dh} + d(\phi_{dmh} + L_{dh} \cdot i_{d1} + L_{d1} \cdot i_{dh} + L_{dh} \cdot i_{dh})/dt \\
&- \omega_e(L_{qh} \cdot i_{q1} + L_{q1} \cdot i_{qh} + L_{qh} \cdot i_{qh}) = 0 \quad \dots (16)
\end{aligned}$$

In order to achieve the relationship expressed in expression (16), it must be ensured that the values of all three terms in expression (16) are 0. However, since the value of the first term is normally insignificant compared to the values of the second term and the third term and can be disregarded, the condition for setting the values of the second term and the third term to 0 is ascertained. The condition for setting the value of the second term to 0 is expressed in the following expression (17).

$$\begin{aligned} \phi_{dm\_h} + L_{d\_h} \cdot i_{d\_1} + (L_{d\_1} + L_{d\_h}) \cdot i_{d\_h} &= \text{constant value} \\ \therefore i_{d\_h} &= -\{(\phi_{dm\_h} + L_{d\_h} \cdot i_{d\_1}) + \text{constant value}\} / (L_{d\_1} \\ &+ L_{d\_h}) \quad \dots (17) \end{aligned}$$

[0065] The condition for setting the value of the third term to 0 is expressed in the following expression (18).

$$L_{q\_h} \cdot i_{q\_1} + L_{q\_1} \cdot i_{q\_h} + L_{q\_h} \cdot i_{q\_h} = 0 \quad \dots (18)$$

[0066] The ripple in the d-axis voltage  $v_d$  may be eliminated by implementing control so as to set the higher harmonics components  $i_{d\_h}$  in the d-axis current and  $i_{q\_h}$  in the q-axis current to the values expressed in expressions (17) and (18) respectively.

[0067] By rewriting expression (14) with each of the individual magnetic fluxes, inductances and currents as the sum of a fundamental wave component and a higher harmonics component, the q-axis voltage  $v_q$  is expressed as in the following expression (19).

$$\begin{aligned} v_q &= \omega_e \{ \phi_{dm\_1} + \phi_{dm\_h} + (L_{d\_1} + L_{d\_h}) (i_{d\_1} + i_{d\_h}) \} \\ &+ R (i_{q\_1} + i_{q\_h}) + d(L_{q\_1} + L_{q\_h}) (i_{q\_1} + i_{q\_h}) / dt \\ &= \{ \omega_e (\phi_{dm\_1} + L_{d\_1} \cdot i_{d\_1}) + R \cdot i_{q\_1} + d(L_{q\_1} \cdot i_{q\_1}) / dt \} \\ &+ [ \omega_e \{ \phi_{dm\_h} + (L_{d\_h} \cdot i_{d\_1} + L_{d\_1} \cdot i_{d\_h} + L_{d\_h} \cdot i_{d\_h}) \} + R \cdot \\ &i_{q\_h} + d(L_{q\_h} \cdot i_{q\_1} + L_{q\_1} \cdot i_{q\_h} + L_{q\_h} \cdot i_{q\_h}) / dt ] \quad \dots (19) \end{aligned}$$

In expression (19), the first term represents the fundamental wave component and the second term represents the higher order component (corresponding to the ripple). The ripple in the q-axis voltage may be eliminated by ensuring that the value of the second term is 0. In other words, the relationship expressed in the following expression (20) must be achieved.

$$\begin{aligned} \omega_e \{ \phi_{dm\_h} + (L_{d\_h} \cdot i_{d\_1} + L_{d\_1} \cdot i_{d\_h} + L_{d\_h} \cdot i_{d\_h}) \} + R \cdot i_{q\_h} \\ + d(L_{q\_h} \cdot i_{q\_1} + L_{q\_1} \cdot i_{q\_h} + L_{q\_h} \cdot i_{q\_h}) / dt = 0 \quad \dots (20) \end{aligned}$$

[0068] In order to achieve the relationship expressed in expression (20), it must be ensured that the values in all three terms in expression (20) are 0. However, since the value of the second term is normally insignificant enough to be disregarded compared to the values of the first term and the third term, the condition for setting the values of the first term and the third term to 0 is ascertained. The condition for setting the value of the first term to 0 is expressed as in the following expression (21).

$$\begin{aligned} \phi_{dm\_h} + (L_{d\_h} \cdot i_{d\_1} + L_{d\_1} \cdot i_{d\_h} + L_{d\_h} \cdot i_{d\_h}) &= 0 \\ \therefore i_{d\_h} &= -(\phi_{dm\_h} + L_{d\_h} \cdot i_{d\_1}) / (L_{d\_1} + L_{d\_h}) \quad \dots (21) \end{aligned}$$

[0069] The condition for setting the value of the third term to 0 is expressed in the following expression (22).

$$L_{q\_h} \cdot i_{q\_1} + L_{q\_1} \cdot i_{q\_h} + L_{q\_h} \cdot i_{q\_h} = \text{constant value}$$

$$\therefore i_{q\_h} = (-L_{q\_h} \cdot i_{q\_1} + \text{constant value}) / (L_{q\_1} + L_{q\_h})$$

... (22)

**[0070]** The ripple in the q-axis voltage  $v_q$  may be eliminated by implementing control so as to set the higher harmonics components  $i_{d\_h}$  in the d-axis current and  $i_{q\_h}$  in the q-axis current to the values expressed in expressions (21) and (22) respectively.

**[0071]** It is to be noted that if the constant values in expressions (17) and (22) are 0, expressions (17) and (18) are identical to expressions (21) and (22) respectively. In other words, since the condition for setting the ripple voltage in the d-axis voltage  $v_d$  can be the same as the condition for setting the ripple voltage in the q-axis voltage  $v_q$ , it becomes possible to set the ripple components in both the d-axis voltage  $v_d$  and the q-axis voltage  $v_q$  under a single condition.

$$i_{d\_h} = -(\phi_{dm\_h} + L_{d\_h} \cdot i_{d\_1}) / L_{d\_1},$$

$$i_{q\_h} = -L_{q\_h} \cdot i_{q\_1} / L_{q\_1} \quad \dots \quad (23)$$

Namely, by implementing control so as to set the d-axis higher harmonics current  $i_{d\_h}$  and the q-axis higher harmonics current  $i_{q\_h}$  in the fundamental coordinate system dq to the values indicated in expression (23), the voltage ripple can be reduced. It is to be noted that the higher harmonics currents  $i_{d\_h}$  and  $i_{q\_h}$  in the fundamental coordinate system dq can be converted to a dh-axis higher harmonics current  $i_{dh}$  and a qh- axis higher harmonics current  $i_{qh}$  in the higher harmonics coordinate system dhqh through expression (1). Thus, by incorporating expression (23) into expression (1) to calculate a dh-axis current command value  $i_{dh}^*$  and a qh-axis current command value  $i_{qh}^*$  and implementing control on the higher harmonics currents accordingly as explained earlier, the voltage ripple can be minimized.

**[0072]** FIG. 8 shows in detail the structure adopted in a torque control unit 1B in the third embodiment. In the motor control apparatus in the third embodiment, the torque control unit 1B is employed instead of the torque control unit 1 shown in FIG. 1. The torque control unit 1B calculates a d-axis current command value  $i_d^*$  corresponding to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  by looking up a maximum efficiency  $i_d$  map 1e. In the maximum efficiency  $i_d$  map 1e, d-axis current command value data relative to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  are stored. In addition, the torque control unit 1B calculates a q-axis current command value  $i_q^*$  corresponding to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  by looking up a maximum efficiency  $i_q$  map 1f. In the maximum efficiency  $i_q$  map 1f, q-axis current command value data relative to the torque command value and the motor rotating speed are stored.

**[0073]** The torque control unit 1B also calculates a dh-axis current command value  $i_{dh}^*$  corresponding to a d-axis current command value  $i_d^*$  and a q-axis current command value  $i_q^*$  by looking up a minimum voltage ripple  $i_{dh}$  map 1i. In the minimum voltage ripple  $i_{dh}$  map 1i, dh-axis current command value data relative to the d-axis current command value and the q-axis current command value are stored. Likewise, the torque control unit 1B calculates a qh-axis current command value  $i_{qh}^*$  corresponding to the d-axis current command value  $i_d^*$  and the q-axis current command value  $i_q^*$  by looking up a minimum voltage ripple  $i_{qh}$  map 1j. In the minimum voltage ripple  $i_{qh}$  map 1j, qh-axis current command value data relative to the d-axis and q-axis current command values are stored.

**[0074]** In the maps 1e, 1f, 1i and 1j, the fundamental current command values and the higher harmonics current command values that minimize the voltage ripple among combinations of current command values for matching the motor torque  $T_e$  to the torque command value  $T_e^*$  are stored. Since an error occurs if these command values are ascertained through an arithmetic operation, data of measured values obtained by measuring the fundamental currents and the higher harmonics currents that achieve minimum voltage ripple in advance may be used.

**[0075]** In the motor control apparatus in the third embodiment, the torque  $T_e$  that matches the torque command value  $T_e^*$  can be output from the motor while minimizing the voltage ripple at any motor rotating speed  $\omega_e$ . As a result, the extent to which the fundamental voltage becomes reduced is minimized to achieve an increase in the motor output.

(Fourth Embodiment)

**[0076]** The motor control apparatus achieved in the fourth embodiment minimizes the current ripple. It is to be noted that since the motor control apparatus in the fourth embodiment assumes a structure identical to the structure of the motor control apparatus in the first embodiment illustrated in FIG. 1 except for the structure adopted in the torque control unit 1, an explanation of the overall structure is omitted and the following explanation focuses on the difference.

**[0077]** FIG. 9 shows in detail the structure adopted in a torque control unit 1C in the fourth embodiment. In the motor control apparatus in the fourth embodiment, the torque control unit 1C is employed instead of the torque control unit shown in FIG. 1. The torque control unit 1C calculates a d-axis current command value  $i_d^*$  corresponding to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  by looking up a maximum efficiency  $i_d$  map 1e. In the maximum efficiency  $i_d$  map 1e, d-axis current command value data relative to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  are stored. In addition, the torque control unit 1C calculates a q-axis current command value  $i_q^*$  corresponding to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$  by looking up a maximum efficiency  $i_q$  map 1f. In the maximum efficiency  $i_q$  map 1f, q-axis current command value data relative to the torque command value  $T_e$  and the motor rotating speed  $\omega_e$  are stored.

**[0078]** The torque control unit 1C sets both the dh-axis current command value  $i_{dh}^*$  and the qh-axis current command value  $i_{qh}^*$  to 0. This enables control for setting both the dh-axis current  $i_{dh}$  and the qh-axis current  $i_{qh}$  in the higher harmonics coordinate system  $d_{hq}$  to 0.

**[0079]** In the motor control apparatus in the fourth embodiment, the torque  $T_e$  that matches the torque command value  $T_e^*$  can be output from the motor while minimizing the current ripple at any motor rotating speed  $\omega_e$ . In addition, since the extent to which the fundamental current is lowered can be minimized by suppressing the current ripple, an increase in the motor torque is achieved in the constant torque control range.

(Fifth Embodiment)

**[0080]** An explanation is given on the fifth embodiment in which optimal fundamental current command values and optimal higher harmonics current command values are selected in correspondence to the operating state of the motor M. It is to be noted that since the motor control apparatus in the fifth embodiment assumes a structure identical to the structure of the motor control apparatus in the first embodiment shown in FIG. 1 except for the structure adopted in the torque control unit 1, an explanation of the overall structure is omitted and the following explanation focuses on the difference.

**[0081]** FIG. 10 shows in detail the structure adopted in a torque control unit 1D in the fifth embodiment. In the motor control apparatus in the fifth embodiment, the torque control unit 1D is employed instead of the torque control unit 1 shown in FIG. 1. The torque control unit 1D is provided with a maximum efficiency current command calculation unit 1p, a minimum torque ripple current command calculation unit 1g, a minimum voltage ripple current command calculation unit 1r, a minimum current ripple current command calculation unit 1t, an optimal command value selection unit 1u and a selector switch 1v.

**[0082]** The maximum efficiency current command calculation unit 1p calculates fundamental current command values  $i_d^*$  and  $i_q^*$  and higher harmonics current command values  $i_{dh}^*$  and  $i_{qh}^*$  that maximize the efficiency. The minimum torque ripple current command calculation unit 1g calculates fundamental current command values  $i_d^*$  and  $i_q^*$  and higher harmonics current command values  $i_{dh}^*$  and  $i_{qh}^*$  that minimize the torque ripple. The minimum voltage ripple current command calculation unit 1r calculates fundamental current command values  $i_d^*$  and  $i_q^*$  and higher harmonics current command values  $i_{dh}^*$  and  $i_{qh}^*$  that minimizes the voltage ripple. The minimum current ripple current command calculation unit 1t calculates fundamental current command values  $i_d^*$  and  $i_q^*$  and higher harmonics current command values  $i_{dh}^*$  and  $i_{qh}^*$  that minimizes the current ripple.

**[0083]** The optimal command value selection unit 1u selects the optimal current command values from the current command values calculated at the current command calculation units 1p, 1g, 1r and 1t, in correspondence to the operating state of the motor M which includes the rotating speed  $\omega_e$  and the torque  $T_e$  of the motor M, and switches the selector switch 1v. It is to be noted that the torque  $T_e$  of the motor M may be calculated through expression (3) or expression (6) mentioned earlier, for instance, or it may be measured by providing a torque detector.

**[0084]** In reference to FIG. 11, the operation of the optimal command value selection unit 1u is explained. FIG. 11 shows the first quadrant in FIG. 7 showing the output characteristics of the motor M. Since the operation achieved in the second ~ fourth quadrants is identical to the operation achieved over the first quadrant, an explanation thereof is omitted.

**[0085]** In the range ⑥ in the vicinity of the maximum torque lint ① in FIG. 11, a higher motor current is achieved compared to the motor current levels in the other ranges ③ ~ (5), and the motor current becomes close to the rated current of the power element of the power conversion unit 10 in the range ⑥. When the operating point of the motor, which is determined by the rotating speed  $\omega_e$  and the torque  $T_e$  of the motor M is within the range ⑥, i.e., when the difference between the motor torque  $T_e$  and the maximum torque is equal to or less than a predetermined value and the motor torque  $T_e$  is close to the maximum value, the current command values calculated at the minimum current ripple current command calculation unit 1t are selected. As a result, the current ripple at the motor M is minimized to achieve a motor current peak value which is lower than the rated current of the power element.

**[0086]** Since a higher voltage must be applied to the motor M as explained earlier in the range ⑤ in the vicinity of the maximum output line ②, the differences between the DC bus voltage (the inverter DC link voltage) and the motor voltages

$v_u$ ,  $v_v$  and  $v_w$  become reduced. Accordingly, when the operating point determined by the rotating speed  $\omega_e$  and the torque  $T_e$  of the motor M is within the range ⑤, i.e., when the difference between the motor output and the maximum output is equal to or less than a predetermined value and the motor output is close to the maximum value, the current command values calculated at the minimum voltage ripple current command calculation unit 1r are selected. As a result, the voltage ripple at the motor M is minimized to make it possible to prevent reductions in the motor voltages caused by ripple voltage while ensuring that the motor voltage peak value is lower than the voltage at the power element.

**[0087]** Since the effect of the torque ripple manifests to a greater extent in the range ④ over which the rotating speed  $\omega_e$  and the torque  $T_e$  of the motor M are both low, the current command values calculated at the minimum torque ripple current command calculation unit 1g are selected. This minimizes the torque ripple at the motor M, which makes it possible to reduce discomfort to the passengers by lowering the extent of adverse effects attributable to the torque ripple such as vibration and noise in an electric car.

**[0088]** When the operating point determined by the rotating speed  $\omega_e$  and the torque  $T_e$  of the motor M is within the range ③, the current command values calculated at the maximum efficiency current command calculation unit 1p for achieving the maximum efficiency are selected. This enables a reduction in the power consumption at the motor M while maximizing the efficiency of the motor M.

**[0089]** In the motor control apparatus in the fifth embodiment, drive control is implemented on the motor M by selecting the optimal current command values corresponding to the operating state of the motor M.

**[0090]** It is to be noted that in the motor control apparatuses achieved in the individual embodiments described above, the d-axis fundamental current command value  $i_d^*$  and the q-axis fundamental current command value  $i_q^*$  and the dh-axis higher harmonics current command value  $i_{dh}^*$  and the qh-axis higher harmonics current command value  $i_{qh}^*$  are calculated at the torque control unit 1, 1A, 1B and 1C based upon the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$ . However, if the motor M is to be driven over the rotating speed ( $\omega_e$ ) range of 0 - base rotating speed  $\omega_b$  shown in FIG. 7, i.e., if the motor M is to be operated only within the constant torque control range (constant torque control), the d-axis fundamental current command value  $i_d^*$  and the q-axis fundamental current command value  $i_q^*$  and the dh-axis higher harmonics current command value  $i_{dh}^*$  and the qh-axis higher harmonics current command value  $i_{qh}^*$  should be calculated based upon the torque command value  $T_e^*$  alone. In other words, by providing a map of current command value data relative to the torque command value  $T_e^*$  in advance, the current command values  $i_d^*$ ,  $i_q^*$ ,  $i_{dh}^*$  and  $i_{qh}^*$  corresponding to a specific torque command value  $T_e^*$  should be calculated by looking up the map.

(Sixth Embodiment)

**[0091]** In the motor control apparatus in the fourth embodiment, the dh-axis current command value  $i_{dh}^*$  (= 0) and the qh-axis current command value  $i_{qh}^*$  (= 0) as well as the current command values  $i_d^*$  and  $i_q^*$  are calculated by looking up maps in correspondence to the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$ . In the motor control apparatus in the sixth embodiment, a higher harmonics current control unit 11A implements control on the higher harmonics currents so as to reduce the higher harmonics components of the specific order as explained earlier among higher harmonics components contained in the motor currents  $i_u$ ,  $i_v$  and  $i_w$ . Namely, it sets both the dh-axis current command value  $i_{dh}^*$  and the qh-axis current command value  $i_{qh}^*$  to 0.

**[0092]** FIG. 12 shows the structure adopted in the motor control apparatus in the sixth embodiment. The structural differences from the motor control apparatus in the first embodiment illustrated in FIG. 1 are in a torque control unit 1E and the higher harmonics current control unit 11A. As explained above, the higher harmonics current control unit 11A implements control on the higher harmonics currents so as to ensure that the higher harmonics components of the specific order are 0 at all times. The torque control unit 1E calculates current command values  $i_d^*$  and  $i_q^*$  by looking up current command value tables based upon the torque command value  $T_e^*$  and the motor rotating speed  $\omega_e$ . The current command values  $i_d^*$  and  $i_q^*$  may be selected so as to maximize the motor efficiency as in the fourth embodiment or appropriate current command values  $i_d^*$  and  $i_q^*$  may be selected from another viewpoint.

**[0093]** FIG. 13A shows the waveform of the U-phase current relative to the U-phase current command value, which manifests when a concentrated winding IPM motor, in which a significant space harmonic component is present is driven by employing a motor control apparatus that implements motor control using the dq coordinate system alone. FIG. 13B shows the waveform of the U-phase current relative to the U-phase current command value manifesting when the same IPM motor is driven by employing the motor control apparatus in the sixth embodiment. As FIG. 13A clearly indicates, a very significant higher harmonics component is contained in the motor current when motor control is implemented by using the dq coordinate system alone. In contrast, when the motor control apparatus in the sixth embodiment is utilized, the higher harmonics component is greatly reduced as shown in FIG. 13B.

**[0094]** By adopting the motor control apparatus in the sixth embodiment, the higher harmonics currents contained in the motor currents  $i_u$ ,  $i_v$  and  $i_w$  and in particular, the higher harmonics components of the kth order and its vicinity, can be greatly reduced.

(Seventh Embodiment)

**[0095]** In the first embodiment explained earlier, the ultimate d-axis voltage command value ( $v_d^* + v_d'$ ) and q-axis voltage command value ( $v_q^* + v_q'$ ) are obtained by adding the d-axis voltage command value  $v_d^*$  and the q-axis voltage command value  $v_q^*$  corresponding to the higher harmonics components to the d-axis voltage command value  $v_d'$  and the q-axis voltage command value  $v_q'$  corresponding to the fundamental wave components respectively, and then, the d-axis and q-axis voltage command values are converted to three-phase voltage command values  $v_u^*$ ,  $v_v^*$  and  $v_w^*$  through dq / three-phase conversion. In the seventh embodiment, on the other hand, three-phase AC voltage command values  $v_u^*$ ,  $v_v^*$  and  $v_w^*$  corresponding to the fundamental wave components and three-phase AC voltage command values  $v_u'$ ,  $v_v'$  and  $v_w'$  corresponding to the higher harmonics components are ascertained and then they are respectively added together to calculate ultimate three-phase AC voltage command values ( $v_u^* + v_u'$ ), ( $v_v^* + v_v'$ ) and ( $v_w^* + v_w'$ ).

**[0096]** FIG. 14 shows the structure adopted in the motor control apparatus in the seventh embodiment. It is to be noted that the same reference numerals are assigned to devices identical to those shown in FIG. 1 to preclude the necessity for a repeated explanation of thereof and that those devices are shown in single-line delineation. Since the fundamental current control circuit is similar to that in the first embodiment shown in FIG. 1, its explanation is omitted.

**[0097]** In the higher harmonics current control circuit, the high pass filter 9 extracts higher harmonics components by implementing filtering on the actual currents  $i_u$  and  $i_v$  at the three-phase alternating current motor M. A three-phase/dhqh conversion unit 21 includes a higher harmonics coordinate system dhqh and converts the higher harmonics components in the motor currents  $i_u$  and  $i_v$  to actual currents  $i_{dh}$  and  $i_{qh}$  in the higher harmonics coordinate system dhqh. The higher harmonics coordinate system in this context refers to an orthogonal coordinate system that rotates at the frequency of a higher harmonics component of a specific order manifesting when the motor currents  $i_u$ ,  $i_v$  and  $i_w$  are controlled by the fundamental current control circuit alone, as explained earlier. The actual current  $i_{dh}$  and  $i_{qh}$  in the dhqh coordinate system are ascertained through the following formula (24), in which  $\theta_{ehs}$  represents the phase of the dhqh coordinate system viewed from the three-phase coordinate system.

$$\begin{bmatrix} i_{dh} \\ i_{qh} \end{bmatrix} = \sqrt{2} \begin{bmatrix} \cos \theta_{ehs} & \sin \theta_{ehs} \\ -\sin \theta_{ehs} & \cos \theta_{ehs} \end{bmatrix} \begin{bmatrix} \sin \left( \theta_e + \frac{\pi}{3} \right) & \sin \theta_e \\ \cos \left( \theta_e + \frac{\pi}{3} \right) & \cos \theta_e \end{bmatrix} \begin{bmatrix} i_u \\ i_v \end{bmatrix} \quad \dots \quad (24)$$

**[0098]** A dhqh / three-phase conversion unit 22 converts a voltage command value  $v_{dh}^*$  along the dh-axis and a voltage command value  $v_{qh}^*$  corresponding to the qh-axis provided by the higher harmonics current control unit 11 to three-phase AC voltage command values  $v_u'$ ,  $v_v'$  and  $v_w'$  corresponding to the higher harmonics components. This conversion may be achieved by reversing the conversion of formula (24). The adders 13 and 14 add the three-phase AC voltage command values  $v_u^*$ ,  $v_v^*$  and  $v_w^*$  corresponding to the fundamental wave components calculated at the fundamental current control circuit to the three-phase AC voltage command values  $v_u'$ ,  $v_v'$  and  $v_w'$  corresponding to the higher harmonics components calculated at the higher harmonics current control circuit and obtain the ultimate three-phase command values ( $v_u^* + v_u'$ ), ( $v_v^* + v_v'$ ) and ( $v_w^* + v_w'$ ).

**[0099]** Advantages achieved by utilizing the motor control apparatus in the seventh embodiment are identical to those realized when the motor control apparatus in the first embodiment is employed. It is to be noted that since the command values corresponding to the fundamental wave components and the higher harmonics components are calculated in the three-phase AC coordinate system in the motor control apparatus in the seventh embodiment, the volume of the arithmetic processing increases compared to the processing volume in the first embodiment, in which the arithmetic operation is performed in the dq coordinate system.

(Eighth Embodiment)

**[0100]** As explained above, in the first embodiment, the voltage command values are calculated in the dq coordinate system and in the seventh embodiment, the voltage command values are calculated in the three-phase AC coordinate system. In the eighth embodiment, the voltage command values are calculated in an  $\alpha\beta$  coordinate system.

**[0101]** The three-phase AC coordinate system mentioned earlier is a static coordinate system fixed to the motor stator, having axes that a U-phase, a V-phase and a W-phase which are sequentially offset from each other by 120°. The  $\alpha\beta$  coordinate system, on the other hand, is an orthogonal coordinate system fixed to the stator. Normally, the  $\alpha\beta$  coordinate system is set by assuming an  $\alpha$ -axis at the phase which is the same as the phase of the U-axis in the three-phase AC coordinate system. Since the three physical quantities in the three-phase AC coordinate system can be handled as two physical quantities that are perpendicular to each other in the  $\alpha\beta$  coordinate system, the volume of processing required



to calculate the command values is roughly equal to the volume of the processing required in the dq coordinate system in the first embodiment.

[0102] FIG. 15 shows the structure adopted in the motor control apparatus in the eighth embodiment. It is to be noted that the same reference numerals are assigned to devices identical to those shown in FIG. 1 to preclude the necessity for a repeated explanation thereof and that such devices are shown in single-line delineation. The fundamental current control circuit in the seventh embodiment is achieved by adding a dq/ $\alpha\beta$  conversion unit 31 and an  $\alpha\beta$ /three-phase conversion unit 32 to the fundamental current control circuit in FIG. 1 and replacing the three-phase/dq conversion unit 8 in FIG. 1 with a three-phase/ $\alpha\beta$  conversion unit 33 and an  $\alpha\beta$ /dq conversion unit 34.

[0103] The dq/ $\alpha\beta$  conversion unit 31 converts fundamental voltage command values  $v_d^*$  and  $v_q^*$  corresponding to the d-axis and the q-axis respectively calculated at the fundamental current control unit 2 to fundamental voltage command values  $v_{\alpha}^*$  and  $v_{\beta}^*$  corresponding to the  $\alpha$ -axis and the  $\beta$ -axis respectively. The  $\alpha\beta$ /three-phase conversion unit 32 converts ultimate voltage command values  $(v_{\alpha}^* + v_{\alpha}')^*$  and  $(v_{\beta}^* + v_{\beta}')^*$  corresponding to the  $\alpha$ -axis and the  $\beta$ -axis to be detailed later to three-phase voltage command values  $v_u^*$ ,  $v_v^*$  and  $v_w^*$ . The three-phase/ $\alpha\beta$  conversion unit 33 converts the actual currents  $i_u$ ,  $i_v$  and  $i_w$  ( $= -i_u - i_v$ ) at the three-phase alternating current motor M to actual currents  $i_{\alpha}$  and  $i_{\beta}$  along the  $\alpha$ -axis and the  $\beta$ -axis based upon the fundamental current phase  $\theta_e$ . The  $\alpha\beta$ /dq conversion unit 34 converts the actual currents  $i_{\alpha}$  and  $i_{\beta}$  along the  $\alpha$ -axis and the  $\beta$ -axis to actual currents  $i_d$  and  $i_q$  along the d-axis and the q-axis.

[0104] In the higher harmonics current control circuit in the eighth embodiment, an  $\alpha\beta$ /dhqh conversion unit 35 and a dhqh/ $\alpha\beta$  conversion unit 36 are utilized instead of the dq/dhqn conversion unit 10 and the dhqn/dq conversion unit 12 in the higher harmonics current control circuit shown in FIG. 1.

[0105] The high pass filter 9 extracts the higher harmonics components by filtering the actual currents  $i_{\alpha}$  and  $i_{\beta}$  along the  $\alpha$ -axis and the  $\beta$ -axis. The extracted higher harmonics components are provided to the  $\alpha\beta$ /dhqh conversion unit 35. The  $\alpha\beta$ /dhqh conversion unit 35, which includes a higher harmonics coordinate system dhqh converts the higher harmonics components of the  $\alpha$ -axis current  $i_{\alpha}$  and the  $\beta$ -axis current  $i_{\beta}$  to actual currents  $i_{dh}$  and  $i_{qh}$  in a higher harmonics coordinate system dhqh. As explained earlier, the higher harmonics coordinate system is an orthogonal coordinate system that rotates at the frequency of the higher harmonics component of a specific order manifesting when the motor currents  $i_u$ ,  $i_v$  and  $i_w$  are controlled through the fundamental current control circuit alone. The dhqh/ $\alpha\beta$  conversion unit 36 converts higher harmonics voltage command values  $v_{dh}^*$  and  $v_{qh}^*$  along the dh-axis and the qh-axis provided from the higher harmonics current control unit 11 to higher harmonics voltage command values  $v_{\alpha}'$  and  $v_{\beta}'$  along the  $\alpha$ -axis and the  $\beta$ -axis.

[0106] The adders 13 and 14 add fundamental voltage command values  $v_{\alpha}^*$  and  $v_{\beta}^*$  along the  $\alpha$ -axis and the  $\beta$ -axis calculated at the fundamental current control circuit to higher harmonics voltage command values  $v_{\alpha}'$  and  $v_{\beta}'$  along the  $\alpha$ -axis and the  $\beta$ -axis calculated at the higher harmonics current control circuit to calculate ultimate voltage command values  $(v_{\alpha}^* + v_{\alpha}')^*$  and  $(v_{\beta}^* + v_{\beta}')^*$  along the  $\alpha$ -axis and the  $\beta$ -axis.

[0107] The ultimate voltage command values  $(v_{\alpha}^* + v_{\alpha}')^*$  and  $(v_{\beta}^* + v_{\beta}')^*$  along the  $\alpha$ -axis and the  $\beta$ -axis are converted to three-phase AC voltage command values  $v_u^*$ ,  $v_v^*$  and  $v_w^*$  at the  $\alpha\beta$ /three-phase conversion unit 32. The power conversion unit 4 applies three-phase AC voltages U, V and W to the three-phase alternating current motor M in conformance to the three-phase AC voltage command values  $v_u^*$ ,  $v_v^*$  and  $v_w^*$ .

[0108] The advantages achieved by utilizing the motor control apparatus in the eighth embodiment are identical to the advantages realized when the motor control apparatus in the first embodiment is employed.

(Ninth Embodiment)

[0109] In the sixth embodiment explained earlier, the higher harmonics component of a single order (the kth order) contained in a motor current is reduced. In the ninth embodiment, the current ripple is minimized by reducing higher harmonic components of two orders, i.e., mainly the higher harmonic components of the fifth order and the seventh order which are normally regarded as orders manifesting significant higher harmonics components.

[0110] FIG. 16 shows the structure adopted in the motor control apparatus in the ninth embodiment. It is to be noted that the same reference numerals are assigned to devices identical to those shown in FIG. 1 to preclude the necessity for a repeated explanation thereof and that such devices are shown in single-line delineation. The structure adopted in the fundamental current control circuit in the ninth embodiment is identical to the structure of the fundamental current control circuit in the sixth embodiment.

[0111] The motor control apparatus in the ninth embodiment differs from the motor control apparatus in the sixth embodiment in the structure adopted in its higher harmonics current control circuit. Namely, the motor control apparatus in the ninth embodiment is provided with two sets of the higher harmonics current control circuit utilized in the sixth embodiment. One of the higher harmonics current control circuit comprises a three-phase/dq conversion unit 8, a high pass filter 9, a dq/dh1qh1 conversion unit 10A, a higher harmonics current control unit 11 and a dh1qh1/dq conversion unit 12A. The other higher harmonics current control circuit comprises a three-phase/dq conversion unit 8, a high pass filter unit 9, a dq/dh2qh2 conversion unit 10B, a higher harmonics current control unit 11 and a dh2qh2/dq conversion

unit 12B.

**[0112]** The dq/dh1qh1 conversion unit 10A and the dq/dh2qh2 conversion unit 10B are both identical to the dq/dhqh conversion unit 10 shown in FIG. 1. However, the dq/dh1qh1 conversion unit 10A converts the higher harmonics components of actual currents  $i_d$  and  $i_q$  along the d-axis and q-axis to actual currents  $i_{dh1}$  and  $i_{qh1}$  in an orthogonal coordinate system (higher harmonics coordinate system) dh1qh1 which rotates in synchronization with the phase  $\theta_{eh1}$  of the fifth-order higher harmonics components of the motor currents viewed from the dq coordinate system. In addition, the dq/dh2qh2 conversion unit 10B converts the higher harmonics components of the actual currents  $i_d$  and  $i_q$  along the d-axis and q-axis to actual currents  $i_{dh2}$  and  $i_{qh2}$  in an orthogonal coordinate system (higher harmonics coordinate system) dh2qh2 which rotates in synchronization the phase  $\theta_{eh2}$  of the seventh-order higher harmonics components of the motor currents viewed from the dq coordinate system.

**[0113]** The dh1qh1/dq conversion unit 12A and the dh2qh2/dq conversion unit 12B are both identical to the dhqh/dq conversion unit 12 in FIG. 1. However, the dh1qh1/dq conversion unit 12A converts higher harmonics voltage command values  $vdh1^*$  and  $vqh1^*$  along the dh1-axis and the qh1-axis to higher harmonics voltage command values  $vd1'$  and  $vq1'$  along the d-axis and the q-axis. In addition, the dh2qh2/dq conversion unit 12B converts higher harmonics voltage command values  $vdh2^*$  and  $vqh2^*$  along the dh2-axis and the qh2-axis to higher harmonics voltage command values  $vd2'$  and  $vq2'$  along the d-axis and the q-axis.

**[0114]** The adders 13 and 14 add fundamental voltage command values  $vd^*$  and  $vq^*$  along the d-axis and the q-axis calculated at the fundamental current control circuit, higher harmonics voltage command values  $vd1'$  and  $vq1'$  along the d-axis and the q-axis calculated at the fifth-order higher harmonics current control circuit and higher harmonics voltage command values  $vd2'$  and  $vq2'$  along the d-axis and the q-axis calculated at the seventh-order higher harmonics current control circuit respectively to calculate ultimate voltage command values  $(vd^* + vd1' + vd2')$  and  $(vq^* + vq1' + vq2')$  along the d-axis and the q-axis.

**[0115]** The ultimate voltage command values  $(vd^* + vd1' + vd2')$  and  $(vq^* + vq1' + vq2')$  along the d-axis and the q-axis are converted to three-phase AC voltage command values  $vu^*$ ,  $vv^*$  and  $vw^*$  at the dq/three-phase conversion unit 3. The power conversion unit 4 applies three-phase AC voltages U, V and W to the three-phase alternating current motor M in conformance to the three-phase AC voltage command values  $vu^*$ ,  $vv^*$  and  $vw^*$ .

**[0116]** In the motor control apparatus in the ninth embodiment, the higher harmonics components contained in the motor currents and, in particular, the higher harmonics components of the fifth order and the seventh order are reduced to an even further extent compared to the motor control apparatus in the sixth embodiment explained earlier.

(Tenth Embodiment)

**[0117]** FIG. 17 shows the structure adopted in the motor control apparatus in the tenth embodiment. It is to be noted that the same reference numerals are assigned to devices identical to those shown in FIG. 1 to preclude the necessity for a repeated explanation thereof and that such devices are shown in single-line delineation. The structure adopted in the fundamental current control circuit is identical to the structure of the fundamental current control circuit in the first embodiment illustrated in FIG. 1 and its explanation is therefore omitted.

**[0118]** The motor control apparatus in the tenth embodiment differs from the motor control apparatus shown in FIG. 1 in that it is provided with a higher harmonics current detection unit 50. Namely, while the high pass filter 9 is utilized to detect the higher harmonics components of the actual currents  $i_d$  and  $i_q$  along the d-axis and the q-axis in the motor control apparatus in the first embodiment, the higher harmonics current detection unit 50 is employed to detect the higher harmonics components in the motor control apparatus in the ninth embodiment. The higher harmonics current detection unit 50 estimates current response values for the current command values  $i_d^*$  and  $i_q^*$  and detects the higher harmonics components of the d-axis current  $i_d$  and the q-axis current  $i_q$  using the estimated current response values and the d-axis current  $i_d$  and the q-axis current  $i_q$  obtained through the conversion implemented at the three-phase/dq conversion unit 8.

**[0119]** FIG. 18 is a block diagram showing the structure of the higher harmonics current detection unit 50. A current response estimating unit 51 has a transfer function  $G(s)$  for outputting estimated current response values  $i_{d\_i}$  and  $i_{q\_i}$  corresponding to the d-axis and q-axis current command values  $i_d^*$  and  $i_q^*$ . When the current control at the fundamental wave current control unit 2 is achieved through, for instance, PI control, the transfer function  $G(s)$  may be realized through a low pass filter (LPF) 51a as shown in figure 19. In this case, the time constant at the low pass filter 51a is equal to the time constant at the fundamental wave current control unit 2.

**[0120]** The d-axis current command value  $i_d^*$  and the q-axis current command value  $i_q^*$  are input to the current response estimating unit 51, and by utilizing the low pass filter 51a, for instance, the estimated current response values  $i_{d\_i}$  and  $i_{q\_i}$  are ascertained to be output to subtractors 52 and 53 respectively. The subtractor 52 subtracts the estimated current response value  $i_{d\_i}$  along the d-axis from the d-axis actual current  $i_d$  to calculate a higher harmonics component  $i_{d\_h}$  of the d-axis current. In addition, the subtractor 53 subtracts the estimated current response value  $i_{q\_i}$  along the q-axis from the q-axis actual current  $i_q$  to calculate the higher harmonics component  $i_{q\_h}$  of the q-axis current. It is to

be noted that the phase characteristics and the gain characteristics of the estimated current response values corresponding to the d-axis current command value  $i_d^*$  and the q-axis current command value  $i_q^*$  are identical to the phase characteristics and the gain characteristics at the fundamental wave current control unit 2. If the fundamental wave current control unit 2 implements control other than PI control, a transfer function corresponding to the control system should be used.

**[0121]** When detecting the higher harmonics components of the d-axis and q-axis currents by using the high pass filter 9 in FIG. 1, a change occurring in a fundamental current may pass through the high pass filter 9 and be detected as a higher harmonics component. If higher harmonics components are detected erroneously, an error occurs in the three-phase AC voltage command values  $v_u^*$ ,  $v_v^*$  and  $v_w^*$  provided to the power conversion unit 4 resulting in reduced accuracy in the motor control. If, on the other hand, the higher harmonics components of the d-axis and q-axis currents are detected by utilizing the higher harmonics current detection unit 50 instead of the high pass filter 9, the higher harmonics components  $i_{d\_h}$  and  $i_{q\_h}$  do not contain changes occurring in the fundamental currents even after such changes occur in the fundamental currents. Namely, since the estimated current response values  $i_{d\_i}$  and  $i_{q\_i}$ , too, change if the d-axis current command value  $i_d^*$  and the q-axis current command value  $i_q^*$  change, the higher harmonics components calculated at the subtractors 52 and 53 by subtracting the estimated current response values having undergone the changes do not reflect the changes in the fundamental currents.

**[0122]** In reference to FIGS. 21 ~ 25, the control results obtained through a simulation implemented on the motor control apparatus in the first embodiment are compared against the control results obtained through a simulation implemented on the motor control apparatus in the tenth embodiment. FIG. 21 shows changes occurring in the d-axis current command value and the q-axis current command value over time. FIG. 22 presents the results of q-axis higher harmonics current detection implemented by using the motor control apparatus in the first embodiment in correspondence to the current command value shown in FIG. 21. The scale of the vertical axis is -60 (A) - 150 (A). As shown in FIG. 22, the detected q-axis higher harmonics current contains the change occurring in the fundamental current.

**[0123]** FIG. 23 presents the results of q-axis higher harmonics current detection implemented by employing the motor control apparatus in the tenth embodiment in correspondence to the current command value shown in FIG. 21. The scale of the vertical axis is -20 (A) ~ 20 (A). The detected q-axis higher harmonics current fluctuates only to a small degree, demonstrating that the change in the fundamental current is not included. FIGS. 24 and 25 show response values relative to the current command values shown in FIG. 21 obtained by setting higher harmonics current command values to  $i_{d\_h} = 0$  and  $i_{q\_h} = 0$ . As FIG. 24 indicates, the d-axis current fluctuates when the control is implemented by the motor control apparatus in the first embodiment. In contrast, the fluctuation of the d-axis current is suppressed through the control implemented by the motor control apparatus in the tenth embodiment, thereby achieving an improvement in the control accuracy. In addition, the response of the q-axis current to the current command values is improved.

**[0124]** FIG. 25, which is a partial enlargement of FIG. 24, presents the results of the control achieved by the motor control apparatus in the first embodiment in conformance to the q-axis current command value and the results of the control implemented by the motor control apparatus in the tenth embodiment in conformance to the q-axis current command value. As shown in the figure, better control accuracy is achieved through the control implemented by the motor control apparatus in the tenth embodiment with regard to the response value of the q-axis current relative to the current command value. As explained earlier, since a change occurring in the fundamental current is detected as a higher harmonics current in the control implemented by the motor control apparatus in the first embodiment, the control accuracy is compromised with regard to the control on both the d-axis current and the q-axis current. Since no fundamental current is contained in a detected higher harmonics current through the control implemented by the motor control apparatus in the tenth embodiment, the control accuracy with regard to the control on the d-axis current and the q-axis current is improved.

**[0125]** The time constant of the low pass filter 51a employed in the motor control apparatus in the tenth embodiment is a fixed value which is equal to the time constant at the fundamental wave current control unit 2. This time constant may be varied. During the actual control process, the state of the motor M changes, e.g., the resistance of the motor M changes as the temperature fluctuates and the inductance changes in response to the motor currents. In such a case, if control is implemented through a first-order delay system having a fixed time constant, an error manifests as a deviation of the current response values relative to the current command values. In order to prevent such an error, the time constant at the low pass filter 51a may be varied to achieve an improvement in the detection accuracy with which the higher harmonics currents are detected.

**[0126]** FIG. 20 is a block diagram of the structure of a higher harmonics current detection unit 50A having a variable time constant at the low pass filter 51a. A time constant table 54 is used to set the time constant of a low pass filter 51aA in correspondence to the command values  $i_d^*$  and  $i_q^*$  along the d-axis and the q-axis. The relationship between the current command values  $i_d^*$  and  $i_q^*$  and the time constant at the low pass filter 51aA is ascertained in advance through testing. The low pass filter 51aA implements filter processing by using the time constant obtained from the time constant table 54 and outputs the estimated current response values  $i_{d\_i}$  and  $i_{q\_i}$  to the subtractors 52 and 53.

**[0127]** In the motor control apparatus in the tenth embodiment, even when a change occurs in a fundamental current,

the change in the fundamental current is not detected as a higher harmonics current, to enable a reliable detection of the higher harmonics current. In addition, by setting the time constant at the low pass filter 51aA in correspondence to the current command values  $i_d^*$  and  $i_q^*$ , an even more accurate higher harmonics current detection is enabled.

**[0128]** It is to be noted that the time constant at the low pass filter 51aA stored in the time constant table 54 may be a value corresponding to the d-axis current  $i_d$  and the q-axis current  $i_q$  instead of the current command values  $i_d^*$  and  $i_q^*$ .

(Eleventh Embodiment)

**[0129]** The motor control apparatus in the tenth embodiment is achieved by replacing the high pass filter 9 in the motor control apparatus in the first embodiment with the higher harmonics current detection unit 50. In the motor control apparatus in the eleventh embodiment, the high pass filter 9 in the motor control apparatus in the seventh embodiment is replaced by a higher harmonics current detection unit 50B. In addition, it is provided with a dq/three-phase conversion unit 55 to input current command values  $i_u^*$  and  $i_v^*$  to the higher harmonics current detection unit 50B. FIG. 26 shows the structure adopted in the motor control apparatus in the eleventh embodiment.

**[0130]** FIG. 27 is a block diagram showing the structure of the higher harmonics current detection unit 50B. The current command values  $i_u^*$  and  $i_v^*$  obtained through the conversion performed at the dq/three-phase conversion unit 55 are input to a low pass filter 51aB. The input current command values  $i_u^*$  and  $i_v^*$  undergo filter processing at the low pass filter 51aB to obtain estimated current response values  $i_{u\_i}$  and  $i_{v\_i}$ . The subtractor 52 subtracts a U-phase estimated current response value  $i_{u\_i}$  from the U-phase current  $i_u$  to ascertain the higher harmonics component  $i_{u\_h}$  of the U-phase current. In addition, the subtractor 53 subtracts the V-phase estimated current response value  $i_{v\_i}$  from a V-phase current  $i_v$  to ascertain a higher harmonics component  $i_{v\_h}$  of the V-phase current. The higher harmonics components  $i_{u\_h}$  and  $i_{v\_h}$  thus obtained are both output to the three-phase/dhqh conversion unit 21.

**[0131]** Furthermore, the time constant at the low pass filter 51aB may be varied as in the fifth embodiment. FIG. 28 presents a block diagram of the structure of a higher harmonics current detection unit 50C with the low pass filter 51aB having a variable time constant. In a time constant table 54C, data of the time constant of a low pass filter 51aC are stored in correspondence to the U-phase current command value  $i_u^*$  and V-phase current command value  $i_v^*$ . By using a variable time constant at the low pass filter 51aC, advantages similar to those achieved by using a variable time constant at the low pass filter 51aA in the tenth embodiment are realized. It is to be noted that the time constant at the low pass filter 51aC stored in the time constant table 54C may be a value corresponding to the U-phase current  $i_u$  and the V-phase current  $i_v$  instead of the current command values  $i_u^*$  and  $i_v^*$ .

**[0132]** The motor control apparatus in the eleventh embodiment achieves the advantages similar to those realized in the motor control apparatus in the tenth embodiment.

(Twelfth Embodiment)

**[0133]** FIG. 29 shows the structure adopted in the motor control apparatus in the twelfth embodiment. The motor control apparatus in the twelfth embodiment is achieved by replacing the high pass filter 9 in the motor control apparatus in the eighth embodiment with a higher harmonics current detection unit 50D. In addition, it is provided with a dq/ $\alpha\beta$  conversion unit 56 to input current command values  $i_\alpha^*$  and  $i_\beta^*$  to the higher harmonics current detection unit 50D.

**[0134]** FIG. 30 is a block diagram showing the structure of the higher harmonics current detection unit 50D. Current command values  $i_\alpha^*$  and  $i_\beta^*$  obtained through the conversion performed at the dq/ $\alpha\beta$  conversion unit 56 are input to a low pass filter 51aD. The input current command values  $i_\alpha^*$  and  $i_\beta^*$  undergo filter processing at the low pass filter 51aD to obtain estimated current response values  $i_{\alpha\_i}$  and  $i_{\beta\_i}$ . The subtractor 52 subtracts an  $\alpha$ -axis estimated current response value  $i_{\alpha\_i}$  from an  $\alpha$ -axis current  $i_\alpha$  to ascertain the higher harmonics component  $i_{\alpha\_h}$  of the  $\alpha$ -phase current. In addition, the subtractor 53 subtracts a  $\beta$ -phase estimated current response value  $i_{\beta\_i}$  from a  $\beta$ -axis current  $i_\beta$  to ascertain the higher harmonics component  $i_{\beta\_h}$  of the  $\beta$ -axis current. The higher harmonics components  $i_{\alpha\_h}$  and  $i_{\beta\_h}$  thus obtained are both output to the  $\alpha\beta$ /dhqh conversion unit 35.

**[0135]** The time constant at the low pass filter 51aD may be varied as in the tenth and eleventh embodiments. FIG. 31 presents a block diagram of the structure of a higher harmonics current detection unit 50E with the low pass filter 51aE having a variable time constant. In a time constant table 54E, data of the time constant of a low pass filter 51aE corresponding to the  $\alpha$ -axis current command value  $i_\alpha^*$  and  $\beta$ -axis current command value  $i_\beta^*$ . Since advantages similar to those achieved by using a variable time constant at the low pass filter 51aA in the tenth and eleventh embodiments are realized by using a variable time constant at the low pass filter 51aE, a detailed explanation thereof is omitted.

**[0136]** The motor control apparatus in the twelfth embodiment achieves the advantages similar to those realized in the motor control apparatuses in the tenth and eleventh embodiments.

(Thirteenth Embodiment)

**[0137]** The motor control apparatus in the thirteenth embodiment is achieved by replacing the high pass filter 9 in the motor control apparatus in the ninth embodiment with a higher harmonics current detection unit 50. The structure adopted in the motor control apparatus in the thirteenth embodiment is shown in FIG. 32. The structure of the higher harmonics current detection unit 50, which is identical to the higher harmonics current detection unit 50 utilized in the tenth embodiment, is as illustrated in FIGS. 18 and 19. In addition, the structure that is adopted in the higher harmonics current detection unit 50 when variable time constant is used for the low pass filter 51a is shown in FIG. 20. The motor control apparatus in the thirteenth embodiment, too, achieves advantages similar to those realized in the motor control apparatuses in the tenth ~ twelfth embodiments.

**[0138]** The present invention is not limited to the examples explained above. For instance, the order of the higher harmonics current components to undergo the control in the higher harmonics current control circuit in the motor control apparatuses in the first - thirteenth embodiments may be switched in correspondence to the motor control state such as the motor speed and the load applied to the motor. In other words, since the higher harmonics current components that are generated change as the motor drive state changes, the most pronounced higher harmonics current components should be the control target depending upon the motor drive state.

**[0139]** In addition, by adopting the structure of the torque control unit 1A in the second embodiment for the torque control unit in the seventh and eighth embodiments, similar advantages to those achieved in the motor control apparatus in the second embodiment are realized. Likewise, by assuming the structures of the torque control units 1B, 1C and 1D in the torque control unit 1, advantages similar to those achieved in the motor control apparatuses in the third, fourth and fifth embodiments are realized.

**[0140]** Furthermore, two sets of the higher harmonics control circuits in the motor control apparatus in the sixth embodiment are provided in the motor control apparatus in the ninth embodiment. Likewise, in the motor control apparatus in the seventh embodiment, two sets of the higher harmonics control circuits having the dh-axis current command value  $idh^*$  and the qh-axis current command value  $iqh^*$  set to 0 may be provided, and two sets of the higher harmonics control circuits having the dh-axis current command value  $idh^*$  and the qh-axis current command value  $iqh^*$  set to 0 may be provided in the motor control apparatus in the eighth embodiment as well. In addition, the high pass filter 9 may be replaced by the higher harmonics current detection unit 50 in any of these variations.

**[0141]** While the fifth-order higher harmonics components and the seventh-order higher harmonics components are reduced in the ninth and thirteenth embodiments in which the higher harmonics components of the fifth order and the seventh order are prominent in the higher harmonics currents contained in the motor currents, the orders of the higher harmonics components to be reduced are not limited to these. In other words, an order at which significant higher harmonics components are present in the higher harmonics current should be reduced. Furthermore, while an explanation is given in reference to the ninth and thirteenth embodiments on an example in which mainly the higher harmonics components of two orders, i.e., the fifth order and the seventh order, are reduced, the higher harmonics components of three orders or more may be reduced instead. In such a case, the number of higher harmonics current control circuit that should be provided corresponds to the number of orders of higher harmonics components to be reduced.

**[0142]** The type of alternating current motor in conjunction with which the motor control apparatus according to the present invention may be adopted is not limited to a three-phase alternating current motor and the present invention may be adopted in a synchronous motors or an induction motor. When the motor control apparatus according to the present invention is adopted in conjunction with an induction motor, a magnetic flux estimating instrument in the earlier technology should be provided to estimate the direction of the magnetic flux, the dq coordinate system should be used as a coordinate system that rotates in synchronization with the estimated direction of the fundamental wave component of the magnetic flux and the dhqh coordinate system to be used as a coordinate system that rotates in synchronization with the estimated direction of the higher harmonics order components of the magnetic flux.

## Claims

1. A motor control apparatus comprising:

- a fundamental current command value determining means (1) for determining a fundamental current command value ( $id^*$ ,  $iq^*$ ) for a the motor current ( $i_u$ ,  $i_v$ ,  $i_w$ );
- a higher harmonics current command value determining means (1) for determining a higher harmonics current command value for the motor current; and
- a current control means (2, 11) for controlling a current ( $i_u$ ,  $i_v$ ,  $i_w$ ) flowing to the AC motor based upon the fundamental current command value ( $id^*$ ,  $iq^*$ ) and the higher harmonics current command value, **characterized in that**

said fundamental current command value determining means (1) sets the fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) based upon at least a torque command value ( $T_e^*$ ) for an AC motor (M);  
 said higher harmonics current command value determining means (1) sets the higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) based upon at least a torque command value ( $T_e^*$ ) of the AC motor (M); and  
 current control means (2,11) includes a fundamental wave current control means (2) for implementing control so as to match a fundamental wave component of the motor current ( $i_u$ ,  $i_v$ ,  $i_w$ ) with the fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) in a dq-coordinate system that rotates in synchronization with a fundamental wave component of an armature interlinked magnetic flux; and a higher harmonics current control means (11) for implementing control so as to match a higher harmonics order component ( $i_{dh}$ ,  $i_{qh}$ ) of the motor current ( $i_u$ ,  $i_v$ ,  $i_w$ ) with the higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) in a dhqh-coordinate system that rotates in synchronization with a higher harmonics order component of the armature interlinked magnetic flux.

2. A motor control apparatus according to claim 1, wherein:

said fundamental current command value determining means (1) determines a fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) in a dq-coordinate system that rotates in synchronization with a fundamental wave component of an armature interlinked magnetic flux; and  
 said higher harmonics current command value determining means (1) determines a higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) in a dhqh-coordinate system that rotates in synchronization with a higher harmonics order component of the armature interlinked magnetic flux.

3. A motor control apparatus according to any one of the preceding claims, wherein said fundamental current command value determining means (1) and said higher harmonics current command value determining means (1) determine a fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and a higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) respectively that maximizes efficiency while matching a motor torque to the torque command value ( $T_e^*$ ).

4. A motor control apparatus according to claim 1 or 2, wherein said fundamental current command value determining means (1) and said higher harmonics current command value determining means (1) determine a fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and a higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) respectively that minimize torque ripple while matching a motor torque to the torque command value ( $T_e^*$ ).

5. A motor control apparatus according to claim 1 or 2, wherein said fundamental current command value determining means (1) and said higher harmonics current command value determining means (1) determine a fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and a higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) respectively that minimizes voltage ripple while matching a motor torque to the torque command value ( $T_e^*$ ).

6. A motor control apparatus according to claim 1 or 2, wherein said fundamental current command value determining means (1) and said higher harmonics current command value determining means (1) determine a fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and a higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) respectively that minimizes current ripple while matching a motor torque to the torque command value ( $T_e^*$ ).

7. A motor control apparatus according to claim 1 or 2, wherein said fundamental current command value determining means (1) and said higher harmonics current command value determining means (1) determine a fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and a higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) that maximize efficiency while matching a motor torque to the torque command value ( $T_e^*$ ),  
 a fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and a higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) that minimizes torque ripple while matching a motor torque to the torque command value ( $T_e^*$ ),  
 a fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and a higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) that minimize voltage ripple while matching a motor torque to the torque command value ( $T_e^*$ ), and  
 a fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and a higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) that minimizes current ripple while matching a motor torque to the torque command value ( $T_e^*$ ); and  
 said motor control apparatus further includes;  
 an operating state detection means (1,5) for detecting a motor operating state ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ); and  
 a current command value selection means (1) for selecting optimal current command values ( $i_d^*$ ,  $i_q^*$ ,  $i_{dh}^*$ ,  $i_{qh}^*$ ) corresponding to the motor operating state ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) among fundamental current command values ( $i_d^*$ ,  $i_q^*$ ) and higher harmonics current command values ( $i_{dh}^*$ ,  $i_{qh}^*$ ) determined by said fundamental current command value determining means (1) and said higher harmonics current command value determining means (1) respectively.

8. A motor control apparatus according to claim 7, wherein said current command value selection means (1) selects the fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and the higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) for minimizing a current ripple while matching a motor torque to the torque command value ( $T_e^*$ ) if a motor operating state ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) in which the motor torque is within a specific range close to a maximum value is detected.
9. A motor control apparatus according to claim 7, wherein said current command value selection means (1) selects the fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and the higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) for minimizing a torque ripple while matching a motor torque to the torque command value ( $T_e^*$ ) if a motor operating state ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) in which the motor torque and the motor rotating speed ( $\omega_e$ ) are both within a specific low range is detected.
10. A motor control apparatus according to claim 7, wherein said current command value selection means (1) the fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and the higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) for minimizing a voltage ripple while matching a motor torque to the torque command value ( $T_e^*$ ) if a motor operating state ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) in which the motor output is within a specific range close to a maximum value is detected.
11. A motor control apparatus according to claim 7, wherein said current command value selection means (1) the fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and the higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) maximizing an efficiency while matching a motor torque to the torque command value ( $T_e^*$ ) if an operating state ( $\theta_{eh}$ ,  $\omega_e$ ) in which  
a motor torque and a motor output are not within the specific ranges over which the motor torque and the motor output are close to the maximum values and  
the motor torque and the motor rotating speed are not within the specific low ranges is detected.
12. A motor control apparatus according to claim 1, wherein  
the higher harmonics order component ( $i_{dh}$ ,  $i_{qh}$ ) is a higher harmonics component of a specific order manifesting when the motor current ( $i_u$ ,  $i_v$ ,  $i_w$ ) is controlled in said dq-coordinate system alone; and  
said higher harmonics current command value determining means (1) sets a higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) corresponding to the specific order in a higher harmonics component ( $i_{dh}$ ,  $i_{qh}$ ) contained in the motor current ( $i_u$ ,  $i_v$ ,  $i_w$ ) to 0.
13. A motor control apparatus according to claim 12, wherein the higher order harmonics component ( $i_{dh}$ ,  $i_{qh}$ ) to undergo control is switched in correspondence to a motor drive state ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ).
14. A motor control apparatus according to claim 1, wherein  
said higher harmonics current control means (8,10,11,50)  
converts the motor current ( $i_u$ ,  $i_v$ ,  $i_w$ ) to a current ( $i_d$ ,  $i_q$ ) in said dq-coordinate system,  
detects a higher harmonics component of the current ( $i_d$ ,  $i_q$ ) in said dq-coordinate system resulting from the conversion, and  
converts the higher harmonics component to a higher harmonics current ( $i_{dh}$ ,  $i_{qh}$ ) in said dhqh-coordinate system.
15. A motor control apparatus according to claim 1, wherein  
said higher harmonics current control means (11, 21, 50B)  
detects a higher harmonics component of the motor current ( $i_u$ ,  $i_v$ ,  $i_w$ ) and converts the higher harmonics component to a higher harmonics current ( $i_{dh}$ ,  $i_{qh}$ ) in said dhqh coordinate system.
16. A motor control apparatus according to claim 1, wherein  
said higher harmonics current control means (11, 33, 35, 50D)  
converts the motor current to a current ( $i_u$ ,  $i_v$ ,  $i_w$ ) in an alpha beta orthogonal coordinate system fixed to a stator of the AC-motor (M),  
detects a higher harmonics component of the current ( $i_\alpha$ ,  $i_\beta$ ) in said alpha beta coordinate system, and  
converts the detected higher harmonics component to a higher harmonics current ( $i_{dh}$ ,  $i_{qh}$ ) in said dhqh coordinate system.
17. A motor control apparatus according to claim 14, wherein said higher harmonics current control means (8,10,11,50) includes:  
  
a current response value estimating means (51,51a) for estimating a current response value relative to a current

command value in said dq-coordinate system; and  
a higher harmonics current detection means (50) for detecting a higher harmonics current by subtracting the current response value estimated by said current response estimating means (51,51a) from the current value in said dq-coordinate system.

18. A motor control apparatus according to claim 15, wherein said higher harmonics current control means (11,21,50B) includes:

a current response value estimating means (51 aB) for estimating a current response value relative to a motor current command value; and  
a higher harmonics current detection means (50B) for detecting a higher harmonics current by subtracting the current response value estimated by said current response estimating means from the fundamental current value.

19. A motor control apparatus according to claim 16, wherein said higher harmonics current control means (11,33,35,50D) includes;

a current response value estimating means (51aD) for estimating a current response value relative to a current command value in said alpha beta coordinate system; and  
a higher harmonics current detection means (50D) for detecting a higher harmonics current by subtracting the current response value estimated by said current response estimating means (51 aD) from the current value in said alpha beta coordinate system.

20. A motor control apparatus according to any one of claims 17 to 19, wherein:

said current response value estimating means (51,51a) is a low pass filter (51a).

21. A motor control apparatus according to claim 20, wherein a time constant at said low pass filter changes as a motor state ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) changes.

22. A motor control apparatus according to any one of claims 12 to 21, having a plurality of said higher harmonics current control means (11) provided in correspondence to a plurality of orders of higher harmonics currents.

23. A motor control apparatus according to claim 22, wherein the order in which higher harmonics of the plurality of orders are to undergo control in said higher harmonics current control means (11) is determined by giving higher priority to orders at which greater higher harmonics components manifest in motor currents.

24. A motor control method comprising:

determining a fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) for a motor current ( $i_u$ ,  $i_v$ ,  $i_w$ ) based upon at least a torque command value ( $T_e^*$ ) for an AC motor (M);  
determining a higher harmonics current command value for the motor current based upon at least a torque command value ( $T_e^*$ ) of the AC-motor (M); and  
controlling the current ( $i_u$ ,  $i_v$ ,  $i_w$ ) flowing to the AC-motor (M) based upon the fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) and said higher harmonics current command value,

**characterized by**

implementing control so as to match a fundamental wave component of the motor current ( $i_u$ ,  $i_v$ ,  $i_w$ ) with the fundamental current command value ( $i_d^*$ ,  $i_q^*$ ) in a dq-coordinate system that rotates in synchronization with a fundamental wave component of an armature interlinked magnetic flux; and

implementing control so as to match a higher harmonics current control means (11) for implementing control so as to match a higher harmonics order component ( $i_{dh}$ ,  $i_{qh}$ ) of the motor current ( $i_u$ ,  $i_v$ ,  $i_w$ ) with the higher harmonics current command value ( $i_{dh}^*$ ,  $i_{qh}^*$ ) in a dhqh-coordinate system that rotates in synchronization with a higher harmonics order component of the armature interlinked magnetic flux.

## Patentansprüche

1. Motorsteuereinrichtung, umfassend:

- eine Grundstrom-Befehlswert-Ermittlungseinrichtung (1) zum Ermitteln eines Grundstrom-Befehlswerts ( $i_d^*$ ,



$i_q^*$ ) für den Motorstrom ( $i_u$ ,  $i_v$ ,  $i_w$ );

- Oberschwingungsstrom-Befehlswert-Ermittlungseinrichtung (1) zum Ermitteln eines Oberschwingungsstrom-Befehlswerts für den Motorstrom; und

- eine Stromsteuereinrichtung (2, 11) zum Steuern eines zum Wechselstrommotor fließenden Stroms ( $i_u$ ,  $i_v$ ,  $i_w$ ) basierend auf dem Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und dem Oberschwingungsstrom-Befehlswert, **dadurch gekennzeichnet, dass**

die Grundstrom-Befehlswert-Ermittlungseinrichtung (1) den Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) basierend auf zumindest einem Drehmoment-Befehlswert ( $T_e^*$ ) für einen Wechselstrommotor (M) einstellt;

die Oberschwingungsstrom-Befehlswert-Ermittlungseinrichtung (1) den Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) basierend auf zumindest einem Drehmoment-Befehlswert ( $T_e^*$ ) des Wechselstrommotors (M) einstellt; und

die Stromsteuereinrichtung (2, 11) eine Grundwellenstrom-Steuereinrichtung (2) zum Implementieren einer Steuerung zum Anpassen einer Grundwellenkomponente des Motorstroms ( $i_u$ ,  $i_v$ ,  $i_w$ ) an den Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) in einem dq-Koordinatensystem, das sich synchron mit einer Grundwellenkomponente eines ankerverknüpften magnetischen Flusses dreht; und eine Oberschwingungsstrom-Steuereinrichtung (11) zum Implementieren einer Steuerung zum Anpassen einer Oberschwingungsordnungskomponente ( $i_{dh}$ ,  $i_{qh}$ ) des Motorstroms ( $i_u$ ,  $i_v$ ,  $i_w$ ) an den Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) in einem dhqh-Koordinatensystem umfasst, das sich synchron mit einer Oberschwingungsordnungskomponente des ankerverknüpften magnetischen Flusses dreht.

## 2. Motorsteuereinrichtung nach Anspruch 1, wobei:

die Grundstrom-Befehlswert-Ermittlungseinrichtung (1) einen Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) in einem dq-Koordinatensystem ermittelt, das sich synchron mit einer Grundwellenkomponente eines ankerverknüpften magnetischen Flusses dreht; und

die Oberschwingungsstrom-Befehlswert-Ermittlungseinrichtung (1) einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) in einem dhqh-Koordinatensystem ermittelt, das sich synchron mit einer Oberschwingungsordnungskomponente des ankerverknüpften magnetischen Flusses dreht.

3. Motorsteuereinrichtung nach einem der vorhergehenden Ansprüche, wobei die Grundstrom-Befehlswert-Ermittlungseinrichtung (1) und die Oberschwingungsstrom-Befehlswert-Ermittlungseinrichtung (1) entsprechend einen Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) ermitteln, der eine Effizienz beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) maximiert.

4. Motorsteuereinrichtung nach Anspruch 1 oder 2, wobei die Grundstrom-Befehlswert-Ermittlungseinrichtung (1) und die Oberschwingungsstrom-Befehlswert-Ermittlungseinrichtung (1) entsprechend einen Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) ermitteln, der Drehmomentschwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) minimiert.

5. Motorsteuereinrichtung nach Anspruch 1 oder 2, wobei die Grundstrom-Befehlswert-Ermittlungseinrichtung (1) und die Oberschwingungsstrom-Befehlswert-Ermittlungseinrichtung (1) entsprechend einen Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) ermitteln, der Spannungsschwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) minimiert.

6. Motorsteuereinrichtung nach Anspruch 1 oder 2, wobei die Grundstrom-Befehlswert-Ermittlungseinrichtung (1) und die Oberschwingungsstrom-Befehlswert-Ermittlungseinrichtung (1) entsprechend einen Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) ermitteln, der Stromschwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) minimiert.

7. Motorsteuereinrichtung nach Anspruch 1 oder 2, wobei die Grundstrom-Befehlswert-Ermittlungseinrichtung (1) und die Oberschwingungsstrom-Befehlswert-Ermittlungseinrichtung (1) ermitteln einen Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ), die eine Effizienz beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) maximieren, einen Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ), die Drehmomentschwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) minimieren, einen Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ), die Spannungsschwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) minimieren, einen Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ), die Stromschwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) minimieren.

schwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) minimieren, und einen Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ), die Stromschwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) minimieren; und die Motorsteuereinrichtung ferner umfasst;

eine Betriebszustand-Erfassungseinrichtung (1, 5) zum Erfassen eines Motor-Betriebszustands ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ); und eine Strombefehlswert-Auswahleinrichtung (1) zum Auswählen optimaler Strom-Befehlswerte ( $i_d^*$ ,  $i_q^*$ ,  $i_{dh}^*$ ,  $i_{qh}^*$ ), die dem MotorBetriebszustand ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) entsprechen, aus Grundstrom-Befehlswerten ( $i_d^*$ ,  $i_q^*$ ) und Oberschwingungsstrom-Befehlswerten ( $i_{dh}^*$ ,  $i_{qh}^*$ ), die entsprechend durch die Grundstrom-Befehlswert-Ermittlungseinrichtung (1) und die Oberschwingungsstrom-Befehlswert-Ermittlungseinrichtung (1) ermittelt wurden.

8. Motorsteuereinrichtung nach Anspruch 7, wobei die Strombefehlswert-Auswahleinrichtung (1) den Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und den Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) zum Minimieren von Stromschwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) auswählt, wenn ein MotorBetriebszustand ( $\theta_{eh}$ ,  $\omega_e$ ), bei dem das Motordrehmoment innerhalb eines bestimmten Bereichs nahe an einem Maximalwert liegt, erfasst wird.

9. Motorsteuereinrichtung nach Anspruch 7, wobei die Strombefehlswert-Auswahleinrichtung (1) den Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und den Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) zum Minimieren von Drehmoment-schwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) auswählt, wenn ein MotorBetriebszustand ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ), bei dem das Motordrehmoment und die Motordrehzahl ( $\omega_e$ ) beide innerhalb eines bestimmten niedrigen Bereiches liegen, erfasst wird.

10. Motorsteuereinrichtung nach Anspruch 7, wobei die Strombefehlswert-Auswahleinrichtung (1) den Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und den Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) zum Minimieren von Spannungsschwankungen beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) auswählt, wenn ein MotorBetriebszustand ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ), bei dem die Motorleistung innerhalb eines bestimmten Bereichs nahe an einem Maximalwert liegt, erfasst wird.

11. Motorsteuereinrichtung nach Anspruch 7, wobei die Strombefehlswert-Auswahleinrichtung (1) den Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und den Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) zum Maximieren einer Effizienz beim Anpassen eines Motordrehmoments an den Drehmoment-Befehlswert ( $T_e^*$ ) auswählt, wenn ein Betriebszustand ( $\theta_{eh}$ ,  $\omega_e$ ), bei dem ein Motordrehmoment und eine Motorleistung nicht innerhalb der bestimmten Bereiche liegen, über die das Motordrehmoment und die Motorleistung nahe an den Maximalwerten liegen, und das Motordrehmoment und die Motordrehzahl nicht innerhalb der bestimmten niedrigen Bereiche liegen, erfasst wird.

12. Motorsteuereinrichtung nach Anspruch 1, wobei die Oberschwingungsordnungskomponente ( $i_{dh}$ ,  $i_{qh}$ ) eine Oberschwingungskomponente bestimmter Ordnung ist, die sich manifestiert, wenn der Motorstrom ( $i_u$ ,  $i_v$ ,  $i_w$ ) allein im dq-Koordinatensystem gesteuert wird; und die Oberschwingungsstrom-Befehlswert-Ermittlungseinrichtung (1) einen Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ), welcher der bestimmten Ordnung in einer Oberschwingungskomponente ( $i_{dh}$ ,  $i_{qh}$ ) entspricht, die im Motorstrom ( $i_u$ ,  $i_v$ ,  $i_w$ ) enthalten ist, auf 0 setzt.

13. Motorsteuereinrichtung nach Anspruch 12, wobei die einer Steuerung zu unterziehende Oberschwingungsordnungskomponente ( $i_{dh}$ ,  $i_{qh}$ ) gemäß einem Motorantriebszustand ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) geschaltet wird.

14. Motorsteuereinrichtung nach Anspruch 1, wobei die Oberschwingungsstrom-Steuereinrichtung (8, 10, 11, 50) den Motorstrom ( $i_u$ ,  $i_v$ ,  $i_w$ ) in einen Strom ( $i_d$ ,  $i_q$ ) im dq-Koordinatensystem umwandelt, eine Oberschwingungskomponente des Stroms ( $i_d$ ,  $i_q$ ) im dq-Koordinatensystem erfasst, der aus der Umwandlung resultiert, und die Oberschwingungskomponente in einen Oberschwingungsstrom ( $i_{dh}$ ,  $i_{qh}$ ) im dhqh-Koordinatensystem umwandelt.

15. Motorsteuereinrichtung nach Anspruch 1, wobei die Oberschwingungsstrom-Steuereinrichtung (11, 21, 50B) eine Oberschwingungskomponente des Motorstroms ( $i_u$ ,  $i_v$ ,  $i_w$ ) erfasst, und die Oberschwingungskomponente in einen Oberschwingungsstrom ( $i_{dh}$ ,  $i_{qh}$ ) im dhqh-Koordinatensystem umwandelt.

16. Motorsteuereinrichtung nach Anspruch 1, wobei die Oberschwingungsstrom-Steuereinrichtung (11, 33, 35, 50D) den Motorstrom in einen Strom ( $i_u$ ,  $i_v$ ,  $i_w$ ) in einem orthogonalen Alpha-Beta-Koordinatensystem, das an einem Stator des Wechselstrommotors (M) fixiert ist, umwandelt, eine Oberschwingungskomponente des Stroms ( $i_{\alpha}$ ,  $i_{\beta}$ ) im Alpha-Beta-Koordinatensystem erfasst, und die erfasste Oberschwingungskomponente in einen Oberschwingungsstrom ( $i_{dh}$ ,  $i_{qh}$ ) im  $dqh$ -Koordinatensystem umwandelt.

17. Motorsteuereinrichtung nach Anspruch 14, wobei die Oberschwingungsstrom-Steuereinrichtung (8, 10, 11, 50) umfasst:

eine Stromansprechwert-Schätzeinrichtung (51, 51a) zum Schätzen eines Stromansprechwerts relativ zu einem Strombefehlswert im  $dq$ -Koordinatensystem; und eine Oberschwingungsstrom-Erfassungseinrichtung (50) zum Erfassen eines Oberschwingungsstroms durch Subtrahieren des Stromansprechwerts, der von der Stromansprechwert-Schätzeinrichtung (51, 51a) geschätzt wurde, vom Stromwert im  $dq$ -Koordinatensystem.

18. Motorsteuereinrichtung nach Anspruch 15, wobei die Oberschwingungsstrom-Steuereinrichtung (11, 21, 50D) umfasst:

eine Stromansprechwert-Schätzeinrichtung (51aB) zum Schätzen eines Stromansprechwerts relativ zu einem Motorstrom-Befehlswert; und eine Oberschwingungsstrom-Erfassungseinrichtung (50B) zum Erfassen eines Oberschwingungsstroms durch Subtrahieren des Stromansprechwerts, der von der Stromansprechwert-Schätzeinrichtung geschätzt wurde, vom Grundstromwert.

19. Motorsteuereinrichtung nach Anspruch 16, wobei die Oberschwingungsstrom-Steuereinrichtung (11, 33, 35, 50D) umfasst:

eine Stromansprechwert-Schätzeinrichtung (51aD) zum Schätzen eines Stromansprechwerts relativ zu einem Strombefehlswert im Alpha-Beta-Koordinatensystem; und eine Oberschwingungsstrom-Erfassungseinrichtung (50D) zum Erfassen eines Oberschwingungsstroms durch Subtrahieren des Stromansprechwerts, der von der Stromansprechwert-Schätzeinrichtung (51aD) geschätzt wurde, vom Stromwert im Alpha-Beta-Koordinatensystem.

20. Motorsteuereinrichtung nach einem der Ansprüche 17 bis 19, wobei die Stromansprechwert-Schätzeinrichtung (51, 51a) ein Tiefpassfilter (51a) ist.

21. Motorsteuereinrichtung nach Anspruch 20, wobei sich eine Zeitkonstante im Tiefpassfilter verändert, wenn sich ein Motorzustand ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) verändert.

22. Motorsteuereinrichtung nach einem der Ansprüche 12 bis 21, die eine Vielzahl der Oberschwingungsstrom-Steuereinrichtungen (11) aufweist, die gemäß einer Vielzahl von Ordnungen von Oberschwingungsströmen vorgesehen sind.

23. Motorsteuereinrichtung nach Anspruch 22, wobei die Reihenfolge, in der die Oberschwingungen der Vielzahl von Ordnungen einer Steuerung in der Oberschwingungsstrom-Steuereinrichtung (11) unterzogen werden, durch Vergabe einer höheren Priorität an Ordnungen bestimmt ist, bei denen sich größere Oberschwingungskomponenten im Motorströmen manifestieren.

24. Motorsteuerverfahren, umfassend:

Ermitteln eines Grundstrom-Befehlswerts ( $i_d^*$ ,  $i_q^*$ ) für einen Motorstrom ( $i_u$ ,  $i_v$ ,  $i_w$ ) basierend auf zumindest einem Drehmoment-Befehlswert ( $T_e^*$ ) für einen Wechselstrommotor (M); Ermitteln eines Oberschwingungsstrom-Befehlswerts für den Motorstrom basierend auf zumindest einem Drehmoment-Befehlswert ( $T_e^*$ ) des Wechselstrommotors (M); und Steuern des Stroms ( $i_u$ ,  $i_v$ ,  $i_w$ ), der durch den Wechselstrommotor (M) fließt, basierend auf dem Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) und dem Oberschwingungsstrom-Befehlswert, **gekennzeichnet durch**

Implementieren einer Steuerung zum Anpassen einer Grundwellenkomponente des Motorstroms ( $i_u$ ,  $i_v$ ,  $i_w$ ) an den Grundstrom-Befehlswert ( $i_d^*$ ,  $i_q^*$ ) in einem dq-Koordinatensystem, das sich synchron mit einer Grundwellenkomponente eines ankerverknüpften magnetischen Flusses dreht; und Implementieren einer Steuerung zum Anpassen einer Oberschwingungsstrom-Steuereinrichtung (11) zum Implementieren einer Steuerung zum Anpassen einer Oberschwingungsordnungs-komponente ( $i_{dh}$ ,  $i_{qh}$ ) des Motorstroms ( $i_u$ ,  $i_v$ ,  $i_w$ ) an den Oberschwingungsstrom-Befehlswert ( $i_{dh}^*$ ,  $i_{qh}^*$ ) in einem dhqh-Koordinatensystem, das sich synchron mit einer Oberschwingungsordnungs-komponente des ankerverknüpften magnetischen Flusses dreht.

## Revendications

### 1. Appareil de commande de moteur comprenant :

- un moyen de détermination de valeur de commande de courant fondamental (1) pour déterminer une valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) pour le courant de moteur ( $i_u$ ,  $i_v$ ,  $i_w$ ) ;
- un moyen de détermination de valeur de commande de courant d'harmoniques supérieurs (1) pour déterminer une valeur de commande de courant d'harmoniques supérieurs pour le courant de moteur ; et
- des moyens de régulation de courant (2, 11) pour réguler un courant ( $i_u$ ,  $i_v$ ,  $i_w$ ) circulant vers le moteur à courant alternatif sur la base de la valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et de la valeur de commande de courant d'harmoniques supérieurs, **caractérisé en ce que** ledit moyen de détermination de valeur de commande de courant fondamental (1) règle la valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) sur la base d'au moins une valeur de commande de couple ( $T_e^*$ ) pour un moteur à courant alternatif (M) ;
- ledit moyen de détermination de valeur de commande de courant d'harmoniques supérieurs (1) règle la valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) sur la base d'au moins une valeur de commande de couple ( $T_e^*$ ) du moteur à courant alternatif (M) ; et
- les moyens de régulation de courant (2, 11) comportent un moyen de régulation de courant d'onde fondamentale (2) pour mettre en oeuvre une régulation de manière à mettre en correspondance une composante d'onde fondamentale du courant de moteur ( $i_u$ ,  $i_v$ ,  $i_w$ ) avec la valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) dans un système de coordonnées dq qui tourne en synchronisation avec une composante d'onde fondamentale d'un flux magnétique interconnecté d'induit ; et un moyen de régulation de courant d'harmoniques supérieurs (11) pour mettre en oeuvre une régulation de manière à mettre en correspondance une composante d'ordre d'harmoniques supérieur ( $i_{dh}$ ,  $i_{qh}$ ) du courant de moteur ( $i_u$ ,  $i_v$ ,  $i_w$ ) avec la valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) dans un système de coordonnées dhqh qui tourne en synchronisation avec une composante d'ordre d'harmoniques supérieur du flux magnétique interconnecté d'induit.

### 2. Appareil de commande de moteur selon la revendication 1, dans lequel :

- ledit moyen de détermination de valeur de commande de courant fondamental (1) détermine une valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) dans un système de coordonnées dq qui tourne en synchronisation avec une composante d'onde fondamentale d'un flux magnétique interconnecté d'induit ; et
- ledit moyen de détermination de valeur de commande de courant d'harmoniques supérieurs (1) détermine une valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) dans un système de coordonnées dhqh qui tourne en synchronisation avec une composante d'ordre d'harmoniques supérieur du flux magnétique interconnecté d'induit.

### 3. Appareil de commande de moteur selon l'une quelconque des revendications précédentes, dans lequel ledit moyen de détermination de valeur de commande de courant fondamental (1) et ledit moyen de détermination de valeur de commande de courant d'harmoniques supérieurs (1) déterminent une valeur de commande de courant fondamental ( $i_d^*$ , $i_q^*$ ) et une valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ , $i_{qh}^*$ ) respectivement, qui maximisent l'efficacité tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ).

### 4. Appareil de commande de moteur selon la revendication 1 ou 2, dans lequel ledit moyen de détermination de valeur de commande de courant fondamental (1) et ledit moyen de détermination de valeur de commande de courant d'harmoniques supérieurs (1) déterminent une valeur de commande de courant fondamental ( $i_d^*$ , $i_q^*$ ) et une valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ , $i_{qh}^*$ ) respectivement, qui minimisent l'ondulation de couple tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ).

5. Appareil de commande de moteur selon la revendication 1 ou 2, dans lequel ledit moyen de détermination de valeur de commande de courant fondamental (1) et ledit moyen de détermination de valeur de commande de courant d'harmoniques supérieurs (1) déterminent une valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et une valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) respectivement, qui minimisent l'ondulation de tension tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ).
6. Appareil de commande de moteur selon la revendication 1 ou 2, dans lequel ledit moyen de détermination de valeur de commande de courant fondamental (1) et ledit moyen de détermination de valeur de commande de courant d'harmoniques supérieurs (1) déterminent une valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et une valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) respectivement, qui minimisent l'ondulation de courant tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ).
7. Appareil de commande de moteur selon la revendication 1 ou 2, dans lequel ledit moyen de détermination de valeur de commande de courant fondamental (1) et ledit moyen de détermination de valeur de courant d'harmoniques supérieurs (1) déterminent une valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et une valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) qui maximisent l'efficacité tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ), une valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et une valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) qui minimisent l'ondulation de couple tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ), une valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et une valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) qui minimisent l'ondulation de tension tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ), et une valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et une valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) qui minimisent l'ondulation de courant tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ) ; et ledit appareil de commande de moteur comporte en outre ; un moyen de détection d'état de fonctionnement (1, 5) pour détecter un état de fonctionnement de moteur ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) ; et un moyen de sélection de valeur de commande de courant (1) pour sélectionner des valeurs de commande de courant optimales ( $i_d^*$ ,  $i_q^*$ ,  $i_{dh}^*$ ,  $i_{qh}^*$ ) correspondant à l'état de fonctionnement de moteur ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) parmi des valeurs de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et des valeurs de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) déterminées par ledit moyen de détermination de valeur de commande de courant fondamental (1) et ledit moyen de détermination de valeur de commande de courant d'harmoniques supérieurs (1) respectivement.
8. Appareil de commande de moteur selon la revendication 7, dans lequel ledit moyen de sélection de valeur de commande de courant (1) sélectionne la valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et la valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) pour minimiser une ondulation de courant tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ) si un état de fonctionnement de moteur ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) dans lequel le couple moteur se trouve dans une plage spécifique proche d'une valeur maximale, est détecté.
9. Appareil de commande de moteur selon la revendication 7, dans lequel ledit moyen de sélection de valeur de commande de courant (1) sélectionne la valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et la valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) pour minimiser une ondulation de couple tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ) si un état de fonctionnement de moteur ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) dans lequel le couple moteur et la vitesse de rotation de moteur ( $\omega_e$ ) se trouvent tous les deux dans une plage basse spécifique, est détecté.
10. Appareil de commande de moteur selon la revendication 7, dans lequel ledit moyen de sélection de valeur de commande de courant (1) sélectionne la valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et la valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) pour minimiser une ondulation de tension tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ) si un état de fonctionnement de moteur ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) dans lequel la rendement-moteur se trouve dans une plage spécifique proche d'une valeur maximale, est détecté.
11. Appareil de commande de moteur selon la revendication 7, dans lequel ledit moyen de sélection de valeur de

commande de courant (1) sélectionne la valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et la valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) maximisant une efficacité tout en mettant en correspondance un couple moteur avec la valeur de commande de couple ( $T_e^*$ ) si un état de fonctionnement ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) dans lequel un couple moteur et une sortie de moteur ne se trouvent pas dans les plages spécifiques sur lesquelles le couple moteur et la sortie de moteur sont proches des valeurs maximales, et le couple moteur et la vitesse de rotation de moteur ne se trouvent pas dans les plages basses spécifiques, est détecté.

12. Appareil de commande de moteur selon la revendication 1, dans lequel la composante d'ordre d'harmoniques supérieur ( $i_{dh}$ ,  $i_{qh}$ ) est une composante d'harmoniques supérieurs ayant un ordre spécifique se manifestant lorsque le courant de moteur ( $i_u$ ,  $i_v$ ,  $i_w$ ) est régulé uniquement dans ledit système de coordonnées dq ; et ledit moyen de détermination de valeur de commande de courant d'harmoniques supérieurs (1) règle à 0 une valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) correspondant à l'ordre spécifique dans une composante d'harmoniques supérieurs ( $i_{dh}$ ,  $i_{qh}$ ) contenue dans le courant de moteur ( $i_u$ ,  $i_v$ ,  $i_w$ ).

13. Appareil de commande de moteur selon la revendication 12, dans lequel la composante d'harmoniques d'ordre supérieur ( $i_{dh}$ ,  $i_{qh}$ ) devant être soumise à une régulation est commutée en correspondance avec un état d'entraînement de moteur ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ).

14. Appareil de commande de moteur selon la revendication 1, dans lequel ledit moyen de régulation de courant d'harmoniques supérieurs (8,10,11, 50) convertit le courant de moteur ( $i_u$ ,  $i_v$ ,  $i_w$ ) en un courant ( $i_d$ ,  $i_q$ ) dans ledit système de coordonnées dq, détecte une composante d'harmoniques supérieurs du courant ( $i_d$ ,  $i_q$ ) dans ledit système de coordonnées dq résultant de la conversion, et convertit la composante d'harmoniques supérieurs en un courant d'harmoniques supérieurs ( $i_{dh}$ ,  $i_{qh}$ ) dans ledit système de coordonnées dhqh.

15. Appareil de commande de moteur selon la revendication 1, dans lequel ledit moyen de régulation de courant d'harmoniques supérieurs (11, 21, 50B) détecte une composante d'harmoniques supérieurs du courant de moteur ( $i_u$ ,  $i_v$ ,  $i_w$ ) et convertit la composante d'harmoniques supérieurs en un courant d'harmoniques supérieurs ( $i_{dh}$ ,  $i_{qh}$ ) dans ledit système de coordonnées dhqh.

16. Appareil de commande de moteur selon la revendication 1, dans lequel ledit moyen de régulation de courant d'harmoniques supérieurs (11, 33, 35, 50D) convertit le courant de moteur en un courant ( $i_u$ ,  $i_v$ ,  $i_w$ ) dans un système de coordonnées orthogonales alpha bêta fixé à un stator du moteur à courant alternatif (M), détecte une composante d'harmoniques supérieurs du courant ( $i_\alpha$ ,  $i_\beta$ ) dans ledit système de coordonnées alpha bêta, et convertit la composante d'harmoniques supérieurs détectée en un courant d'harmoniques supérieurs ( $i_{dh}$ ,  $i_{qh}$ ) dans ledit système de coordonnées dhqh.

17. Appareil de commande de moteur selon la revendication 14, dans lequel ledit moyen de régulation de courant d'harmoniques supérieurs (8, 10, 11, 50) comporte :

un moyen d'estimation de valeur de réponse de courant (51, 51a) pour estimer une valeur de réponse de courant par rapport à une valeur de commande de courant dans ledit système de coordonnées dq ; et un moyen de détection de courant d'harmoniques supérieurs (50) pour détecter un courant d'harmoniques supérieurs en soustrayant la valeur de réponse de courant estimée par ledit moyen d'estimation de réponse de courant (51, 51a) de la valeur de courant dans ledit système de coordonnées dq.

18. Appareil de commande de moteur selon la revendication 15, dans lequel ledit moyen de régulation de courant d'harmoniques supérieurs (11, 21, 50B) comporte :

un moyen d'estimation de valeur de réponse de courant (51aB) pour estimer une valeur de réponse de courant par rapport à une valeur de commande de courant de moteur ; et un moyen de détection de courant d'harmoniques supérieurs (50B) pour détecter un courant d'harmoniques supérieurs en soustrayant la valeur de réponse de courant estimée par ledit moyen d'estimation de réponse

de courant de la valeur de courant fondamental.

19. Appareil de commande de moteur selon la revendication 16, dans lequel ledit moyen de régulation de courant d'harmoniques supérieurs (11, 33, 35, 50D) comporte ;  
un moyen d'estimation de valeur de réponse de courant (51aD) pour estimer une valeur de réponse de courant par rapport à une valeur de commande de courant dans ledit système de coordonnées alpha bêta ; et  
un moyen de détection de courant d'harmoniques supérieurs (50D) pour détecter un courant d'harmoniques supérieurs en soustrayant la valeur de réponse de courant estimée par ledit moyen d'estimation de réponse de courant (51 aD) de la valeur de courant dans ledit système de coordonnées alpha bêta.

20. Appareil de commande de moteur selon l'une quelconque des revendications 17 à 19, dans lequel : ledit moyen d'estimation de valeur de réponse de courant (51, 51a) est un filtre passe-bas (51a).

21. Appareil de commande de moteur selon la revendication 20, dans lequel une constante de temps au niveau dudit filtre passe-bas change à mesure qu'un état de moteur ( $\theta_{eh}$ ,  $\theta_e$ ,  $\omega_e$ ) change.

22. Appareil de commande de moteur selon l'une quelconque des revendications 12 à 21, ayant une pluralité desdits moyens de régulation de courant d'harmoniques supérieurs (11) prévus en correspondance avec une pluralité d'ordres de courants d'harmoniques supérieurs.

23. Appareil de commande de moteur selon la revendication 22, dans lequel, l'ordre dans lequel des harmoniques supérieurs de la pluralité d'ordres doivent être soumis à une régulation dans ledit moyen de régulation de courant d'harmoniques supérieurs (11) est déterminé en donnant une priorité plus élevée à des ordres auxquels des composantes d'harmoniques supérieurs plus importantes se manifestent dans des courants de moteur.

24. Procédé de commande de moteur comprenant le fait :

de déterminer une valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) pour un courant de moteur ( $i_u$ ,  $i_v$ ,  $i_w$ ) sur la base d'au moins une valeur de commande de couple ( $T_e^*$ ) pour un moteur à courant alternatif (M) ;  
de déterminer une valeur de commande de courant d'harmoniques supérieurs pour le courant de moteur sur la base d'au moins une valeur de commande de couple ( $T_e^*$ ) du moteur à courant alternatif (M) ; et  
de réguler le courant ( $i_u$ ,  $i_v$ ,  $i_w$ ) circulant vers le moteur à courant alternatif (M) sur la base de la valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) et de ladite valeur de commande de courant d'harmoniques supérieurs,

**caractérisé**

**par** la mise en oeuvre d'une régulation de manière à mettre en correspondance une composante d'onde fondamentale du courant de moteur ( $i_u$ ,  $i_v$ ,  $i_w$ ) avec la valeur de commande de courant fondamental ( $i_d^*$ ,  $i_q^*$ ) dans un système de coordonnées dq qui tourne en synchronisation avec une composante d'onde fondamentale d'un flux magnétique interconnecté d'induit ; et

par la mise en oeuvre d'une régulation de manière à mettre en correspondre un moyen de régulation de courant d'harmoniques supérieurs (11) pour mettre en oeuvre une régulation de manière à mettre en correspondre une composante d'ordre d'harmoniques supérieur ( $i_{dh}$ ,  $i_{qh}$ ) du courant de moteur ( $i_u$ ,  $i_v$ ,  $i_w$ ) avec la valeur de commande de courant d'harmoniques supérieurs ( $i_{dh}^*$ ,  $i_{qh}^*$ ) dans un système de coordonnées dhqh qui tourne en synchronisation avec une composante d'ordre d'harmoniques supérieur du flux magnétique interconnecté d'induit.

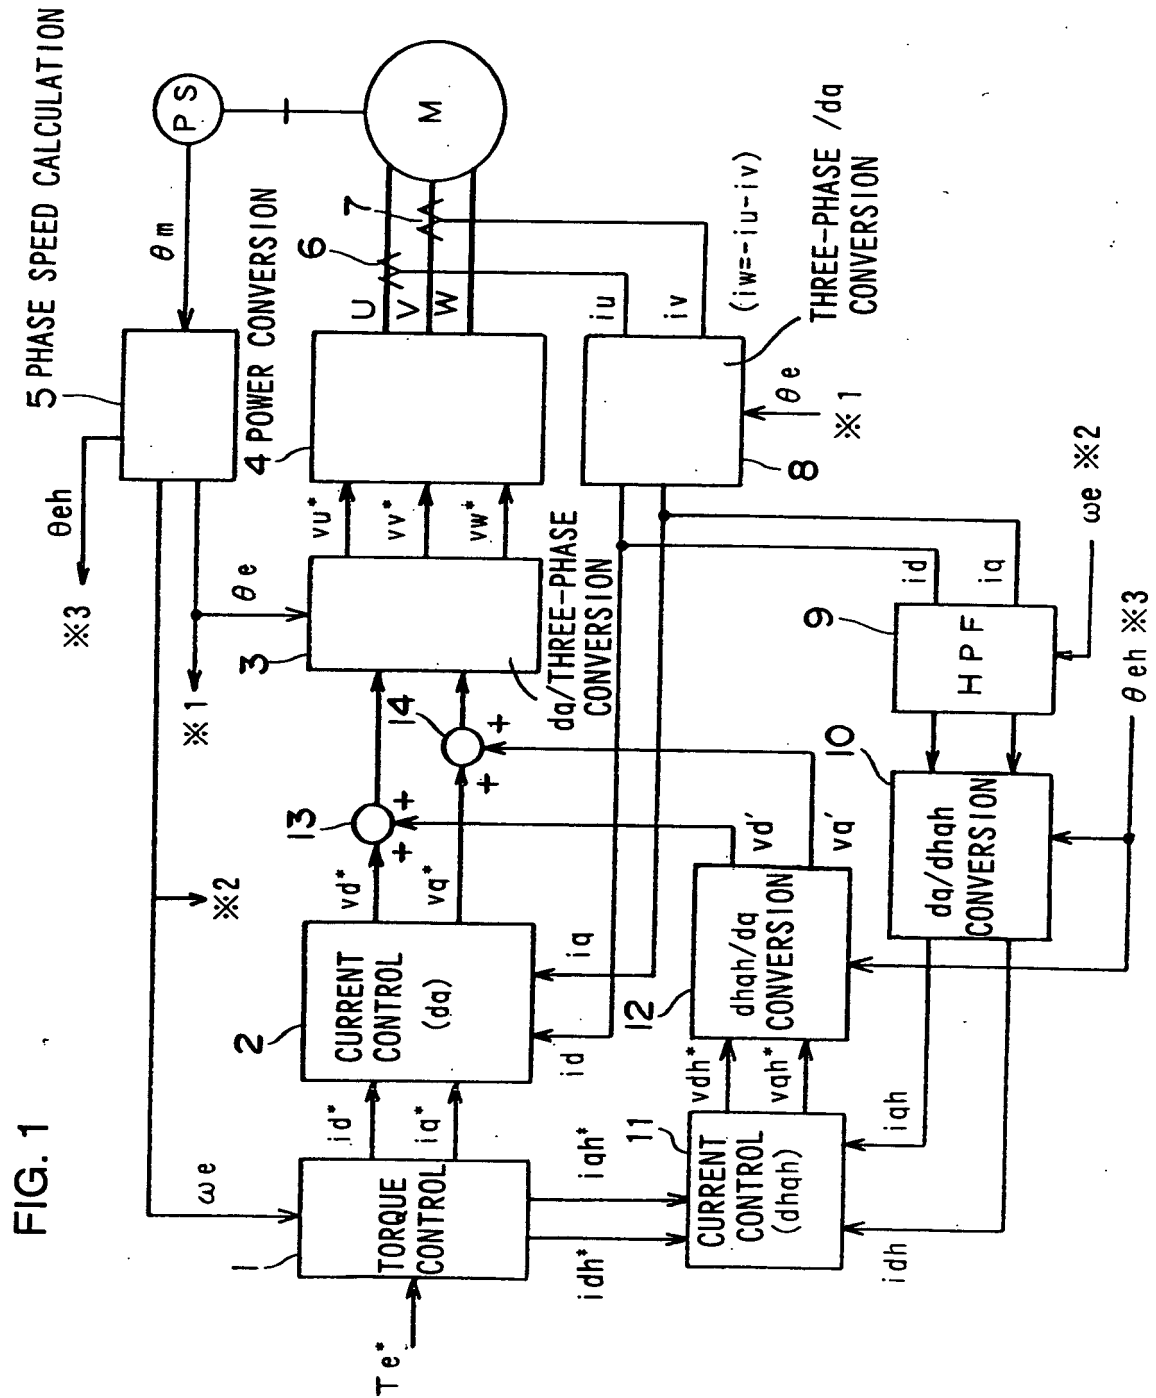




FIG. 2

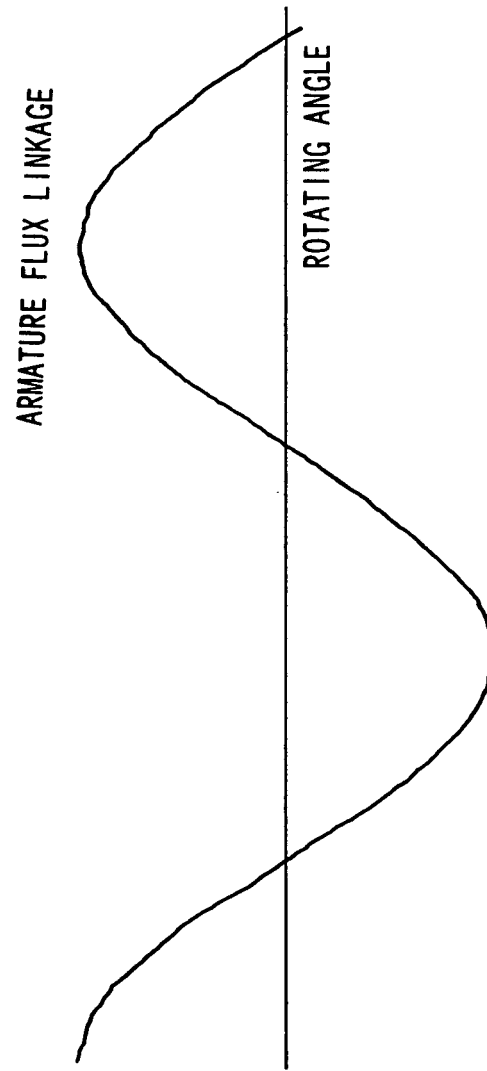


FIG. 3

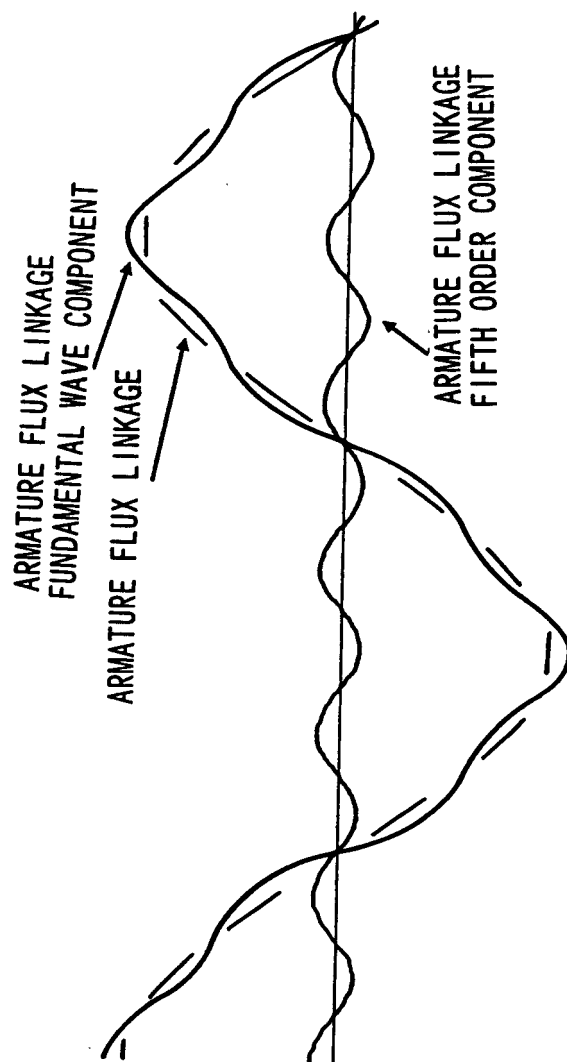


FIG. 4A

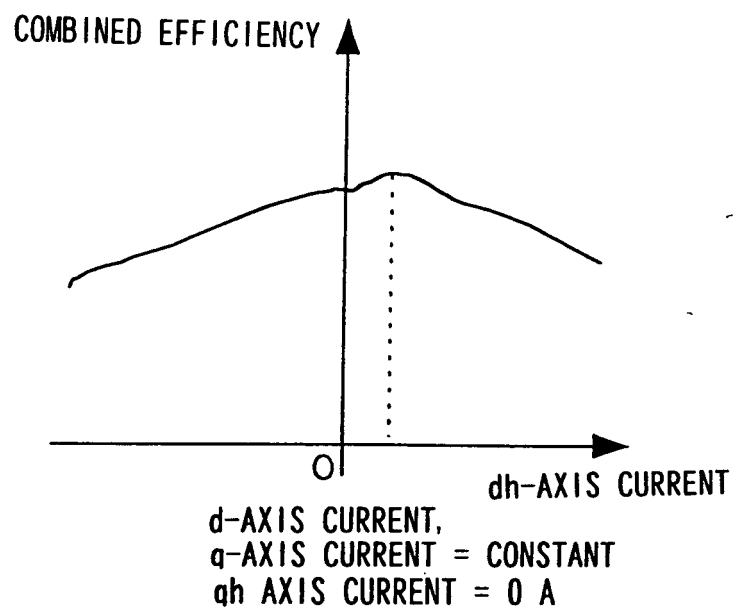


FIG. 4B

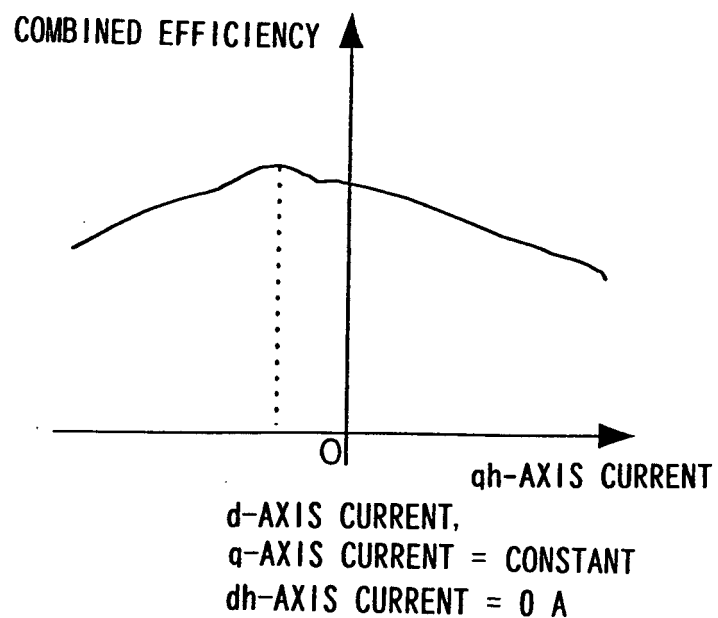


FIG. 5

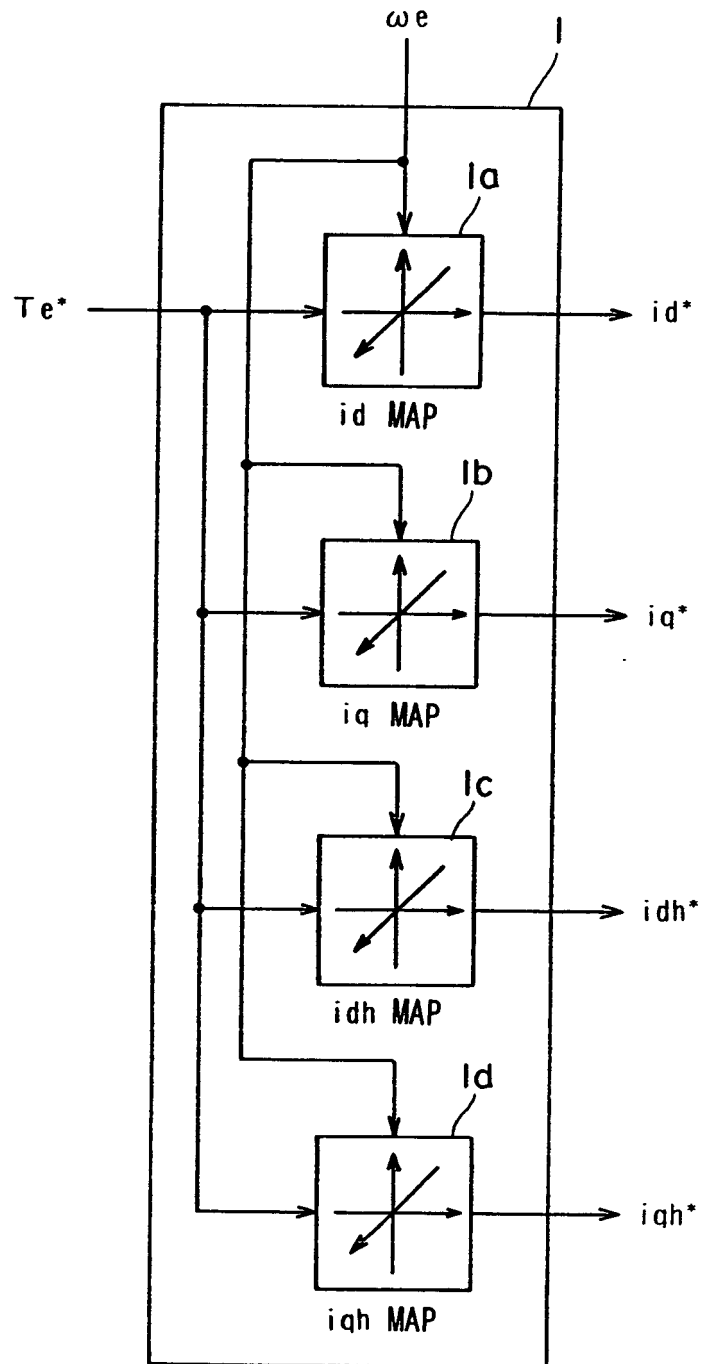


FIG. 6

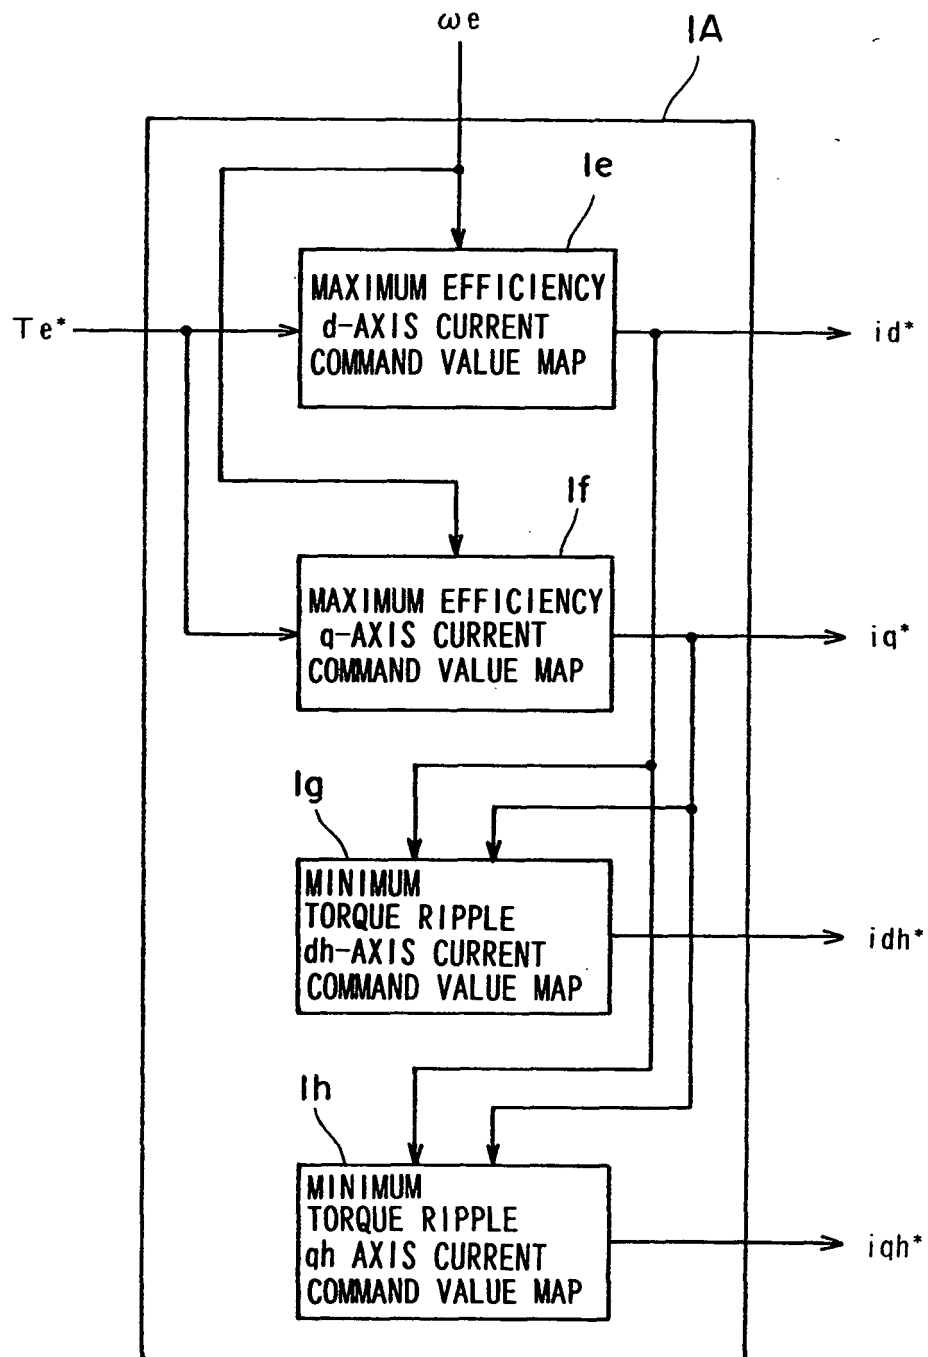


FIG. 7

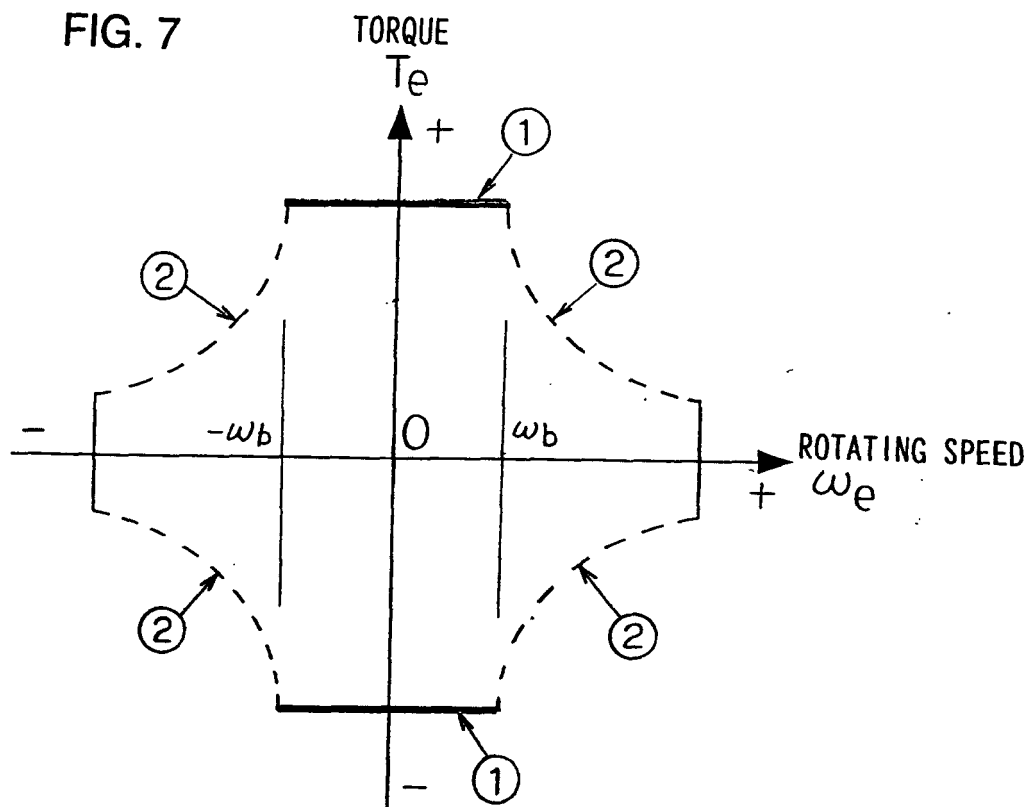


FIG. 8

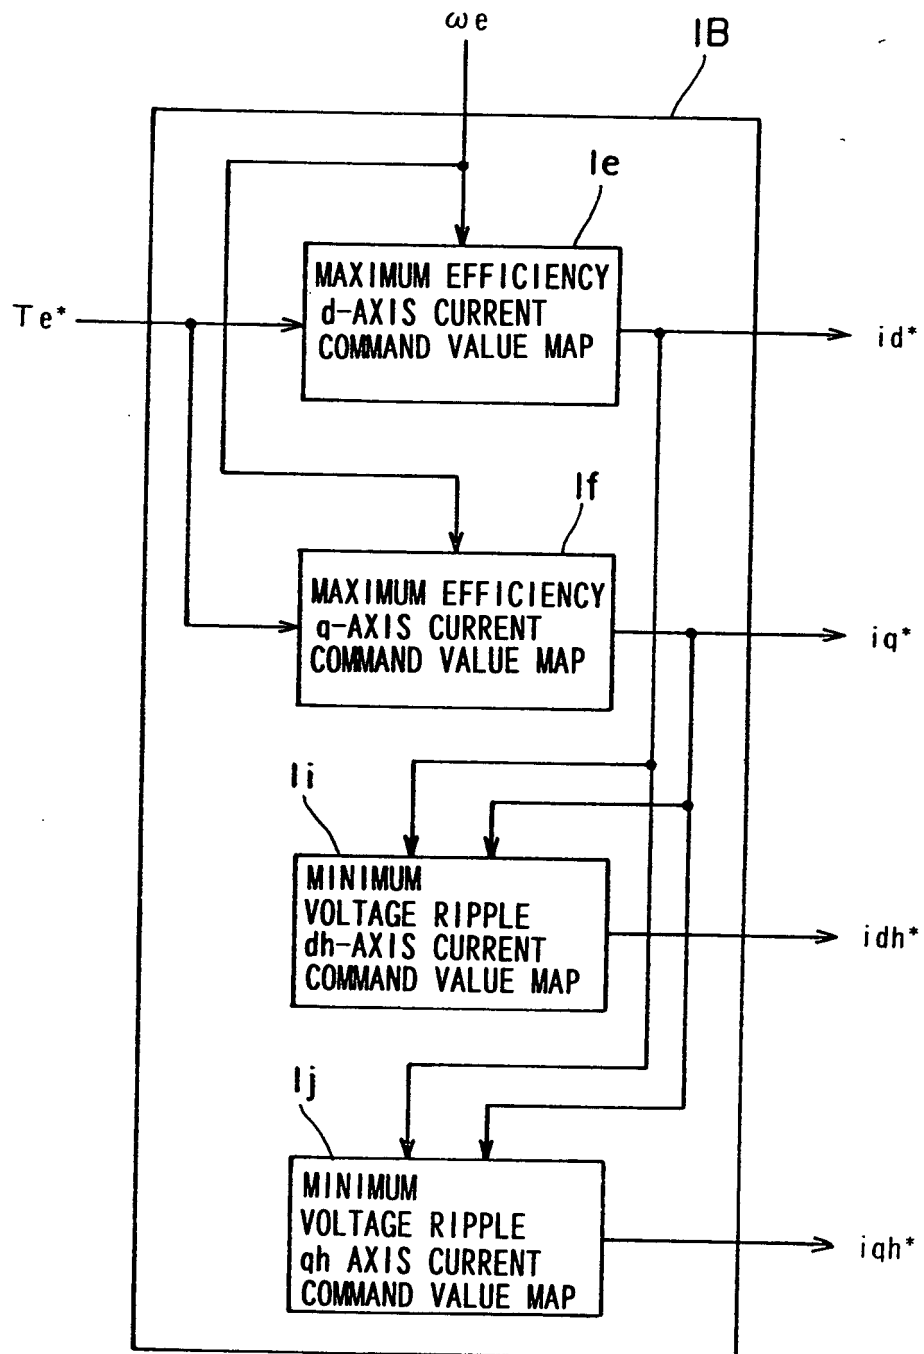


FIG. 9

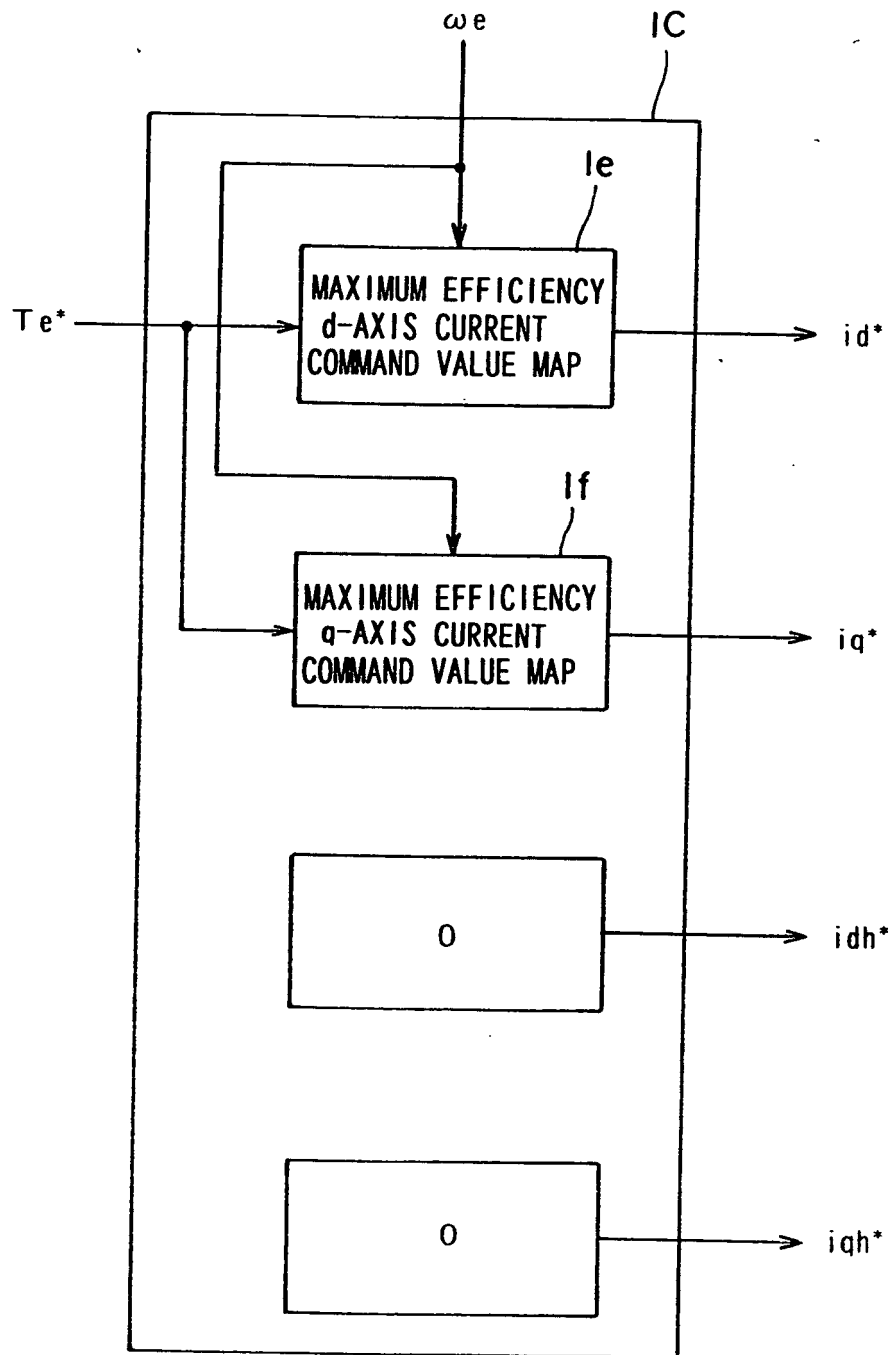




FIG. 10

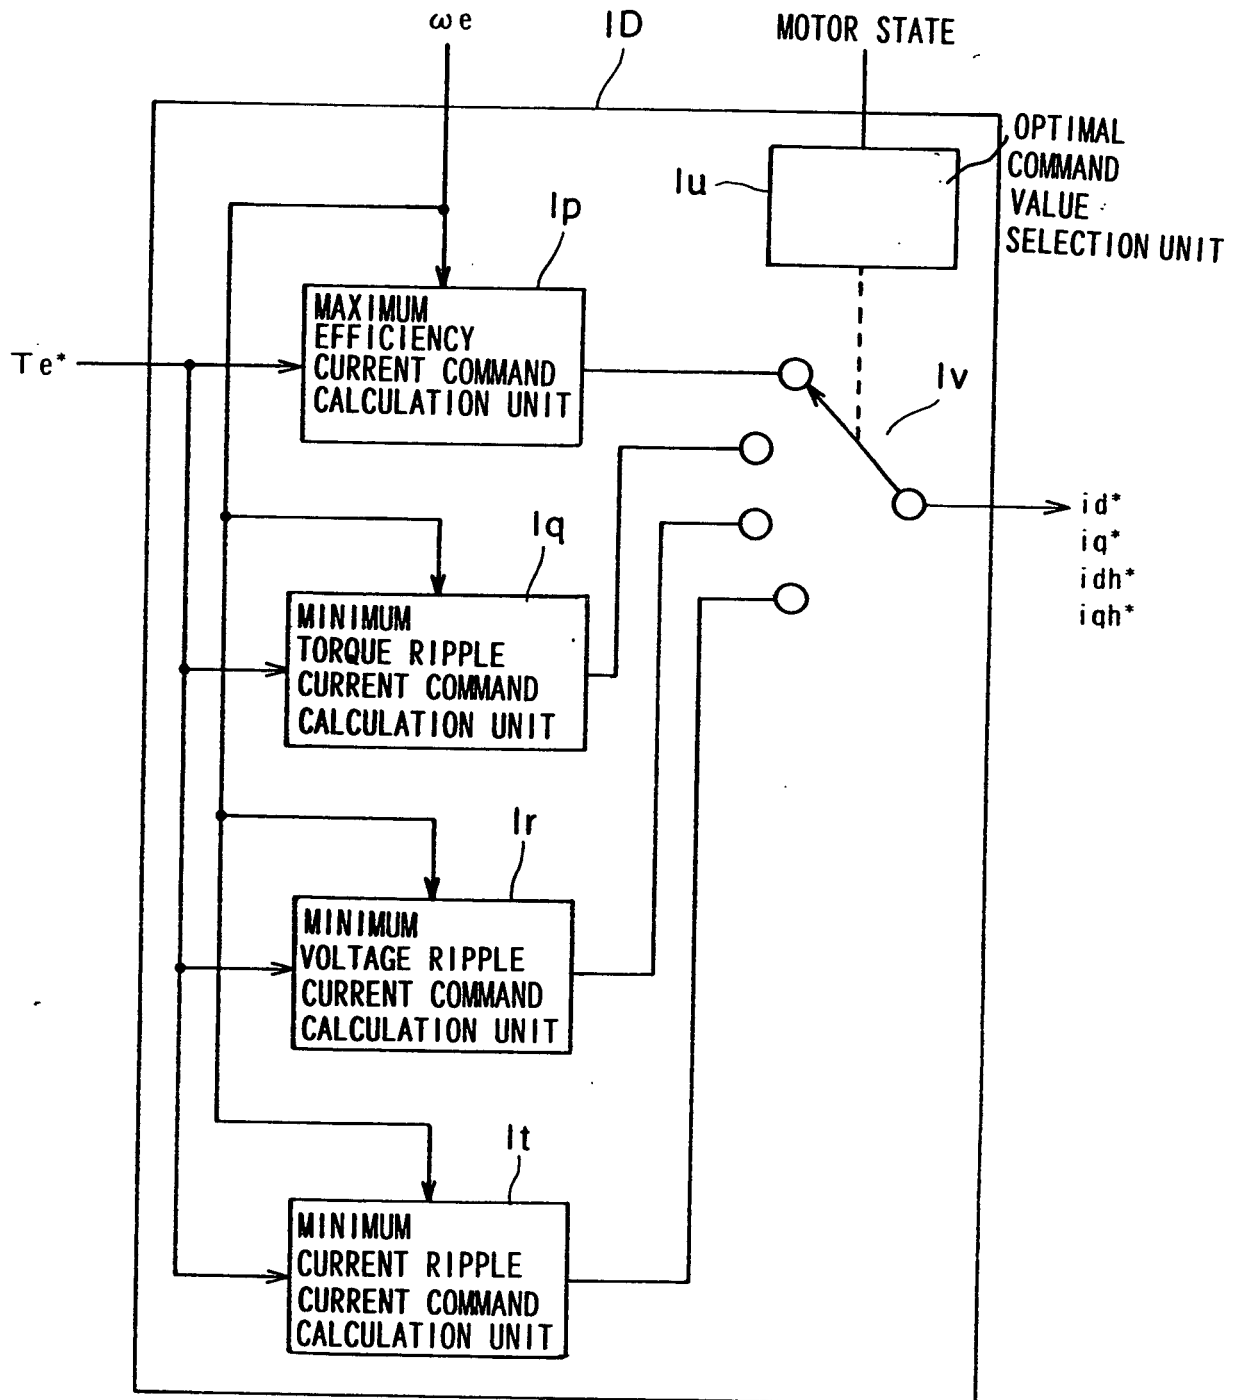
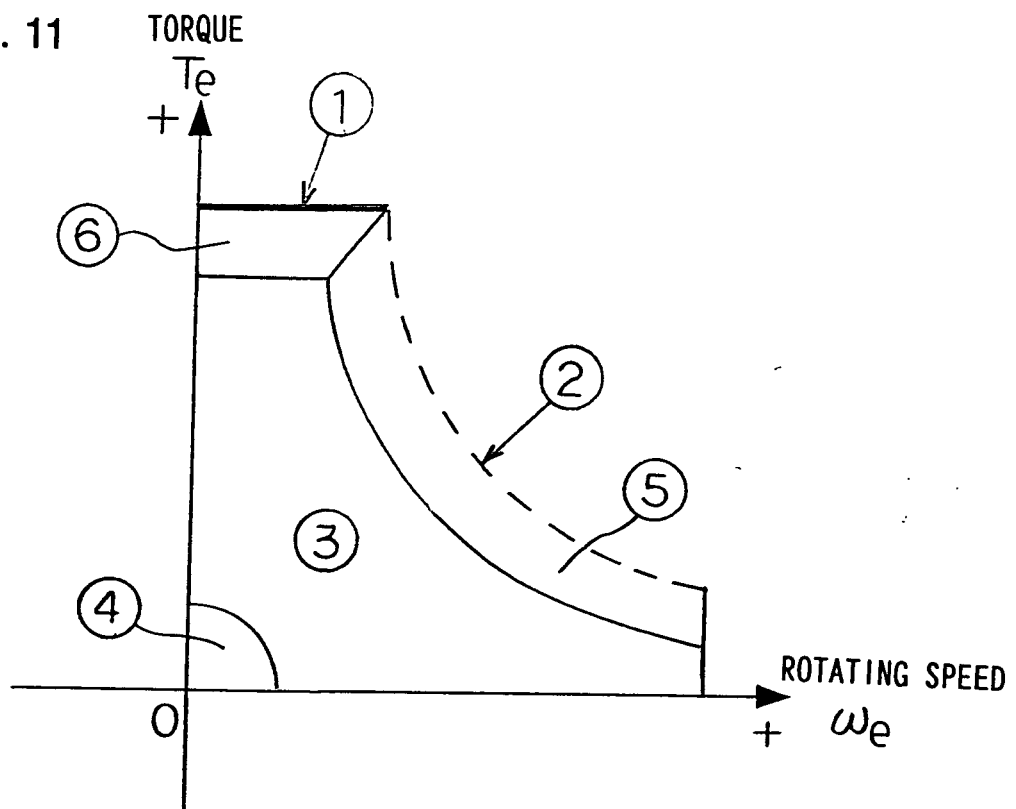
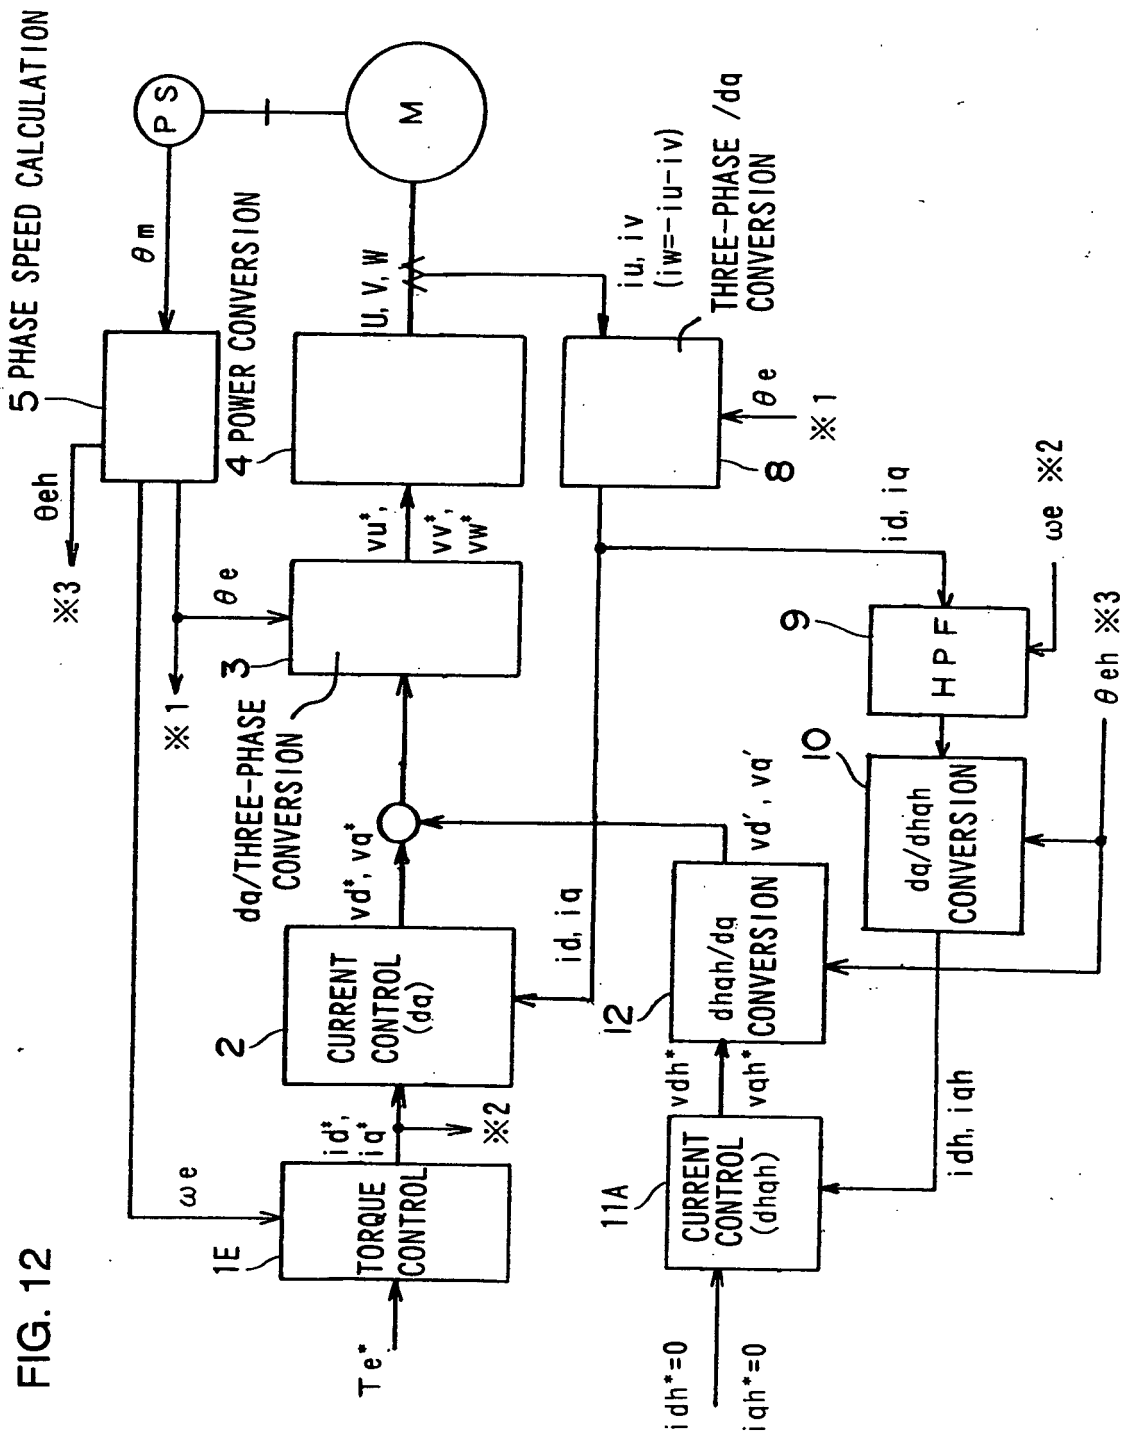
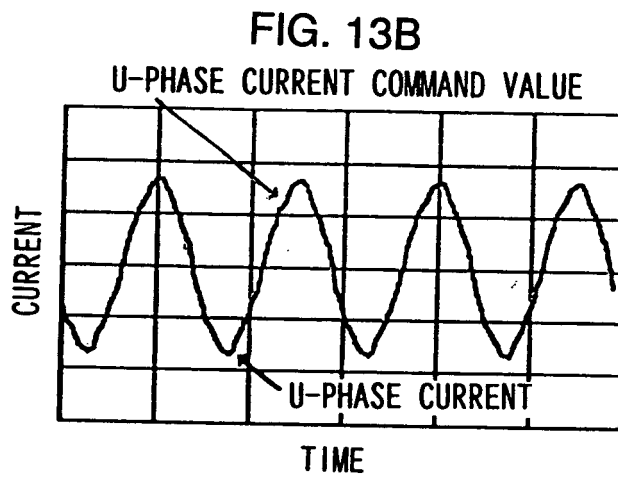
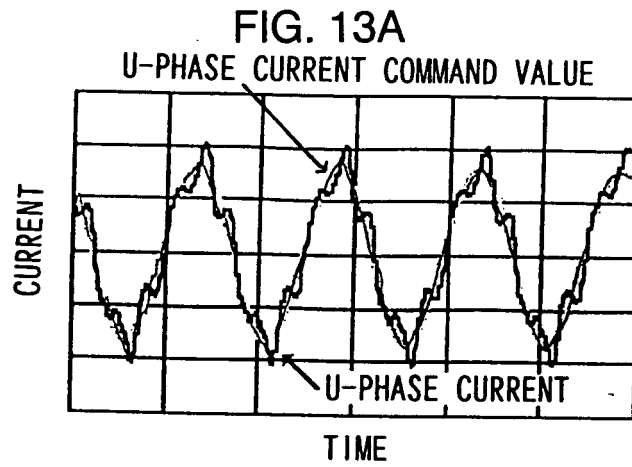


FIG. 11







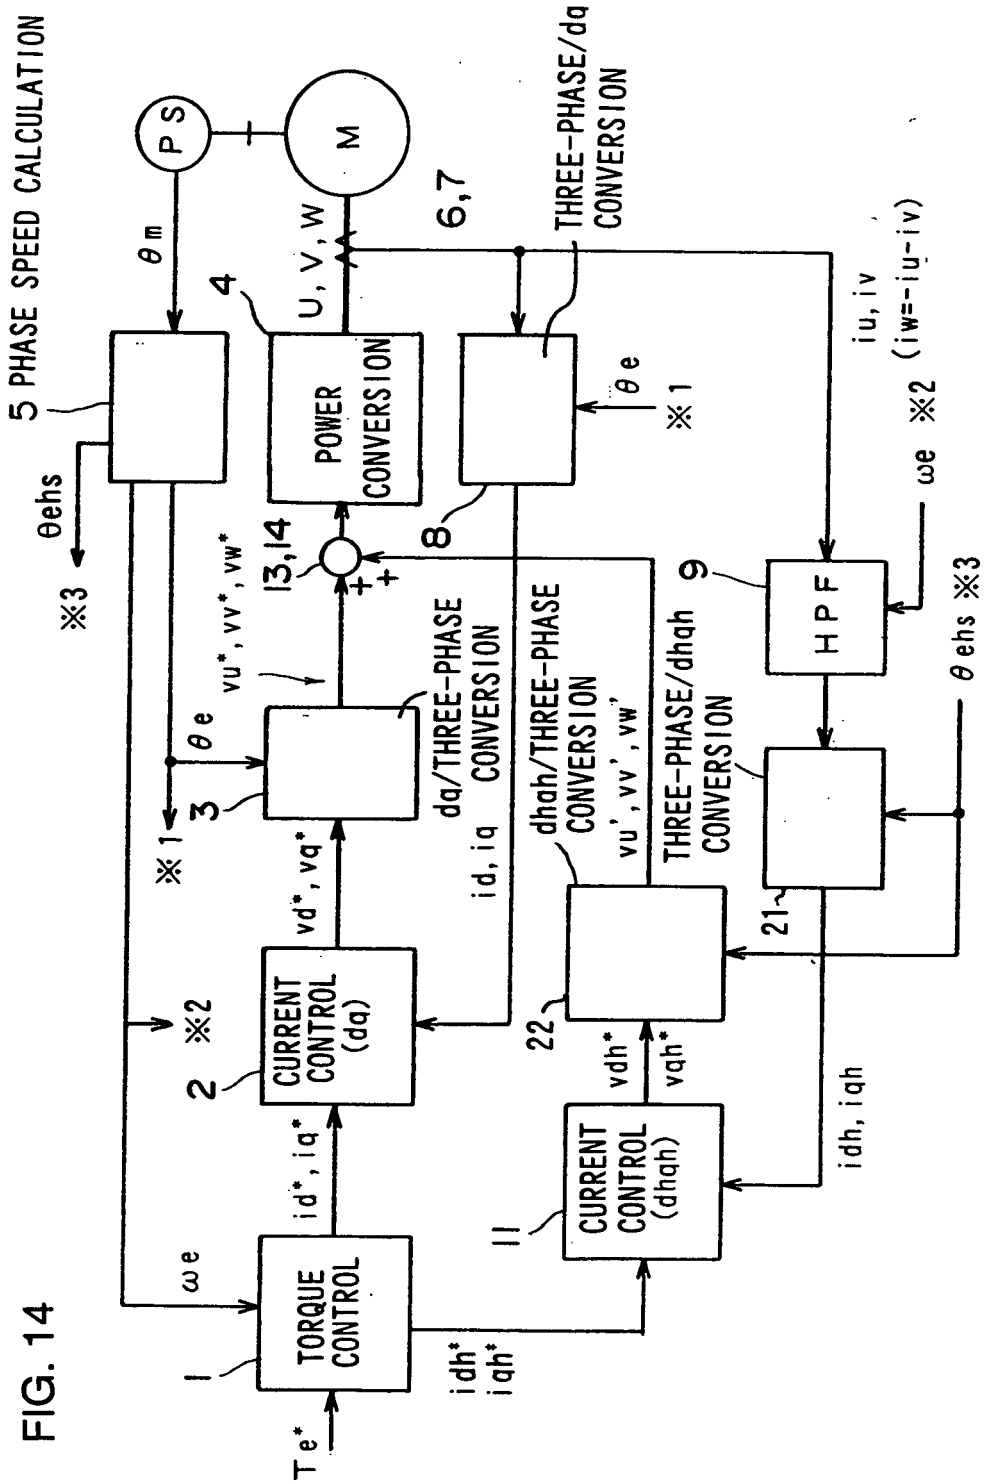
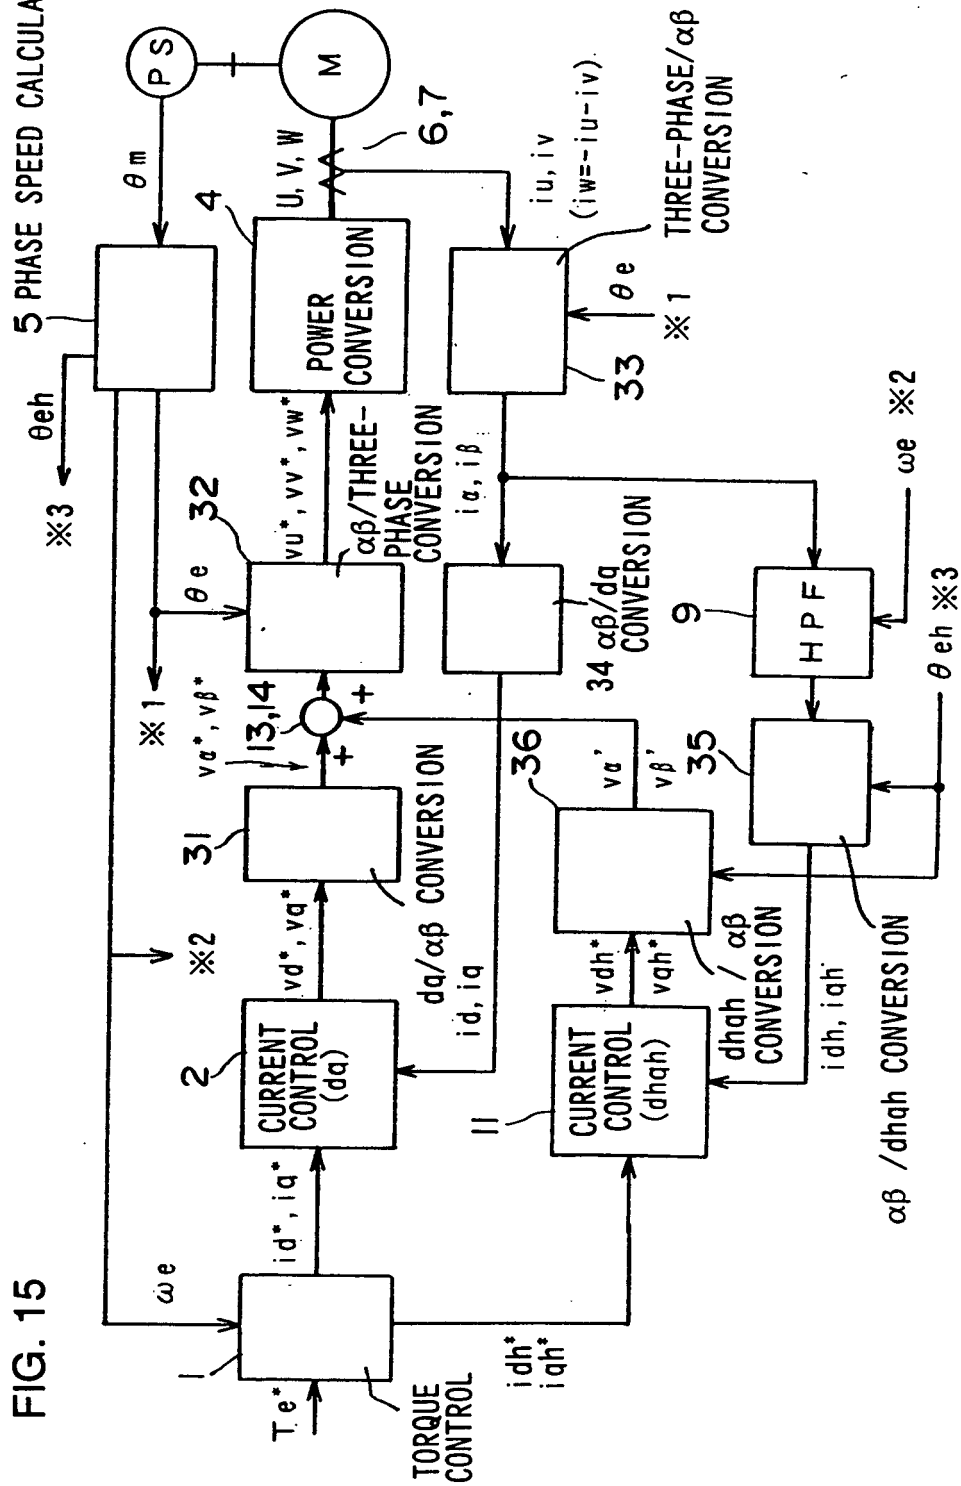


FIG. 15



**FIG. 16**

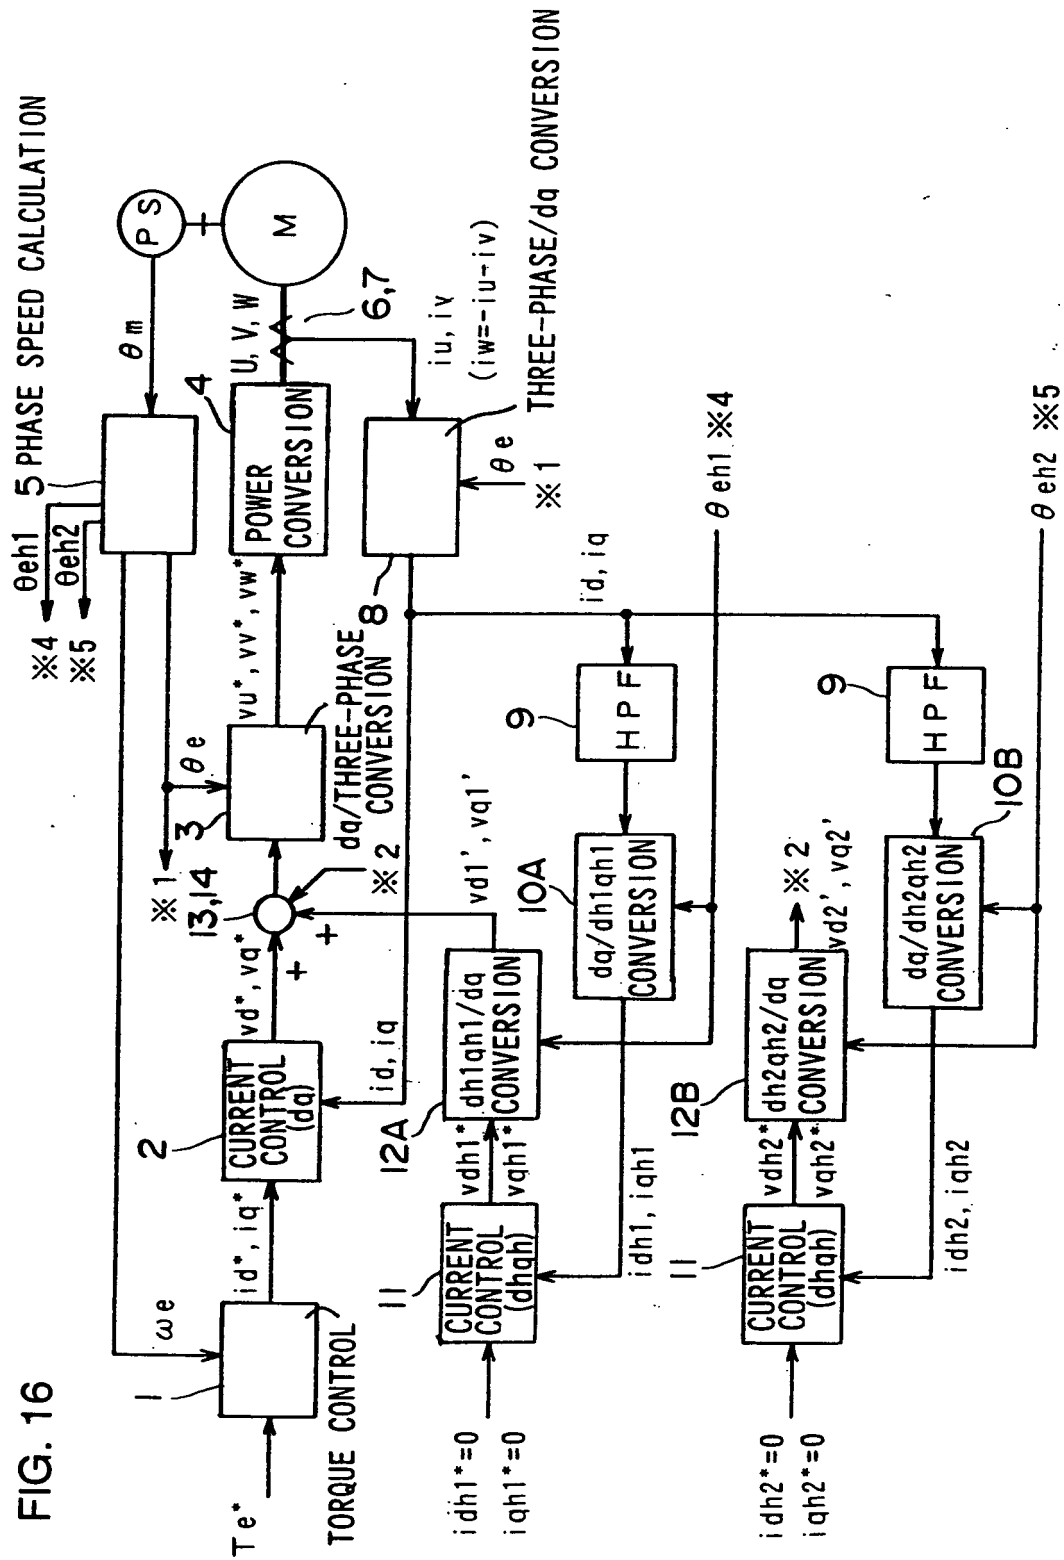


FIG. 17

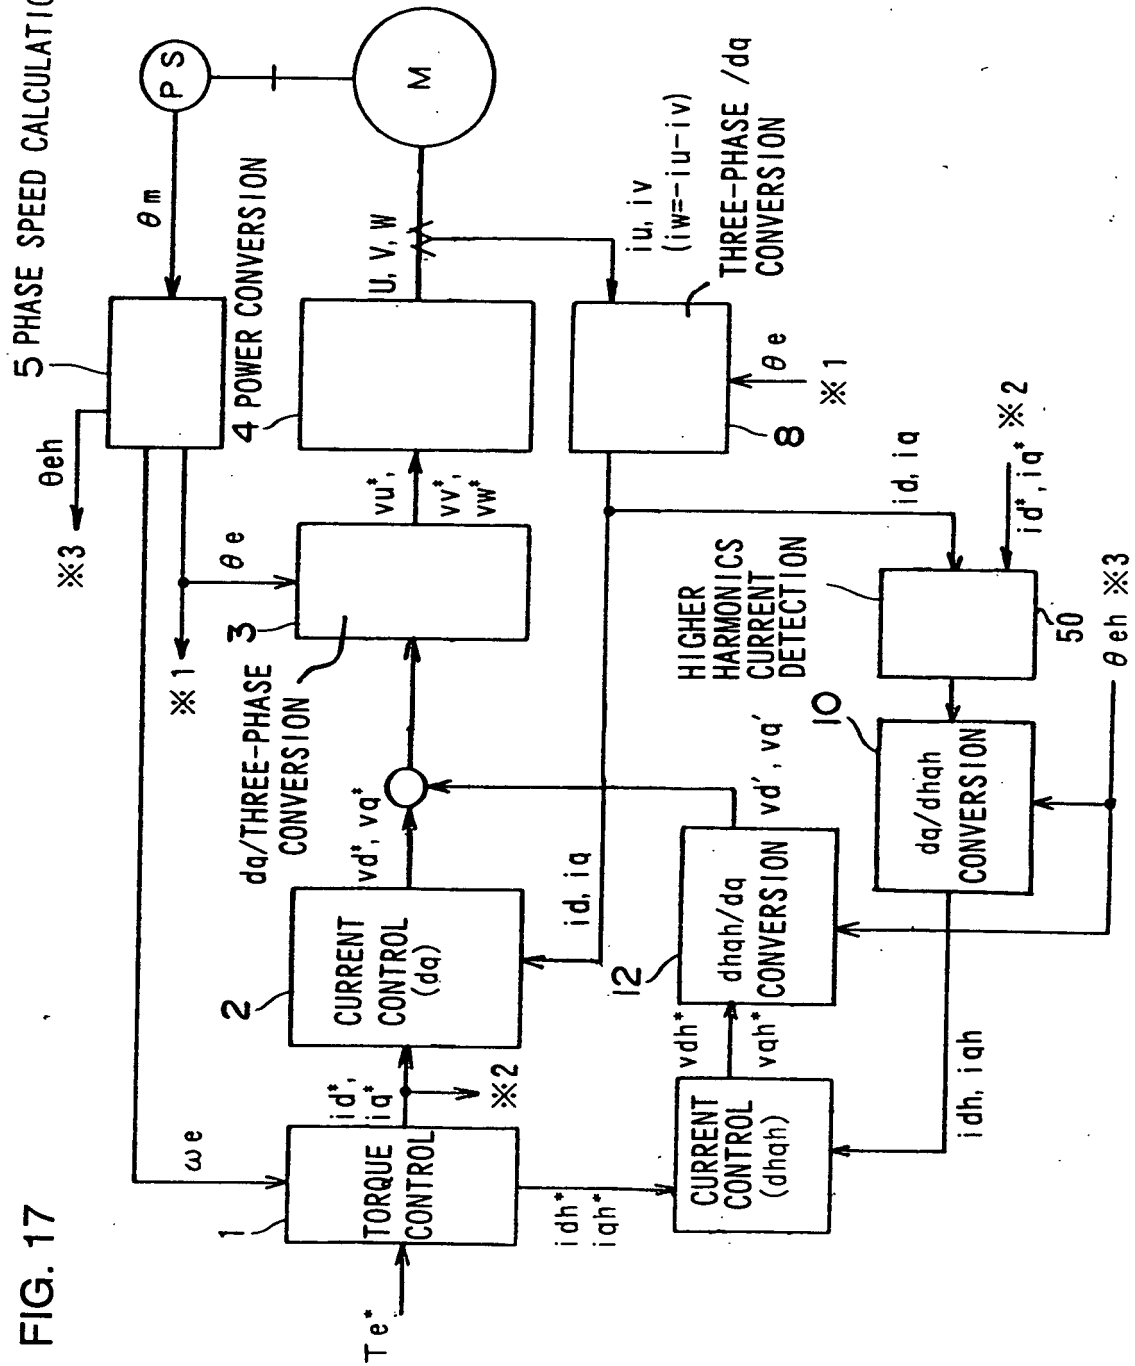




FIG.18

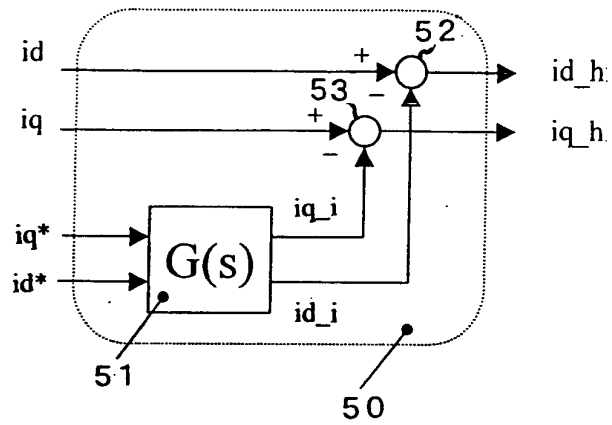


FIG.19

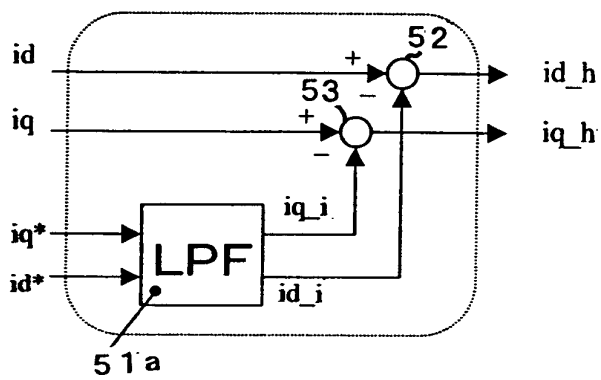


FIG.20

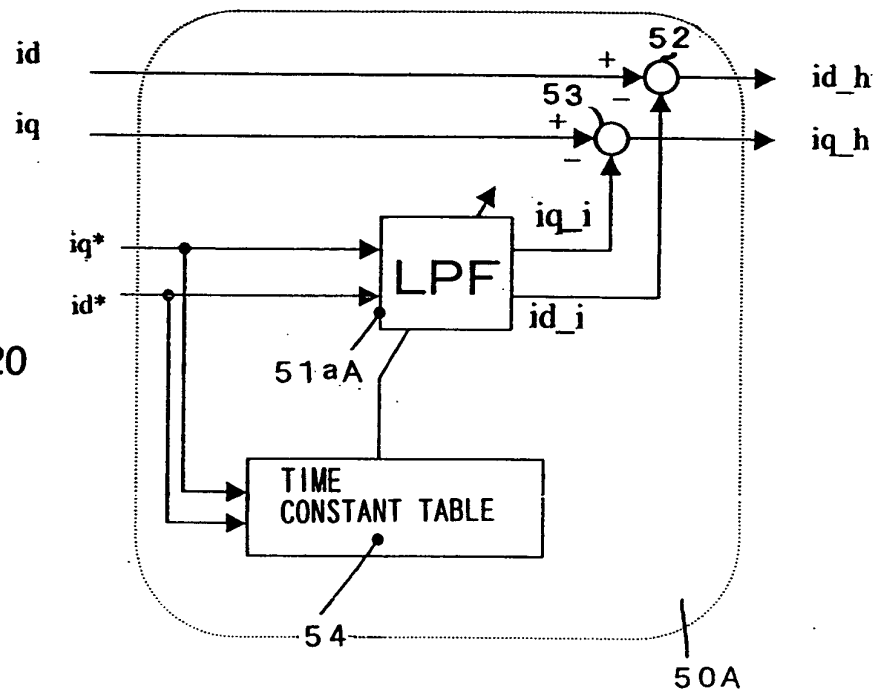


FIG. 21

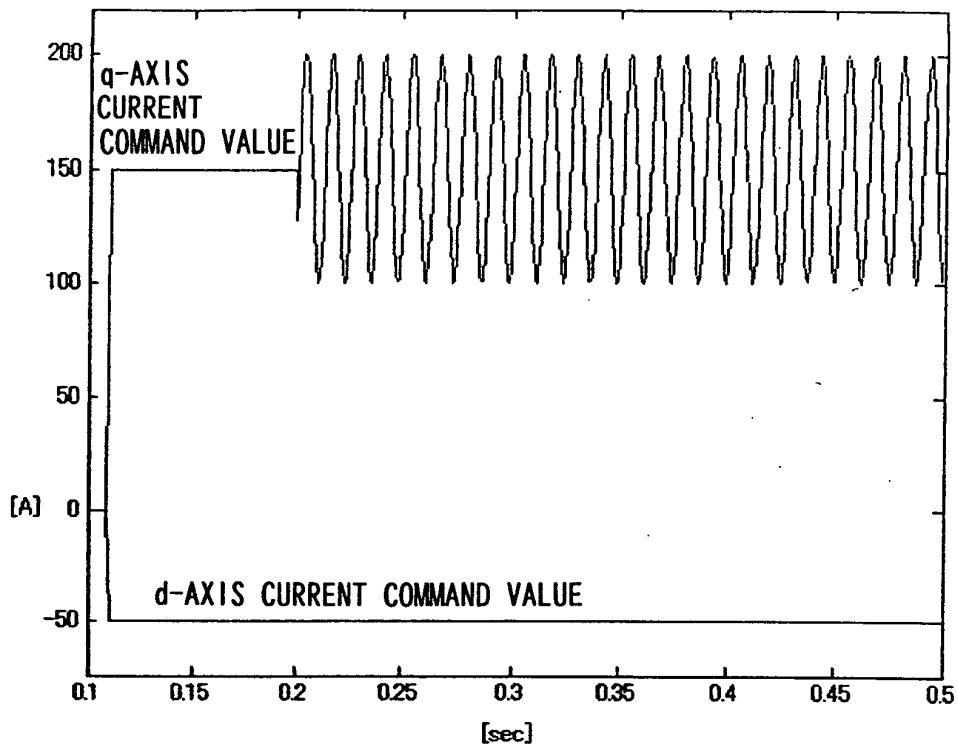


FIG. 22

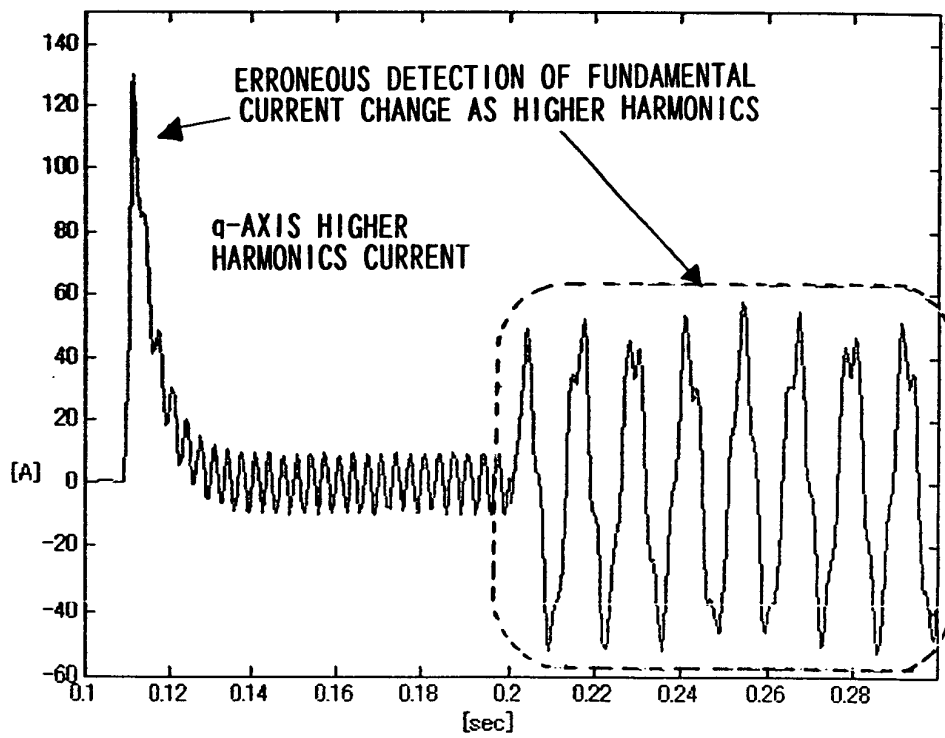


FIG. 23

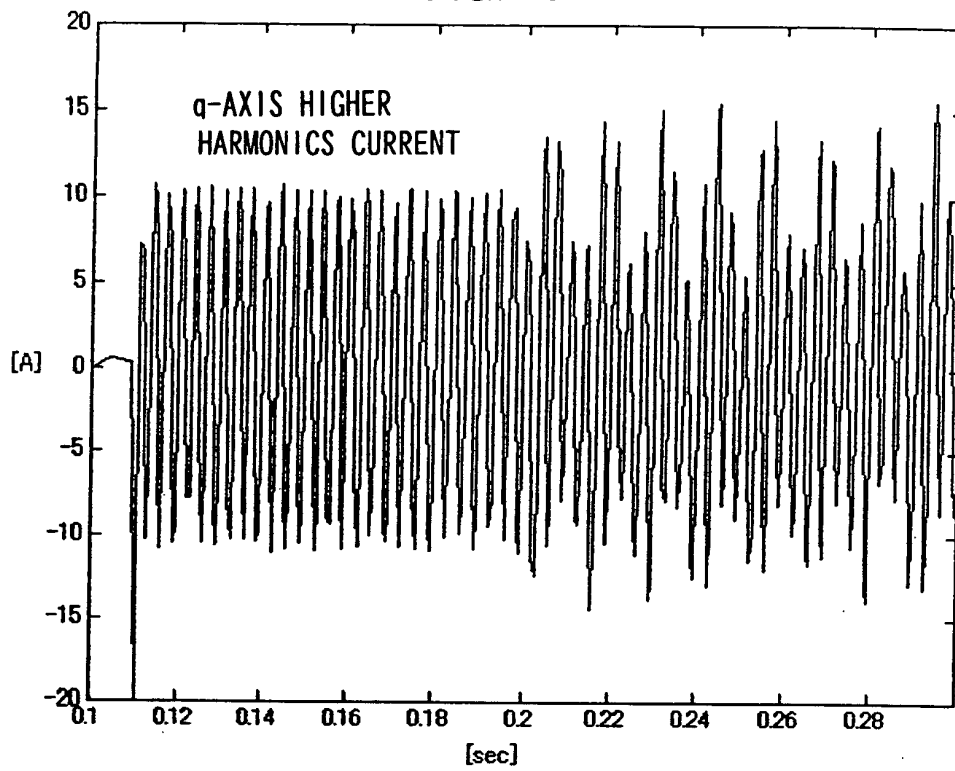


FIG. 24

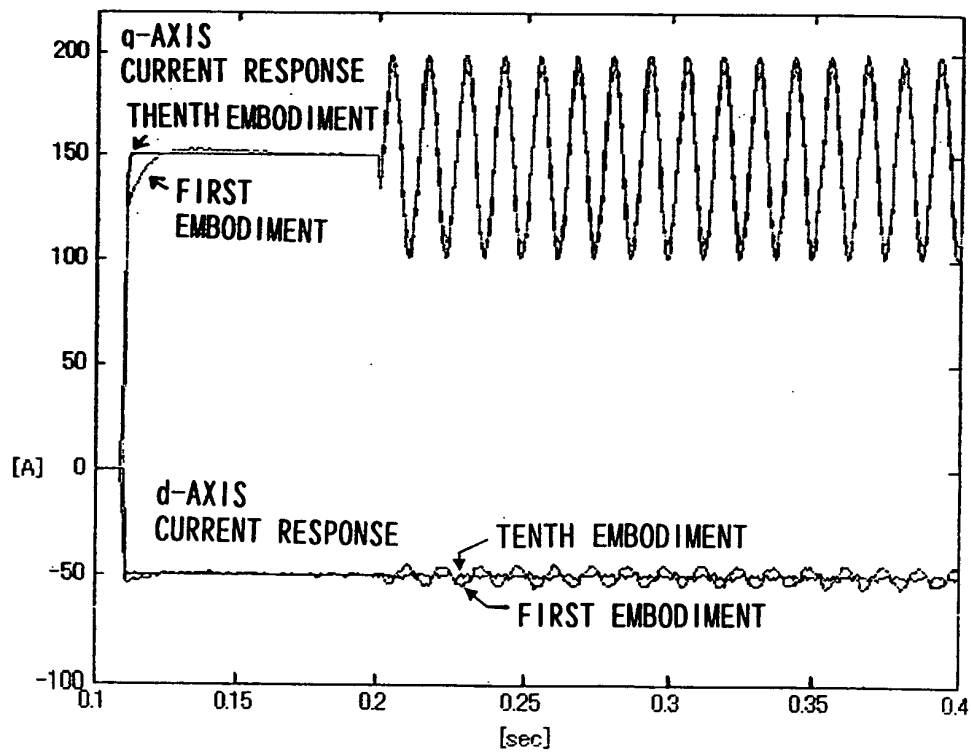


FIG. 25

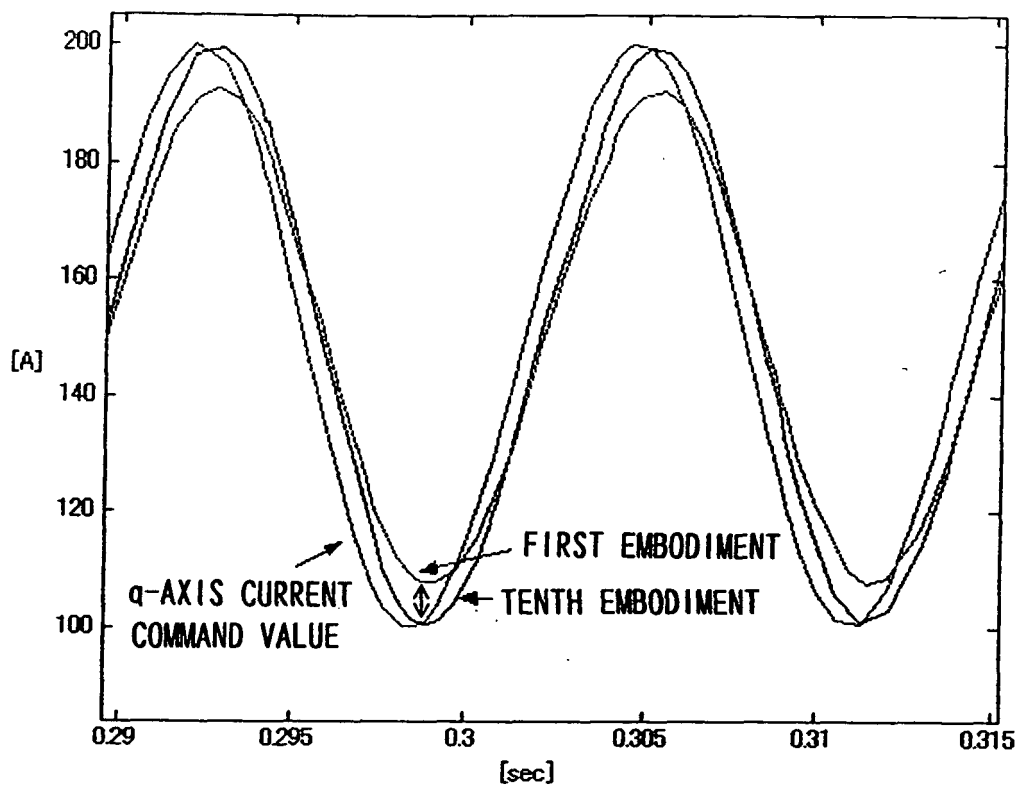


FIG. 26

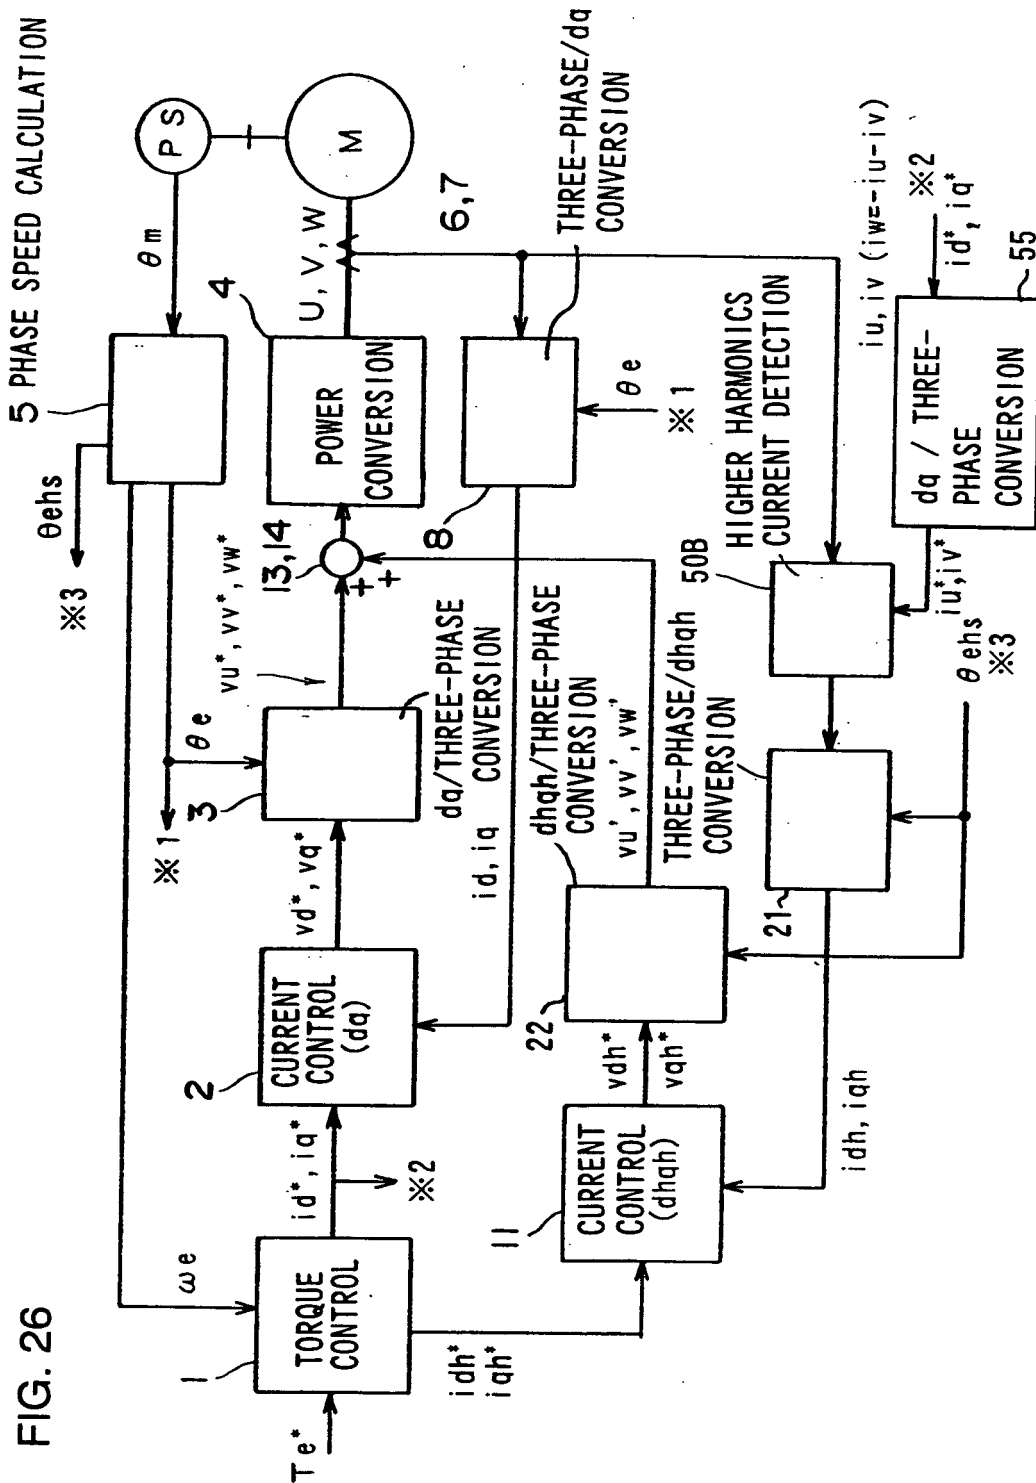


FIG.27

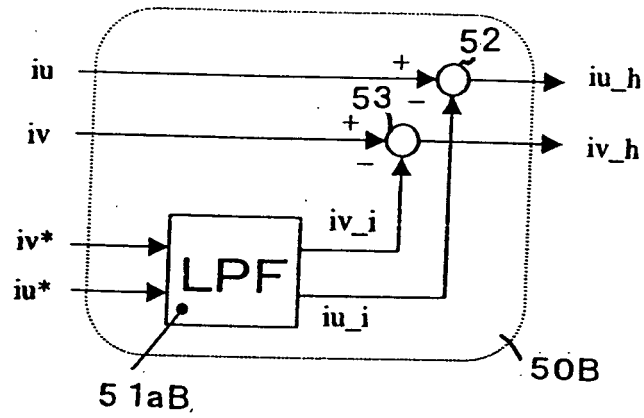
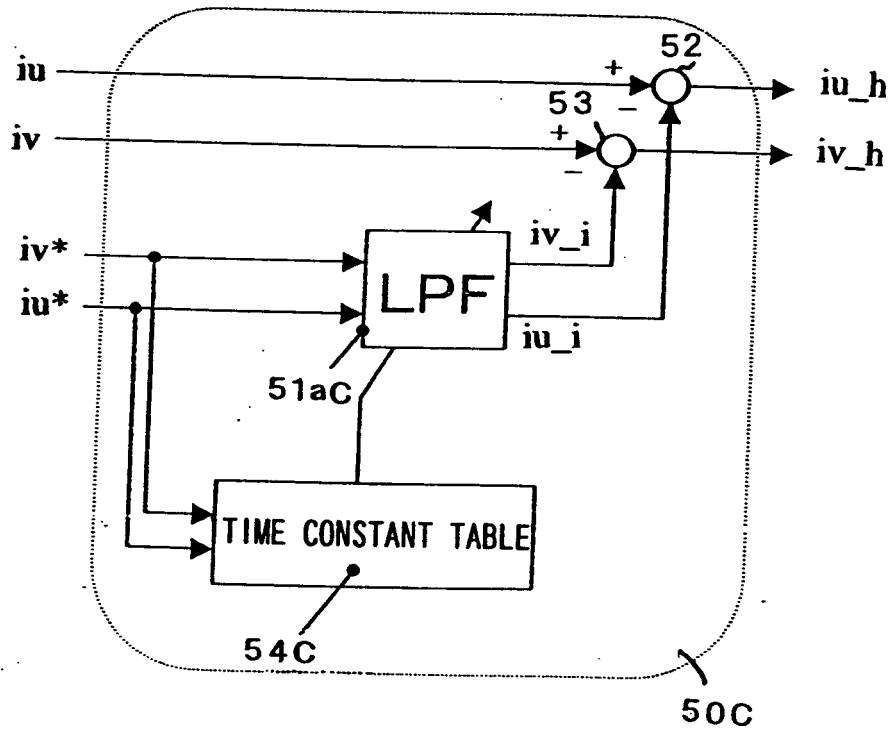


FIG. 28



**FIG. 29**

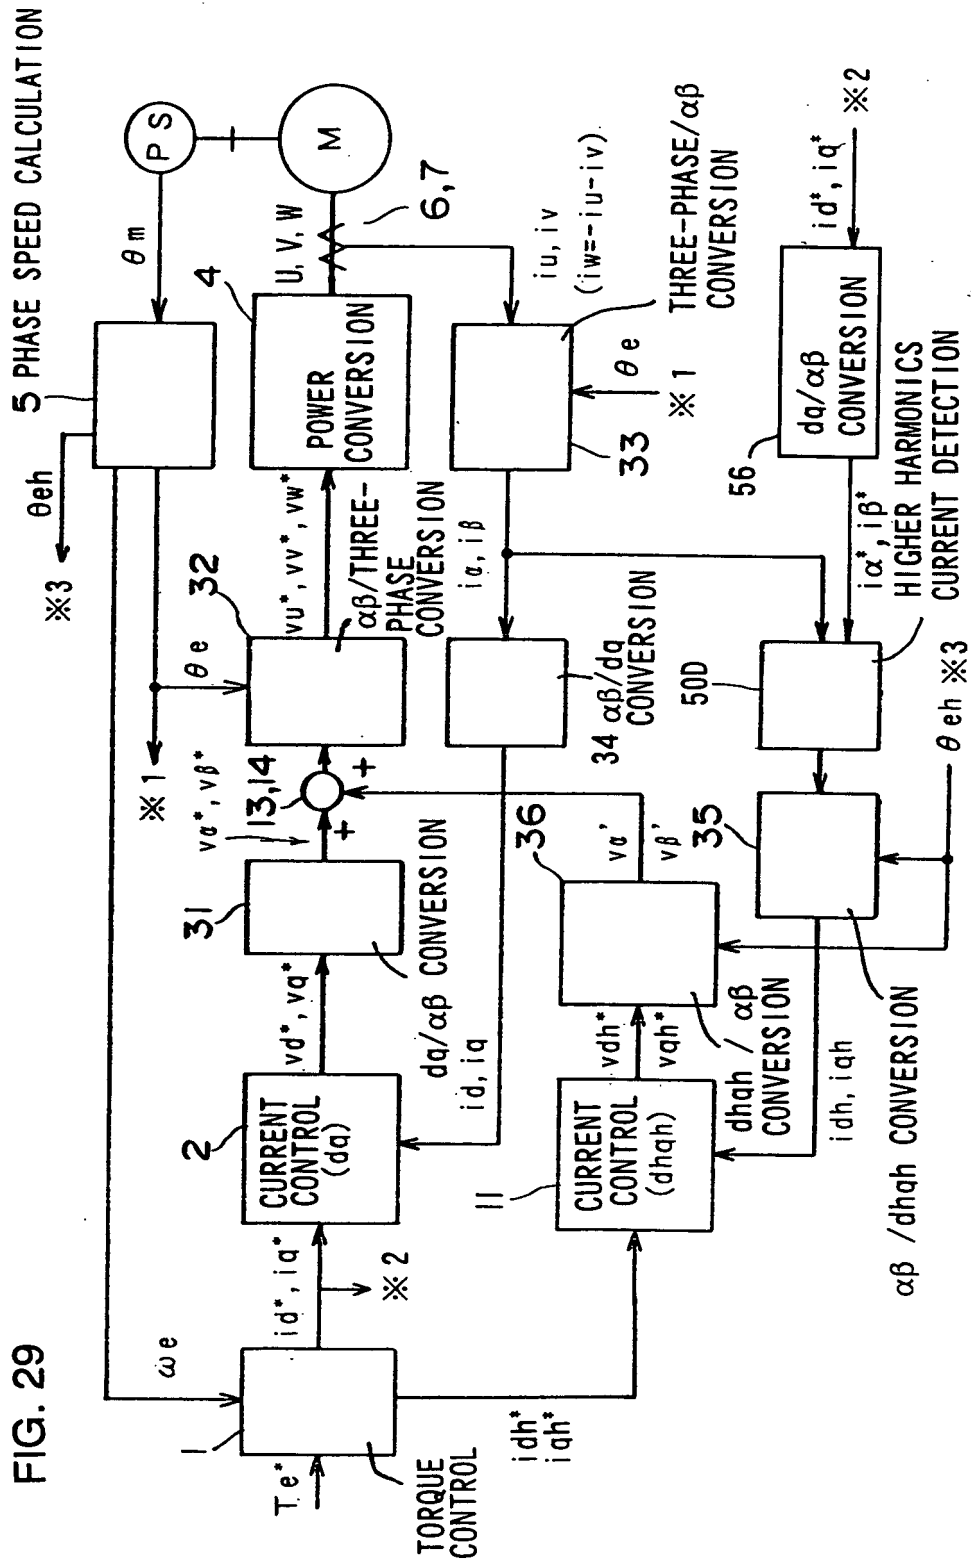


FIG.30

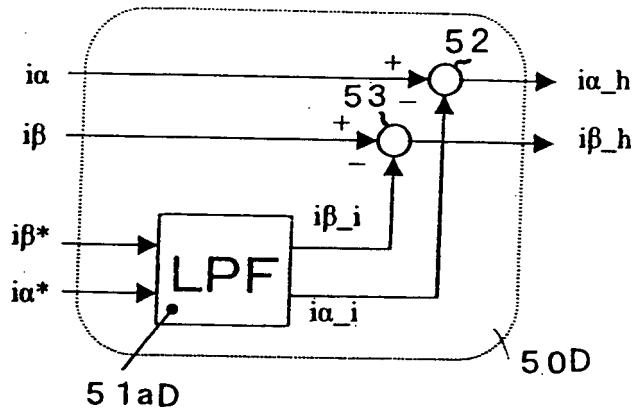
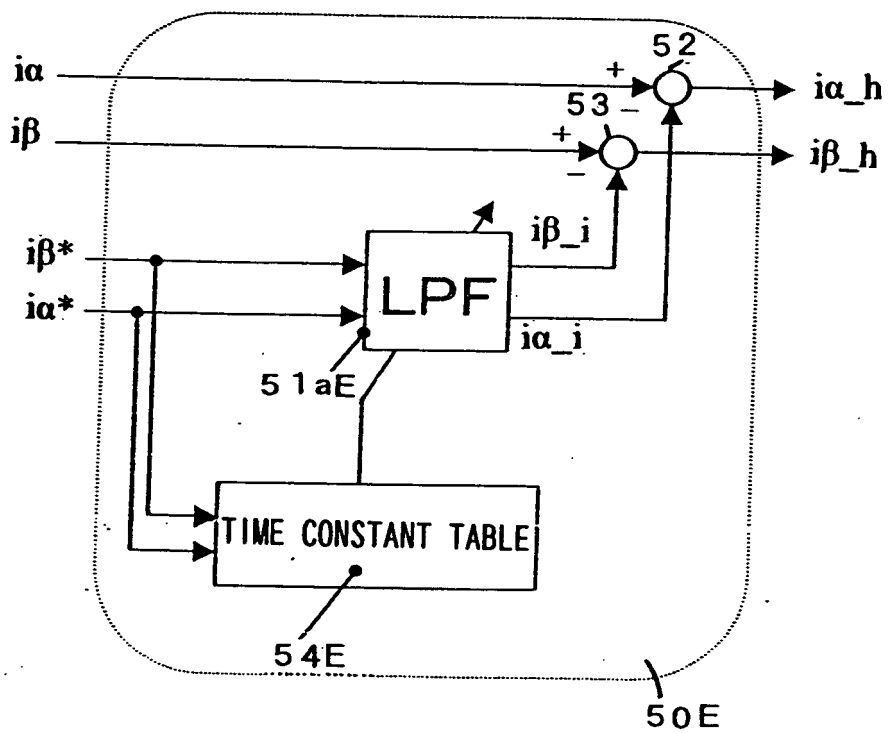
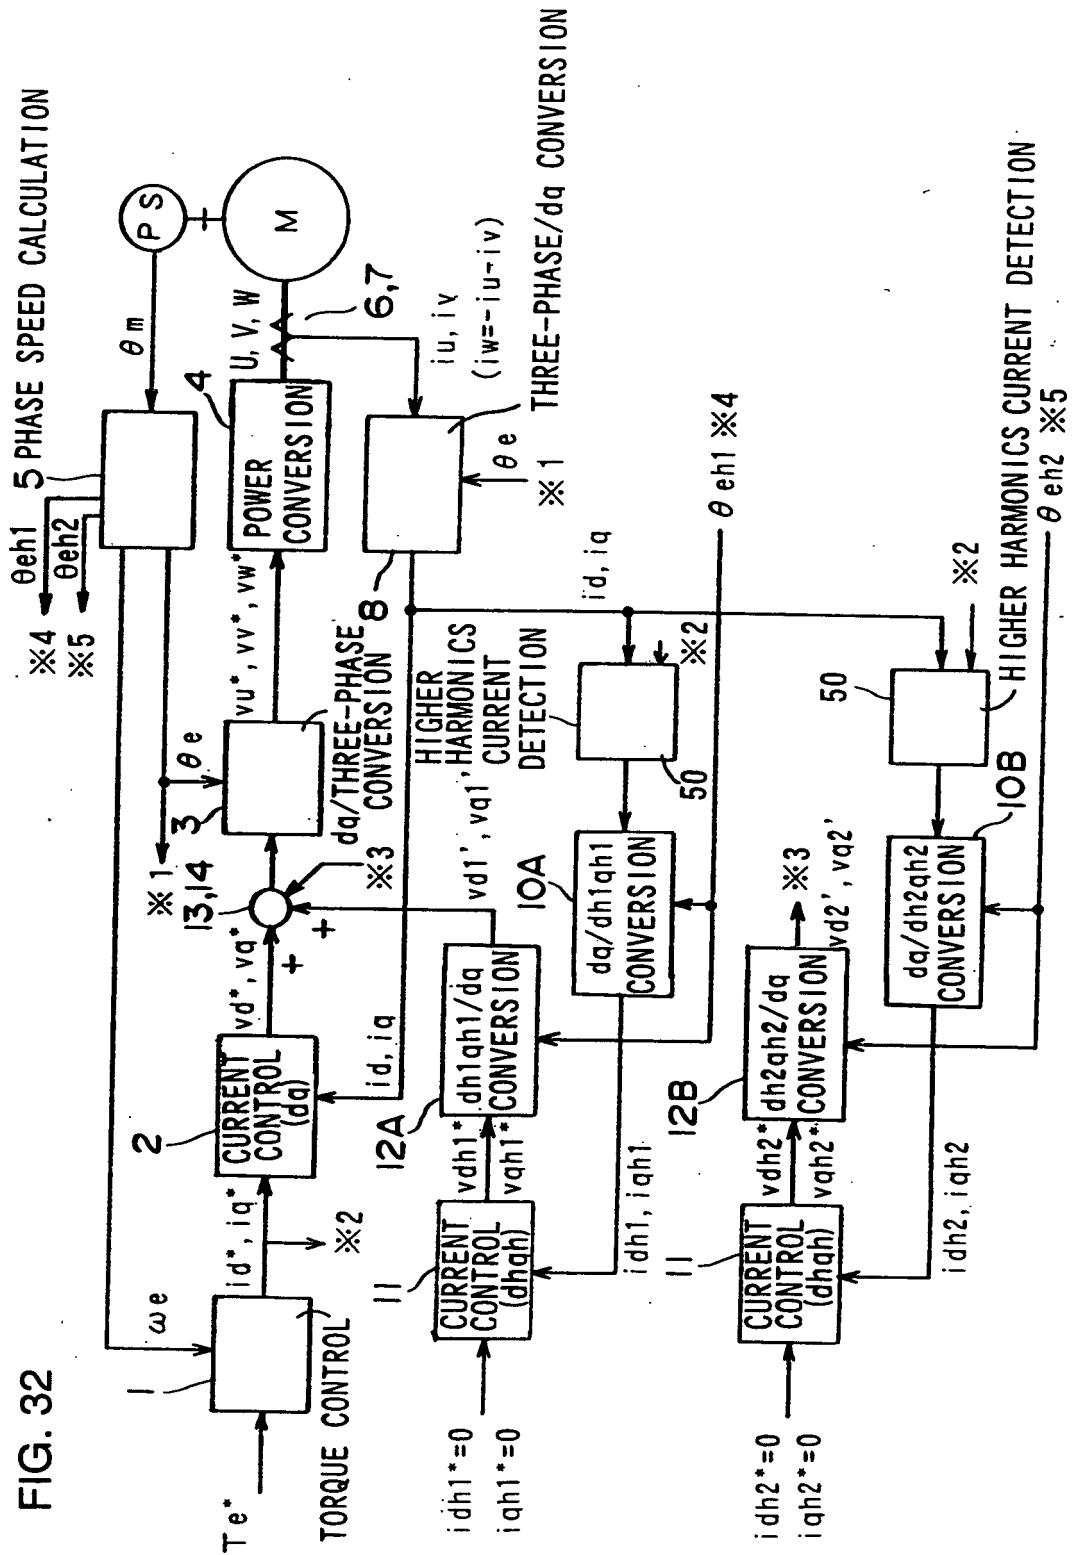


FIG. 31





**FIG. 32**



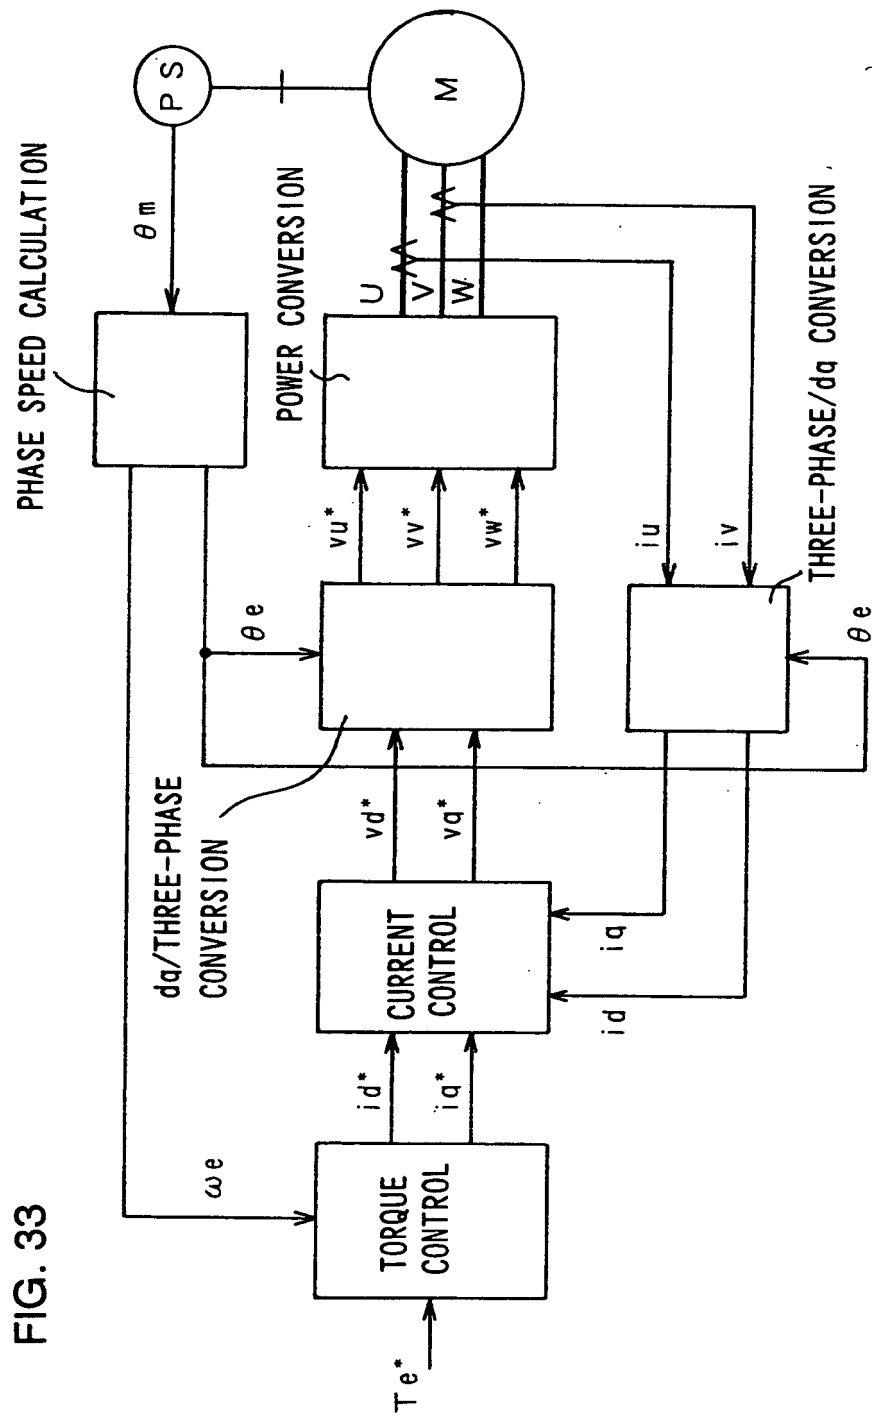


FIG.34


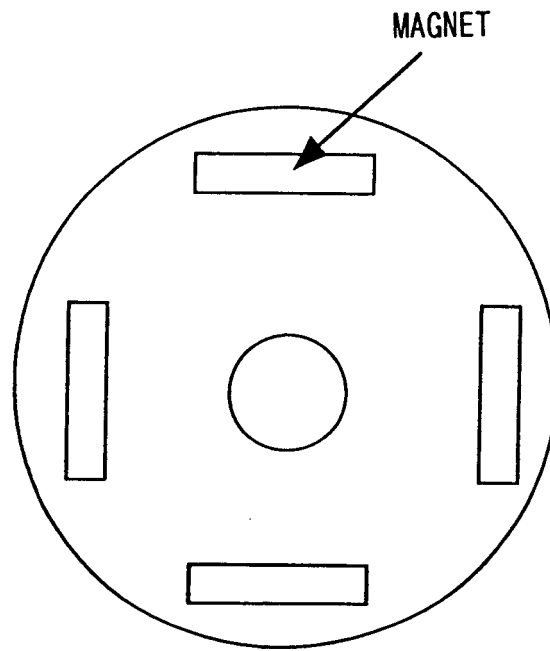


FIG.35

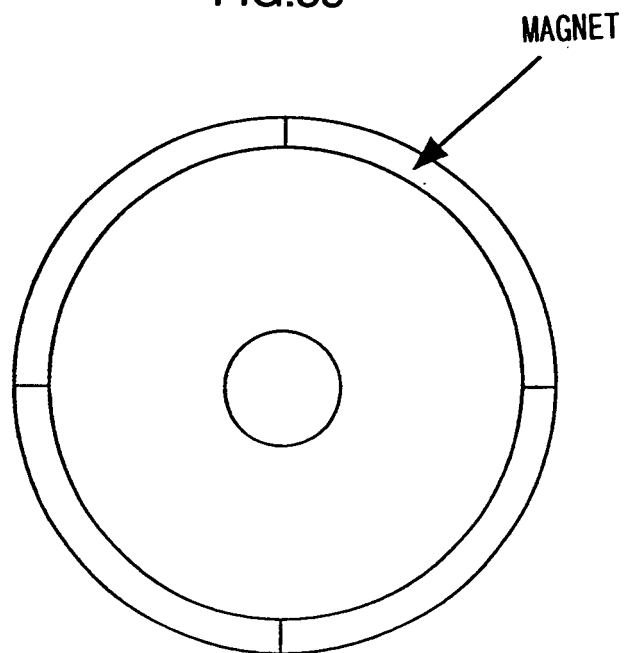

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP H08331885 B [0002]
- EP 0982844 A1 [0004]