



(11) **EP 1 277 286 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Description Paragraph(s) 7

(51) Int Cl.:
H04B 1/38 (2006.01)

(86) International application number:
PCT/US2001/011090

(48) Corrigendum issued on:
31.10.2007 Bulletin 2007/44

(87) International publication number:
WO 2001/079878 (25.10.2001 Gazette 2001/43)

(45) Date of publication and mention
of the grant of the patent:
13.06.2007 Bulletin 2007/24

(21) Application number: **01924707.1**

(22) Date of filing: **05.04.2001**

(54) **PERSONAL COMMUNICATIONS DEVICE WITH GPS RECEIVER AND COMON CLOCK SOURCE**

PERSÖNLICHE KOMMUNIKATIONSANLAGE MIT GPS EMPFÄNGER UND GEMEINSAMER
TAKTQUELLE

DISPOSITIF DE COMMUNICATION PERSONNEL COMPRENANT UN RECEPTEUR GPS ET UNE
SOURCE DE SIGNAL DE SYNCHRONISATION COMMUNE

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(72) Inventor: **UNDERBRINK, Paul, A.**
Lake Forest, CA 92630-2150 (US)

(30) Priority: **18.04.2000 US 551060**

(74) Representative: **Kramer - Barske - Schmidtchen**
European Patent Attorneys
Patenta
Radeckestrasse 43
81245 München (DE)

(43) Date of publication of application:
22.01.2003 Bulletin 2003/04

(73) Proprietor: **SiRF Technology, Inc.**
San Jose, CA 95112 (US)

(56) References cited:
WO-A-99/57929 US-A- 5 535 432
US-A- 5 841 396 US-A- 6 041 222

EP 1 277 286 B9

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention is generally related to a personal communications device having global positioning system receiver provisions which are clocked via a clock signal derived from a clock source shared with CDMA based radio. More particularly, the invention provides for a fractional N-synthesizer for providing a feedback signal for controlling an oscillator signal output frequency.

[0002] Personal communications devices incorporating global positioning (GPS) capabilities are becoming popular. In these devices, the circuitry and components necessary to provide the global positioning capabilities must share the same enclosure and circuit board real estate as the circuitry and components dedicated to providing, for example, mobile (cellular) telephone capabilities. Further, circuitry and components for both GPS capabilities as well as mobile telephone capabilities are powered by the same power source, typically, via an on-board battery. While battery technology is improving, it is typical that the more power consumed by a device the larger the physical size of the battery necessary to provide a given operating time.

[0003] The demand for smaller, more compact personal communication devices is increasing. Concurrent with this increasing demand for compactness is the demand for devices that provide for increased functionality and capabilities. As functionality and capabilities increase, typically, so does the need for power and printed circuit real estate within the personal communications device.

[0004] In personal communications devices such as that shown in the block diagram of FIG. 1, wherein there is provided a personal communications device that incorporates a global positioning systems (GPS) receiver 100 and a code division multiple access (CDMA) based telecommunications device 200, it is common for separate clock sources (oscillators) to be associated with the GPS receiver 100 and the CDMA device 200. More particularly, GPS receiver 100 includes an associated oscillator 101 while CDMA device 200 includes an associated oscillator 201. Each oscillator, 101 and 201 provides a clock signal to the respective circuitry to which it is associated.

[0005] FIG.2 shows a GPS receiver 100, which includes an oscillator 101. Oscillator 101 provides a signal of a particular frequency to phase comparator 146. Phase comparator 146 also receives input from frequency divider 136 and outputs a signal to loop filter 145. Loop filter 145 provides a signal to voltage controlled oscillator (VCO) 115 which generates an output signal whose frequency is contingent upon the signal input from loop filter 145. The signal from VCO 115 is provided to mixer 110 where it is combined with a radio frequency (RF) signal from low noise amplifier (LNA) 105 to produce a first intermediate frequency (IF) signal S1. This first IF signal S1 is provided to variable amplifier 112 and then on to mixer 120 and mixer 121. In mixer 120, the signal S1 is combined with a signal S2 from frequency divider 130 to

produce an in-phase second IF frequency output signal S3. In mixer 121, the signal S1 is combined with a signal S4 from frequency divider 130 to produce a quadrature-phase second IF frequency output signal S5. Signal S3 is provided to comparator and A to D processor 125 to produce a digitized signal I for output to GPS baseband section 150. Signal S5 is provided to comparator and A to D processor 126 to produce a digitized signal Q for output to GPS baseband section 150. Frequency divider 130 also provides its output signal S4 to frequency divider 135 and frequency divider 136. The output from VCO 115 is also provided to frequency divider 130. Frequency divider 130 outputs a signal S5 that is mixed by mixer 121 with a signal S1 to produce a signal S4.

[0006] As two separate oscillators are provided within the same personal communications device 10, printed and/or integrated circuit real estate is devoted to accommodating each oscillator and power consumption of two oscillators is greater than for one oscillator. Thus, an unaddressed need exists in the industry to address the previous mentioned deficiencies and inadequacies.

[0007] US 5,841,396 and US 6,041,222 each disclose a personal communications device comprising a telecommunications unit, a global positioning system (GPS) receiver and a clock source for providing a common clock signal to the GPS receiver and the telecommunications unit. US 5481,396 discloses in Fig. 6B and the corresponding description in column 14, starting with line 10, that a common clock signal from the clock source is supplied as a reference frequency to a frequency synthesizer in a GPS downconverter in the GPS receiver. The frequency synthesizer produces inputs for two local oscillators in the GPS system. The output of one of these two local oscillator is input into the first stage of an RF to IF downconversion and is also supplied to the frequency synthesizer in a feedback loop.

[0008] It is an object of the invention to provide an improved personal telecommunications device having both global positioning systems (GPS) and telecommunications provisions that share a common clock source.

[0009] This object is achieved by a device and a method according to claims 1 and 8, respectively.

[0010] Further developments of the invention are given in the dependent claims.

[0011] Other systems, methods, features, and advantages of the invention will be or become apparent to one with skill in the art upon examination of the following figures and detailed description.

[0012] The invention can be better understood with reference to the following figures. The components in the figures are not necessarily to scale, emphasis instead being placed upon clearly illustrating the principles of the invention. In the figures, like reference numerals designate corresponding parts throughout the different views.

FIG. 1 is a block diagram of a typical personal communications device;

FIG. 2 is a schematic diagram of a GPS receiver;

FIG. 3 is a block diagram of the invention;
 FIG. 4 is a schematic diagram of a personal communications device according to the invention;
 FIG. 5 is a schematic diagram of a Fractional-N synthesizer;
 FIG. 6 is a detailed description of an embodiment of a phase compensation circuit and an on-chip tuning circuit;
 FIG. FIG. 7 is a timing diagram illustrating the relationship between signals of the frequency synthesizer in relation to the signals of the compensation circuit; and
 FIG. 8 is a diagram showing a further embodiment of the invention.

[0013] The invention seeks to provide a personal communications device 10 having global positioning system (GPS) capabilities. The invention seeks to provide a personal communications device 10 in which a single oscillator 201 acts as a clock source for both mobile telephone circuitry 200 and global positioning system (GPS) circuitry 100. GPS circuitry 100 includes fractional synthesizer provisions for controlling the generation of the frequency of signals based upon the oscillator 201.

[0014] FIG. 3 shows a block diagram of a personal communications device 10 according to the invention. There is provided a global positioning system (GPS) receiver 100 and a code division multiple access (CDMA) based telecommunications unit 200. GPS receiver 100 includes a GPS radio 102 and a GPS baseband unit 103. GPS radio 102 receives and processes GPS signals and provides them to the baseband unit 103 for further extraction of data from a received GPS signal. There is also provided a CDMA radio unit 202 for receiving, processing and transmitting CDMA based RF signals and a CDMA baseband unit 203 for further processing of CDMA RF signals received or to be transmitted. CDMA telecommunications unit 200 includes an oscillator 201 for providing a clock signal to circuitry of COMA telecommunications unit 200 and to GPS receiver 100. More particularly CDMA oscillator 201 provides a clock signal to CDMA radio 202, CDMA baseband unit 203 and to GPS receiver 102 and GPS baseband unit 103.

[0015] FIG. 4 shows a diagram detailing GPS receiver 100. There is provided a voltage controlled oscillator (VCO) 115 which generates a GPS system clock signal Z whose frequency is contingent upon the voltage input from loop filter 145. The output from VCO 115 is provided to mixer 110 where it is combined with a received radio frequency (RF) input signal from low noise amplifier (INA) 105 to produce a first intermediate frequency (IF) signal S1. This first IF signal S1 is provided to amplifier 112 and then to mixer 120 and mixer 121. At mixer 120 it is combined with a signal S2 from frequency divider 130 to produce a second IF frequency output signal S3. At mixer 121 second IF frequency output signal S1 is combined with a signal S4 also from frequency divider 130 to produce a further IF frequency output signal S5. Signal S4

is also provided to frequency divider 135 where it is converted into a signal of alternate frequency S6 and output to GPS baseband unit 150.

[0016] Signal S3 is input to comparator and A to D processor 125 where it is processed and converted into a digital output signal I for input to GPS baseband unit 150. Likewise signal S5 is input to comparator and A to D processor 126 where it is processed and converted into digital output signal Q which is provided to GPS baseband unit 150.

[0017] The GPS system clock signal Z output from VCO 115 is also provided to frequency divider 130 and a frequency synthesizer 116. Frequency divider 116 converts the signal Z from VCO 115 into a feedback signal S7 that is provided to phase comparator 146 which outputs a control signal S9 to loop filter 145 in response to the input of the feedback signal S7 and the clock signal S8 from oscillator 201. Control signal S9 is then provided to VCO 115, which adjusts the frequency of output signal Z in accordance with the control signal S9. In this illustration it can be seen that there is formed a feedback loop composed of frequency synthesizer 116, phase comparator 146 and loop filter 145.

[0018] FIG. 5 is a block diagram of the phase interpolated fractional N frequency synthesizer 116. The synthesizer 116 can be implemented as an integrated circuit using known CMOS fabrication methods or other compatible semiconductor chip technologies. In FIG. 5, a reference signal Z from VCO 115 is provided to an input of a phase detector 322. The output of the phase-detector 322 is provided to a loop filter 324. The output of the loop filter 324 is provided to a controlled oscillator 326, such as a VCO, which has an output S7 (feedback signal S7) that is the output of the synthesizer 116. The signal S7 is supplied to a fractional-N divider 328. A control word K is supplied to the fractional-N divider 328 in order to set the value of the divisor N.

[0019] The output of the fractional-N divider 328 is provided to a phase compensation circuit 330 and to an on chip tuning circuit 332, which in combination are referred to as a phase compensator. The output (fcomp) from the phase compensation circuit 330 is provided as the second input to the phase detector 322. An accumulator 334 also receives control word K and the signal Z. The carry out port (the carry signal S10) from the accumulator 334 also serves as an input to the fractional-N divider 328. The signal Z serves as the clocking signal for the accumulator 334. The signal S10 from carry out port of the accumulator 334 triggers the divide by the N+1 function of the fractional-N divider.

[0020] The phase detector 322, loops filter 324 and VCO 326 may be of any suitable type known to those of ordinary skill. The types of phase detectors, loop filters, VCOs and fractional-N dividers commonly used in fractional-N synthesizers can be used for the synthesizer 320, such as voltage or current controlled oscillators, phase or phase/frequency detectors, active or passive loop filters and loop filters with charge pumps.

[0021] FIG. 6 shows a more detailed description of an embodiment of phase compensation circuit 330 and on-chip tuning circuit 332. Phase compensation circuit 330 and on-chip tuning circuit 332 may be implemented using an arrangement of voltage controlled delay elements (D) where the amount of delay elements D provides a signal delay of $T_{vco}/4$, where T_{vco} equals the period of the frequency of the output S10 of the VCO 326.

[0022] The output of the fractional-N divider 328 is applied to the series of delay lines whose outputs are identified as $\phi 1$ - $\phi 4$. It will be noted that $\phi 1$ has no delay elements, while $\phi 2$ has a single delay element, $\phi 3$ has two delay elements and $\phi 4$ has three delay elements. The signals $\phi 1$ - $\phi 4$ are provided to control circuitry 339 that has an output signal fcomp that is applied to an input of the phase detector 322 as shown in FIG. 5. The output fcomp of control circuitry 339 is selectively switched among the inputs $\phi 1$ - $\phi 4$ according to the output of the accumulator 334 which is provided to the control circuit 339.

[0023] The on-chip tuning circuit 332 includes four voltage control delay elements D, a phase detector 336 and a loop filter 338. In the on-chip tuning circuit 332 is implemented as a delay locked loop. The signal S10 from VCO 326 passes through the four delay elements (D) of the on-chip tuning circuit 332 and is then provided to the phase detector 336. In addition S10 is also applied to the phase detector 336. The phase detector 336 outputs a signal proportional to the difference in phase between the two input signals. The output of the phase detector 336 then passes through a loop filter 338. The output V_c of the loop filter 338 is used as a control voltage for each of the delay elements D of the on-chip tuning circuit 332. Control voltage V_c is also applied to each delay element (D) of the tuning circuit 332 is $1/4$ the period of the frequency of the input signal to the delay locked loop. The tuning circuit 332 determines or adjusts the value of the delay elements according to the input frequency.

[0024] FIG. 7 illustrates a timing diagram which illustrates the relationship between various signals of the synthesizer 116 in relation to the signals of the compensation circuit 330 and on-chip tuning circuit 332. More particularly, FIG. 6b illustrates an example wherein $S10 = 4.25$ (Z). In this example, the divider 328 is programmed for $N=4$ (via control word K). The accumulator 334 is programmed (via control word K) to generate a carry signal at every fourth cycle of the signal Z. Each time interval T is equal to one cycle of Z. During the time interval T1-T4, S10 has 17 cycles and Z has 4 cycles. During the time interval T1, the fractional-N divider 328 divides the signal S10 by 4. In the second time period T2 and the third time period T3, the divider 328 again divides the signal S10 by 4. At the beginning of the fourth time period, T4, the accumulator 334 generates the carry signal which causes the divider to divide by $N+1$, in this example $N+1=5$. Therefore, signal Z is divided by five during T4.

[0025] During the time period T1, the phase compensation circuit 330, more specifically, control circuit 339,

provides the signal $\phi 1$ to the phase detector 322. At the beginning of the time period T1, signal $\phi 1$ is in phase with the signal Z. At the beginning of the time period $\phi 2$, the output of the phase compensation circuit 330 switches to $\phi 2$. Switching of the output of the control circuit 339 is controlled by the output of the accumulator 334, which is clocked by the signal Z. It will be noted that $\phi 2$ is in phase with Z at the output of the phase compensation circuit 330. Similarly, at the beginning of the time period T3, the output of the phase compensation circuit 330 switches to $\phi 3$ and then at the beginning of the time period T4, the output of the phase compensation circuit 330 switches to $\phi 4$. The pattern then repeats. In this way, compensation for the phase lag of the divider 328 is accomplished.

[0026] FIG. 8 illustrates an alternate embodiment in which provisions are made for selectively providing feedback to phase comparator 146 via fractional N synthesizer 116 or a frequency divider 136. In this embodiment a switch 250 is provided for switching between the output of fractional N synthesizer 116 or frequency divider 136 for input to phase comparator 146. Switch 250 may be a multiplexor or other logic gating. Further, switch 250 can be permanently set to a desired position during manufacture or could remain selectively switchable and controllable via application of an appropriate switching signal.

OTHER EMBODIMENTS

[0027] The present invention can be implemented in the systems described in U.S. in U.S. Patent No. 5,874,914 for "GPS Receiver Utilizing A Communication Link" and in U.S. Patent No. 5,841,396 also, for a "GPS Receiver Utilizing A Communication Link". Here there is disclosed a global positioning system (GPS) receiver which incorporates a first antenna for receiving a GPS signal and a downconverter coupled to the first antenna. The first antenna provides the GPS signals to the downconverter. A local oscillator is coupled to the downconverter and provides a reference signal to the downconverter to convert the GPS signals from a first frequency to a second frequency. A second antenna is provided for receiving a precision carrier frequency signal from a source of the precision carrier frequency signal. An automatic frequency control (AFC) circuit is coupled to the second antenna. The AFC circuit provides a second reference signal to the local oscillator to calibrate the first reference signal from the local oscillator. The local oscillator is used to acquire the GPS signals.

[0028] There is also described a mobile, GPS receiver having a first antenna for receiving GPS signals and a downconverter coupled to the first antenna. The first antenna provides the GPS signals to the downconverter. The downconverter has an input for receiving a local oscillator signal to convert the GPS signals from a first frequency to a second frequency. The second antenna is provided for receiving a precision carrier frequency signal

from a source providing the precision carrier frequency signal. An automatic frequency control (AFC) circuit is coupled to the second antenna. The AFC circuit is also coupled to the downconverter to provide the local oscillator signal that is used to acquire the GPS signals.

[0029] Further, the present invention can be implemented in the system described in U.S. Patent No. 6.002.363 for "Combined GPS Positioning Systems and Communication System Utilizing Shared Circuitry." U.S. Patent No. 6.002.363 discloses among other things a GPS receiver which includes a GPS antenna for receiving data representative of GPS signals from at least one satellite; a digital processor coupled to the GPS antenna, the digital processor processes the data representative of GPS signals from at least one satellite, including performing a matched filtering operation to determine a pseudorange based on the data representative of GPS signals. The digital processor also processes communication signals received through a communication link, the processing of communication signals comprising demodulation of communication signals sent to the GPS receiver.

[0030] Additionally, the present invention can be implemented in the system described in U.S. Patent No. 5,734,966 for a "Wireless Communications System For Adapting to Frequency Drift." U.S. Patent No. 5,734,966 discloses among other things a frequency tolerant wireless transceiver to receive and transmit on the wireless signal energy on the same frequency and to automatically adjust to that frequency, the transceiver includes: an antenna to receive a wireless data signal, including application data from one or more remote transceivers, at an actual frequency and issue this signal as a conducted radio frequency (RF) data signal and to transmit a wireless return signal at the actual frequency to the remote transceiver in response to a conducted RF return signal; a synthesizer to generate a local oscillator (LO) signal sequentially in response to a first and a second frequency control signal, and to generate the RF return signal at the actual frequency in response to the second frequency control signal and having modulation in response to a digital return signal; a direct conversion receiver to receive the LO signal to down convert the RF data signal to a baseband data signal; a frequency discriminator to receive the baseband data signal, to provide a frequency difference signal for the current frequency difference between the expected frequency and the actual frequency, and to demodulate the baseband data signal, and to issue a demodulated data signal; and a microcontroller system having a receive adjust mode to provide the first frequency control signal predictive of an expected frequency and to receive the frequency difference signal, having a receive data mode to process the frequency difference signal, to provide the second frequency control signal predictive of the actual frequency, and to receive the demodulated data signal, including the application data, and to provide the digital return signal.

[0031] There is further disclosed a frequency tolerant transceiver to automatically adjust to receive a radio frequency (RF) data signal on an actual frequency and to transmit an RF return signal on that same frequency, the transceiver comprising: a synthesizer for sequentially generating a local oscillator (LO) signal and the RF return signal, the LO signal sequentially having a first frequency corresponding to an expected frequency of the RF data signal and a second frequency corresponding to the actual frequency of the RF data signal in response to a first and a second frequency control signal, respectively, the RF return signal having the second frequency in response to the second frequency control signal; and a microcontroller system having a receive adjust mode for providing the first frequency control signal predictive of the expected frequency and providing the second frequency control signal for the actual frequency based upon a frequency difference between the actual frequency and the expected frequency.

[0032] The personal communications device of the invention can be implemented in hardware, software, firmware, or a combination thereof. In the preferred embodiment(s), the personal communications device is implemented in software or firmware that is stored in a memory and that is executed by a suitable instruction execution system. If implemented in hardware, as in an alternative embodiment, the personal communications device of the invention can be implemented with any or a combination of the following technologies, which are all well known in the art: a discrete logic circuit(s) having logic gates for implementing logic functions upon data signals, an application specific integrated circuit having appropriate logic gates, a programmable gate array(s) (PGA), a fully programmable gate array (FPGA), *etc.*

[0033] It should be emphasized that the above-described embodiments of the invention, particularly, any "preferred" embodiments, are merely possible examples of implementations, merely set forth for a clear understanding of the principles of the invention. Many variations and modifications may be made to the above-described embodiment(s) of the invention without departing substantially from the scope of the invention as defined by the following claims.

Claims

1. A personal communications device, comprising

a telecommunications unit (200),
a global positioning systems (GPS) receiver (100), and
a clock source (201) for providing a common clock signal (S8) to the global positioning receiver and the telecommunications unit,
wherein said GPS receiver comprises a voltage controlled oscillator (115) for generating a system clock signal (Z) based upon the clock

source, and a feedback loop for controlling the voltage controlled oscillator, having a frequency synthesizer (116) for producing a feedback signal (S7), wherein

said feedback loop further comprises a phase comparator (146, 150) for generating a control signal (S9) in accordance with the feedback signal (S7) and the common clock source signal (S8) and a loop filter (145) for processing the control signal (S9) and outputting it to the voltage controlled oscillator (115), and
 said frequency synthesizer (116) comprises a controlled oscillator (326) having a variable output (S7) controlled by an input signal, a fractional-N divider frequency divider (328) coupled to receive the output (S7) of the controlled oscillator and responsive to the output to provide a frequency divided output signal, a phase compensation circuit (330) coupled to receive the frequency divided output signal from the frequency divider, the phase compensation circuit responsive to the frequency divided output signal to provide an output (f comp) which compensates for phase lag of the frequency divided output of the frequency divider, and a phase detector (322) coupled to receive the frequency and to output a signal proportional to the difference in phase between the two inputs to control the controlled oscillator.

2. The device according to claim 1 wherein the telecommunications device comprises a CDMA based telecommunications device.
3. The device according to claim 1 or 2 wherein the telecommunications unit (200) comprises the clock source (201).
4. The device according to one of claims 1 to 3 wherein the clock source comprises a crystal oscillator.
5. The device of one of claims 1 to 4 wherein the controlled oscillator (326) is a voltage controlled oscillator.
6. The device of one of claims 1 to 5, further comprising a switch for selectably engaging the feedback loop to control the voltage controlled oscillator.
7. The device of claim 6 wherein the switch (250) is permanently set during manufacture.
8. A method of clocking GPS receiver operations comprising the steps of

receiving a clock signal (S8) from a clock source from a crystal oscillator (201) of a telecommunication unit (200),

generating a control voltage for controlling frequency of an oscillator signal generated by a voltage controlled oscillator (115) based upon a feedback signal (S7) from a frequency synthesizer (116) of the GPS receiver, and generating a system clock signal (Z) of a particular frequency in response to the control voltage, wherein the feedback signal (S7) is generated by the frequency synthesizer in accordance with the following steps:

receiving the system clock signal (Z);
 frequency dividing the feedback signal by at least two integer values to generate a fractional-N divider signal over a discrete time period;
 generating a variably delayed signal based upon the fractional-N divided signal, wherein the variably delay compensates for phase delays of the fractional-N divided signal within the discrete time period; and
 comparing the phase of the variably delayed signal and a reference signal and varying the system clock signal according to difference.

9. The method according to claim 8 wherein the telecommunications unit comprises a CDMA based telecommunications unit.

Patentansprüche

1. Persönliche Kommunikationsvorrichtung, mit

einer Telekommunikationseinheit (200),
 einem Global-Positioning-System(GPS)-Empfänger (100), und
 einer Taktquelle (201) zum Liefern eines gemeinsamen Taktsignals (S8) an den Global-Positioning-Empfänger und die Telekommunikationseinheit,
 bei der der GPS-Empfänger einen spannungsgesteuerten Oszillator (115) zum Erzeugen eines Systemtaktsignals (Z) basierend auf der Taktquelle, und eine Rückkopplungsschleife zum Steuern des spannungsgesteuerten Oszillator mit einem Frequenz-Synthesizer (116) zum Erzeugen eines Rückkopplungssignals (S7) aufweist,
 bei der
 die Rückkopplungsschleife weiter einen Phasenkomparator (146, 150) zum Erzeugen eines Steuersignals (S9) entsprechend des Rückkopplungssignals (S7) und des gemeinsamen Taktquellensignals (S8) und einen Schleifenfilter (145) zum Verarbeiten des Steuersignals

- (S9) und zum Ausgeben desselben an den spannungsgesteuerten Oszillator (115) aufweist, und der Frequenz-Synthesizer (116) einen gesteuerten Oszillator (326) mit einer variablen Ausgabe (S7), der durch ein Eingangssignal gesteuert wird, 5
- einen Fractional-N-Teiler-Frequenzteiler (328), der zum Empfangen der Ausgabe (S7) des gesteuerten Oszillators verbunden ist und auf die Ausgabe mit dem Liefern eines frequenzgeteilten Ausgangssignals reagiert, 10
- eine Phasenkompensationsschaltung (330), die zum Empfangen des frequenzgeteilten Ausgangssignals von dem Frequenzteiler verbunden ist, wobei die Phasenkompensationsschaltung auf das frequenzgeteilte Ausgangssignal mit dem Liefern einer Ausgabe (f comp), die eine Phasenverzögerung der frequenzgeteilten Ausgabe des Frequenzteilers kompensiert, reagiert, und 15
- einen Phasendetektor (322), der verbunden ist zum Empfangen der Frequenz und zum Ausgeben eines Signals, das proportional zu der Phasendifferenz zwischen den beiden Eingaben ist, zum Steuern des gesteuerten Oszillators, aufweist. 20 25
2. Vorrichtung nach Anspruch 1, bei der die Telekommunikationsvorrichtung eine CDMA-basierende Telekommunikationsvorrichtung aufweist. 30
 3. Vorrichtung nach Anspruch 1 oder 2, bei der die Telekommunikationseinheit (200) die Taktquelle (201) aufweist. 35
 4. Vorrichtung nach einem der Ansprüche 1 bis 3, bei der die Taktquelle einen Kristalloszillator aufweist.
 5. Vorrichtung nach einem der Ansprüche 1 bis 4, bei der der gesteuerte Oszillator (326) ein spannungsgesteuerter Oszillator ist. 40
 6. Vorrichtung nach einem der Ansprüche 1 bis 5, die weiter einen Schalter zum selektiven Verwenden der Rückkopplungsschleife zum Steuern des spannungsgesteuerten Oszillators aufweist. 45
 7. Vorrichtung nach Anspruch 6, bei der der Schalter (250) während der Herstellung permanent eingestellt wird. 50
 8. Verfahren zum Takten von GPS-Empfängerbetriebsabläufen, das die Schritte des Empfangens eines Taktsignals (S8) von einer Taktquelle von einem Kristalloszillator (201) einer Telekommunikationseinheit (200), 55

Erzeugens einer Steuerspannung zum Steuern

einer Frequenz eines Oszillatorsignals, das durch einen spannungsgesteuerten Oszillator (115) des GPS-Empfängers basierend auf einem Rückkopplungssignal (S7) von einem Frequenz-Synthesizer (116) des GPS-Empfängers erzeugt wird, und Erzeugens eines Systemtaktsignals (Z) einer bestimmten Frequenz als Reaktion auf die Steuerspannung, aufweist, bei dem der Frequenz-Synthesizer das Rückkopplungssignal (S7) entsprechend der folgenden Schritte erzeugt:

Empfangen des Systemtaktsignals (Z);
 Frequenzteilen des Rückkopplungssignals durch mindestens zwei ganzzahlige Werte zum Erzeugen eines Fractional-N-Teilersignals über einen diskreten Zeitraum;
 Erzeugen eines variabel verzögerten Signals basierend auf dem Fractional-N-geteilten Signal, bei dem die variable Verzögerung Phasenverzögerungen des Fractional-N-geteilten Signals innerhalb des diskreten Zeitraums kompensiert; und
 Vergleichen der Phase des variabel verzögerten Signals und eines Referenzsignals und Variieren des Systemtaktsignals entsprechend der Differenz.

9. Verfahren nach Anspruch 8, bei dem die Telekommunikationseinheit eine CDMA-basierte Telekommunikationseinheit aufweist.

Revendications

1. Dispositif de communication personnel, comprenant

une unité de télécommunication (200),
 un récepteur de systèmes de positionnement par satellite (GPS) (100), et
 un générateur de signaux d'horloge (201) pour fournir un signal d'horloge commun (S8) au récepteur de positionnement par satellite et à l'unité de télécommunication,
 dans lequel ledit récepteur GPS comprend un oscillateur à commande par tension (115) pour générer un signal d'horloge système (Z) basé sur le générateur de signaux d'horloge, et une boucle de réaction servant à commander l'oscillateur à commande par tension ayant un synthétiseur de fréquence (116) pour produire un signal de réaction (S7),
 dans lequel
 ladite boucle de réaction comprend en outre un comparateur de phase (146, 150) pour générer un signal de commande (S9) conforme au signal

- de réaction (57) et au signal commun du générateur de signaux d'horloge (S8), et un filtre à boucle (145) pour traiter le signal de commande (S9) et le transmettre vers l'oscillateur à commande par tension (115), et 5
- ledit synthétiseur de fréquence (116) comprend un oscillateur commandé (326) ayant une sortie variable (57) commandée par un signal d'entrée, 10
- un diviseur de fréquence de diviseur fractionnel N (328) couplé pour recevoir le signal de sortie (57) de l'oscillateur commandé et réactif au signal de sortie pour fournir un signal de sortie de fréquence divisée, un circuit de compensation de phase (330) couplé pour recevoir le signal de sortie de fréquence divisée provenant du diviseur de fréquence, le circuit de compensation de phase étant réactif au signal de sortie de fréquence divisée pour fournir un signal de sortie (f comp) qui compense un retard de phase du signal de sortie de fréquence divisée du diviseur de fréquence, et 15
- un détecteur de phase (322) couplé pour recevoir la fréquence et pour émettre un signal proportionnel à la différence de phase entre les deux signaux d'entrée pour commander l'oscillateur commandé. 20
2. Dispositif selon la revendication 1, dans lequel le dispositif de télécommunication comprend un dispositif de télécommunication basé sur le CDMA. 30
 3. Dispositif selon la revendication 1 ou 2, dans lequel l'unité de télécommunication (200) comprend le générateur de signaux d'horloge (201). 35
 4. Dispositif selon l'une des revendications 1 à 3, dans lequel le générateur de signaux d'horloge comprend un oscillateur à quartz. 40
 5. Dispositif selon l'une des revendications 1 à 4, dans lequel l'oscillateur commandé (326) est un oscillateur à commande par tension.
 6. Dispositif selon l'une des revendications 1 à 5, comprenant en outre un interrupteur servant à enclencher de manière sélective la boucle de réaction pour commander l'oscillateur à commande par tension. 45
 7. Dispositif selon la revendication 6, dans lequel l'interrupteur (250) est fixé de façon permanente lors de la fabrication. 50
 8. Procédé permettant de lancer au rythme de l'horloge les opérations du récepteur GPS comprenant l'étape consistant à 55

recevoir un signal d'horloge (S8) d'un généra-

teur de signaux d'horloge depuis un oscillateur à quartz (201) d'une unité de télécommunication (200)

générer une tension de commande pour commander la fréquence d'un signal d'oscillateur généré par un oscillateur à commande par tension (115) du récepteur GPS basée sur un signal de réaction (S7) depuis un synthétiseur de fréquence (116) du récepteur GPS, et

générer un signal d'horloge système (Z) d'une fréquence précise en réponse à la tension de commande, dans lequel

le synthétiseur de fréquence génère le signal de réaction (S7) conformément aux étapes suivantes :

réception du signal d'horloge système (Z) ;

division de la fréquence du signal de réaction par au moins deux valeurs entières pour générer un signal de diviseur fractionnel-N sur une période distincte ;

génération d'un signal retardé variablement basé sur le signal divisé fractionnel-N, dans lequel le retard variable compense les temps de propagation de phase du signal divisé fractionnel-N au cours de la période distincte ; et

comparaison de la phase du signal retardé variablement à celle d'un signal de référence et variation du signal d'horloge système selon la différence.

9. Procédé selon la revendication 8, dans lequel l'unité de télécommunication comprend une unité de télécommunication basée sur le CDMA.

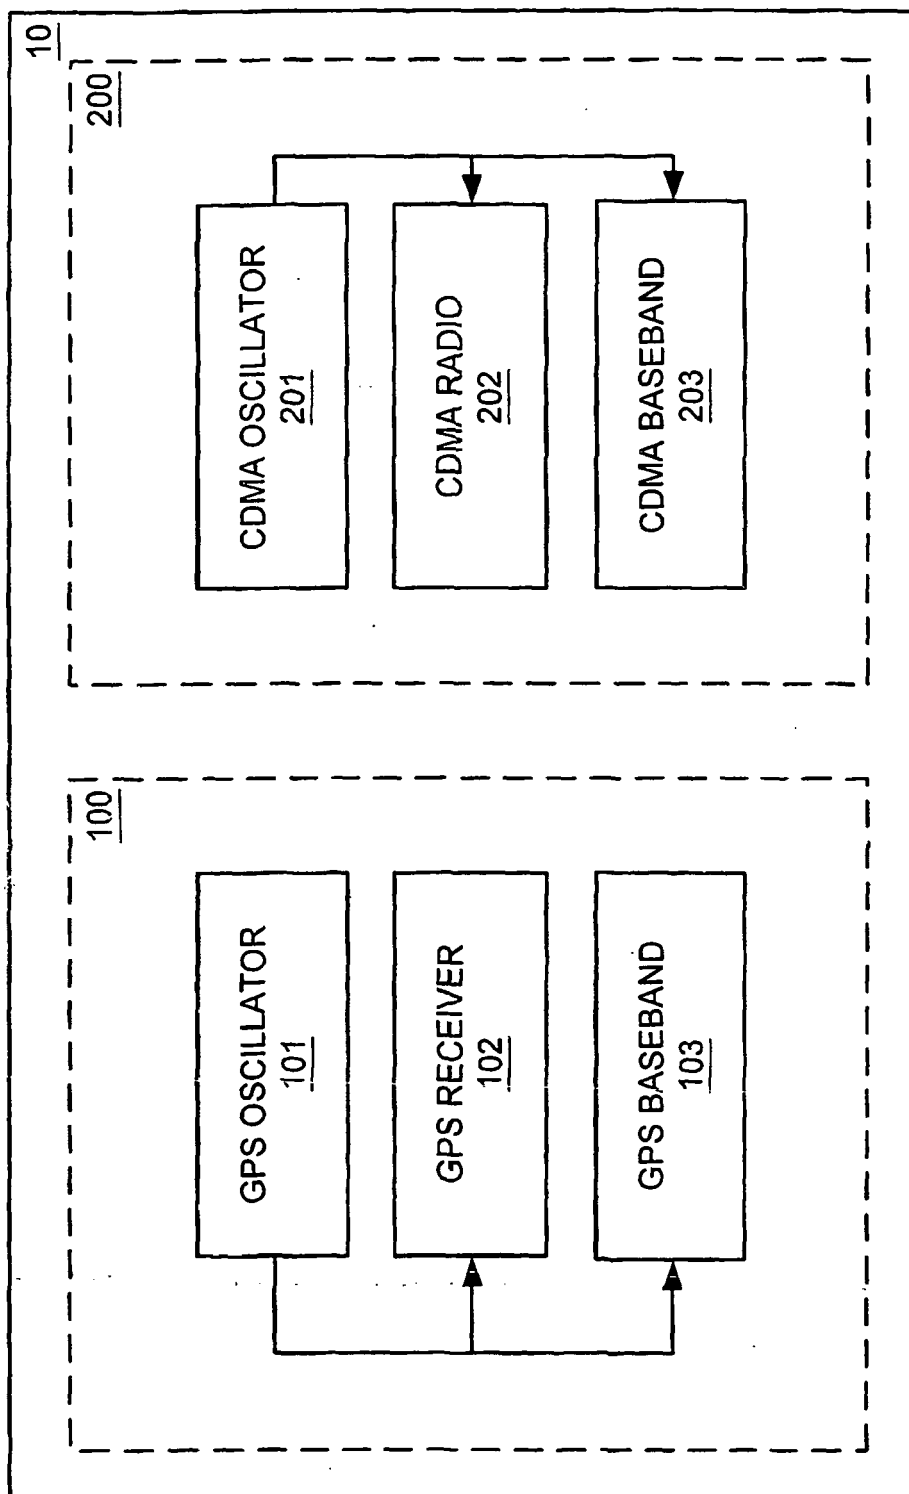


FIG. 1
PRIOR ART

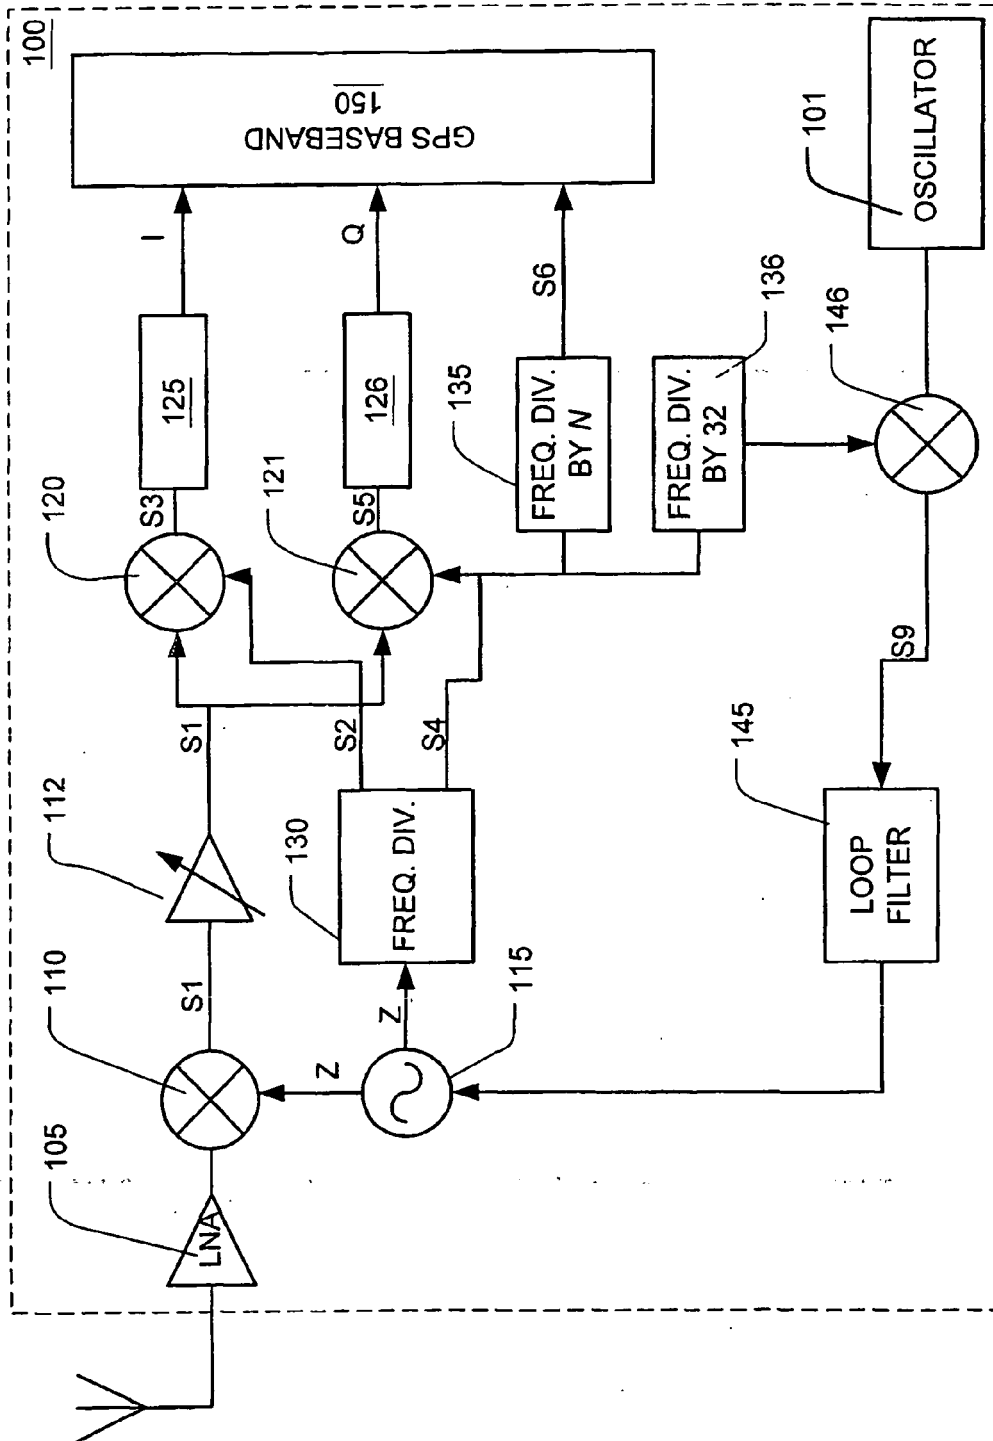


FIG.2
PRIOR ART

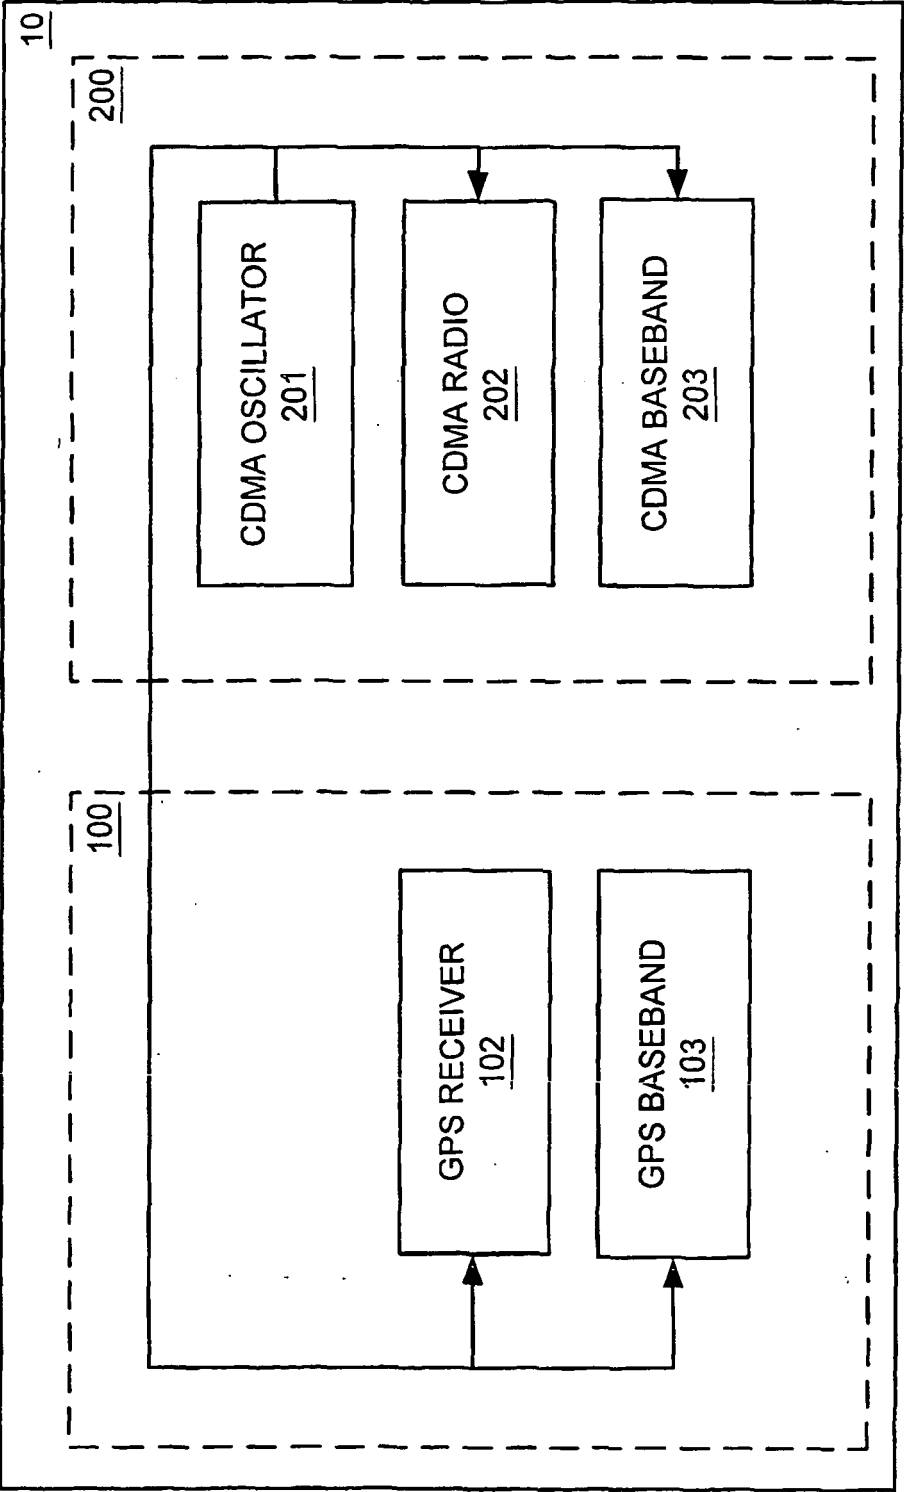


FIG.3

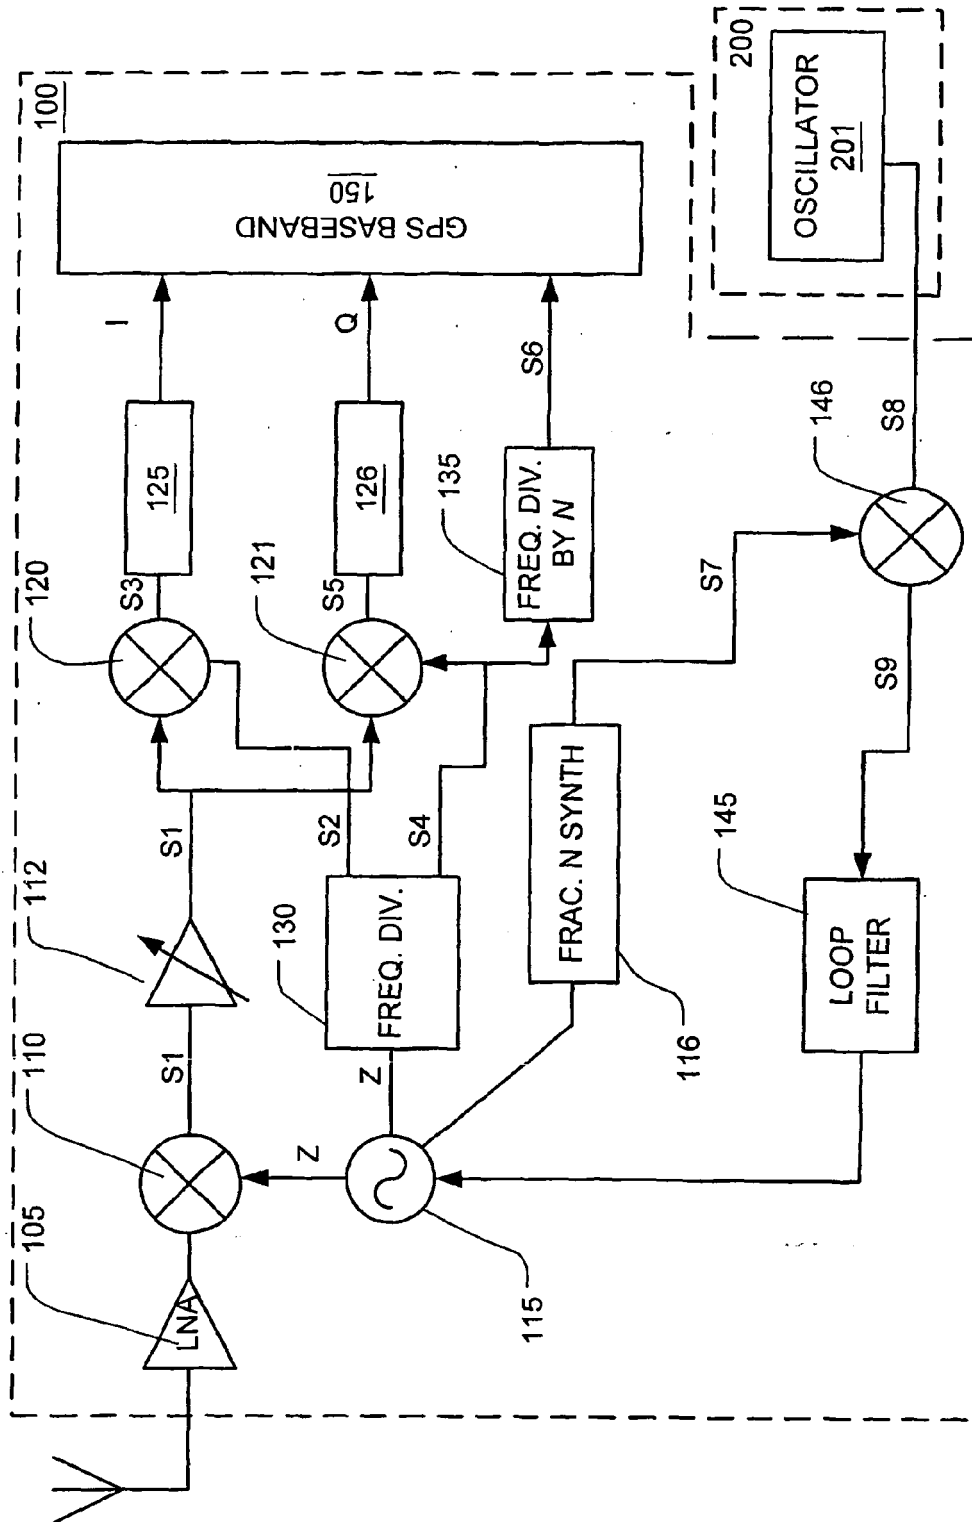


FIG.4

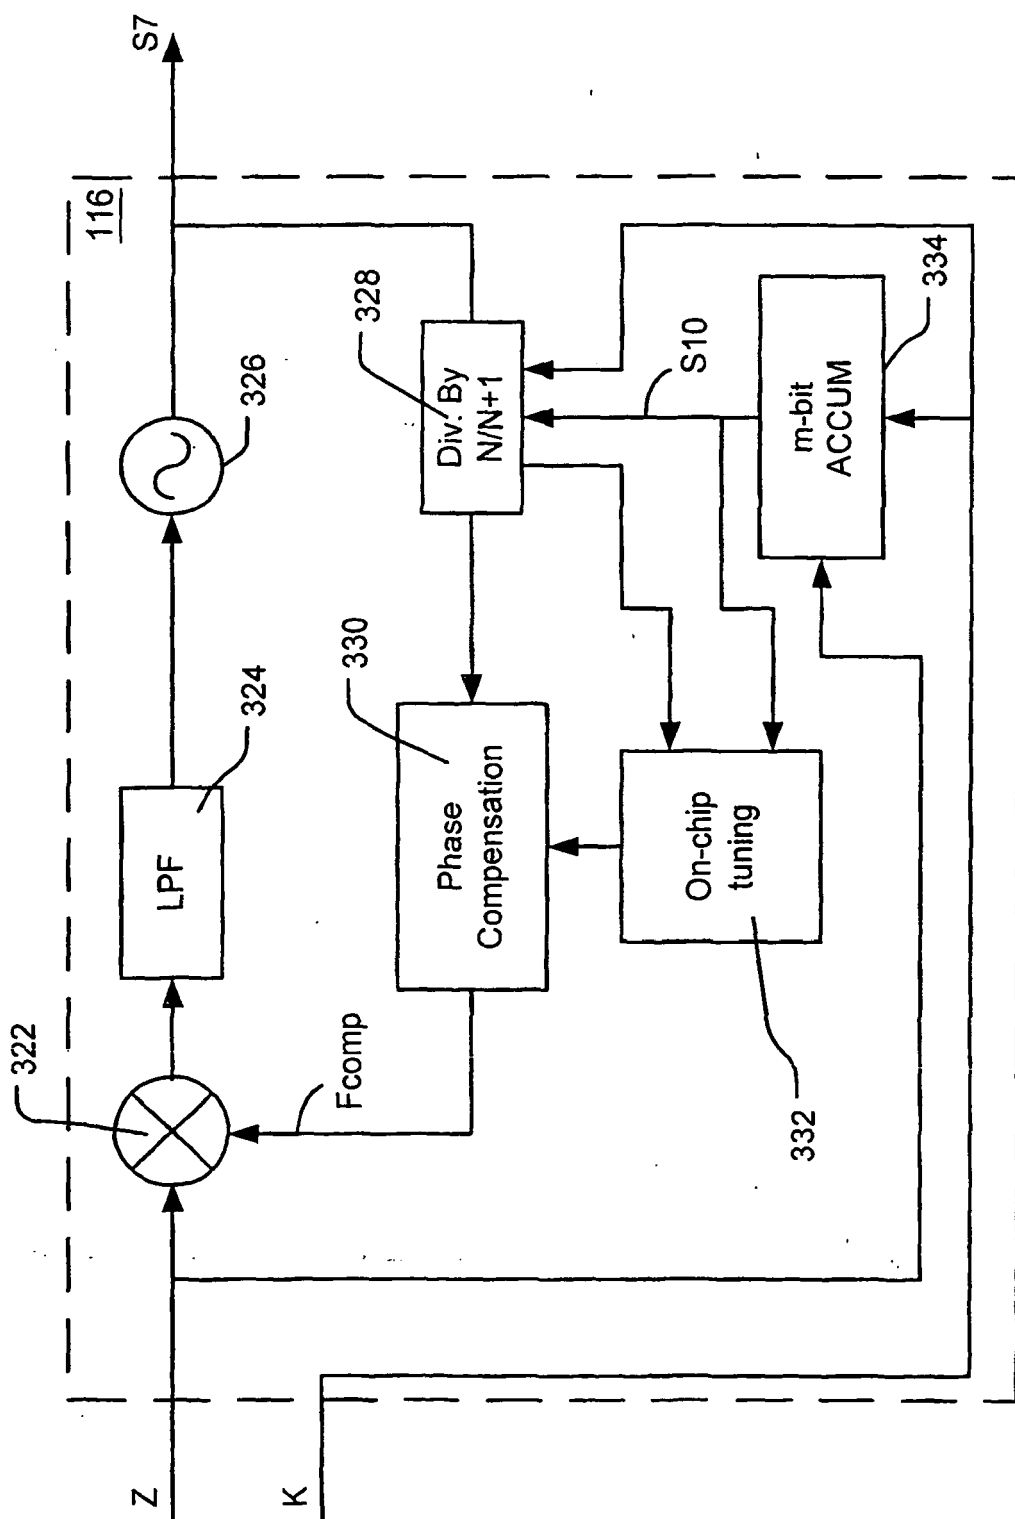


FIG. 5

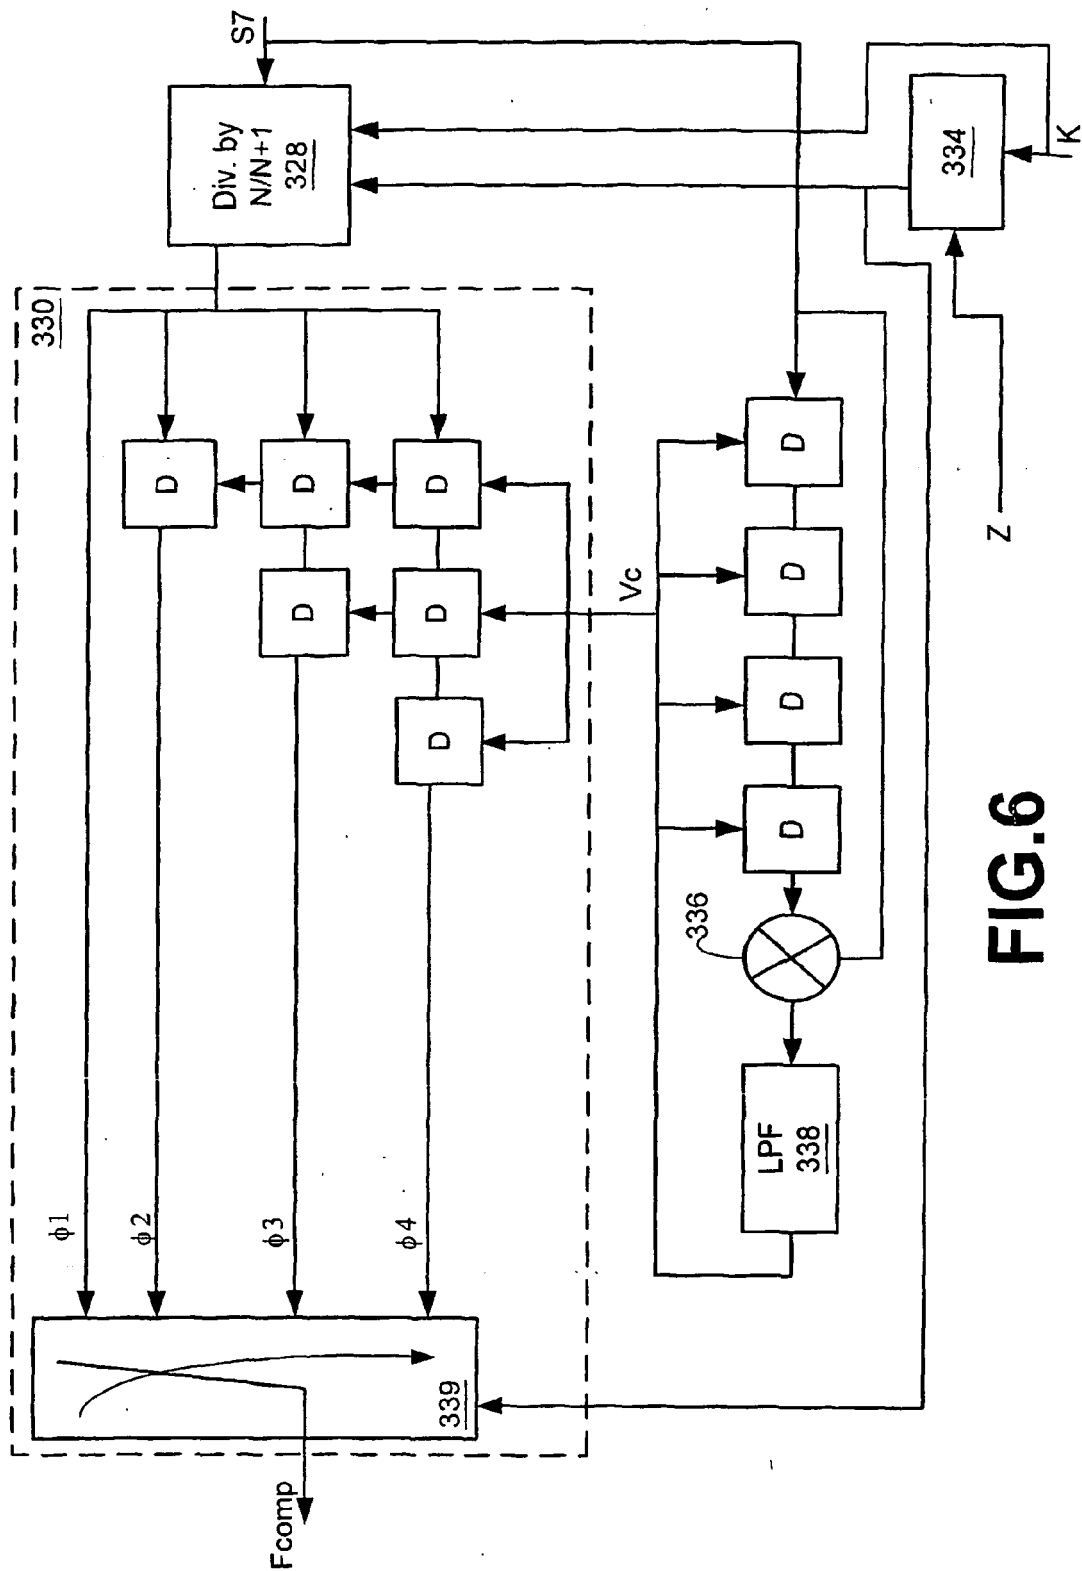


FIG. 6

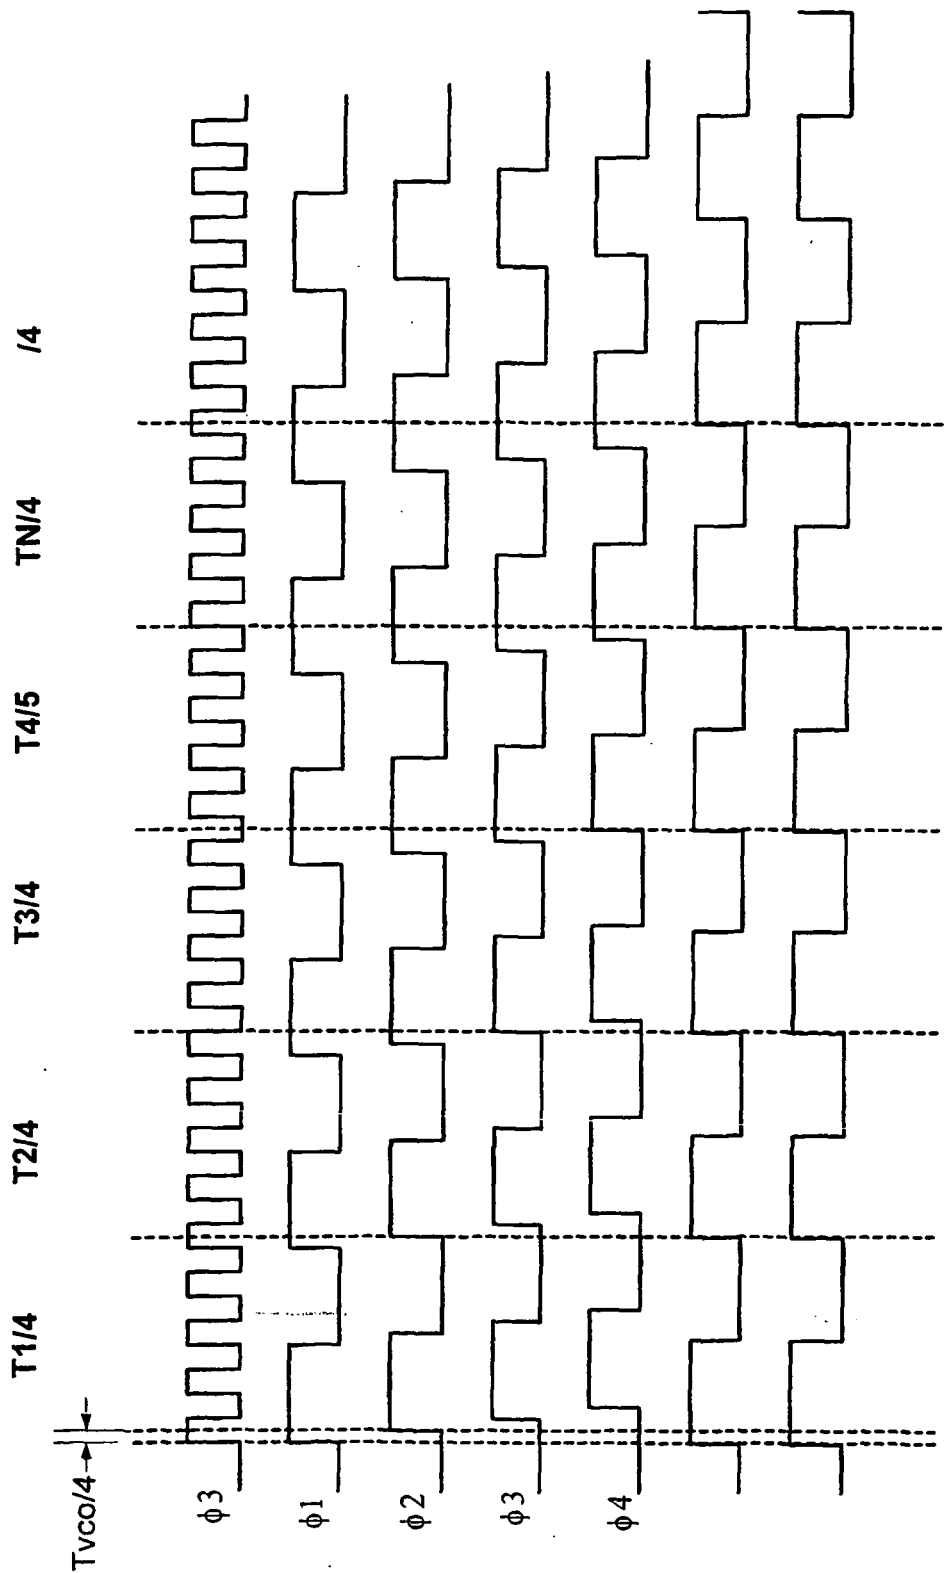


FIG.7

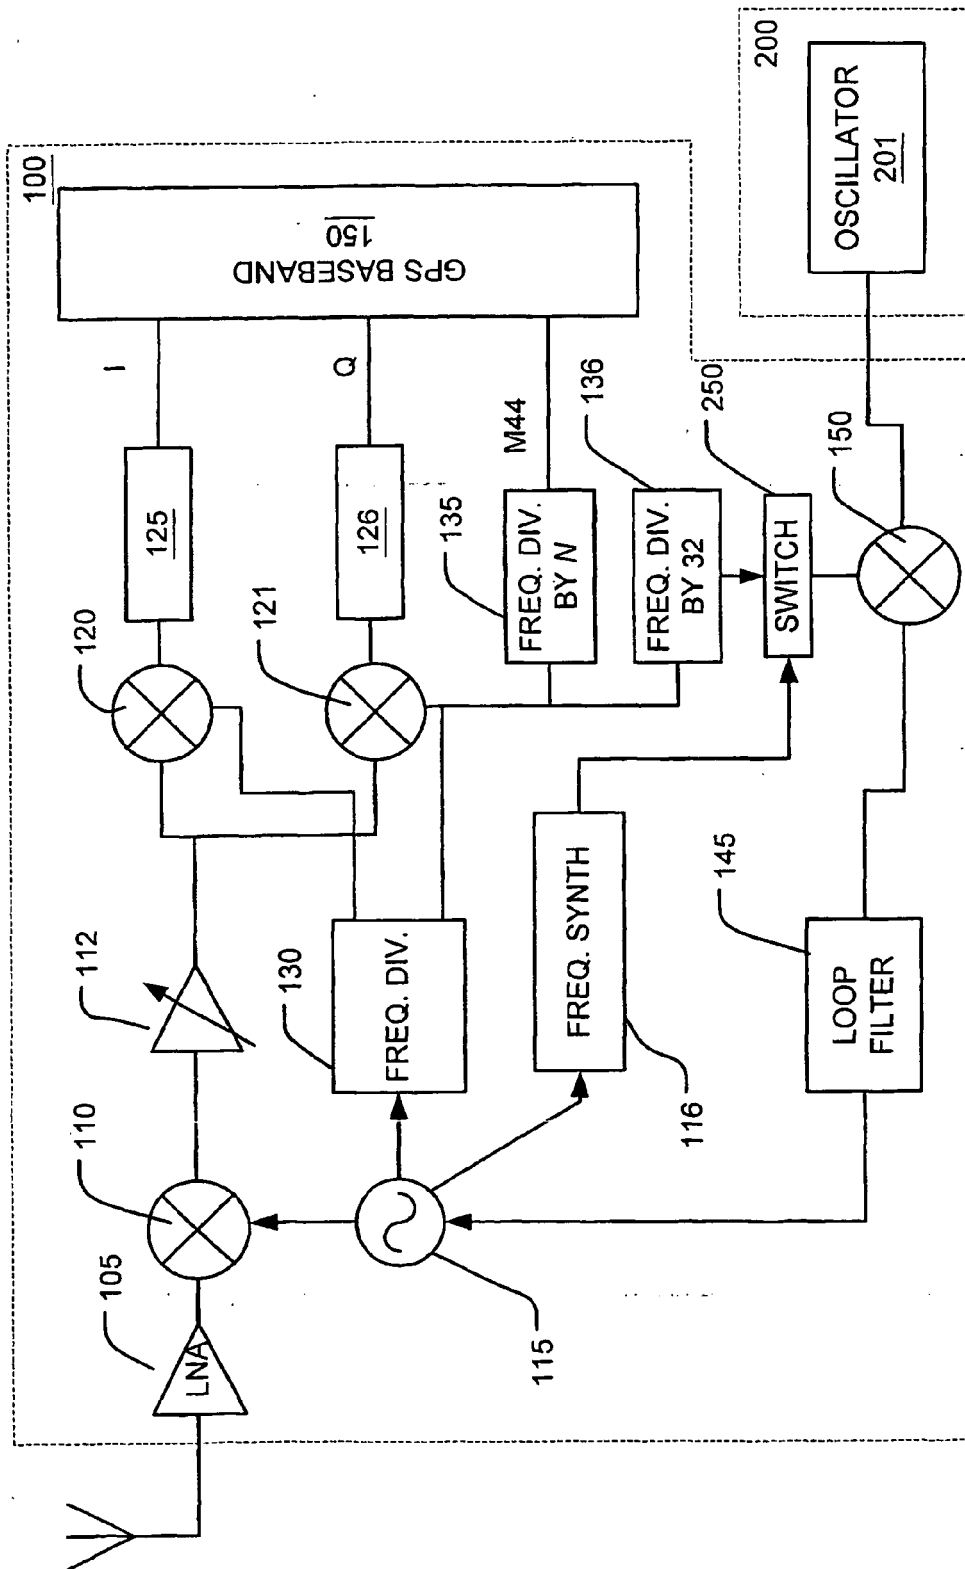


FIG.8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5841396 A [0007] [0027]
- US 6041222 A [0007]
- US 5481396 A [0007]
- US 5874914 A [0027]
- US 6002363 A [0029] [0029]
- US 5734966 A [0030] [0030]