



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 356 597 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.05.2006 Bulletin 2006/18

(21) Application number: **01984808.4**

(22) Date of filing: **30.11.2001**

(51) Int Cl.:
H03M 13/41 ^(2006.01) **H04B 7/26** ^(2006.01)

(86) International application number:
PCT/EP2001/014383

(87) International publication number:
WO 2002/047276 (13.06.2002 Gazette 2002/24)

(54) **SCALING OF DEMODULATED DATA IN AN INTERLEAVER MEMORY**

SKALIERUNG DEMODULIERTER DATEN IN EINEM VERSCHACHTELUNGSSPEICHER

MISE A L'ECHELLE DE DONNEES DEMODULEES DANS UNE MEMOIRE D'ENTRELACEUR

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **04.12.2000 US 729748**

(43) Date of publication of application:
29.10.2003 Bulletin 2003/44

(73) Proprietor: **Koninklijke Philips Electronics N.V.
5621 BA Eindhoven (NL)**

(72) Inventor: **RAZZELL, Charles
NL-5656 AA Eindhoven (NL)**

(74) Representative: **Volmer, Georg
Philips Intellectual Property & Standards GmbH,
Weisshausstrasse 2
52066 Aachen (DE)**

(56) References cited:
EP-A- 0 909 038

- **LEE Y K ET AL: "Normalization, windowing and quantization of soft-decision Viterbi decoder inputs in CDMA systems" , VEHICULAR TECHNOLOGY CONFERENCE, 1999 IEEE 49TH HOUSTON, TX, USA 16-20 MAY 1999, PISCATAWAY, NJ, USA, IEEE, US, PAGE(S) 221-225 XP010341929 ISBN: 0-7803-5565-2 page 221 -page 222**
- **LINGWOOD S D ET AL: "ASIC implementation of a direct-sequence spread-spectrum RAKE-receiver" , VEHICULAR TECHNOLOGY CONFERENCE, 1994 IEEE 44TH STOCKHOLM, SWEDEN 8-10 JUNE 1994, NEW YORK, NY, USA, IEEE, PAGE(S) 1326-1330 XP010123293 ISBN: 0-7803-1927-3 page 1329, left-hand column -page 1330, left-hand column**
- **PATENT ABSTRACTS OF JAPAN vol. 1995, no. 06, 31 July 1995 (1995-07-31) & JP 07 074694 A (SONY CORP), 17 March 1995 (1995-03-17)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 356 597 B1

Description

[0001] The present invention relates to a method of demodulating and decoding a received encoded interleaved signal, more particularly to de-interleaving and scaling of soft-decision demodulated output words. Such a method is particularly useful in a receiver that receives such encoded interleaved signal through a strongly fading channel. The channel can be a wireless channel carrying communication signals or broadcast signals, but also a non-wireless channel exhibiting fading of signals. The method can be used in modems, cell phone systems, digital audio broadcasting systems, digital television systems, or any other system where interleaving of source code bits is done to overcome channel shortcomings.

[0002] In the US Patent No. 5,241,563, demodulation, de-interleaving and decoding of a convolutional encoded interleaved received signal is disclosed. Interleaving digital data before transmission and de-interleaving the data after reception causes bursts of channel errors to be spread out in time, and, as described, is particularly useful for strongly fading channels, or when signals arrive as multipath signals over two or more paths of different lengths. For decoding such received signals, various techniques are known, one such technique being the well-known Viterbi algorithm, which uses the trellis structure of a convolutional code. For any convolutional code, the output of the Viterbi decoder is a sequence of estimated information digits which is maximum likelihood conditioned upon the received sequence.

[0003] As disclosed in the US Patent No. 6,125,136, convolutional codes involve memory, an output code of a convolutional encoder being a sequence of n bits generated for every input of k source digits, a ratio k/n being the code rate. For convolutional codes, the optimum decoding process amounts to finding the single path through the code trellis that most nearly represents the demodulated bit sequence. The transmitted code digits correspond to a specific path through the trellis. The receiver determines the most likely path that corresponds to the received sequence and then uses this path to specify the decoded data sequence that would have generated the path. As described in US 6,125,136, a system that uses such trellis coded signals is a direct sequence spread spectrum communication system, e.g. a CDMA system that has been adopted as a standard in North America. In such CDMA systems signals are received that are transmitted on strongly fading channels, typically as a multi-path received signal.

[0004] In such CDMA systems, one type of receiver that is used is the well-known so-called rake receiver that ratio combines rays of a multi-path received signal. The rake receiver, or any other type of suitable receiver, produces soft-decision demodulated output words that, after de-interleaving, are provided to a Viterbi decoder so as to obtain decoded data.

[0005] Furthermore, soft decision scaling and quantization methods in digital receivers are known that reduce

the amount of memory and the complexity of the arithmetic in the receiver, as part of the Viterbi forward error correction algorithm. In order to do that, an estimate of the signal power is used to apply appropriate scaling and so bits can be discarded without excessive overflow (clipping) or underflow (accidental insertion of erasures). Known methods of scaling include application of a fixed scaling factor, and buffering of an entire frame of data and mapping the mean to a chosen point within the dynamic range of the word size or length of the soft-decision demodulated output words. Application of a fixed scaling factor is prone to loss of information due to underflow and overflow. Mapping the mean to a chosen point is extremely memory intensive.

[0006] It is noted that the article "Normalization, windowing and quantization of soft-decision Viterbi decoder inputs in CDMA systems" by Lee Y K et al, Vehicular Technology Conference, 1999 IEEE 49th Houston, TX, USA 16-20 May 1999, Piscataway, NJ, USA, IEEE, Pages 222-225 XP010341929 ISBN: 0-7803-5565-2 discloses a communication system, in which normalization and quantization is applied on soft-decision decoder input words. The document teaches to apply scaling (called normalization) for a current frame of data (see e.g. page 222, top right column), and word length reduction (called quantization).

[0007] The handbook "Mobile Radio Communications", R. Steele, Pentech Press Limited, London, 1992, reprinted 1994, in Chapter 4, pp. 347-398 describes channel coding, interleaving techniques, convolutional codes and the Viterbi algorithm. More particularly, on pages 350-353 block de-interleaving is described that uses a de-interleaving memory. In one block de-interleaver, at the receiver, the de-interleaver feeds the de-interleaving memory in one column at a time until the de-interleaving memory is filled and removes the symbols a row at a time, the inverse permutation of the interleaving memory at the side of the transmitter. In another block de-interleaver, the symbols are written a row at a time. In the one block interleaver/de-interleaver, interleaving adds considerable delay. In the other block interleaver/de-interleaver, the interleaver delay is negligible, end-to-end delay mainly being due to the de-interleaver.

[0008] It is an object of the invention to provide a method of demodulating and decoding an encoded interleaved signal that achieves optimal adaptation of decoding to demodulation.

[0009] It is another object of the invention to provide such a method wherein scaling of soft-decision demodulated output words and de-interleaving is done with reduced memory usage.

[0010] It is still another object of the invention to provide such a method in which such scaling is done taking into account input word and processing needs of the decoder.

[0011] In accordance with the invention, a method of demodulating and decoding an encoded interleaved signal is provided as defined in claim 1, and a receiver is provided as defined in claim 5.

[0012] In an advantageous embodiment, a de-interleaving memory is filled with the word-length-reduced soft-decision demodulated output words. While the de-interleaving memory is being filled, overflow or underflow of the word-length-reduced words is checked and a scaling factor is adjusted accordingly. In case of underflow, the scaling factor is increased. In case of overflow, the scaling factor is decreased.

[0013] Advantageously, memory locations where scale factors were changed during the filling of the interleaving memory are recorded, along with the modified scaling factor applied, and, after filling of the interleaving memory, through in-place normalization of the entire interleaving memory a uniform scaling is determined. Such a normalization in-place, that avoids using additional memory, is particularly advantageous when decoding is done using a Viterbi algorithm. It also avoids using information from a previous frame to adjust the scale factor of the current frame which may lead to accidental erasures or overflow conditions. The use of a uniform scaling factor is important because the Viterbi algorithm performs better when receiving properly scaled successive input words, i.e., where the scaling of soft decisions is at least uniform over the length of the employed traceback memory. The reordering of bits in the deinterleaver widens the scope of this constraint such that a safe policy is to keep the scale factor uniform over the entire interleaving frame.

[0014] Once the de-interleaver memory has been filled and uniform scaling has been applied, a de-interleaving operation is performed. Such a de-interleaving operation is known per se.

[0015] In an alternative embodiment, the scaling is done in a de-interleaving memory and determination of the scaling factors is done through digital low pass filtering while writing the plurality of successively demodulated and word-length-reduced output words into the de-interleaving memory. In such a scheme, the output of the low pass filter is subject to a sample and hold block so that the scale factor is only allowed to change at the boundary of interleaver frames.

[0016] In case the receiver is a spread spectrum CDMA receiver for use in a wireless communication system, preferably the receiver has a demodulator of a type that combines rays in a multi-path received signal using Maximum Ratio Combining. Such a demodulator can be a rake receiver, or any other suitable ratio combining demodulator.

[0017] In case of maximum likelihood decoding such as Viterbi decoding, the demodulator should preferably provide soft-decision demodulated output words that are log-likelihood ratios. With log-likelihood ratio input, the Viterbi algorithm only needs to perform summing operations such as the summing of path metrics in the trellis. Herewith it is avoided that the Viterbi algorithm needs to perform multiplication operations. Such multiplication operations demand more processing capacity and are more memory intensive than summing operations. The Viterbi

decoder expects convolutional encoded input words.

Fig. 1 schematically shows a system with a transmitter, a channel, and a receiver.

Fig. 2 shows a block diagram of a transmitter.

Fig. 3 shows a receiver according to the invention.

Fig. 4 is a flowchart illustrating a first embodiment of determining scale factors according to the invention.

Fig. 5 shows a second embodiment of determining scale factors according to the invention.

[0018] Throughout the figures the same reference numerals are used for the same features.

[0019] Figure 1 schematically shows a system 1 with a transmitter 2, a channel 3, and a receiver 4. The channel is a bursty error channel. In the transmitter 2, encoding and interleaving is applied. In the receiver 4, de-interleaving and decoding is applied. Interleaving is a process of rearranging the ordering of a sequence of binary or non-binary symbols in some unique one-to-one deterministic manner. The reverse of this process is the de-interleaving which is to the sequence of its original ordering. In one example, the system is a cellular radio system such as a North American standardized CDMA system. The system may be any wireless or wired system in which interleaving is applied to overcome the bursty error character of the channel.

[0020] Figure 2 shows a block diagram of the transmitter 2. In the transmitter 2, a data source 20 provides data to an encoder 21. After interleaving of encoded data in an interleaver 22, a modulator 23 transmits a modulated encoded interleaved signal to the receiver 4 via the channel 3. The encoder 21 may provide a convolutional code. The receiver 4 may apply convolutional decoding, through a Viterbi algorithm, for instance.

[0021] Figure 3 shows a mixed hardware/software block diagram of the receiver according to the invention. For performing software functions, such a receiver has a processor with ROM and RAM (not shown in detail here), as will be readily recognized in the art. The receiver 4 has a demodulator 30 that produces soft-decision demodulated output words of N bits, N being an integer. The receiver 4 further has a de-interleaving memory 31 that is filled with a plurality of successively demodulated output words at a time, until it is full. The demodulated output words are written in successive columns of the de-interleaving memory 31. Upon completion of writing and scaling, a de-interleaving operation is performed and de-interleaved scaled input words are provided, a row at a time, to a decoder 32, in the example given a Viterbi decoder. The demodulator 30 may include a rake receiver that provides maximum likelihood ratios. The de-interleaver, formed by the de-interleaving memory 31 and a processor, may have any other suitable hardware and/or software structure. Upon writing of the soft-decision demodulated output words into the de-interleaving memory 31, the word length of the words is reduced from N to M bits, in operation 32 where the most significant bits are

taken from the N bit words. This is because the Viterbi algorithm does not need N bit accuracy, and to save memory. In block 33, from the M bit reduced words, a new scale factor is determined for each of the soft-decision demodulated output words being written into the de-interleaving memory 31, and the new scale factor is stored in block 34.

[0022] Figure 4 is a flowchart illustrating a first embodiment of determining scale factors according to the invention. First, scale factors are determined for each reduced word being written into the de-interleaving memory 31. Shown is determination of a new scale factor for the i-th soft-decision, i being a running variable spanning the entire de-interleaving memory 31. An initial scale factor SF may be determined from previous frames or may be an initial guess or otherwise. The process starts in block 40. In block 41 it is checked whether an overflow situation exists, overflow being monitored by an overflow counter Ov. In case of overflow, the overflow counter Ov is incremented, indicated by Ov++, in block 42. In block 43 it is checked whether an underflow situation exists, underflow being monitored by an underflow counter Uf. In case of under flow, the underflow counter Uf is incremented, indicated by Uf++, in block 44. If no overflow or underflow situation exists, there is no need to adapt the scale factor SF. In block 45, it is checked whether the overflow counter Ov exceeds a given threshold max_Ov. If so, in block 46, a new scale factor is determined as $SF = SF \cdot 0.7$, the overflow counter Ov is reset, $Ov = 0$, the index i for which overflow occurred is recorded in an array SF_indexes[j], j being an array index, as $SF_indexes[j] = i$, and the corresponding newly determined scaling factor SF is recorded in an array SF_values[j++], j++ being an array index, as $SF_values[j++] = SF$. Multiplication factor 0.7 corresponds to a 3 dB decrease. Other reduction factors may be applied. Similarly, in block 47, it is checked whether the underflow counter Uf exceeds a given threshold max_Uf, and, if so, the scaling factor SF is increased to $SF = SF \cdot 1.4$, $Uf = 0$, $SF_indexes[j] = i$, and $SF_values[j++] = SF$. Thereafter, in block 49, new scale factor SF is applied for index i. For a persisting overflow situation, when receiving a very high level signal that has a clipping effect, the scale factor will be decreased for a succession of words. For, example, for ten successive overflows it might then take twenty words for the scale factor to get back to an earlier, higher, value. Similar holds for a persisting underflow situation. In the embodiment wherein a uniform scaling factor is determined for the entire de-interleaving memory 31, after filling and initial scaling of the entire de-interleaving memory 31, the information recorded in arrays SF_indexes[j], i.e., locations of adapted scale factors, and SF_values[j++], i.e., the correspondingly adapted scale factors is used. Particularly when applying a Viterbi decoder, such clean-up is highly desired. Thus, from the recorded information a good overall scaling factor is determined for the entire de-interleaving memory 31. From the arrays it is known where, i.e., at what indexes i, the scale factor SF had been adapted,

and also, from that index i, how many times the adapted scale factor was applied before again being adapted. So, the overall scale factor could be computed as the sum of products of occurrences of given scale factors and the correspondingly recorded scaling factor, divided by the length of the de-interleaving memory 31. After determination of the overall scaling factor, the de-interleaving memory 31 is re-written, for each position where an adapted scaling factor was applied, thereby re-scaling a stored reduced word with a normalized scaling factor, the determined overall scaling factor divided by the previously applied scaling factor.

[0023] Figure 5 shows a second embodiment of determining scale factors according to the invention. To determine new scaling factors, full length words of length N are subject to an absolute value operation 60 (|.|) and then applied to a digital low pass filter 61. In block 62, output words of the digital low pass filter 61 are subjected to a reciprocal operation of the absolute value operation. The digital low pass filter 61 can be a first order IIR-filter (Infinite Impulse Response), operating on substantially an entire interleaving frame of soft bits. In this case, a sample and hold block 63 must be used to prevent the applied scale factor from changing during an interleaving frame. Alternatively, it can be a sum and dump operation operating over the entire length of an interleaving frame. In either case, this results in amplitude data from one frame being used to derive a scaling factor for the next frame.

Claims

1. A method of demodulating and decoding an encoded interleaved signal, said method comprising:

demodulating (30) a received encoded interleaved signal thereby producing soft-decision demodulated output words (N);
de-interleaving and scaling (31) said soft-decision demodulated output words (N) thereby producing de-interleaved and scaled words, said scaling being performed for a plurality of successively demodulated output words at a time by applying scaling factors (SF);
said de-interleaved and scaled words being word-length-reduced words (M); and
decoding (32) said de-interleaved and scaled words,

characterized in that the method comprises:

first applying intermediate scaling factors, each intermediate scaling factor having the same value for a number of adjacent demodulated output words, and then
determining said scaling factors (SF) from said intermediate scaling factors such that said plu-

ality of successively demodulated output words (N) have a same scale factor applied.

2. A method as claimed in claim 1, wherein said determining of said scaling factors from said intermediate scaling factors achieves a uniform scaling factor for said plurality of successively demodulated output words (N) so that the uniform scale factor is only allowed to change at the boundary of interleaver frames.

3. A method as claimed in claim 1, therein performing said scaling in a de-interleaving memory (31), said application of said intermediate scaling factors being done while writing said plurality of successively demodulated output words into said de-interleaving memory, and said scaling based on said scaling factors from said intermediate scaling factors being done in-place in said de-interleaving memory.

4. A method as claimed in claim 1, therein performing said scaling in a de-interleaving memory (31) and determining said scaling factors (SF) through digital low pass filtering (61) while writing said plurality of successively demodulated output words into said de-interleaving memory (31).

5. A receiver (4) for receiving an encoded interleaved signal, said receiver (4) comprising:

a demodulator (30) for demodulating said received encoded interleaved signal, said demodulator (30) producing soft-decision demodulated output words (N);

a de-interleaving and scaling memory (31) for de-interleaving and scaling of said soft-decision demodulated output words, said receiver (4) being configured to produce de-interleaved and scaled words in said de-interleaving and scaling memory (31) for a plurality of successively demodulated output words at a time by applying scaling factors (SF), said de-interleaved and scaled words being word-length-reduced words (M); and

a decoder (32) for decoding said de-interleaved and scaled words, **characterized in that** the receiver (4) is further configured

to first apply intermediate scaling factors, each intermediate scaling factor having the same value for a number of adjacent demodulated output words, and then

to determine said scaling factors (SF) from said intermediate scaling factors such that said plurality of successively demodulated output words (N) have a same scale factor applied.

6. A receiver (4) as claimed in claim 5, said receiver (4) being configured to apply said intermediate scaling

factors while writing said plurality of successively demodulated output words into said de-interleaving memory (31), and to do said scaling based on said scaling factors from said intermediate scaling factors in-place in said de-interleaving and scaling memory (31).

7. A receiver (4) as claimed in claim 5, said receiver (4) being configured to increase a previously determined intermediate scaling factor for a current demodulated output word if said number of adjacent demodulated output words exhibits a predetermined number of underflows.

8. A receiver (4) as claimed in claim 5, said receiver (4) being configured to decrease a previously determined intermediate scaling factor for a current demodulated output word if said number of adjacent demodulated output words exhibits a predetermined number of overflows.

9. A receiver (4) as claimed in claim 5, said receiver (4) being configured to achieve a uniform scaling factor for said plurality of successively demodulated output words when determining of said scaling factors from said intermediate scaling factors so that the uniform scale factor is only allowed to change at the boundary of interleaver frames.

10. A receiver (4) as claimed in claim 5, further comprising a digital low pass filter (61), said receiver (4) being configured to determine said scaling factors (SF) through digital low pass filtering of said soft-decision demodulated output words (N) with said digital low pass filter (61) while writing said plurality of successively demodulated output words into said de-interleaving memory (31).

11. A receiver (4) as claimed in claim 5, wherein said demodulator (30) is a rake receiver.

12. A receiver (4) as claimed in claim 5, wherein said decoder is a Viterbi-decoder (32).

Patentansprüche

1. Verfahren zum Demodulieren und Decodieren eines codierten, verschachtelten Signals, wobei das Verfahren die nachfolgenden Verfahrensschritte umfasst:

- Demodulation (30) eines empfangenen codierten verschachtelten Signals, wodurch weich-Entscheidungs-demodulierte Ausgangswörter (N) erzeugt werden;

- Entschachtelung und Skalierung (31) der genannten weich-Entscheidungs-demodulierten

Ausgangswörter (N), wodurch entschachtelte und skalierte Wörter erzeugt werden, wobei die genannte Skalierung für eine Anzahl aufeinander folgender demodulierter Ausgangswörter gleichzeitig durchgeführt wird durch Anwendung von Skalierungsfaktoren (SF);
 - wobei die genannten entschachtelten und skalierten Wörter Wortlänge-reduzierte Wörter (M) sind; und
 - Decodierung (32) der genannten entschachtelten und skalierten Wörter,

dadurch gekennzeichnet, dass das Verfahren Folgendes umfasst:

- erstens das Anwenden von Zwischenskalierungsfaktoren, wobei jeder Zwischenskalierungsfaktor für eine Anzahl nebeneinander liegender demodulierter Ausgangswörter den gleichen Wert hat, und danach
 - das Ermitteln der genannten Skalierungsfaktoren (SF) aus den genannten Zwischenskalierungsfaktoren, so dass die genannte Anzahl aufeinander folgender demodulierter Ausgangswörter (N) einen gleichen angewandten Skalierungsfaktor haben.
2. Verfahren nach Anspruch 1, wobei die genannte Ermittlung der genannten Skalierungsfaktoren aus den genannten Zwischenskalierungsfaktoren einen einheitlichen Skalierungsfaktor für die genannte Anzahl aufeinander folgender demodulierter Ausgangswörter (N) erzielt, so dass der einheitliche Skalierungsfaktor nur an der Grenze der Verschachtelungsframes ändern darf.
3. Verfahren nach Anspruch 1, wobei die genannte Skalierung in einem Entschachtelungsspeicher (31) durchgeführt wird, wobei die genannte Anwendung der genannten Zwischenskalierungsfaktoren durchgeführt wird, indem die genannte Anzahl aufeinander folgender demodulierter Ausgangswörter in den genannten Entschachtelungsspeicher eingeschrieben werden, und die genannte Skalierung auf Basis der genannten Skalierungsfaktoren aus den genannten Zwischenskalierungsfaktoren vor Ort in dem genannten Entschachtelungsspeicher durchgeführt wird.
4. Verfahren nach Anspruch 1, wobei die genannte Skalierung in einem Entschachtelungsspeicher (31) und die Ermittlung der genannten Skalierungsfaktoren (SF) durch eine digitale Tiefpassfilterung (611) durchgeführt wird, indem eine Anzahl aufeinander folgender demodulierter Ausgangswörter in den genannten Entschachtelungsspeicher (31) eingeschrieben werden.

5. Empfänger (4) zum Empfangen eines codierten verschachtelten Signals, wobei der genannte Empfänger (4) Folgendes umfasst:

- einen Demodulator (30) zum Demodulieren des genannten empfangenen codierten verschachtelten Signals, wobei der genannte Demodulator (30) weich-Entscheidungs-demodulierte Ausgangswörter (N) erzeugt;
- einen Entschachtelungs- und Skalierungsspeicher (31) zur Entschachtelung und Skalierung der genannten weich-Entscheidungs-demodulierten Ausgangswörter, wobei der genannte Empfänger (4) derart ausgebildet ist, dass er entschachtelte und skalierte Wörter in dem genannten Entschachtelungs- und Skalierungsspeicher (31) für eine Anzahl aufeinander folgender demodulierter Ausgangswörter gleichzeitig erzeugt, und zwar durch Zuführung von Skalierungsfaktoren (SF), wobei die genannten entschachtelten und skalierten Wörter Wortlänge-reduzierte Wörter (M) sind; und
- einen Decoder (32) zum Decodieren der genannten entschachtelten und skalierten Wörter, **dadurch gekennzeichnet, dass** der Empfänger (4) weiterhin derart ausgebildet ist, dass er:

- zunächst Zwischenskalierungsfaktoren anwendet, wobei jeder Zwischenskalierungsfaktor für eine Anzahl aneinander grenzender demodulierter Ausgangswörter den gleichen Wert hat, und
- danach die genannten Skalierungsfaktoren (SF) aus den genannten Zwischenskalierungsfaktoren derart ermittelt, dass auf die genannte Anzahl aufeinander folgend demodulierter Ausgangswörter (N) ein gleicher Skalierungsfaktor angewandt wird.

6. Empfänger (4) nach Anspruch 5, wobei der genannte Empfänger (4) derart ausgebildet ist, dass er die genannten Zwischenskalierungsfaktoren anwendet, indem die genannte Anzahl nacheinander demodulierter Ausgangswörter in den Entschachtelungsspeicher (31) eingeschrieben wird, und die genannte Skalierung auf Basis der genannten Skalierungsfaktoren aus den genannten Zwischenskalierungsfaktoren an der Stelle in dem genannten Entschachtelungs- und Skalierungsspeicher (31) durchführt.

7. Empfänger (4) nach Anspruch 5, wobei der genannte Empfänger (4) derart ausgebildet ist, dass er einen vorher bestimmten Zwischenskalierungsfaktor für ein aktuell demoduliertes Ausgangswort erhöht, wenn die genannte Anzahl aneinander grenzender demodulierter Ausgangswörter eine vorbestimmte Anzahl Unterläufe aufweist.

8. Empfänger (4) nach Anspruch 5, wobei der genannte

Empfänger (4) derart ausgebildet ist, dass er einen vorher bestimmten Zwischenskalierungsfaktor für ein aktuell demoduliertes Ausgangswort verringert, wenn die genannte Anzahl aneinander grenzender demodulierter Ausgangswörter eine vorbestimmte Anzahl Überläufe aufweist. 5

9. Empfänger (4) nach Anspruch 5, wobei der genannte Empfänger (4) derart ausgebildet ist, dass er einen einheitlichen Skalierungsfaktor für die genannte Anzahl aufeinander folgende demodulierter Ausgangswörter erzielt, wenn er die genannten Skalierungsfaktoren aus den genannten Zwischenskalierungsfaktoren ermittelt, so dass der einheitliche Skalierungsfaktor nur an der Grenze von Verschachtelungsramen ändern darf. 10
10. Empfänger (4) nach Anspruch 5, der weiterhin ein digitales Tiefpassfilter (61) aufweist, wobei der genannte Empfänger (4) derart ausgebildet ist, dass er die genannten Skalierungsfaktoren (SF) durch eine digitale Tiefpassfilterung der genannten weich-Entscheidungs-demodulierten Ausgangswörter (N) mit dem genannten digitalen Tiefpassfilter (61) bestimmt, indem die genannte Anzahl aufeinander folgend demodulierter Ausgangswörter in den genannten Entschachtelungsspeicher (31) einschreibt. 20
11. Empfänger (4) nach Anspruch 5, wobei der genannte Demodulator (30) ein RAKE-Empfänger ist. 25
12. Empfänger (4) nach Anspruch 5, wobei der genannte Decoder ein Viterbi-Decoder (32) ist. 30

Revendications

1. Procédé de démodulation et de décodage d'un signal entrelacé codé, ledit procédé comprenant : 35
la démodulation (30) d'un signal entrelacé codé reçu afin de produire ainsi des mots de sortie démodulés par décision non stricte (N) ;
le désentrelacement et la modification d'échelle (31) desdits mots de sortie démodulés par décision non stricte (N) afin de produire ainsi des mots désentrelacés et à échelle modifiée, ladite modification d'échelle étant effectuée en une seule fois pour une pluralité de mots de sortie démodulés successivement en appliquant des facteurs d'échelle (SF) ; 40
lesdits mots désentrelacés et à échelle modifiée étant des mots de longueur réduite (M) ; et
le décodage (32) desdits mots désentrelacés et à échelle modifiée, **caractérisé en ce que** le procédé comprend : 45
le fait d'appliquer en premier lieu des fac-

teurs d'échelle intermédiaires, chaque facteur d'échelle intermédiaire ayant la même valeur pour un certain nombre de mots de sortie démodulés adjacents, puis la détermination desdits facteurs d'échelle (SF) à partir desdits facteurs d'échelle intermédiaires de façon à ce que ladite pluralité de mots de sortie démodulés successivement (N) soient soumis à l'application d'un même facteur d'échelle.

2. Procédé selon la revendication 1, **caractérisé en ce que** ladite détermination desdits facteurs d'échelle à partir dudit facteur d'échelle intermédiaire conduit à un facteur d'échelle uniforme pour ladite pluralité de mots de sortie démodulés successivement (N), de sorte que le facteur d'échelle uniforme ne peut varier qu'à la frontière entre des trames de l'entrelaceur. 50
3. Procédé selon la revendication 1, effectuant ici ladite modification d'échelle dans une mémoire de désentrelacement (31), ladite application desdits facteurs d'échelle intermédiaires étant effectuée pendant l'écriture de ladite pluralité de mots de sortie démodulés successivement dans ladite mémoire de désentrelacement, et ladite modification d'échelle étant basée sur lesdits facteurs d'échelle obtenus à partir desdits facteurs d'échelle intermédiaires étant effectuée en place dans ladite mémoire de désentrelacement. 55
4. Procédé selon la revendication 1, effectuant ici ladite modification d'échelle dans une mémoire de désentrelacement (31) et déterminant lesdits facteurs d'échelle (SF) par filtrage passe-bas numérique (61) pendant l'écriture de ladite pluralité de mots de sortie démodulés successivement dans ladite mémoire de désentrelacement (31).
5. Récepteur (4) pour recevoir un signal entrelacé codé, ledit récepteur (4) comprenant :
un démodulateur (30) pour démoduler ledit signal entrelacé codé reçu, ledit démodulateur (30) produisant des mots de sortie démodulés par décision non stricte (N) ;
une mémoire de désentrelacement et de modification d'échelle (31) pour désentrelacer et modifier l'échelle desdits mots de sortie démodulés par décision non stricte, ledit récepteur (4) étant configuré pour produire des mots désentrelacés et à échelle modifiée dans ladite mémoire de désentrelacement et de modification d'échelle (31) pour une pluralité de mots de sortie démodulés successivement en appliquant des facteurs d'échelle (SF), lesdits mots désentrelacés et à échelle modifiée étant des mots de longueur

réduite (M) ; et
un décodeur (32) pour décoder lesdits mots désentrelacés et à échelle modifiée,

caractérisé en ce que le récepteur (4) est en outre configuré :

pour appliquer en premier lieu des facteurs d'échelle intermédiaires, chaque facteur d'échelle intermédiaire ayant la même valeur pour un certain nombre de mots de sortie démodulés adjacents, puis
pour déterminer lesdits facteurs d'échelle (SF) à partir desdits facteurs d'échelle intermédiaires de façon à ce que ladite pluralité de mots de sortie démodulés successivement (N) soient soumis à l'application d'un même facteur d'échelle.

6. Récepteur (4) selon la revendication 5, ledit récepteur (4) étant configuré pour appliquer lesdits facteurs d'échelle intermédiaires pendant l'écriture de ladite pluralité de mots de sortie démodulés successivement dans ladite mémoire de désentrelacement (31), et pour effectuer ladite modification d'échelle sur la base desdits facteurs d'échelle obtenus à partir desdits facteurs d'échelle intermédiaires en place dans ladite mémoire de désentrelacement et de modification d'échelle (31).
7. Récepteur (4) selon la revendication 5, ledit récepteur (4) étant configuré pour augmenter un facteur d'échelle intermédiaire précédemment déterminé pour un mot de sortie démodulé courant si ledit nombre de mots de sortie démodulés adjacents présente un nombre prédéterminé de dépassements inférieurs.
8. Récepteur (4) selon la revendication 5, ledit récepteur (4) étant configuré pour réduire un facteur d'échelle intermédiaire précédemment déterminé pour un mot de sortie démodulé courant si ledit nombre de mots de sortie démodulés adjacents présente un nombre prédéterminé de dépassements supérieurs.
9. Récepteur (4) selon la revendication 5, ledit récepteur (4) étant configuré pour obtenir un facteur d'échelle uniforme pour ladite pluralité de mots de sortie démodulés successivement lors de la détermination desdits facteurs d'échelle à partir desdits facteurs d'échelle intermédiaires, de sorte que le facteur d'échelle uniforme ne peut varier qu'à la frontière entre des trames d'entrelacement.
10. Récepteur (4) selon la revendication 5, comprenant en outre un filtre numérique passe-bas (61), ledit récepteur (4) étant configuré pour déterminer lesdits

facteurs d'échelle (SF) par filtrage numérique passe-bas desdits mots de sortie démodulés par décision non stricte (N) au moyen dudit filtre numérique passe-bas (61) pendant l'écriture de ladite pluralité de mots de sortie démodulés successivement dans ladite mémoire de désentrelacement (31).

11. Récepteur (4) selon la revendication 5, **caractérisé en ce que** ledit démodulateur (30) est un récepteur en râteau.
12. Récepteur (4) selon la revendication 5, **caractérisé en ce que** ledit décodeur est un décodeur de Viterbi (32).

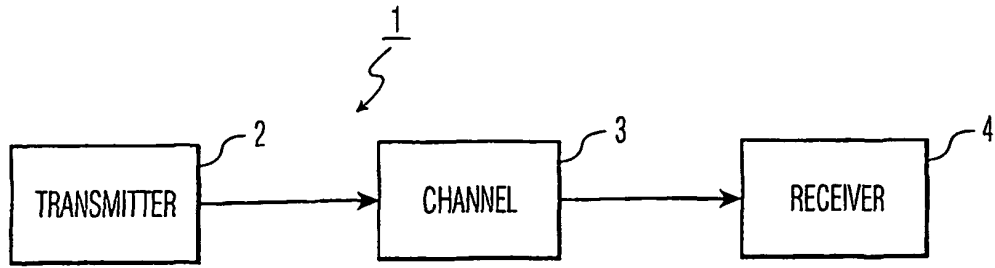


FIG. 1

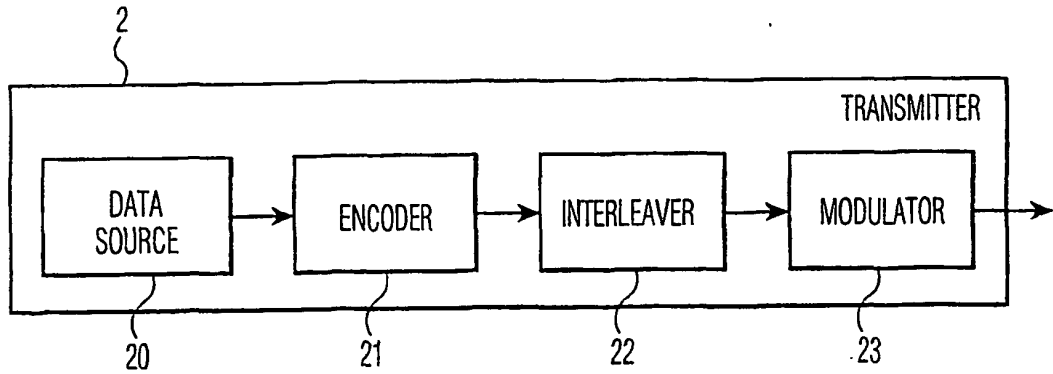


FIG. 2

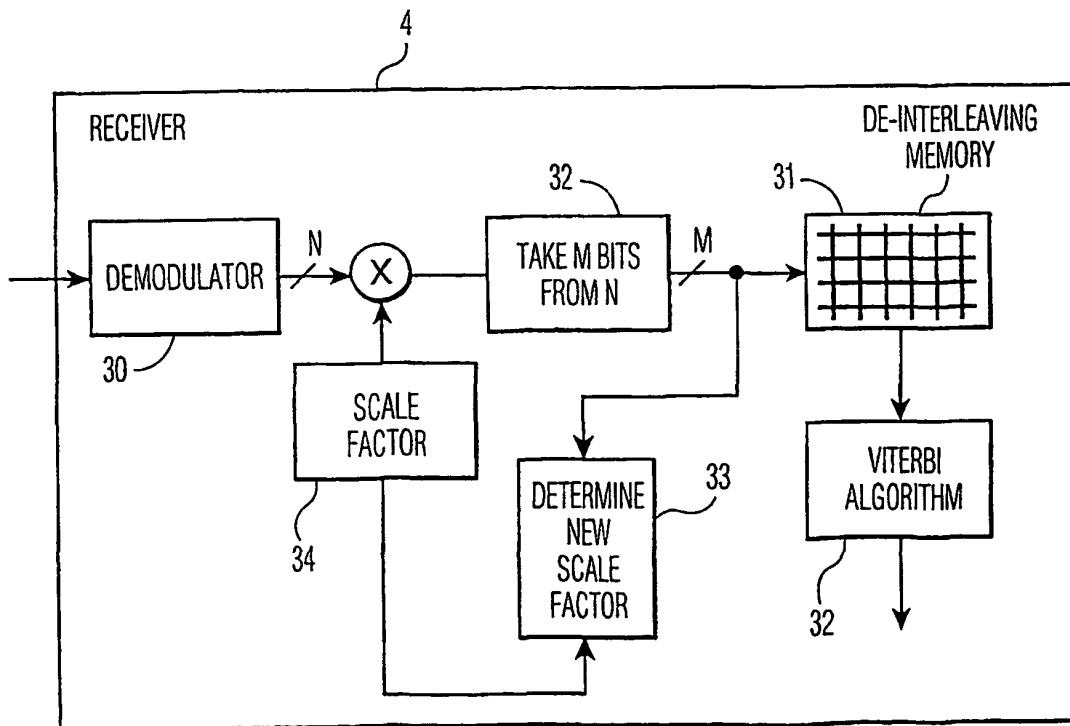


FIG. 3

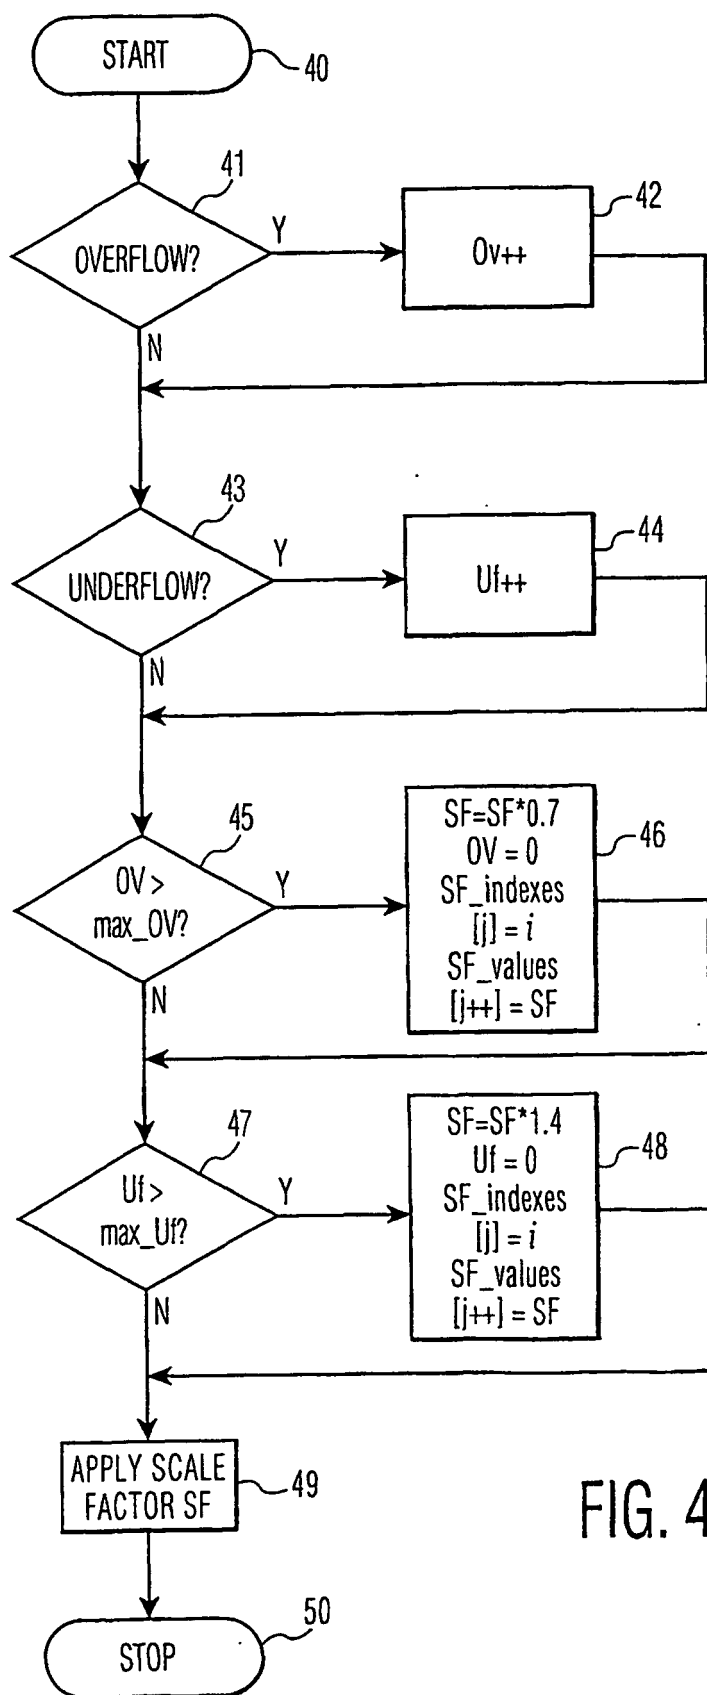


FIG. 4

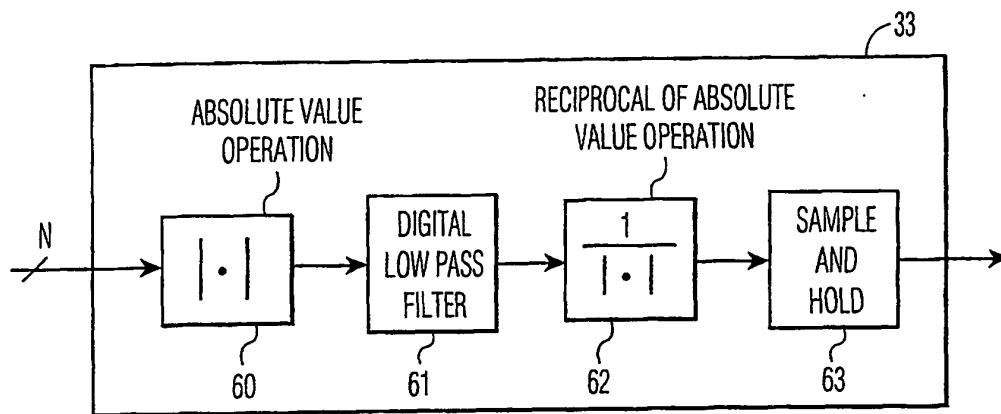


FIG. 5