



(11) **EP 1 570 363 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
18.05.2011 Bulletin 2011/20

(21) Application number: **03808456.2**

(22) Date of filing: **11.12.2003**

(51) Int Cl.:
G06F 15/00 (2006.01)

(86) International application number:
PCT/US2003/039778

(87) International publication number:
WO 2004/061693 (22.07.2004 Gazette 2004/30)

(54) **Method and apparatus for process state monitoring and state transition detection**

Verfahren und Vorrichtung zur Überwachung eines Prozesses und Bestimmung eines Zustandsübergangs

Procédé et appareil de surveillance de l'état d'un processus et de détection d'une transition

(84) Designated Contracting States:
BE DE FR IT NL

(30) Priority: **13.12.2002 US 318967**

(43) Date of publication of application:
07.09.2005 Bulletin 2005/36

(73) Proprietor: **LAM RESEARCH CORPORATION**
Fremont, CA 94538 (US)

(72) Inventors:
• **GOTKIS, Yehiel**
Fremont, CA 94536 (US)
• **KATZ, Vladimir**
Fremont, CA 94538 (US)

- **HEMKER, David**
San Jose, CA 95127 (US)
- **KISTLER, Rodney**
Los Gatos, CA 95032 (US)
- **BRIGHT, Nicolas, J.**
San Jose, CA 95138 (US)

(74) Representative: **Kontrus, Gerhard et al**
Lam Research AG
SEZ-Strasse 1
9500 Villach (AT)

(56) References cited:
WO-A-00/24052 US-A- 5 091 963
US-A- 5 621 668 US-A1- 2002 180 449
US-B1- 6 449 571

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 570 363 B1

Description

1. Field of the Invention

[0001] This invention relates generally to semiconductor manufacturing and more particularly to real time metrology for process and wafer state monitoring in semiconductor manufacturing operations.

2. Description of the Related Art

[0002] During semiconductor fabrication, there exists multiple steps where an underlying substrate is subjected to the formation, modification and removal of various layers, blanket or patterned. The small feature sizes, tight surface planarity requirement, combined with the constant quest to increase throughput, makes it highly desirable to stop or change the process parameters when the targeted properties (thickness, resistance, planarity, transparency, chemical composition etc.) of the processed film has been achieved, i.e., when an endpoint has been obtained for the current process step. Of course, some semiconductor fabrication steps transition to a subsequent fabrication step after the current process step has accomplished the task of obtaining the defined wafer characteristics. US 5,621,668 discloses a semiconductor processing system capable of detecting a transition point for slope change transitions through a threshold determination in real time, comprising a processing module configured to process a semiconductor wafer until a defined parameter associated with the semiconductor wafer being processed is obtained, the processing module including, and a sensor configured to monitor a process parameter associated with a process operation.

[0003] Real time metrology for the control of wafer characteristics is now a necessity so that an endpoint or transition point for a particular processing operation may be determined. The real time in-situ monitoring of parameters associated with a semiconductor operation provides valuable information as to an endpoint or a transition point of a processing operation. Typically the properties of an object, either the wafer itself or another object, which is strongly linked to the wafer in the process, undergo monotonic change prior to and after the transition, experiencing an abrupt property variation during the transition itself. This leads to a step-like property for monitoring signal variation in cases when the monitored system is small enough and when the transition occurs simultaneously for the watch point of the inspection space. For larger systems, such as semiconductor wafers, there is a time distribution, which transfers a step-like transition point into a slope change, associated with data points corresponding to the process parameter changes, thereby creating an indicator of the endpoint or transition point. However, slope change detection requires usage of derivatives, which are associated with reduced signal-to-noise ratio complicating this approach.

[0004] Figure 1 is a graph of a thickness of a semicon-

ductor wafer being monitored over time during a processing operation, such as a planarization processing operation. Line 100 represents values associated with an infrared (IR) based sensor for determining an endpoint/transition point during a processing operation. Lines 102 represent values associated with a plurality of eddy current sensors (ECS) for capturing thickness of a semiconductor wafer over time during the processing. As can be seen, region 104 represents the time where the endpoint/transition point occurs. In region 104, the general slope associated with lines 102 and line 100 transition. However, the signal being monitored for either the IR monitoring or eddy current monitoring is superimposed with significant and variable background noise that changes from run to run. Accordingly, when measuring the derivative based slope to determine the endpoint, the signal to noise level affects the stability and reliability of the endpoint determination. Thus, in-line determination of a transition point predicated upon a slope based analysis does not provide the robust data necessary for semiconductor operations.

[0005] As a result, there is a need to solve the problems of the prior art to provide a method and apparatus for providing stable and reliable transition point determination for processes where the transition point occurs through a slope based transition of a monitored process parameter.

SUMMARY OF THE INVENTION

[0006] Broadly speaking, the present invention fills these needs by providing method for detecting a transition point of a semiconductor process, comprising:

- defining an approximation equation for a set of points corresponding to values of said semiconductor process being monitored, wherein the approximation equation is determined in order to fit to the curve represented by measured values, wherein the approximation equation is a polynomial equation, wherein the approximation equation takes the form of a parabolic equation or any other higher power equation;
- predicting an expected value at a current point of the process being monitored, whereby the expected value is calculated from the approximation equation;
- calculating a difference between a measured value at the current point of the process being monitored and the corresponding expected value;
- monitoring the difference to detect a deviation value between the measured value and the expected value; and
- identifying said transition point for the semiconductor process being monitored based on the detection of the deviation value.

It should be appreciated that the present invention can be implemented in numerous ways, including as a meth-

od, a system, computer readable media or a device. Several inventive embodiments of the present invention are described below.

[0007] In one embodiment, a method for converting a slope based detection task to a threshold based detection task is provided. The method initiates with defining an approximation equation for a set of points corresponding to values of a process being monitored. Then, an expected value at a current point of the process being monitored is predicted. Next, a difference between a measured value at the current point of the process being monitored and the corresponding expected value is calculated. Then, the difference is monitored for successive points to detect a deviation value between the measured value and the expected value. Next, a transition point for the process being monitored is identified based on the detection of the deviation value.

[0008] In another embodiment, a method for detecting a transition point of a slope based change through a threshold detection is provided. The method initiates with monitoring a parameter associated with a transition point. Then, a predicted value of the parameter is calculated from past values of the monitored process parameter. The predicted value corresponds to a current value of the process parameter being monitored. Next, a threshold value is defined. Then, a difference between the current value and the predicted value is tracked. Next, when the difference exceeds the threshold value a transition point is identified.

[0009] In yet another embodiment, a semiconductor processing system capable of detecting a transition point for slope change transitions through a threshold determination in real time is provided. The system includes a processing module configured to process a semiconductor wafer until a defined parameter associated with the semiconductor wafer being processed is obtained. The processing system includes a sensor configured to monitor a process parameter associated with a process operation. The system includes a detector in communication with the sensor. The detector is configured to compare measured values to predicted values, where the measured values indicate a transition point through a slope change. The predicted values are derived from previously measured values. The detector is further configured to track a difference between the measured values and the corresponding predicted values to enhance a change at the transition point to enable a threshold deviation value to be defined. The threshold deviation value indicates the transition point associated with the process operation.

[0010] In still yet another embodiment, a computer readable media having program instructions for converting a slope based detection task to a threshold based detection task is provided. The computer readable media includes program instructions for defining an approximation equation for a set of points corresponding to values of a process being monitored and program instructions for predicting an expected value at a current point of the

process being monitored. Program instructions for calculating a difference between a measured value at the current point of the process being monitored and the corresponding expected value are provided. Program instructions for monitoring the difference to detect a deviation value between the measured value and the expected value and program instructions for identifying a transition point for the process being monitored based on the detection of the deviation value are included.

[0011] Other aspects and advantages of the invention will become apparent from the following detailed description, taken in conjunction with the accompanying drawings, illustrating by way of example the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The present invention will be readily understood by the following detailed description in conjunction with the accompanying drawings, and like reference numerals designate like structural elements.

[0013] Figure 1 is a graph of a thickness of a semiconductor wafer being monitored over time during a processing operation, such as a planarization processing operation.

[0014] Figure 2 is a graph of an infrared (IR) based trace where the noise level in the transition region is smoothed to show a transition point in accordance with one embodiment of the invention.

[0015] Figure 3 is an exemplary graph of a signal trace over time where the period of time includes a transition point.

[0016] Figure 4 is an exemplary graph of the signal of Figure 3 which has been smoothed to eliminate noise.

[0017] Figure 5 is an exemplary graph of a predicted signal generated from the points of the actual signal of Figure 3 in accordance with one embodiment of the invention.

[0018] Figure 6 is an exemplary graph of a deviation signal generated by calculating the difference between an actual signal and a corresponding predicted signal at various time points in accordance with one embodiment of the invention.

[0019] Figure 7 is an exemplary graph including the graphs of Figures 4, 5 and 6 superimposed over each other to illustrate a threshold determination for the transition point in accordance with one embodiment of the invention.

[0020] Figure 8A is an exemplary graph illustrating a trace of an actual signal and a predicted signal in accordance with one embodiment of the invention.

[0021] Figure 8B is a graph of the original signal value and a corresponding graph of a deviation between the actual signal and a predicted signal in accordance with one embodiment of the invention.

[0022] Figure 8C is a graph illustrating the actual trace and the delta trace of Figures 8A and 8B superimposed with the predicted value trace, all of which are used for

the conversion of a slope based task to a threshold based task in accordance with one embodiment of the invention.

[0023] Figure 9 is a flowchart of the method operations for a method for converting a slope based detection task to a threshold based detection task in accordance with one embodiment of the invention.

[0024] Figure 10 is a high-level schematic diagram of a processing module in communication with a detector configured to convert a slope detection transition point to a threshold detection transition point in accordance with one embodiment of the invention.

[0025] Figure 11 is a simplified schematic diagram of a CMP system having an infrared sensor to determine a transition point of a semiconductor substrate being processed in accordance with one embodiment of the invention.

[0026] Figure 12 is a simplified schematic diagram of a processing system having eddy current sensors configured to determine a transition point of a semiconductor substrate being processed in accordance with one embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0027] An invention is described for a system, device and method that provides a reliable and stable measure of a transition point during a semiconductor processing operation. It will be obvious, however, to one skilled in the art, that the present invention may be practiced without some or all of these specific details. In other instances, well known process operations have not been described in detail in order not to unnecessarily obscure the present invention. Figure 1 is described in the "Background of the Invention" section.

[0028] The embodiments of the present invention provide a system and method for converting a slope detection task to a threshold detection task, as well as amplifying the transition features that are indicative of a transition. Threshold behavior, produces a step-like feature on the background of a zero or a constant signal and provides simpler detection algorithms, higher signal-to-noise ratios and more robust detectability. Threshold based determination for transition points/endpoints provides increased stability and reliability as compared to slope based determinations. In turn, more stable and reliable triggering conditions are provided with respect to a semiconductor operation. That is, since the transition point/endpoint is determined with a high degree of confidence, the downstream operations requiring substantially precise measurements may be initiated through inline metrology. As a result, semiconductor throughput for the associated operations may be concomitantly increased. The complications resulting from small changes in slopes of the process tracing signal with respect to derivative analysis are eliminated by the conversion to a threshold type of tracing signal. It should be appreciated that the terms endpoint and transition point, as used here-

in, are interchangeable. It will be apparent to one skilled in the art that the terms endpoint and transition point may refer to any point in a semiconductor process, or any other process, where a targeted change is occurring, a targeted state is achieved, or where the attainment of a certain value associated with a monitored parameter is used to trigger an event, such as an endpoint or initiation of another process operation.

[0029] Figure 2 is a graph of an infrared (IR) based trace where the noise level in the transition region is smoothed to show a transition point in accordance with one embodiment of the invention. Here, in region 106, the noise level is substantially eliminated to show trace 108 as a smoothed line. As can be seen, the slope associated with smoothed trace 108 transitions in region 106. However, the noise associated with the operation being monitored, e.g., a chemical mechanical planarization (CMP) operation or an etch operation, prevents real time stable and reproducible readings to trigger an event, such as an endpoint or initiation of another operation. It should be appreciated that while Figure 2 illustrates an infrared signal related to temperature, other signals, e.g. eddy current sensors, vibration, optical refraction, etc., will exhibit similar properties. That is, the smoothed slope will indicate a transition point. However, as stated above, the background noise prevents a stable and accurate real time reading from the slope reading. As will be explained in more detail below, the conversion of the slope measurement to a threshold measurement removes the uncertainties associated with the noise levels that impact the small differences being analyzed for the derivative measurements associated with a slope measurement. Thus, a for more precise detection of a transition point in real time is enabled. The small changes in slope that indicate a transition point are masked by the noise in a slope measurement, however, the embodiments described herein substantially eliminate the noise from impacting the determination of the transition point.

[0030] Figure 3 is an exemplary graph of a signal trace over time, where the period of time includes a transition point. Here, signal 110 is plotted over time. In one embodiment, signal 110 originates from an eddy current sensor configured to detect a process parameter indicating a transition point during a semiconductor operation. It should be appreciated that other signals for detecting transition points during semiconductor operations can be included here, such as infrared, vibration, optical-based signals, etc. As can be seen, signal 110 has a significant amount of noise associated with the signal, however, a trend over time indicates a transition point at time 100. One skilled in the art will appreciate that a slope based determination would yield unstable results here, due to the background noise.

[0031] Figure 4 is an exemplary graph of the signal of Figure 3 which has been smoothed to eliminate noise. Here, line 110a has had a regular sinusoidal noise filter applied in order to smooth the signal. Where signal 110a represents the values of an eddy current sensor over

time, a transition point is shown by a change in slope at approximately time 100. As mentioned above, the smoothed slope is not able to be produced in a stable and precise manner in real time. Therefore, a slope based determination is not a viable alternative here.

[0032] Figure 5 is an exemplary graph of a predicted signal generated from the points of the actual signal of Figure 3 in accordance with one embodiment of the invention. Here, an approximation equation for a selected interval of data flow points is used to predict the most recent data reading in one embodiment of the invention. As will be explained in more detail with reference to Figures 8A and 8B, the predicted signal is generated by applying the approximation equation to historical data points of the actual signal to generate a predicted real-time data point in accordance with one embodiment of the invention. As shown in Figure 5, the predicted signal represented by line 110b begins to deviate from the actual signal of Figures 3 and 4 at time 100, which represents a transition point. It should be appreciated that the approximation equation may be any polynomial equation. For example, the approximation equation may take the form of a parabolic equation or any other higher power equation.

[0033] Figure 6 is an exemplary graph of a deviation signal generated by calculating the difference between an actual signal and a corresponding predicted signal at various time points in accordance with one embodiment of the invention. Here, line 112 represents the difference between the predicted signal and the actual signal over time. Region 114 represents a corridor of noise. That is, an offset can be applied to the difference between the actual signal and the predicted signal to define a corridor of noise in which points outside of the corridor of noise would be considered valid points for a transition point. In essence, the corridor of noise defines a boundary around the difference between the actual value and the predicted value. In one embodiment, the offset is chosen as 3 times the value of the standard deviation, i.e., 3σ . Thus, where the noise distribution is configured as a Gaussian distribution, then 3σ will cover 99.7% of all the points of the distribution. Therefore, out of 1000 points, a probability of 3×10^{-3} exists for one point to be actually outside of the corridor of noise and to not be the start of a transition point. Depending on the nature of the process being monitored, this probability can be reduced or increased to provide an acceptable level of accuracy.

[0034] Figure 7 is an exemplary graph including the graphs of Figures 4, 5 and 6 superimposed over each other to illustrate a threshold determination for the transition point in accordance with one embodiment of the invention. Here, line 110a from Figure 4 line 110b from Figure 5 and line 112 are superimposed over each other. In addition, the corridor of noise 114 is also illustrated. It should be appreciated that line 112, which represents the deviation signal, i.e., the difference between the actual signal and the predicted signal, begins to exceed the corridor of noise at the transition point of time 100. As

will be explained in further detail below, the 3σ corridor (of noise) can be adjusted in order to give a higher or lower confidence level that a transition point is being detected. For example, processing requiring high degrees of accuracy and precision may use a wider corridor of noise than processes requiring a less degree of accuracy and precision. In another embodiment, more than one consecutive point outside the boundaries of the corridor of noise may be required to trigger acknowledging a transition point.

[0035] Figure 8A is an exemplary graph illustrating a trace of an actual signal and a predicted signal in accordance with one embodiment of the invention. Line 120 represents a plot of a process parameter reading over time. It should be appreciated that the process parameter a process parameter associated with a film thickness in one embodiment. Region 121 of the graph represents the pre-transition region, while region 123 of the graph represents the post transition region. Thus, line 120 represents two continuous processes, e.g., a pre-transition region process and a post-transition region process, and in between the two processes is an interrupt in the form of a transition point. The transition point here indicates a change from one state to another state. While the embodiments described herein refer to semiconductor processes, it should be appreciated that the methodology may be applied to any system where a transition is occurring and a slope detection process may capture the transition from one state to another state.

[0036] Still referring to Figure 8A, a previous section or interval of data, for example section n of region 121, is used to predict the value at a later time point. In one embodiment, a polynomial equation, such as a parabolic equation is used to derive the predicted value corresponding to a most recent data reading. Here, a section of data, also referred to as a data interval, is taken and a data value projected forward by a distance m is calculated. One skilled in the art will appreciate that in one embodiment the parabolic (or higher power) approximation used to project the data value is of the form:

$$Y = a_1 t^n + a_2 t^{n-1} + \dots + a_n \text{ where } Y \text{ represents the predicted value (y coordinate value) and } t \text{ represents the time (x coordinate value).}$$

Of course, it is assumed here that the previous data represents the dynamics of the respective region the data is associated with.

[0037] Thus, the actual signal measured by a detecting device, i.e., sensor, may be compared with the predicted signal which is calculated from an approximation equation. The actual signal and the predicted signal are substantially equal as long as no transition occurs and the projection (extrapolation) distance is not too large. That is, the difference between the value of the actual signal and the value of the predicted signal (represented as $S_i - Y$ where S_i is the actual signal and Y is the predicted

signal) is close to 0 within the noise level. However, once the transition occurs the difference between the actual signal and the predicted value starts to be increasingly greater than 0, $\Delta Y > 0$, as represented by $\Delta 122$ of Figure 8A. Accordingly, a threshold value may now be used to detect where the actual signal and the predicted value deviate. As will be explained further, the conversion of the slope detection process to a threshold detection process enhances (amplifies) the transition related changes so that the transition can be more accurately and precisely identified.

[0038] Figure 8B is a graph of the original signal value and a corresponding graph of a deviation between the actual signal and a predicted signal in accordance with one embodiment of the invention. The upper graph of Figure 8B represents the actual signal of Figure 8A. For example, with respect to semiconductor process monitoring, line 120 may represent a trace associated with a signal from an infrared sensor, an eddy current sensor, a vibration sensor, a temperature sensor, a sensor configured to detect reflected spectra, etc. A transition occurring at time t_1 is detected through deviation trace 128, also referred to as a delta trace. Regions 124 and 126 represent regions where the predicted value deviates from the actual signal as positive and negative differences, respectively, from the actual signal.

[0039] Delta trace 128 of figure 8B represents the difference between the actual signal and the predicted signal over time. Region 114 represents a corridor of noise. It should be appreciated that delta trace 128 and the trace 120 of the actual signal are likely to have background noise associated with each trace. Accordingly, trace 120 is likely to be similar to the trace of Figure 3 and delta trace 128 is likely to be similar to the trace of Figure 6. That is, the traces are likely to have noise associated with each trace rather than be smooth lines. Therefore, the corridor of noise is configured to take into account the noise level so that the noise level does not impact the determination of the transition point. At the same time, the magnitude, also referred to as the offset of the corridor of noise is chosen so that the transition occurs above the noise level, i.e., the corridor of noise is not so large as to mask the transition point.

[0040] In one embodiment, the offset of the corridor of noise is set at 3 standard deviations (3σ) of delta trace 128. Thus, where the noise is a Gaussian distribution, then 3σ will cover 99.7% of all the points of the distribution. As described above, a probability of 3×10^{-3} exists for a point to fall outside of the corridor of noise and not be the start of a transition point, meaning that 3 out of each 1000 points could be actually outside of the defined 3σ interval. As will be explained further, with reference to Figure 9, a number of consecutive points outside of the corridor of noise may be required to indicate the start of a transition point to further reduce the probability of a false positive. In one embodiment, the offset may not be necessary if a reasonably high number of consecutive points outside the corridor of noise is used or larger than

3σ noise corridor is used. It should be appreciated that any number of consecutive points outside the corridor of noise may be defined as the trigger for a transition point. The higher the number of consecutive points required to indicate that a transition point has been reached, the more confidence that the actual transition point has been obtained. Thus, for precise operations where it a false positive would be costly and cause irrecoverable damage, three or more consecutive points outside the corridor of noise may be chosen to provide a high degree of confidence. Where the operation is not as demanding it may be desirable to choose less than three points.

[0041] Figure 8C is a graph illustrating the actual trace and the delta trace of Figures 8A and 8B superimposed with the predicted value trace, all of which are used for the conversion of a slope based task to a threshold based task in accordance with one embodiment of the invention. Trace 120 represents the actual sensor reading. Trace 136 represents the parabolically extrapolated predicted value. Trace 128 represents the delta trace which is the difference between the actual sensor reading and the corresponding predicted value. The parabolically extrapolated predicted value includes a parabolic approximation associated with a selected interval of data points and a parabolic forecast to a most recent data reading. Delta trace 128 is calculated by subtracting the parabolically extrapolated predicted value for the current point and a number of foregoing consecutive points. Thus, a threshold may be defined when the delta trace is stably above the noise level. For example, defining a number of consecutive points outside the noise level prior to acknowledging that a transition point has occurred will provide a high confidence level that the transition point determination is accurate. One skilled in the art will appreciate that a transition point includes an endpoint as used herein. While a parabolic equation is used as the approximation equation in this embodiment, it should be appreciated that any polynomial equation may be used as the approximation equation as the shape of the curve defined by the actual sensor reading will impact the type of approximation equation.

[0042] Referring to Figure 3 and Figure 6, it can be seen that threshold determination of the delta trace approach of Figure 6 is superior than the slope based approach of Figure 3. That is, the noise in the slope based determination hides small changes in slope while the noise in the threshold based determination is eliminated as a concern by defining an offset or by requiring a number of consecutive points outside the corridor of noise prior to initiating the recognition of a transition point. Once a transition point has been achieved, it should be appreciated that another defined operation may initiate or an endpoint for a current process may occur. With respect to semiconductor manufacturing, e.g., etch, deposition, CMP operations or any other surface modification process, a first layer may have been added, removed, planarized or modified, and then the semiconductor wafer may be transitioned to another module in the process-

ing tool or a different processing tool.

[0043] Figure 9 is a flowchart of the method operations for a method for converting a slope based detection task to a threshold based detection task in accordance with one embodiment of the invention. The method initiates with operation 140 where an approximation equation is defined for a set of points. The approximation equation for a set of points corresponds to values of a process being monitored. For example, a polynomial equation, such as a parabolic equation, as discussed above, may be the approximation equation. The process being monitored may be monitored through eddy current sensors, infrared sensors, temperature sensors, vibration sensors, etc. The method then advances to operation 142 where an expected value at a current point of the process being monitored is predicted. Here, the polynomial equation takes a data interval of a number of consecutive points and predicts an expected value for the current point. In essence, the polynomial equation allows for forecasting the current point from past data points as described with reference to Figure 8A.

[0044] The method of Figure 9, then proceeds to operation 144 where a difference between the measured (actual) value at the current point of the process and the corresponding expected value is calculated. Here, the difference between the measured value and the expected (predicted) value will be approximately 0 until a transition point. It should be appreciated that the difference can be measured in terms of subtraction between two values, but is not limited to this interpretation of difference. The difference may be captured as a delta trace as described above with reference to Figures 8A-C. Thus, the difference between the measured value at the current point of the process and the corresponding expected value is monitored to detect a deviation value in operation 146. The deviation value may be defined as a number of consecutive points outside a corridor of noise, where the number of consecutive points may be one or more. In other embodiments, the difference may also be calculated as a ratio, a square of differences, etc. That is, the term difference as used herein refers to a broad range of measures that indicate a generalized difference between two values. Alternatively, an offset may be used, where the offset is high enough to avoid background noise from indicating a transition point and low enough so that the deviation value indicating the transition point may be identified, i.e., is not masked by the offset. The method then advances to operation 148 where a transition point for the process being monitored is identified based on the detection of the deviation value. Of course, the transition point may end the current process operation and trigger another process operation or simply end the current process.

[0045] Figure 10 is a high-level schematic diagram of a processing module in communication with a detector configured to convert a slope detection transition point to a threshold detection transition point in accordance with one embodiment of the invention. Processing mod-

ule 160 may be any processing module, e.g., any associated semiconductor processing module such as a CMP module, etch module, etc. Detector 162 is in communication with processing module 160. For example, sensors located within processing module 160 may be used to transmit signals to detector 162. Detector 162 is configured to convert a process in which slope determines a transition point to a threshold detection process where a threshold value is used to detect a transition point. That is, the embodiments described with reference to Figures 8A, 8B, 8C and 9 convert the slope detection process into a threshold detection process are performed by detector 162. Furthermore, the changes occurring in the transition point are enhanced so that the threshold value can be readily detected. In one embodiment, the threshold value is defined as a difference between an actual signal and a predicted signal as described herein. It should be appreciated that detector 162 may be a general purpose computer controlling the processing operation being performed in processing module 160. Detector 162 may receive signals from sensors configured to monitor a composition change or a state change as described below. Of course, the communication between processing module 160 and detector 162 may be through a closed loop.

[0046] Figure 11 is a simplified schematic diagram of a CMP system having an infrared sensor to determine a transition point of a semiconductor substrate being processed in accordance with one embodiment of the invention. Controller 164 includes detector 162. Controller 164 is in communication with infrared sensor 166. Infrared sensor is contained within carrier plate 168. Semiconductor substrate 172 is supported against carrier film 170 within carrier plate 168. Infrared sensor 166 has a line of view through window 178 to semiconductor substrate 172. Polishing pad 174 planarizes a surface of semiconductor substrate 172. Polishing pad 174 is disposed over stainless steel belt 176. Detector 162 converts the slope based signal process associated with the infrared sensor to a threshold based signal. In one embodiment, the slope based signal is converted to a threshold based operation by defining a delta trace between an actual signal and a predicted signal as described with reference to Figures 8A-C and 9.

[0047] Figure 12 is a simplified schematic diagram of a processing system having eddy current sensors configured to determine a transition point of a semiconductor substrate being processed in accordance with one embodiment of the invention. Controller 164 includes detector 162. Controller 164 is in communication with eddy current sensors 180a and 180b. Eddy current sensors 180a and 180b may be configured to monitor a process parameter such as thickness of a film disposed over semiconductor substrate 162. Where the processing system is a CMP processing system, polishing pad 174 planarizes a surface of semiconductor substrate 172. Polishing pad 174 is disposed over backing 176. Detector 162 converts the slope based detection output of eddy current

sensors 180a and 180b to a threshold detection process. Here again, detector 162 tracks a difference between measured values and predicted values in order to detect a threshold deviation value that indicates a transition point.

[0048] Figures 11 and 12 depict specific embodiments of sensors used for semiconductor fabrication. It should be appreciated that the embodiments described herein may be associated with any type of sensor that is capable of monitoring a composition change or a state change. Exemplary composition changes include surface composition changes where a first layer is removed and a second layer is exposed or a surface of an object, such as a semiconductor wafer, is modified. Exemplary state changes include the change from a liquid to a gas, liquid to a solid, etc. In fact, a transition point may be defined as a point at which a composition or a state change occurs. At the transition point, a property, which is monitored through the sensors described herein, changes due to the processing conditions. Targeted properties include properties such as thickness, resistance, planarity, transparency, vibration, chemical composition, etc. This change is monitored and the transition point is determined by a threshold detection scheme as described herein. One skilled in the art will appreciate that the embodiments described herein are not limited to the specific types of sensors described above. More particularly, any sensor configured to detect a signal indicating a composition or a state change may be used with the embodiments described above, whether or not the sensors are associated with a semiconductor fabrication process. It should be further appreciated that the sensors can detect the change through the object being processed, e.g., semiconductor wafer, or a component of the processing module, e.g., polishing pad. Thus, the transition point may be detected directly or indirectly. Some exemplary sensors include sensors configured to detect resistance, capacitance, reflected light, vibration, etc.

[0049] In summary, the above described invention describes a method and a system for converting a slope based detection task to a threshold based detection task. An approximation equation, such as a polynomial equation, is used to predict an expected value at the current data point. A difference between the expected value and the corresponding actual value supplied from a sensor is monitored to detect a transition point. The monitored difference may be captured as a delta trace as described herein. The tracking of the difference allows a threshold value to be defined. In one embodiment, the transition point occurs when a pre-defined number of consecutive points of the monitored difference are detected outside of a corridor of noise. An offset may also be provided to define a level where a detected point, i.e., value of a difference between an actual value and a predicted value, outside of the offset boundary indicates a transition point. By converting the slope detection task to a threshold detection task, a stable and reliable transition detection system is provided that avoids the need to analyze

derivatives as required by the slope detection tasks. Additionally, the delta trace described above enhances the changes occurring at the transition point in order to more readily identify the transition point.

[0050] With the above embodiments in mind, it should be understood that the invention may employ various computer-implemented operations involving data stored in computer systems. These operations include operations requiring physical manipulation of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. Further, the manipulations performed are often referred to in terms, such as producing, identifying, determining, or comparing.

[0051] The above described invention may be practiced with other computer system configurations including hand-held devices, microprocessor systems, microprocessor-based or programmable consumer electronics, minicomputers, mainframe computers and the like. The invention may also be practiced in distributing computing environments where tasks are performed by remote processing devices that are linked through a communications network.

[0052] The invention can also be embodied as computer readable code on a computer readable medium. The computer readable medium is any data storage device that can store data which can be thereafter read by a computer system. Examples of the computer readable medium include hard drives, network attached storage (NAS), read-only memory, random-access memory, CD-ROMs, CD-Rs, CD-RWs, magnetic tapes, and other optical and non-optical data storage devices. The computer readable medium can also be distributed over a network coupled computer system so that the computer readable code is stored and executed in a distributed fashion.

[0053] Although the foregoing invention has been described in some detail for purposes of clarity of understanding, it will be apparent that certain changes and modifications may be practiced within the scope of the appended claims. Accordingly, the present embodiments are to be considered as illustrative and not restrictive, and the invention is not to be limited to the details given herein, but may be modified within the scope and equivalents of the appended claims. In the claims, elements and/or steps do not imply any particular order of operation, unless explicitly stated in the claims.

Claims

1. A computer implemented method for detecting a transition point (t_T) of a semiconductor process, comprising:

- defining an approximation equation for a set of points corresponding to values of said semiconductor process being monitored, wherein the ap-

- proximation equation is determined in order to fit to the curve represented by measured values, wherein the approximation equation is a polynomial equation, wherein the approximation equation takes the form of a parabolic equation or any other higher power equation (140);
- predicting an expected value (Y) at a current point of the process being monitored, whereby the expected value is calculated from the approximation equation (142);
 - calculating a difference (Δ 122) between a measured value at the current point of the process being monitored and the corresponding expected value (144);
 - monitoring the difference to detect a deviation value between the measured value and the expected value (146); and
 - identifying said transition point for the semiconductor process being monitored based on the detection of the deviation value (148).
2. The method of claim 1, wherein the semiconductor process being monitored is a semiconductor process selected from the group consisting of a chemical mechanical planarization process and an etch, deposition or surface modification process.
 3. The method of claim 1, wherein the measured value is generated by a sensor configured to detect a property associated with the process being monitored.
 4. The method of claim 1 further comprising: tracing the difference between the measured value and the corresponding expected value; and defining a corridor of noise (114), so that the corridor of noise (114) is providing a boundary, so that said transition is identified when the deviation value falls outside of the boundary.
 5. The method of claim 1, wherein the method operation of identifying a transition point for the process being monitored based on the detection of the deviation value includes, identifying more than one consecutive points in which the deviation value associated with each of the at least two consecutive points is outside a corridor of noise.
 6. The method of claim 1, wherein the approximation equation derives the expected value from an interval of past data generated by a sensor associated with the process being monitored.
 7. The method of claim 1, further comprising: in response to identifying the transition point, triggering an end of the processing being monitored.
 8. A semiconductor processing system capable of detecting a transition point for slope change transitions

through a threshold determination in real time, comprising:

- a processing module configured to process a semiconductor wafer until a defined parameter associated with the semiconductor wafer being processed is obtained, the processing module including;
 - a sensor configured to monitor a process parameter associated with a process operation; **characterised in that** said semiconductor processing system further comprises
 - a detector in communication with the sensor, o the detector configured to compare measured values to predicted values, the measured values indicating said transition point through a slope change, the predicted values being derived from previously measured values, whereby the predicted value is calculated from an approximation equation, wherein the approximation equation is determined in order to fit to the curve represented by measured values, wherein the approximation equation is a polynomial equation, wherein the approximation equation takes the form of a parabolic equation or any other higher power equation;
 - o the detector further configured to track a difference between the measured values and the corresponding predicted values, configured to define a threshold value indicating the transition point associated with the process operation, and to identify said transition point when said difference exceeds the threshold value.
9. The system of claim 8, wherein the detector is configured to identify said transition associated with the processing system when a difference between the measured values and the predicted values for at least two consecutive time points exceeds said threshold value.
 10. The system of claim 8, wherein the processing module is selected from the group consisting of a chemical mechanical planarization module and an etch module.
 11. The system of claim 8, wherein the sensor is sensitive to variation of the process parameter, the process parameter varying as one of a composition and a state changes, the composition and the state changes associated with one of the semiconductor wafer and a component of the processing module.
 12. The system of claim 8, wherein the sensor is selected from the group consisting of an eddy current sensor, an infrared sensor, a vibration sensor and a sensor configured to detect reflected spectra.

13. The system of claim 8, wherein the detector is configured to associate an offset configured to substantially eliminate background noise from interfering with the threshold determination.
14. A computer readable medium comprising program instructions for detecting a transition point of a semiconductor process, wherein said program instructions are adapted to perform all the steps of any one of the claims 1 to 7, when they are executed on a computer.
15. The computer readable media of claim 14, further comprising: program instructions for tracing the difference between the measured value and the corresponding expected value; and program instructions for defining a corridor of noise, so that the corridor of noise is providing a boundary, so that said transition is identified when the deviation value falls outside of the boundary.

Patentansprüche

1. Computer-implementiertes Verfahren zur Feststellung eines Übergangspunktes (t_T) eines Halbleiterprozesses, Folgendes umfassend:
- Definieren einer Näherungsgleichung für eine Gruppe von Punkten in Entsprechung zu Werten des überwachten Halbleiterprozesses, wobei die Näherungsgleichung so bestimmt wird, dass sie zu der von den Messwerten repräsentierten Kurve passt, wobei die Näherungsgleichung eine Polynomgleichung ist und die Näherungsgleichung die Form einer Parabolgleichung oder einer anderen Gleichung (140) höherer Potenz annimmt;
 - Voraussagen eines erwarteten Werts (Y) an einem aktuellen Punkt des überwachten Prozesses, wobei der erwartete Wert aus der Näherungsgleichung (142) berechnet wird;
 - Berechnen einer Differenz (Δ 122) zwischen einem Messwert am aktuellen Punkt des überwachten Prozesses und dem entsprechenden erwarteten Wert (144);
 - Überwachen der Differenz zum Feststellen eines Abweichungswerts zwischen dem Messwert und dem erwarteten Wert (146); und
 - Identifizieren des Übergangspunkts für den überwachten Halbleiterprozess auf Basis der Feststellung des Abweichungswerts (148).
2. Verfahren gemäß Anspruch 1, wobei der überwachte Halbleiterprozess ein Halbleiterprozess ist, der aus der Gruppe bestehend aus einem chemisch-mechanischen Planarisierungsprozess und einem Ätz-, Abscheidungs- oder Oberflächenbearbeitungspro-

zess ausgewählt ist.

3. Verfahren gemäß Anspruch 1, wobei der Messwert durch einen Sensor generiert wird, der dazu konfiguriert ist, eine Eigenschaft in Verbindung mit dem überwachten Prozess festzustellen.
4. Verfahren gemäß Anspruch 1, ferner umfassend: Feststellen der Differenz zwischen dem Messwert und dem entsprechenden erwarteten Wert, und Definieren eines Rauschbereichs (114), so dass der Rauschbereich (114) eine Grenze bereitstellt, anhand derer der Übergang identifiziert wird, wenn der Abweichungswert außerhalb der Grenze fällt.
5. Verfahren gemäß Anspruch 1, wobei der Verfahrensvorgang der Identifizierung eines Übergangspunktes für den überwachten Prozess auf Basis der Detektion des Abweichungswerts die Identifizierung von mehr als einem Folgepunkt umfasst, in dem der Abweichungswert in Verbindung mit jedem der wenigstens zwei Folgepunkte außerhalb des Rauschbereichs liegt.
6. Verfahren gemäß Anspruch 1, wobei die Näherungsgleichung den erwarteten Wert von einem Intervall früherer Daten ableitet, das von einem Sensor in Verbindung mit dem überwachten Prozess generiert wird.
7. Verfahren gemäß Anspruch 1, ferner umfassend: in Reaktion auf die Identifizierung des Übergangspunkts das Auslösen eines Endes der überwachten Bearbeitung
8. Halbleiterbearbeitungssystem, das geeignet ist, einen Übergangspunkt für Übergänge, die durch Änderung der Steigung **gekennzeichnet sind, durch** eine Schwellwertbestimmung in Echtzeit festzustellen, folgendes umfassend:
- ein Bearbeitungsmodul, das so konfiguriert ist, dass es einen Halbleiter-Wafer bearbeitet, bis ein definierter Parameter in Verbindung mit dem bearbeiteten Halbleiter-Wafer erreicht ist, wobei das Bearbeitungsmodul umfasst;
 - einen Sensor, der dazu konfiguriert ist, einen Prozessparameter in Verbindung mit einem Prozessvorgang zu überwachen;
- dadurch gekennzeichnet, dass** das Halbleiterbearbeitungssystem ferner umfasst:
- einen Detektor in Kommunikation mit dem Sensor,
 - wobei der Detektor dazu konfiguriert ist, Messwerte mit vorhergesagten Werten zu vergleichen, wobei die Messwerte den Übergangspunkt **durch** eine Änderung der Steigung anzeigen, wobei die vorhergesagten Werte von zuvor

- gemessenen Werten abgeleitet sind, wobei der vorhergesagte Wert aus einer Näherungsgleichung berechnet wird, wobei die Näherungsgleichung so bestimmt ist, dass sie zu der von den Messwerten repräsentierten Kurve passt, wobei die Näherungsgleichung eine Polynomgleichung ist, wobei die Näherungsgleichung die Form einer Parabolgleichung oder einer anderen höheren Gleichung annimmt;
- wobei der Detektor ferner dazu konfiguriert ist, eine Differenz zwischen den Messwerten und den entsprechenden vorhergesagten Werten festzustellen, und dazu konfiguriert ist, einen Schwellwert zu definieren, der den Übergangspunkt in Verbindung mit dem Prozessvorgang anzeigt, und den Übergangspunkt zu identifizieren, wenn die Differenz den Schwellwert überschreitet.
9. System gemäß Anspruch 8, wobei der Detektor dazu konfiguriert ist, den Übergang in Verbindung mit dem Bearbeitungssystem zu identifizieren, wenn eine Differenz zwischen den Messwerten und den vorhergesagten Werten für wenigstens zwei aufeinanderfolgende Zeitpunkte den Schwellwert überschreitet.
10. System gemäß Anspruch 8, wobei das Bearbeitungsmodul aus der Gruppe bestehend aus einem chemisch-mechanischen Planarisierungsmodul und einem Ätzmodul ausgewählt ist.
11. System gemäß Anspruch 8, wobei der Sensor empfindlich auf die Variation des Prozessparameters ist, wobei der Prozessparameter variiert, wenn sich eine Zusammensetzung oder ein Zustand ändern, wobei die Zusammensetzungs- und Zustandsänderungen mit dem Halbleiter-Wafer oder einer Komponente des Bearbeitungsmoduls assoziiert sind.
12. System gemäß Anspruch 8, wobei der Sensor ausgewählt ist aus der Gruppe bestehend aus einem Wirbelstromsensor, einem Infrarotsensor, einem Vibrationssensor und einem Sensor, der dazu konfiguriert ist, reflektierte Spektren festzustellen.
13. System gemäß Anspruch 8, wobei der Detektor konfiguriert ist, um einen Versatz zu assoziieren, der konfiguriert ist, um Hintergrundrauschen, das die Schwellwertbestimmung stört, im wesentlichen zu eliminieren.
14. Computer-lesbares Medium, das Programmbefehle zur Feststellung eines Übergangspunktes eines Halbleiterprozesses umfasst, wobei die Programmbefehle dazu geeignet sind, alle Schritte aus einem der Ansprüche 1 bis 7 auszuführen, wenn diese auf einem Computer ausgeführt werden.
15. Computer-lesbares Medium gemäß Anspruch 14, ferner umfassend:
- Programmbefehle zur Feststellung der Differenz zwischen dem Messwert und dem entsprechenden erwarteten Wert; und Programmbefehle zum Definieren eines Rauschbereichs, so dass der Rauschbereich eine Grenze bereitstellt, so dass der Übergang identifiziert wird, wenn der Abweichungswert außerhalb der Grenze fällt.
- ### Revendications
1. Une méthode mise en place par ordinateur pour détecter un point de transition (I_T) d'un processus semi-conducteur, comprenant :
- la définition d'une équation d'approximation pour un ensemble de points correspondant à des valeurs dudit processus semi-conducteur étant contrôlé, où l'équation d'approximation est déterminée afin de s'adapter à la courbe représentée par des valeurs mesurées, où l'équation d'approximation est une équation polynomiale, où l'équation d'approximation prend la forme d'une équation parabolique ou toute autre équation de puissance supérieure (140) ;
 - la prédiction d'une valeur probable (Y) à un point actuel du processus étant contrôlé, par lequel la valeur probable est calculée à partir de l'équation d'approximation (142) ;
 - le calcul d'une différence (Δ 122) entre une valeur mesurée au point actuel du processus étant contrôlé et la valeur probable correspondante (144) ;
 - le contrôle de la différence pour détecter une valeur d'écart entre la valeur mesurée et la valeur probable (146) ; et
 - l'identification dudit point de transition pour le processus semi-conducteur étant contrôlé, basée sur la détection de la valeur d'écart (148).
2. La méthode de la revendication 1, où le processus semi-conducteur étant contrôlé est un processus semi-conducteur sélectionné à partir du groupe se composant d'un processus de planarisation mécanique et chimique et d'un processus d'attaque chimique, de modification de surface ou de dépôt.
3. La méthode de la revendication 1, où la valeur mesurée est générée par un capteur configuré pour détecter une propriété associée au processus étant contrôlé.
4. La méthode de la revendication 1 comprenant de plus : le suivi de la différence entre la valeur mesurée

et la valeur probable correspondante ; et la définition d'un corridor de bruit (114), de sorte que ce corridor de bruit (114) fournisse une limite, pour que ladite transition soit identifiée lorsque la valeur d'écart tombe en dehors de la limite.

5. La méthode de la revendication 1, où le fonctionnement de la méthode d'identification d'un point de transition pour le processus étant contrôlé basée sur la détection de la valeur d'écart inclut l'identification de plus d'un point consécutif dans lequel la valeur d'écart associée à au moins chacun des deux points consécutifs est en dehors d'un corridor de bruit.

6. La méthode de la revendication 1, où l'équation d'approximation fait dériver la valeur probable d'un intervalle de données passées générées par un capteur associé au processus étant contrôlé.

7. La méthode de la revendication 1, comprenant de plus : en réponse à l'identification du point de transition, le déclenchement de la fin du traitement étant contrôlé.

8. Un système de traitement semi-conducteur capable de détecter un point de transition pour des transitions de changement de pente au travers d'une détermination de seuil en temps réel, comprenant :

- un module de traitement configuré pour traiter une tranche de semi-conducteur jusqu'à ce qu'un certain paramètre associé à la tranche de semi-conducteur étant traitée soit obtenu, le module de traitement incluant ;

- un capteur configuré pour contrôler un paramètre de processus associé à un fonctionnement de processus ;

caractérisé en ce que ledit système de traitement de semi-conducteur comprenne également

- un détecteur en communication avec le capteur,

où le détecteur est configuré pour comparer des valeurs mesurées aux valeurs probables, les valeurs mesurées indiquant ledit point de transition au travers d'un changement de pente, les valeurs probables étant dérivées des valeurs mesurées précédemment, par lequel la valeur probable est calculée à partir d'une équation d'approximation, où l'équation d'approximation est déterminée afin de s'adapter à la courbe représentée par des valeurs mesurées, où l'équation d'approximation est une équation polynomiale, où l'équation d'approximation prend la forme d'une équation parabolique ou toute autre équation de puissance supérieure ;

où le détecteur est de plus configuré pour suivre

une différence entre les valeurs mesurées et les valeurs probables correspondantes, configuré pour définir une valeur seuil indiquant le point de transition associé au fonctionnement du processus, et pour identifier ledit point de transition lorsque ladite différence dépasse la valeur seuil.

9. Le système de la revendication 8, où le détecteur est configuré pour identifier ladite transition associée au système de traitement lorsqu'une différence entre les valeurs mesurées et les valeurs probables pour aux moins deux points de temps consécutifs dépasse ladite valeur seuil.

10. Le système de la revendication 8, où le module de traitement est sélectionné à partir du groupe se composant d'un module de planarisation mécanique et chimique et d'un module d'attaque chimique.

11. Le système de la revendication 8, où le capteur est sensible à la variation du paramètre de processus, le paramètre de processus variant comme l'un des changements de composition et d'état, les changements de composition et d'état associés à l'une des tranches de semi-conducteur et un composant du module de traitement.

12. Le système de la revendication 8, où le capteur est sélectionné à partir du groupe se composant d'un capteur de courant de Foucault, un capteur infrarouge, un capteur de vibration et un capteur configuré pour détecter des spectres réfléchés.

13. Le système de la revendication 8, où le détecteur est configuré pour associer un décalage configuré pour éliminer substantiellement le bruit de fond et l'empêcher d'interférer avec la détermination du seuil.

14. Un moyen lisible par ordinateur comprenant des instructions de programme pour détecter un point de transition d'un processus de semi-conducteur, où lesdites instructions de programme sont adaptées pour réaliser toutes les étapes de n'importe quelle revendication 1 à 7, lorsqu'elles sont exécutées sur un ordinateur.

15. Les moyens lisibles par ordinateur de la revendication 14, comprenant de plus : des instructions de programme pour suivre la différence entre la valeur mesurée et la valeur probable correspondante ; et des instructions de programme pour définir un corridor de bruit, de sorte que le corridor de bruit fournisse une limite, pour que ladite transition soit identifiée lorsque la valeur de déviation tombe en dehors de la limite.

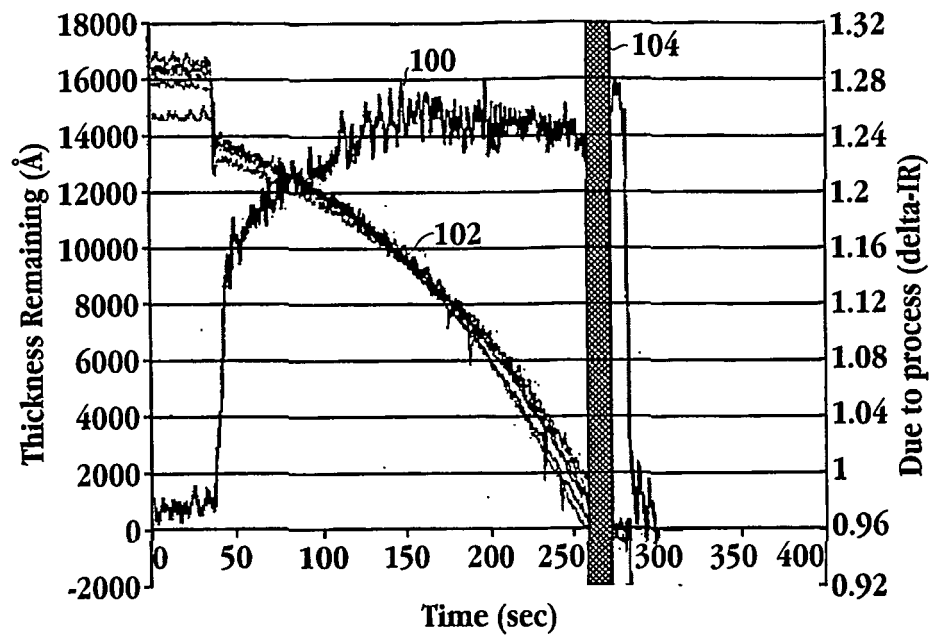


Fig. 1

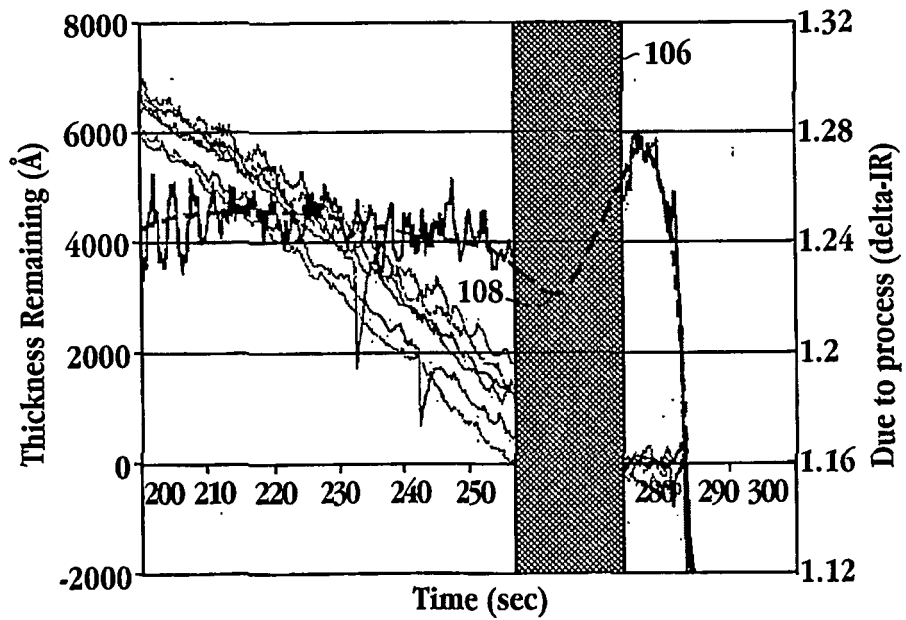


Fig. 2

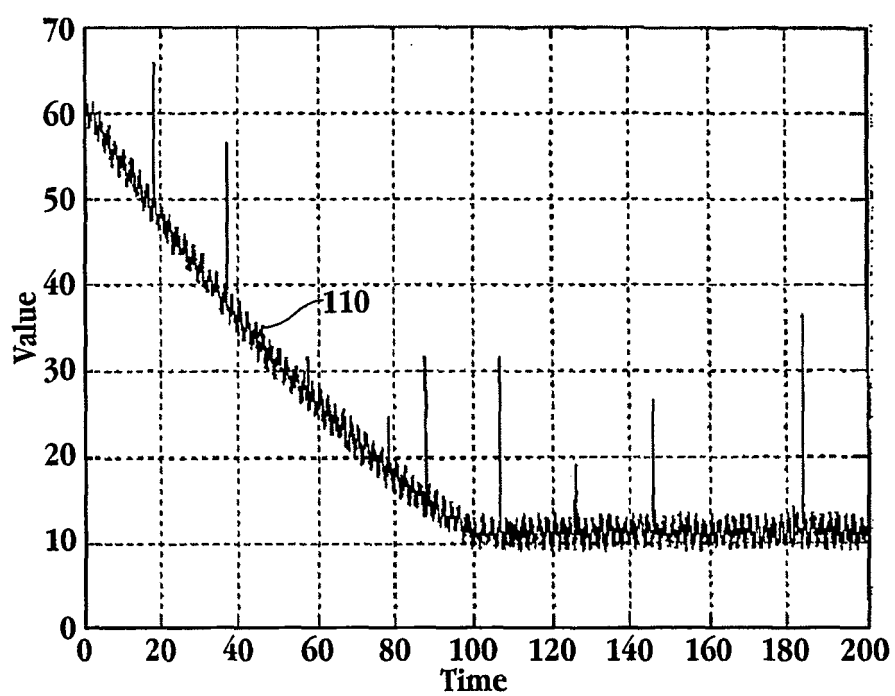


Fig. 3

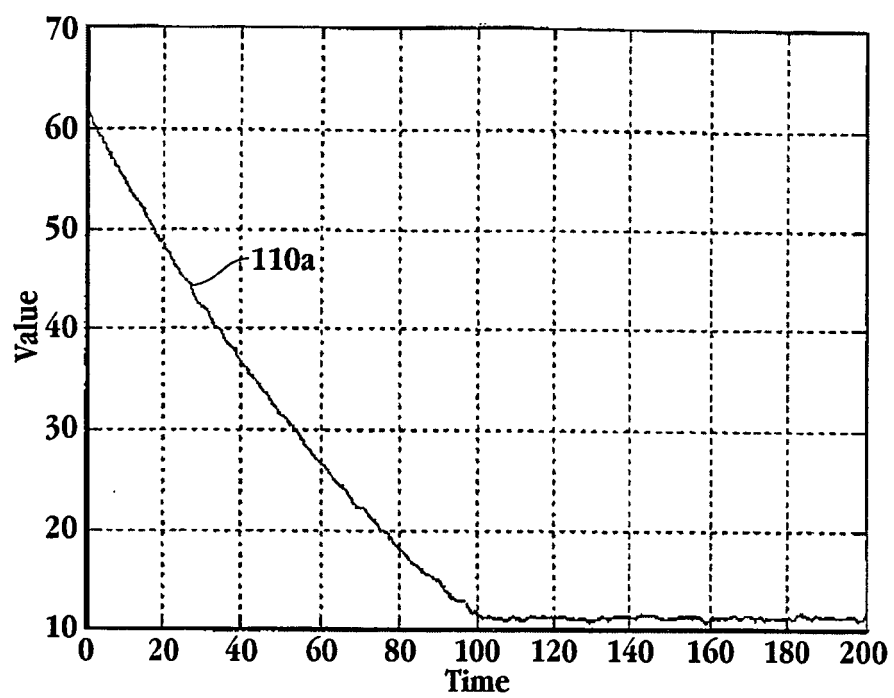


Fig. 4

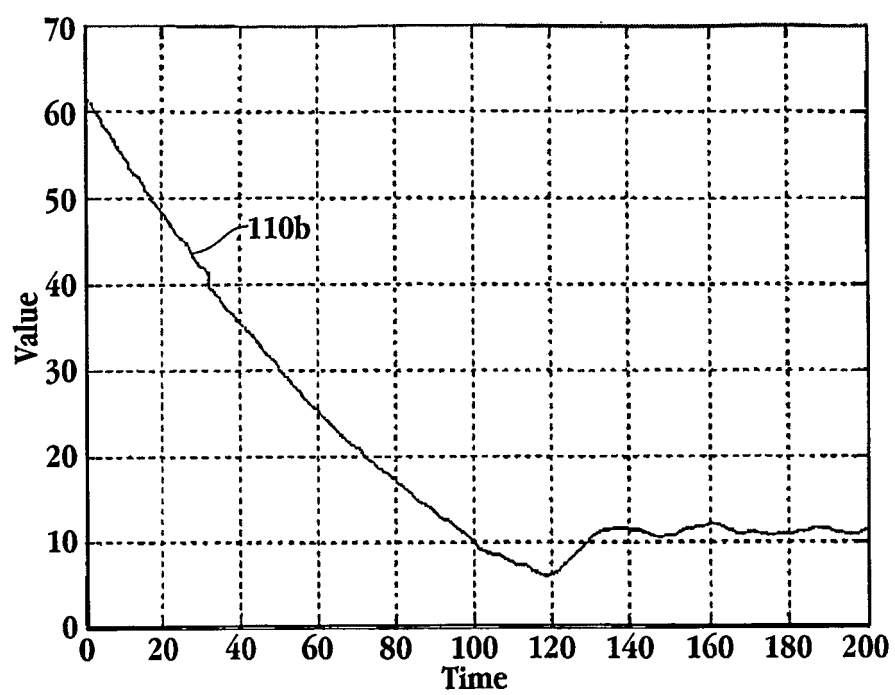


Fig. 5

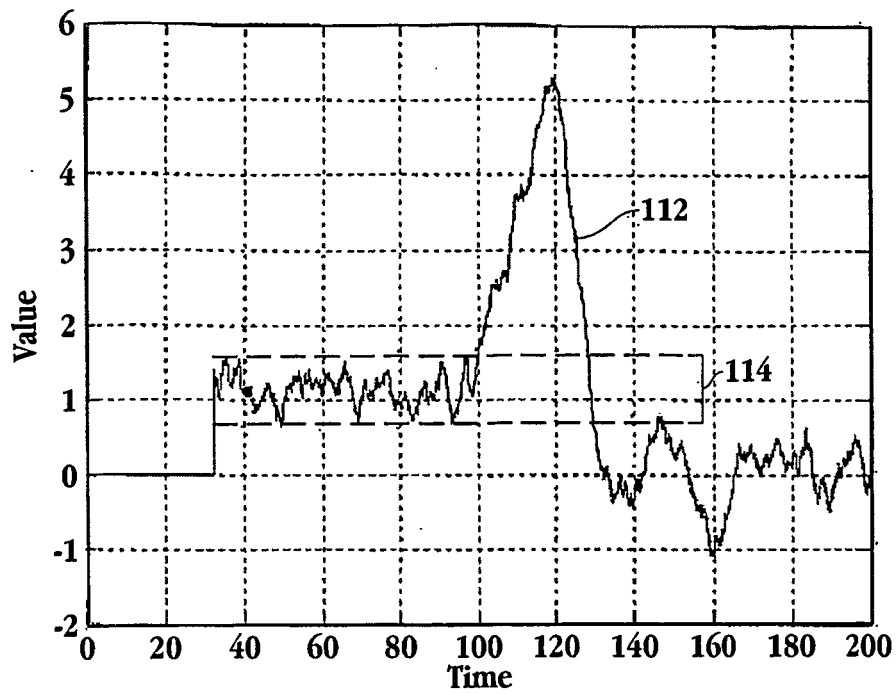


Fig. 6

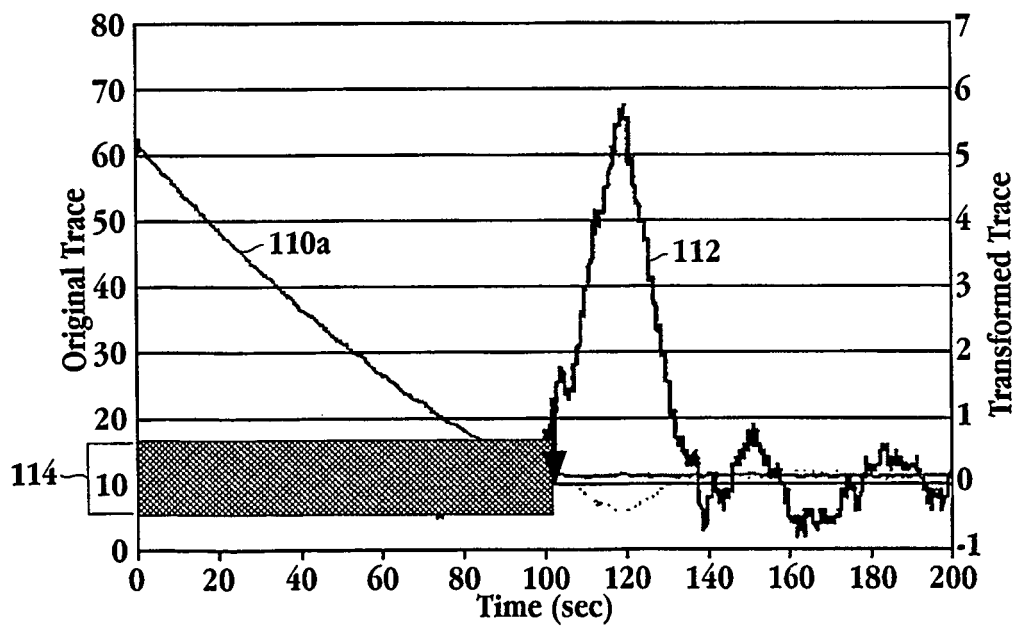


Fig. 7

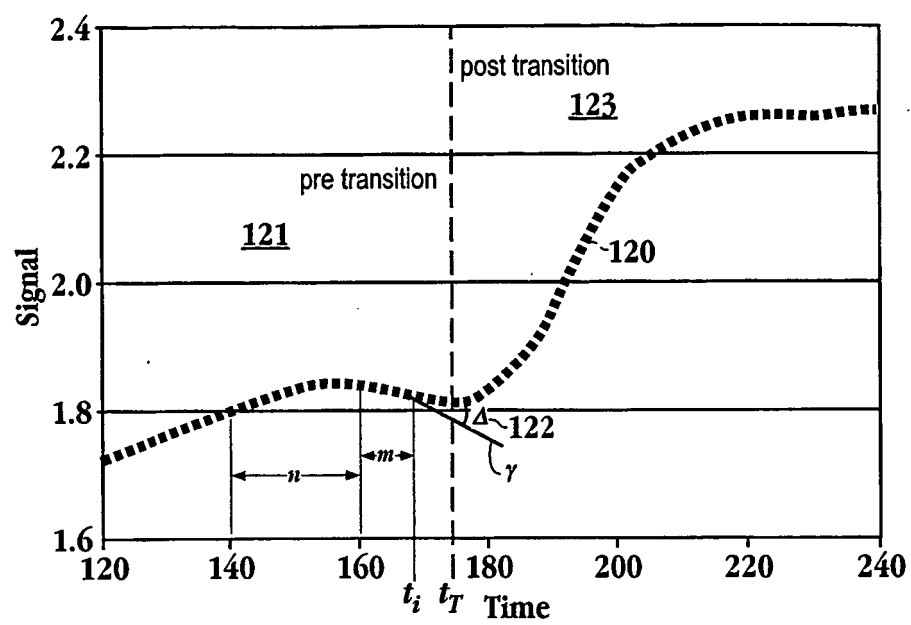


Fig. 8A

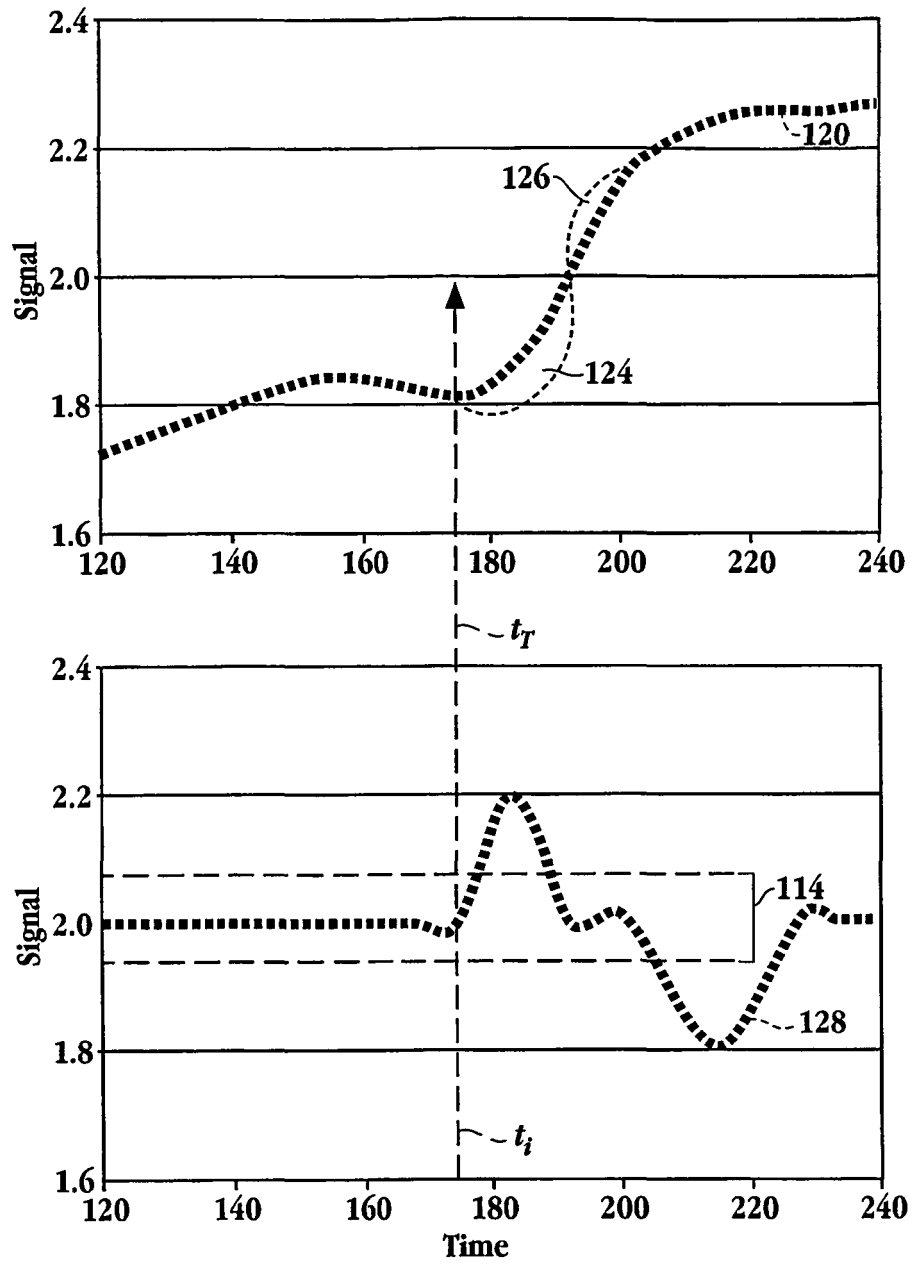


Fig. 8B

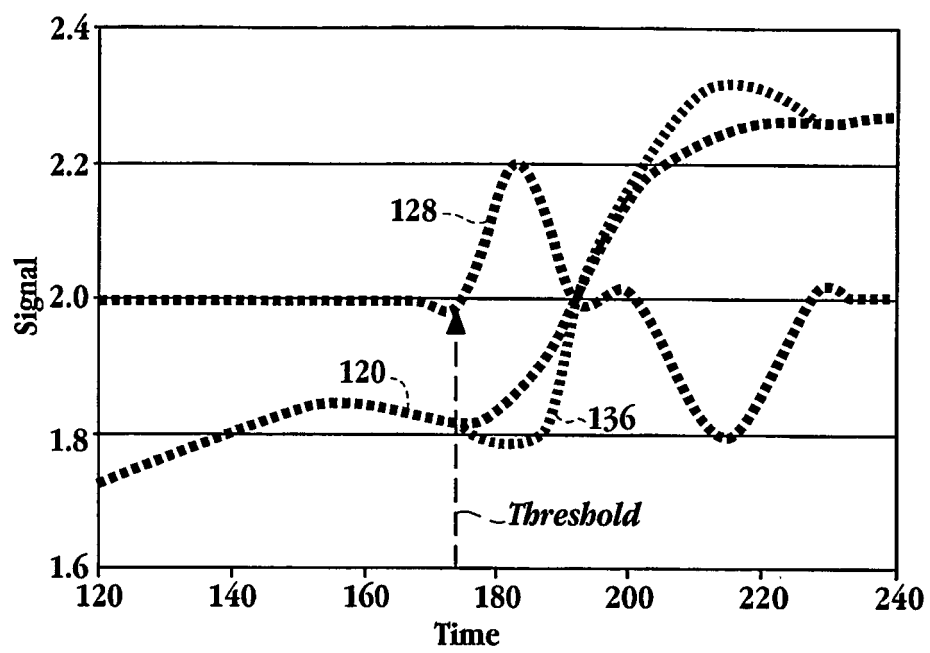
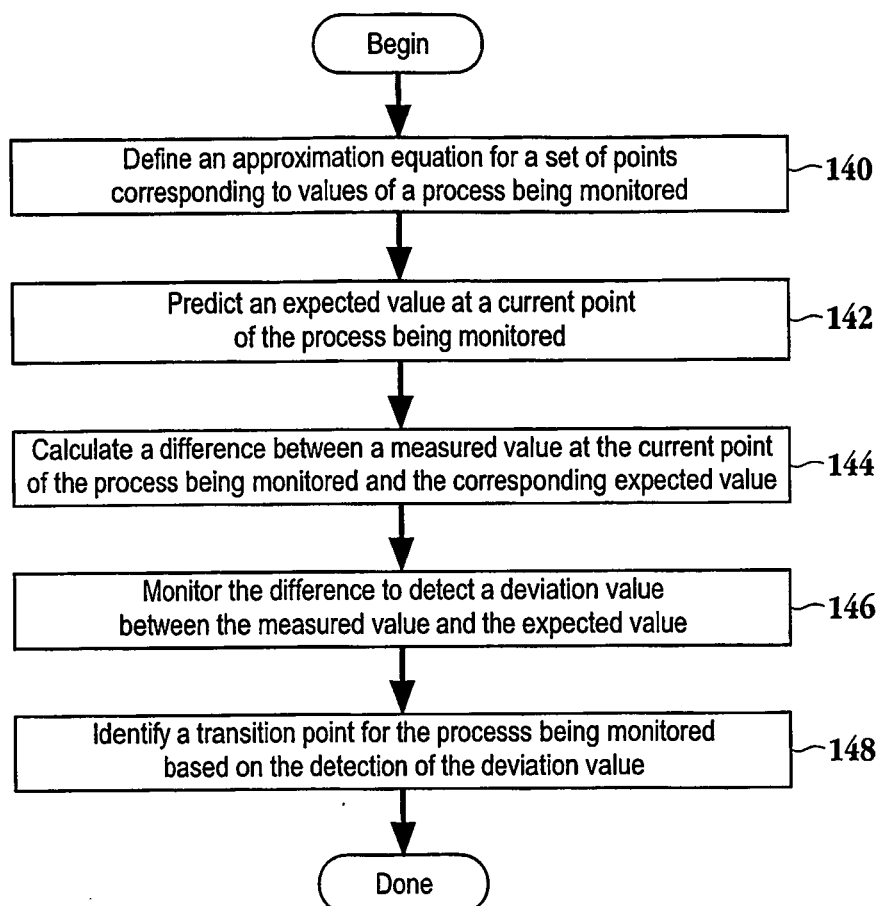


Fig. 8C

**Fig. 9**

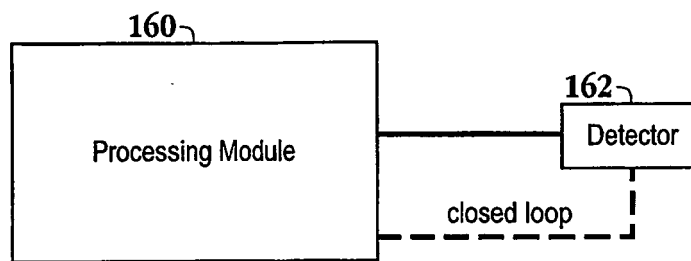


Fig. 10

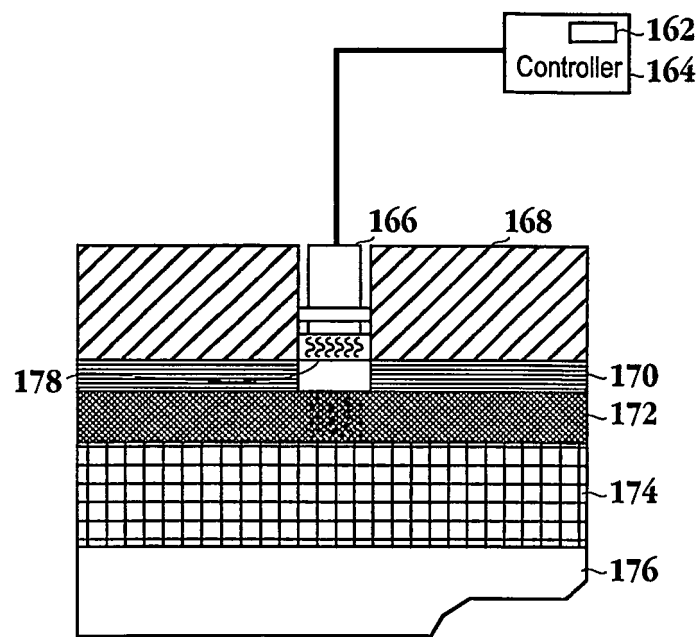


Fig. 11

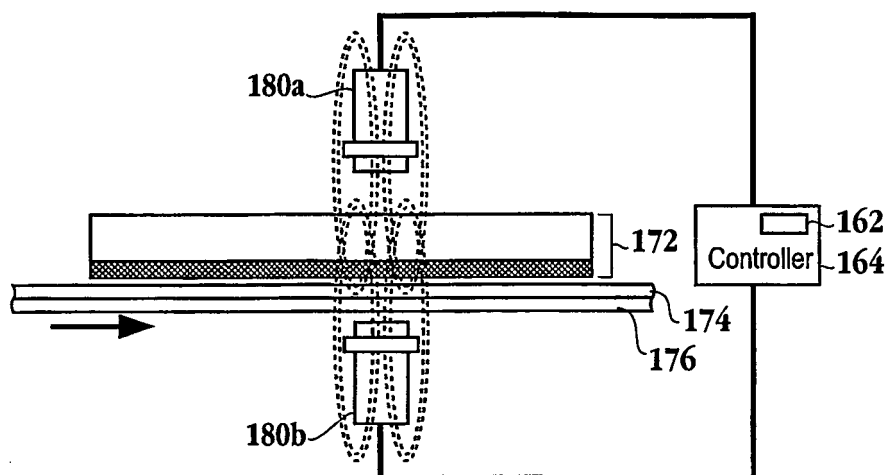


Fig. 12

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5621668 A [0002]