



(11) **EP 1 598 972 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
15.08.2012 Bulletin 2012/33

(51) Int Cl.:
H04J 14/02 ^(2006.01) **H04B 10/20** ^(2006.01)
H04Q 11/00 ^(2006.01)

(21) Application number: **04712712.1**

(86) International application number:
PCT/JP2004/001891

(22) Date of filing: **19.02.2004**

(87) International publication number:
WO 2004/077716 (10.09.2004 Gazette 2004/37)

(54) **OPTICAL COMMUNICATION NETWORK SYSTEM, WAVELENGTH ROUTING APPARATUS, COMMUNICATION NODE, OPTICAL PATH MANAGING METHOD FOR USE IN OPTICAL CROSS CONNECT APPARATUS, AND APPARATUS FOR THAT METHOD**

OPTISCHES KOMMUNIKATIONSNETZWERKSYSTEM, WELLENLÄNGEN-ROUTING-VORRICHTUNG, KOMMUNIKATIONSKNOTEN, VERWALTUNGSVERFAHREN FÜR OPTISCHE WEGE ZUR VERWENDUNG IN EINER OPTISCHEN CROSSCONNECT-VORRICHTUNG UND VORRICHTUNG FÜR DIESES VERFAHREN

SYSTEME DE RESEAUX DE COMMUNICATION OPTIQUE, APPAREIL DE ROUTAGE A LONGUEUR D'ONDE, NOEUDS DE COMMUNICATION, PROCEDE DE GESTION DE PARCOURS OPTIQUE POUR L'UTILISATION DANS UN APPAREIL A CONNEXION TRANSVERSALE, ET APPAREIL POUR LEDIT PROCEDE

(84) Designated Contracting States:
DE FR GB

(30) Priority: **27.02.2003 JP 2003051425**
12.08.2003 JP 2003292454

(43) Date of publication of application:
23.11.2005 Bulletin 2005/47

(73) Proprietor: **NIPPON TELEGRAPH AND TELEPHONE CORPORATION**
Tokyo 100-8116 (JP)

(72) Inventors:
• **MORIWAKI, Osamu,**
c/o NTT Intellectual Pty Center
Musashino-shi,
Tokyo 180-8585 (JP)
• **OKADA, Akira,**
c/o NTT Intellectual Pty Center
Musashino-shi,
Tokyo 180-8585 (JP)
• **NOGUCHI, Kazuto,**
c/o NTT Intellectual Pty Center
Musashino-shi,
Tokyo 180-8585 (JP)

- **TANOBE, Hiromasa,**
c/o NTT Intellectual Pty Center
Musashino-shi,
Tokyo 180-8585 (JP)
- **MATSUOKA, Morito,**
c/o NTT Intellectual Pty Center
Musashino-shi,
Tokyo 180-8585 (JP)
- **SAKAMOTO, Takashi,**
c/o NTT Intellectual Pty Center
Musashino-shi,
Tokyo 180-8585 (JP)

(74) Representative: **Poulin, Gérard et al**
BREVALEX
95, rue d'Amsterdam
75378 Paris Cedex 8 (FR)

(56) References cited:
JP-A- 2001 008 244 JP-A- 2002 262 319

- **OKAYAMA H. ET AL: 'Multiwavelength highway photonic switches using wavelength-sorting elements-design' J. OF LIGHTWAVE TECHNOLOGY vol. 15, no. 4, April 1997, pages 607 - 615, XP000691026**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to an optical communication network system which takes advantage of wavelength-routing and which establishes communication between a plurality of communication nodes by route control according to the wavelength of an optical signal, to a wavelength-routing device thereof, and to a communication node.

[0002] Furthermore, the present invention relates to an optical path management method and a device therefor which are useful when applied to such an optical communication network system, and to a technique for managing the optical path in an optical cross connect device which forms an optical network using an optical wavelength division multiplexing technique, and in particular an optical cross connect device which consists of a combination of a plurality of small scale optical matrix switches, and which establishes an optical path between any desired communication nodes among a maximum of N (where N is an integer greater than or equal to 2) communication nodes which transmit and receive wavelength division multiplexed signals which are obtained by wavelength division multiplexing optical signals of a maximum of m wavelengths (where m is an integer greater than or equal to 2).

Background Art

[0003] In recent years, communication traffic is constantly increasing along with the spread of broadband service and the increase in the utilization of information interchange by companies which take advantage of the internet, and demand for increase of the capacity and the rate of communication networks is unrelenting.

[0004] The wavelength division multiplexing (WDM) communication technique greatly increases the transmission capacity per one optical fiber, and has realized great capacity increase between two locations. However, when relaying the optical signal at a communication node, it is necessary to demultiplex the wavelength division multiplexed signals for each wavelength, and to route the data packets in each optical signal individually for each packet.

[0005] Nowadays, routing of data packets is performed electrically by converting the optical signal to an electrical signal, but, along with increases in the transmission rate and increases in capacity, the routing by electrical processing of a high volume signal will reach a limit in the near future.

[0006] As a means for solving this problem, wavelength path routing is proposed, in which the optical signals are not converted into electrical signals, but are routed in the optical state (upon the optical layer).

[0007] FIG. 25 is an optical communication network system based upon wavelength path routing which has

been implemented using an arrayed-waveguide grating which is provided with a wavelength-routing function (for example, refer to "32x32 full-mesh (1024 path) wavelength-routing WDM network based upon uniform-loss cyclic-frequency arrayed-waveguide grating", IEE Electron. Lett., vol. 36, no., pp. 1294-1295, 2000, by K. Kato et al.).

[0008] The optical communication network shown in FIG. 25 shows the case in which the number of the communication nodes is four, and 100-1 through 100-4 are communication nodes, 110 is a 4x4 arrayed-waveguide grating having four input ports and four output ports, 120-1 through 120-4 are upstream optical transmission lines along which pass optical signals which have been transmitted towards the arrayed-waveguide grating 110 from the communication nodes 100-1 through 100-4, and 130-1 through 130-4 are downstream optical transmission lines along which pass optical signals which have been transmitted from the arrayed-waveguide grating 110 towards the communication nodes 100-1 through 100-4.

[0009] The arrayed-waveguide grating 110 is an optical component which has input ports 140-1 through 140-4 and output ports 150-1 through 150-4, and the output ports 150-1 through 150-4 which output the optical signals which have been inputted to the input ports 140-1 through 140-4 are determined uniquely according to the wavelengths of these optical signals.

[0010] The upstream optical transmission lines 120-1 through 120-4 are respectively connected to the input ports 140-1 through 140-4 of the arrayed-waveguide grating 110, while the downstream transmission lines 130-1 through 130-4 are respectively connected to the output ports 150-1 through 150-4 of the arrayed-waveguide grating 110.

[0011] FIGS. 26 and 27 show how the input ports 140-1 through 140-4 and the output ports 150-1 through 150-4 of the 4x4 arrayed-waveguide grating 110, which has the four input ports 140-1 through 140-4 and the four output ports 150-1 through 150-4, are connected together according to wavelength.

[0012] FIG. 26 shows the case of a 4x4 arrayed-waveguide grating 110 which is provided with a cyclic-wavelength characteristic, and moreover FIG. 27 shows the case of one which is not provided with a cyclic-wavelength characteristic.

[0013] For example, in FIG. 26, when an optical signal of wavelength λ_3 has been inputted to the input port 140-1, this optical signal of wavelength λ_3 is outputted from the output port 150-3. Accordingly, when an optical signal of wavelength λ_3 is transmitted from the communication node 100-1, this optical signal of wavelength λ_3 is inputted to the input port 140-1 of the arrayed-waveguide grating 110 via the optical transmission line 120-1, and, due to wavelength-routing, this optical signal of wavelength λ_3 is outputted from the output port 150-3 of the arrayed-waveguide grating 110. Subsequently, the optical signal of wavelength λ_3 arrives at the communi-

cation node 100-3 along the optical transmission line 130-3. In this manner, it is possible to perform routing upon the optical layer based upon the wavelength of the optical signals by utilizing the wavelength-routing function of the arrayed-waveguide grating 110, and to perform communication between the communication nodes 100-1 through 100-4, without converting the optical signals into electrical signals.

[0014] Furthermore, an optical communication network having a structure as shown in FIG. 28 is known as a network system which is capable of answering to increase of transmission capacity by providing an optical path of two or more wavelengths between two communication nodes (refer to Japanese Unexamined Patent Application, First Publications Nos. 2000-134649, 2002-165238, and 2002-262319).

[0015] The optical communication network shown in FIG. 28 shows the case in which the number of communication nodes is four. In FIG. 28, 1200-1 through 1200-4 denote communication nodes, 1220-1 through 1220-4 denote wavelength-band demultiplexing devices, 1230-1 through 1230-4 denote wavelength-band multiplexing devices, and 1240 denotes an optical switch.

[0016] The communication nodes 1200-1 through 1200-4 wavelength division multiplex and output a plurality of optical signals. The optical signals which are outputted are inputted to the respective wavelength-band demultiplexing devices 1220-1 through 1220-4. These wavelength-band demultiplexing devices are provided with the function of distributing the wavelength division multiplexed signals which have been inputted to a plurality of output ports. At this time, the signals which are outputted from the respective output ports are wavelength division multiplexed for each combination of wavelengths which are determined in advance, in other words for each wavelength-band. The routes of the optical signals which are outputted from the wavelength-band demultiplexing devices are changed over by the optical switch 1240, and the outputs thereof are inputted to the wavelength-band multiplexing devices 1230-1 through 1230-4. These wavelength-band multiplexing devices, in a manner opposite to the wavelength-band demultiplexing devices, are provided with the function of bundling together signals which have been wavelength division multiplexed for each wavelength-band to a single output port. The signals which have been outputted from the wavelength-band multiplexing devices 1230-1 through 1230-4 are inputted to the communication nodes 1200-1 through 1200-4, and are received thereby.

[0017] Since it is possible to provide an optical path in this type of optical communication network between two communication nodes for each wavelength-band, accordingly it is possible to provide a plurality of optical paths between the communication nodes up to the number of wavelengths which are included within a wavelength-band.

[0018] It should be understood that, as shown in FIG. 29, there is also a known method of forming the optical

switch 1240 by combining a plurality of small scale optical switches 1240-1 through 1240-3 (refer to Japanese Unexamined Patent Application, First Publication No. 2001-8244).

[0019] Moreover, it should be understood that there is known an optical communication network (refer to Japanese Unexamined Patent Application, First Publication No. 2002-300137) which utilizes the CWDM (Coarse WDM) standard having a grid of 20 nm interval in the wavelength-band demultiplexing devices or the wavelength-band multiplexing devices, and which forms wavelength-bands in which DWDM (Dense WDM) signals of 100 GHz (about 0.8 nm) intervals are accommodated in the 20 nm bands.

[0020] However, with the above-described conventional optical communication network system based upon wavelength-routing of the arrayed-waveguide grating 110, although the communication node 100-1 can transmit information to the communication node 100-3 with an optical signal of wavelength λ_3 , it is difficult to increase the transmission capacity from the communication node 100-1 to the communication node 100-3 above the transmission capacity of an optical signal of one wavelength.

[0021] In other words, it is only possible to establish a single optical path between two communication nodes with the conventional technique shown in FIG. 25. In this manner, with an optical communication network system of the conventional structure which is based upon wavelength-routing by an arrayed-waveguide grating 110, there is the problematical aspect that it is extremely difficult to increase the transmission capacity by increasing the number of optical paths between the communication nodes.

[0022] Furthermore, with the method of establishing an optical path between communication nodes for each wavelength-band, the number of communication nodes to which some communication node can transmit information is limited to the number of wavelength-bands, and there is the problem that, if the number of communication nodes exceeds the number of the wavelength-bands, then a combination of the communication nodes is created in which information is not delivered unless it is transmitted via other communication nodes.

[0023] On the other hand, FIG. 30 shows an example of a conventional optical cross connect device (refer to "Optical Networks", R. Ramaswami, K. N. Sivarajan, Morgan Kaufman Publishers Inc., 1998, p. 341 etc.). In this figure, 1-1, 1-2, ... 1-N are wavelength division demultiplexing circuits, 2-1, 2-2, ... 2-N are wavelength division multiplexing circuits, 3-1, 3-2, ... 3-m are optical matrix switches, 4-1, 4-2, ... 4-N are input optical fibers (optical transmission lines upon the input side), and 5-1, 5-2, ... 5-N are output optical fibers (optical transmission lines upon the output side).

[0024] The wavelength division demultiplexing circuits 1-1 through 1-N each have a single input port and m output ports, and the input port is connected via the input optical fibers 4-1 through 4-N to a certain single commu-

nication node (not shown in the figure), and a wavelength division multiplexed signal which has been inputted from the certain communication node to the input port is demultiplexed by wavelength and is outputted from the respective output ports.

[0025] The wavelength division multiplexing circuits 2-1 through 2-N each has m input ports and a single output port, and the output port is connected to a certain communication node (not shown in the figure) via output optical fibers 5-1 through 5-N, so that optical signals of a maximum of m wavelengths which have been inputted to the respective input ports are wavelength division multiplexed to form a wavelength division multiplexed signal, which is outputted from the output port to the certain communication node.

[0026] The optical matrix switches 3-1 through 3-m each has N input ports and N output ports, and each of the input ports is respectively connected to that output port, among the output ports of the wavelength division demultiplexing circuits 1-1 through 1-N, which outputs an optical signal of the same wavelength, while each of the output ports is separately connected to the input ports of the wavelength division multiplexing circuits 2-1 through 2-N.

[0027] With this type of optical cross connect device, the wavelength division multiplexed signals of m wavelengths which have been transmitted via the input optical fibers 4-1 through 4-N from the respective communication nodes are inputted to the wavelength division demultiplexing circuits 1-1 through 1-N, are demultiplexed by wavelength, are outputted from the separate output ports, and are respectively inputted by wavelength to the different optical matrix switches 3-1 through 3-m. Routes, that is, the wavelength division multiplexing circuits 2-1 through 2-N which are the output destination, are changed over so that the optical signals which have been inputted to the optical matrix switches 3-1 through 3-m are outputted to the desired output optical fibers 5-1 through 5-N under the condition that optical signals of the same wavelength are not outputted from the same output optical fiber, in other words, under the condition that optical signals of the same wavelength are not inputted to the same wavelength division multiplexing circuit, and the optical signals of m wavelengths which have been inputted to the wavelength division multiplexing circuits 2-1 through 2-N are wavelength division multiplexed, and are transmitted to the respective communication nodes via the output optical fibers 5-1 through 5-N.

[0028] With the circuit of FIG. 30, it is possible to establish settings so that all the optical signals of all the wavelengths which have been multiplexed upon the input optical fibers are outputted from the desired output optical fibers. However, due to the condition that optical signals of the same wavelength are not outputted from the same output optical fiber, the optical paths between the input optical fibers and the output optical fibers cannot be set freely.

[0029] For example, the case may be considered in

which the number of the input optical fibers and the number of the output optical fibers are both 8, and the number of multiplexed wavelengths is 4. At this time, under the conditions that the optical paths between the input optical fibers and the output optical fibers are not arranged, that is, as shown in FIGS. 31A through 31D, optical paths which use the wavelength λ_1 are established between the #1 input optical fiber and the #3 output optical fiber and between the #3 input optical fiber and the #1 output optical fiber, optical paths which use the wavelength λ_2 are established between the #2 input optical fiber and the #5 output optical fiber and between the #5 input optical fiber and the #2 output optical fiber, optical paths which use the wavelength λ_3 are established between the #2 input optical fiber and the #8 output optical fiber and between the #8 input optical fiber and the #2 output optical fiber,; and optical paths which use the wavelength λ_4 are established between the #1 input optical fiber and the #3 output optical fiber and between the #3 input optical fiber and the #1 output optical fiber, it is not possible to implement setting of the optical matrix switches so as to establish an optical path between the #1 input optical fiber and the #2 output optical fiber, or between the #2 input optical fiber and the #1 output optical fiber, even using the optical matrix switches through which any of the wavelengths from λ_1 through λ_4 passes, since a signal of the same wavelength as an already existing optical path is being outputted from the same output optical fiber.

[0030] On the other hand, as another method for implementing the establishment of optical paths between the input optical fibers and output optical fibers, there is a method as shown in FIGS. 32A through 32D, in which the optical paths between the input optical fibers and the output optical fibers are arranged. In detail, there is the method in which: optical paths which use the wavelength λ_1 are established between the #1 input optical fiber and the #3 output optical fiber and between the #3 input optical fiber and the #1 output optical fiber; optical paths which use the wavelength λ_1 are established between the #2 input optical fiber and the #5 output optical fiber and between the #5 input optical fiber and the #2 output optical fiber; optical paths which use the wavelength λ_2 are established between the #2 input optical fiber and the #8 output optical fiber and between the #8 input optical fiber and the #2 output optical fiber; and optical paths which use the wavelength λ_2 are established between the #1 input optical fiber and the #3 output optical fiber and between the #3 input optical fiber and the #1 output optical fiber.

[0031] In these circumstances, it is possible to utilize the wavelength λ_3 or the wavelength λ_4 for setting of the optical matrix switches so as to establish a further optical path between the #1 optical fiber and the #2 optical fiber, and, as compared with the previous case, it is possible to enhance the efficiency of utilization of the optical matrix switches.

[0032] In this manner, in order to utilize an optical cross

connect device formed by combining small scale optical matrix switches efficiently, it is necessary to establish an optical path by planning a method of utilizing wavelengths so as to enhance efficiency.

Disclosure of Invention

[0033] The present invention has been conceived in the light of the above-described problems, and its object is to provide an optical communication network system and a wavelength-routing device and a communication node therefor, which can easily increase the number of optical paths between the communication nodes and are capable of increasing the transmission capacity, and which excel in flexibility and expandability.

[0034] Furthermore, an object of the present invention is to provide an optical communication network system and a wavelength-routing device and a communication node therefor which provide full mesh connectivity in which optical paths are established between all the communication nodes by utilizing an arrayed-waveguide grating for wavelength-routing.

[0035] Yet furthermore, an object of the present invention is to provide an optical path management method and a device therefor, which can increase the efficiency of utilization of an optical cross connect device which is formed by combining small scale optical matrix switches.

[0036] In order to attain the above-described objects, the present invention is an optical communication network system comprising: a plurality of communication nodes; a wavelength-routing device which establishes communication between the communication nodes based upon route control according to the wavelength of an optical signal; and an optical transmission line which forms a communication path which connects the communication nodes and the wavelength-routing device, wherein the wavelength-routing device comprises: N device input ports, where N being an integer greater than or equal to 2, which are connected via the optical transmission line to the communication nodes; N device output ports which are connected via the optical transmission line to the communication nodes; a plurality of wavelength-band demultiplexers which are provided to each of the N device input ports, and each has a single input port and a plurality of output ports, and the input port is connected to one of the device input ports; a plurality of wavelength-band multiplexers which are provided to each of the N device output ports, and each has a plurality of input ports and a single output port, and the output port is connected to one of the device output ports; and R KxK arrayed-waveguide gratings, where R being an integer greater than or equal to J and J being an integer greater than or equal to 2, which have K input ports and K output ports, where K being an integer that satisfies $K = N$, which have wavelength-routing characteristics in which optical signals having different wavelengths which are inputted to one input port are output at different output ports depending on the wavelengths of the inputted op-

tical signals and in which optical signals having different wavelengths which are outputted from one output port are optical signals which have been inputted to different input ports, and wherein the wavelength-band demultiplexers comprise a means which demultiplexes by wavelength band a wavelength division multiplexed signal in which a respective predetermined number of wavelengths have been wavelength division multiplexed for each wavelength band which is transmitted from the communication nodes, where wavelength band = central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$, with $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, where $1 = m = R-1$, with m being an integer, and outputs the results at different output ports, the wavelength-band multiplexers comprise a means which multiplexes optical signals which have been inputted from the plurality of input ports for each wavelength band and which outputs a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed at the output port, the KxK arrayed-waveguide gratings are provided with a wavelength-routing characteristic for each wavelength band of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \lambda B_3 - \Delta\lambda_3$), ..., central wavelength $\lambda B_R \pm$ wavelength band width $\Delta\lambda_R$ ($\lambda B_{R-1} + \Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$), the output ports of the wavelength-band demultiplexers which are respectively connected to the N device input ports are one to one connected to the input ports of the KxK arrayed-waveguide gratings which have wavelength-routing characteristics at the wavelength bands of the optical signals which are outputted from the output ports of the wavelength-band demultiplexers, and the output ports of the KxK arrayed-waveguide gratings are one to one connected to the input ports of any one of the plurality of wavelength-band multiplexers which can multiplex optical signals of wavelengths which belong to the wavelength bands of the optical signals which are outputted from the output ports of the KxK arrayed-waveguide gratings.

[0037] According to the present invention, when, for example, an optical signal within the $\lambda B_m \pm \Delta\lambda_m$ wavelength band is outputted from a predetermined communication node, this optical signal is transmitted along the optical transmission line and arrives at an input port of the wavelength-band demultiplexer of the wavelength-routing device, wavelength-band demultiplexing of the wavelength bands is performed by the wavelength-band demultiplexer, and the results are outputted from a predetermined output port. The optical signal which is outputted from the output port of the wavelength-band demultiplexer is inputted to an input port of the arrayed-waveguide grating according to its wavelength band.

[0038] From the relationship between the input ports/output ports of the arrayed-waveguide grating and wavelengths, the optical signal which has been inputted to the input port of the arrayed-waveguide grating is outputted

at a predetermined output port of the arrayed-waveguide grating.

[0039] An optical signal which has been outputted from the output port of the arrayed-waveguide grating is inputted to an input port of the wavelength-band multiplexer, and is multiplexed by the wavelength-band multiplexer with optical signals of other wavelength bands, then being outputted from an output port.

[0040] The optical signal which has been outputted from the output port of the wavelength-band multiplexer is transmitted along the optical transmission line, and arrives at a communication node.

[0041] By doing this, when transmitting data from one communication node to another communication node, it is possible to utilize the optical paths for each wavelength band by varying the wavelength band $\lambda B_m \pm \Delta\lambda_m$ of the wavelength of the optical signal which is transmitted from the communication node.

[0042] The communication nodes and the wavelength-routing device which make up the optical communication network system are connected by pairs of optical fibers in the same manner as in the conventional example, but, with the present invention, an arrayed-waveguide grating is arranged independently for each wavelength band in the wavelength-routing device, and by performing wavelength-band multiplexing of wavelength bands and wavelength-band demultiplexing of wavelength bands in each communication node and the wavelength-routing device, it is possible to form one optical path for each wavelength band between the communication nodes.

[0043] Accordingly, although with the conventional technique shown in FIG. 25 it is possible to form only a single optical path between the communication nodes with a pair of optical transmission lines, by applying the structure of the present invention, it is possible to form, at a maximum, the same number of optical paths as the number of wavelength bands, and it is possible easily to increase the transmission capacity between the communication nodes.

[0044] Furthermore, with the optical communication network system of the present invention, when increasing the number of optical paths, it will be sufficient to add the required equipment only between the communication nodes for which this increase of the number of optical paths is required, so that the flexibility and the economy are superb.

[0045] Yet further, with a conventional optical communication system in which the optical paths are formed between the communication nodes by taking the wavelength-bands as units, when the number of communication nodes exceeds the number of the wavelength-bands, it is necessary to pass via a different communication node. In contrast, according to the present invention, it is possible to implement an optical communication network system which provides full mesh connectivity in which optical paths are provided between all the communication nodes. Accordingly, even if the number of communication nodes exceeds the number of the wave-

length-bands, it is not necessary to pass via a different communication node.

[0046] Furthermore, in the optical communication network system of the above-described structure, each of the communication nodes may comprise: a Jx1 wavelength-band multiplexer, where J being an integer greater than or equal to 2, which has J input ports IP [1], IP [2], IP [3], ... IP [J] and a single output port, and outputs at the single output port optical signals of wavelengths which belong to the wavelength bands of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to the respective J input ports, where $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 = m = J - 1$, where m being an integer; a plurality of wavelength division multiplexers which are provided at each of the input ports IP [1], IP [2], IP [3], ... IP [J] of the Jx1 wavelength-band multiplexer, and which have two or more input ports and one output port, with the output ports being connected to the input ports of the Jx1 wavelength-band multiplexer; and a plurality of optical transmitters which are connected to the input ports of the wavelength division multiplexers, and which emit light of wavelengths which belong to wavelength bands of central wavelengths, $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$, and wherein the output port of the Jx1 wavelength-band multiplexer may be connected via an optical waveguide to the device input ports of the wavelength-routing device.

[0047] According to this structure, a communication node can transmit optical signals of different wavelengths within a different plurality of communication wavelength bands. Accordingly, whereas the conventional technique shown in FIG. 25 can form only a single optical path between the communication nodes with a pair of optical transmission lines, by applying the structure of the present invention, it is possible to form, as a maximum, the same number of optical paths as the number of wavelength bands, so that it is possible easily to increase the transmission capacity between the communication nodes. Furthermore, with the optical communication network system of the present invention, when increasing the number of optical paths, it will be sufficient to add the required equipment only between the communication nodes for which this increase of the number of optical paths is required, so that the flexibility and the economy are superb.

[0048] Furthermore, in an optical communication network system of the above-described structure, each of the communication nodes may comprise: a 1xJ wavelength-band demultiplexer, where J being an integer greater than or equal to 2, which has J output ports OP [1], OP[2], OP[3], ... OP[J] and a single input port, and which outputs at the J output ports optical signals of wavelengths which belong to the wavelength band widths which are inputted to the single input port of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wave-

length $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, where $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, where m being an integer; a plurality of wavelength division demultiplexers which are provided to each of the output ports OP[1], OP[2], OP[3], ... OP[J] of the 1xJ wavelength-band demultiplexer, each of which has two or more output ports and a single input port, and the input port is connected to one of the output ports of the 1xJ wavelength-band demultiplexer; and a plurality of optical receivers which are connected to the output ports of the wavelength division demultiplexers, and wherein the single input port of the 1xJ wavelength-band demultiplexer may be connected via an optical waveguide to one of the device output ports of the wavelength-routing device.

[0049] According to this structure, a communication node can receive optical signals of different wavelengths within a different plurality of communication wavelength bands. Accordingly, whereas the conventional technique shown in FIG. 25 can form only a single optical path between the communication nodes with a pair of optical transmission lines, by applying the structure of the present invention, it is possible to form, as a maximum, the same number of optical paths as the number of wavelength bands, so that it is possible easily to increase the transmission capacity between the communication nodes. Furthermore, with the optical communication network system of the present invention, when increasing the number of optical paths, it will be sufficient to add the required equipment only between the communication nodes for which this increase of the number of optical paths is required, so that the flexibility and the economy are superb.

[0050] Furthermore, in an optical communication network system of the above-described structure, each of the communication nodes may comprise: a Jx1 wavelength-band multiplexer, where J being an integer greater than or equal to 2, which has J input ports IP [1], IP [2], IP [3], ... IP [J] and a single output port, and outputs at the single output port optical signals of wavelengths which belong to the wavelength bands of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to each of the J input ports, where $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 = m = J - 1$, where m being an integer; at least one wavelength-tunable optical light source integrated optical transmitter which is connected to any one of the input ports IP [1], IP [2], IP [3], ... IP [J] of the Jx1 wavelength-band multiplexer, which is provided with a wavelength-tunable optical light source which can be set to a wavelength within a wavelength band which belongs to the input port which is connected, and which outputs light of the wavelength; a plurality of wavelength division multiplexers which are provided to each of the input ports of the Jx1 wavelength-band multiplexer, other

than the input port to which the wavelength-tunable optical light source integrated optical transmitter is connected, and which have two or more input ports and one output port, with the output port being connected to one of the input ports of the Jx1 wavelength-band multiplexer; a plurality of optical transmitters which are connected to the input ports of the wavelength division multiplexer, and which emit light of wavelength which belongs to a wavelength band of central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$; a 1xJ wavelength-band demultiplexer, where J being an integer greater than or equal to 2, which has J output ports OP[1], OP[2], OP[3], ... OP[J] and a single input port, and outputs at the J output ports optical signals of wavelengths which belong to the wavelength band widths of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to the single input port, where $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 = m = J$, where m being an integer; an optical receiver which is connected to that output port, among the output ports OP [1], OP[2], OP[3], ... OP[J] of the 1xJ wavelength-band demultiplexer, which belongs to the wavelength band to which the wavelength-tunable optical light source integrated optical transmitter is provided, and which receives an optical signal of the wavelength which is outputted from the wavelength-tunable optical light source integrated optical transmitter; a plurality of wavelength division demultiplexers which are provided to each of the output ports of the 1xJ wavelength-band demultiplexer, except for the output port to which the optical receiver is connected, which have two or more output ports and a single input port, and the input port is connected to one of the output ports of the 1xJ wavelength-band demultiplexer; and a plurality of optical receivers which are connected to the output ports of the wavelength division demultiplexers, and wherein the single input port of the 1xJ wavelength-band demultiplexer is connected via an optical waveguide to one of the device output ports of the wavelength-routing device.

[0051] According to this structure, an optical signal is inputted at any one of the input ports IP [1], IP [2], IP [3], ... IP [J] of the Jx1 wavelength-band multiplexer from at least one wavelength-tunable optical light source integrated optical transmitter which is provided with the wavelength-tunable optical light source which can be set to a wavelength within the wavelength band which belongs to the input port without passing through the wavelength division multiplexer, and, among the output ports OP[1], OP[2], OP[3], ... OP[J] of the 1xJ wavelength-band demultiplexer, an optical signal which has been outputted from an output port which belongs to a wavelength band which is provided to the wavelength-tunable optical light source integrated optical transmitter, in other words an optical signal of the wavelength which has been outputted from the wavelength-tunable optical light source integrated optical transmitter, is inputted to an optical re-

ceiver without passing through the optical division demultiplexer.

[0052] Furthermore, the optical communication network system of the above-described structure may further comprise an optical path management means which controls an optical path between two different communication nodes, and wherein if at least one group of the wavelength-tunable optical light source integrated optical transmitters exists which are provided to all the communication nodes and which output optical signals of the same wavelength band, and if there are K wavelength bands, where K being an integer greater than or equal to 2, which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, the optical path management means may assign mutually different priority rankings from 1 to K to the wavelength bands which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, and when, among the wavelength bands which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, the highest numbered priority ranking among the wavelength bands for which optical paths exist between x-th communication node and y-th communication node is number b, and the lowest numbered priority ranking among the wavelength bands for which an optical path whose start point is the x-th communication node, an optical path whose end point is the x-th communication node, an optical path whose start point is the y-th communication node, and an optical path whose end point is the y-th communication node do not exist is number a, and the number a is smaller than the number b, the optical path management means may establish an optical path between the x-th communication node and the y-th communication node upon the wavelength band of a-th priority ranking, and thereafter controls ON/OFF and an oscillation wavelength of the wavelength-tunable optical light source integrated optical transmitter so as to cancel the optical path which was established between the x-th communication node and the y-th communication node upon the wavelength band of b-th priority ranking.

[0053] Furthermore, in the above-described optical network communication system, there may be further comprised: a database which records an optical path for each wavelength band; a first search means which, when a requirement has arisen newly to establish an optical path between xx-th communication node and yy-th communication node, searches in the database, in order from data which correspond to a wavelength band whose priority ranking is the lowest, for a wavelength band which is not in use by the xx-th communication node and the yy-th communication node; a first transmission means which transmits to the optical path management means a command for establishing an optical path according to the result of searching by the first search means; a first

database update means which registers an optical path which has been newly established in the database; a second search means which, when a requirement for an optical path which is already established between xxx-th communication node and yyy-th communication node has ceased, searches in the database, in order from data which correspond to a wavelength band whose priority ranking is the highest, for a wavelength band upon which an optical path is established between the xxx-th communication node and the yyy-th communication node; a second transmission means which transmits to the optical path management means a command for canceling an optical path according to the result of searching by the second search means; a second database update means which deletes an optical path which has been cancelled from the database; an extraction means which searches in the database the number b of the highest priority ranking among the wavelength bands upon which optical paths are established between the x-th communication node and the y-th communication node, and the number a of the lowest priority ranking among the wavelength bands which do not use both the x-th communication node and the y-th communication node, for all the combinations of x and y in a predetermined order, and extracts combinations of x, y, a, and b for which the number a is smaller than the number b; a third transmission means which, when an applicable combination exists, transmits to the optical path management means a command for establishing an optical path using the a-th wavelength band between the x-th communication node and the y-th communication node, and thereafter transmits to the optical path management means a command for canceling an optical path using the b-th wavelength band between the x-th communication node and the y-th communication node; and a database update means which registers an optical path which has been newly established in the database, and deletes an optical path which has been cancelled from the database.

[0054] By employing this type of structure, the state is brought about in which the optical paths between the communication nodes are always arranged, so that it is possible to enhance the efficiency of use of the optical cross connect device.

[0055] Yet further, in the optical communication network system of the above-described structure, the KxK arrayed-waveguide gratings may have cyclic-wavelength characteristics.

[0056] Even further, the present invention is a wavelength-routing device which is provided to an optical communication network system comprising a plurality of communication nodes and an optical transmission line which forms a communication path, connected with the communication nodes by the optical transmission line, and which establishes communication between the communication nodes based upon route control according to the wavelength of an optical signal, the wavelength-routing device comprising: N device input ports, where N being an integer greater than or equal to 2, which are connected

via the optical transmission line to the communication nodes; N device output ports which are connected via the optical transmission line to the communication nodes; a plurality of wavelength-band demultiplexers which are provided to each of the N device input ports, and each has a single input port and a plurality of output ports, and the input port is connected to one of the device input ports; a plurality of wavelength-band multiplexers which are provided to each of the N device output ports, and each has a plurality of input ports and a single output port, and the output port is connected to one of the device output ports; and R KxK arrayed-waveguide gratings, where R being an integer greater than or equal to J and J being an integer greater than or equal to 2, which have K input ports and K output ports, where K being an integer that satisfies $K = N$, which have wavelength-routing characteristics in which optical signals having different wavelengths which are inputted to one input port are output at different output ports depending on the wavelengths of the inputted optical signals and in which optical signals having different wavelengths which are outputted from one output port are optical signals which have been inputted to different input ports, and wherein the wavelength-band demultiplexers comprise a means which demultiplexes by wavelength band a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed for each wavelength band which is transmitted from the communication nodes, where wavelength band = central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$, with $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$ where $1 = m = R - 1$, with m being an integer, and outputs the results at different output ports, the wavelength-band multiplexers comprise a means which multiplexes optical signals which have been inputted from the plurality of input ports for each wavelength band and which outputs a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed at the output port, the KxK arrayed-waveguide gratings are provided with a wavelength-routing characteristic for each wavelength band of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \lambda B_3 - \Delta\lambda_3$), ..., central wavelength $\lambda B_R \pm$ wavelength band width $\Delta\lambda_R$ ($\lambda B_{R-1} + \Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$), the output ports of the wavelength-band demultiplexers which are respectively connected to the N device input ports are one to one connected to the input ports of the KxK arrayed-waveguide gratings which have wavelength-routing characteristics at the wavelength bands of the optical signals which are outputted from the output ports of the wavelength-band demultiplexers, and the output ports of the KxK arrayed-waveguide gratings are one to one connected to the input ports of any one of the plurality of wavelength-band multiplexers which can multiplex optical signals of wavelengths which belong to the wavelength bands of the optical signals which

are outputted from the output ports of the KxK arrayed-waveguide gratings.

[0057] Furthermore, the present invention is an optical path management device which controls an optical path between two different communication nodes in an optical communication network system which comprises a plurality of communication nodes, a wavelength-routing device which establishes communication between the communication nodes based upon route control according to the wavelength of an optical signal, and an optical transmission line which forms a communication path which connects the communication nodes and the wavelength-routing device wherein the wavelength-routing device comprises: N device input ports, where N being an integer greater than or equal to 2, which are connected via the optical transmission line to the communication nodes; N device output ports which are connected via the optical transmission line to the communication nodes; a plurality of wavelength-band demultiplexers which are provided to each of the N device input ports, and each has a single input port and a plurality of output ports, and the input port is connected to one of the device input ports; a plurality of wavelength-band multiplexers which are provided to each of the N device output ports, and each has a plurality of input ports and a single output port, and the output port is connected to one of the device output ports; and R KxK arrayed-waveguide gratings, where R being an integer greater than or equal to J and J being an integer greater than or equal to 2, which have K input ports and K output ports, where K being an integer that satisfies $K = N$, which have wavelength-routing characteristics in which optical signals having different wavelengths which are inputted to one input port are output at different output ports depending on the wavelengths of the inputted optical signals and in which optical signals having different wavelengths which are outputted from one output port are optical signals which have been inputted to different input ports, and wherein the wavelength-band demultiplexers comprise a means which demultiplexes by wavelength band a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed for each wavelength band which is transmitted from the communication nodes, wherein wavelength band = central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$, with $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, where $1 = m = R - 1$, with m being an integer, and outputs the results at different output ports, the wavelength-band multiplexers comprise a means which multiplexes optical signals which have been inputted from the plurality of input ports for each wavelength band and which outputs a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed at the output port, the KxK arrayed-waveguide gratings are provided with a wavelength-routing characteristic for each wavelength band of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), central

wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \lambda B_3 - \Delta\lambda_3$), ..., central wavelength $\lambda B_R \pm$ wavelength band width $\Delta\lambda_R$ ($\lambda B_{R-1} + \Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$), the output ports of the wavelength-band demultiplexers which are respectively connected to the N device input ports are one to one connected to the input ports of the KxK arrayed-waveguide gratings which have wavelength-routing characteristics at the wavelength bands of the optical signals which are outputted from the output ports of the wavelength-band demultiplexers, and the output ports of the KxK arrayed-waveguide gratings are one to one connected to the input ports of any one of the plurality of wavelength-band multiplexers which can multiplex optical signals of wavelengths which belong to the wavelength bands of the optical signals which are outputted from the output ports of the KxK arrayed-waveguide gratings, and each of the communication nodes comprises: a Jx1 wavelength-band multiplexer, where J being an integer greater than or equal to 2, which has J input ports IP [1], IP [2], IP [3], ... IP [J] and a single output port, and outputs at the single output port optical signals of wavelengths which belong to the wavelength bands of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to each of the J input ports, where $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 = m = J - 1$, where m being an integer; at least one wavelength-tunable optical light source integrated optical transmitter which is connected to any one of the input ports IP [1], IP [2], IP [3], ... IP [J] of the Jx1 wavelength-band multiplexer, which is provided with a wavelength-tunable optical light source which can be set to a wavelength within a wavelength band which belongs to the input port which is connected, and which outputs light of the wavelength; a plurality of wavelength division multiplexers which are provided to each of the input ports of the Jx1 wavelength-band multiplexer, other than the input port to which the wavelength-tunable optical light source integrated optical transmitter is connected, and which have two or more input ports and one output port, with the output port being connected to one of the input ports of the Jx1 wavelength-band multiplexer; a plurality of optical transmitters which are connected to the input ports of the wavelength division multiplexer, and which emit light of wavelength which belongs to a wavelength band of central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$; a 1xJ wavelength-band demultiplexer, where J being an integer greater than or equal to 2, which has J output ports OP [1], OP[2], OP[3], ... OP[J] and a single input port, and outputs at the J output ports optical signals of wavelengths which belong to the wavelength band widths of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to the single input port, where $\lambda B_m +$

$\Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 = m = J$, where m being an integer; an optical receiver which is connected to that output port, among the output ports OP[1], OP[2], OP [3], ... OP[J] of the 1xJ wavelength-band demultiplexer, which belongs to the wavelength band to which the wavelength-tunable optical light source integrated optical transmitter is provided, and which receives an optical signal of the wavelength which is outputted from the wavelength-tunable optical light source integrated optical transmitter; a plurality of wavelength division demultiplexers which are provided to each of the output ports of the 1xJ wavelength-band demultiplexer, except for the output port to which the optical receiver is connected, which have two or more output ports and a single input port, and the input port is connected to one of the output ports of the 1xJ wavelength-band demultiplexer; and a plurality of optical receivers which are connected to the output ports of the wavelength division demultiplexers; and wherein the single input port of the 1xJ wavelength-band demultiplexer is connected via an optical waveguide to one of the device output ports of the wavelength-routing device, and wherein the optical path management device comprises: a means which, if at least one group of the wavelength-tunable optical light source integrated optical transmitters exists which are provided to all the communication nodes and which output optical signals of the same wavelength band, and if there are K wavelength bands, where K being an integer greater than or equal to 2, which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, assigns mutually different priority rankings from 1 to K to the wavelength bands which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters; a means which detects that, among the wavelength bands which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, the highest numbered priority ranking among the wavelength bands of optical paths between x-th communication node and y-th communication node is number b, and the lowest numbered priority ranking among the wavelength bands which are not used for an optical path whose start point is the x-th communication node, an optical path whose end point is the x-th communication node, an optical path whose start point is the y-th communication node, and an optical path whose end point is the y-th communication node is number a, and the number a is smaller than the number b; and a means which, if it has been detected that the number a is smaller than the number b, establishes an optical path between the x-th communication node and the y-th communication node upon the wavelength band of a-th priority ranking, and thereafter controls ON/OFF and an oscillation wavelength of the wavelength-tunable optical light source integrated optical transmitter so as to cancel the optical path which was

established between the x-th communication node and the y-th communication node upon the wavelength band of b-th priority ranking.

[0058] Furthermore, the present invention is an optical path management method which controls an optical path between two different communication nodes in an optical communication network system which comprises a plurality of communication nodes, a wavelength-routing device which establishes communication between the communication nodes based upon route control according to the wavelength of an optical signal, and an optical transmission line which forms a communication path which connects the communication nodes and the wavelength-routing device, wherein the wavelength-routing device comprises: N device input ports, where N being an integer greater than or equal to 2, which are connected via the optical transmission line to the communication nodes; N device output ports which are connected via the optical transmission line to the communication nodes; a plurality of wavelength-band demultiplexers which are provided to each of the N device input ports, and each has a single input port and a plurality of output ports, and the input port is connected to one of the device input ports; a plurality of wavelength-band multiplexers which are provided to each of the N device output ports, and each has a plurality of input ports and a single output port, and the output port is connected to one of the device output ports; and R KxK arrayed-waveguide gratings, where R being an integer greater than or equal to J and J being an integer greater than or equal to 2, which have K input ports and K output ports, where K being an integer that satisfies $K = N$, which have wavelength-routing characteristics in which optical signals having different wavelengths which are inputted to one input port are output at different output ports depending on the wavelengths of the inputted optical signals and in which optical signals having different wavelengths which are outputted from one output port are optical signals which have been inputted to different input ports, wherein the wavelength-band demultiplexers comprise a means which demultiplexes by wavelength band a wavelength division multiplexed optical signal in which a predetermined number of wavelengths have been wavelength division multiplexed for each wavelength band which is transmitted from the communication nodes, where wavelength band = central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$, with $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, where $1 = m = R - 1$, with m being an integer, and outputs the results at different output ports, the wavelength-band multiplexers comprise a means which multiplexes optical signals which have been inputted from the plurality of input ports for each wavelength band and which outputs a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed at the output port, the KxK arrayed-waveguide gratings are provided with a wavelength-routing characteristic for each wavelength band of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wave-

length band width $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \lambda B_3 - \Delta\lambda_3$), ..., central wavelength $\lambda B_R \pm$ wavelength band width $\Delta\lambda_R$ ($\lambda B_{R-1} + \Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$), the output ports of the wavelength-band demultiplexers which are respectively connected to the N device input ports are one to one connected to the input ports of the KxK arrayed-waveguide gratings which have wavelength-routing characteristics at the wavelength bands of the optical signals which are outputted from the output ports of the wavelength-band demultiplexers, and the output ports of the KxK arrayed-waveguide gratings are one to one connected to the input ports of any one of the plurality of wavelength-band multiplexers which can multiplex optical signals of wavelengths which belong to the wavelength bands of the optical signals which are outputted from the output ports of the KxK arrayed-waveguide gratings, and each of the communication nodes comprises: a Jx1 wavelength-band multiplexer, where J being an integer greater than or equal to 2, which has J input ports IP [1], IP [2], IP [3], ... IP [J] and a single output port, and outputs at the single output port optical signals of wavelengths which belong to the wavelength bands of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to each of the J input ports, where $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 = m = J - 1$, where m being an integer; at least one wavelength-tunable optical light source integrated optical transmitter which is connected to any one of the input ports IP [1], IP [2], IP [3], ... IP [J] of the Jx1 wavelength-band multiplexer, which is provided with a wavelength-tunable optical light source which can be set to a wavelength within a wavelength band which belongs to the input port which is connected, and which outputs light of the wavelength; a plurality of wavelength division multiplexers which are provided to each of the input ports of the Jx1 wavelength-band multiplexer, other than the input port to which the wavelength-tunable optical light source integrated optical transmitter is connected, and which have two or more input ports and one output port, with the output port being connected to one of the input ports of the Jx1 wavelength-band multiplexer; a plurality of optical transmitters which are connected to the input ports of the wavelength division multiplexer, and which emit light of wavelength which belongs to a wavelength band of central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$; a 1xJ wavelength-band demultiplexer, where J being an integer greater than or equal to 2, which has J output ports OP [1], OP[2], OP[3], ... OP[J] and a single input port, and outputs at the J output ports optical signals of wavelengths which belong to the wavelength band widths of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$,

which are inputted to the single input port, where $\lambda B_m + \Delta\lambda_m = \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 = m = J$, where m being an integer; an optical receiver which is connected to that output port, among the output ports OP[1], OP[2], OP [3], ... OP[J] of the $1 \times J$ wavelength-band demultiplexer, which belongs to the wavelength band to which the wavelength-tunable optical light source integrated optical transmitter is provided, and which receives an optical signal of the wavelength which is outputted from the wavelength-tunable optical light source integrated optical transmitter; a plurality of wavelength division demultiplexers which are provided to each of the output ports of the $1 \times J$ wavelength-band demultiplexer, except for the output port to which the optical receiver is connected, which have two or more output ports and a single input port, and the input port is connected to one of the output ports of the $1 \times J$ wavelength-band demultiplexer; and a plurality of optical receivers which are connected to the output ports of the wavelength division demultiplexers, and wherein the single input port of the $1 \times J$ wavelength-band demultiplexer is connected via an optical waveguide to one of the device output ports of the wavelength-routing device, and the optical path management method comprises: a step of, if at least one group of the wavelength-tunable optical light source integrated optical transmitters exists which are provided to all the communication nodes and which output optical signals of the same wavelength band, and if there are K wavelength bands, where K being an integer greater than or equal to 2, which belong to the input ports of the $J \times 1$ wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, assigning mutually different priority rankings from 1 to K to the wavelength bands which belong to the input ports of the $J \times 1$ wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters; a step of, when, among the wavelength bands which belong to the input ports of the $J \times 1$ wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitter, the highest numbered priority ranking among the wavelength bands for which an optical path exists between x -th communication node and y -th communication node is number b , and the lowest numbered priority ranking among the wavelength bands for which an optical path whose start point is the x -th communication node, an optical path whose end point is the x -th communication node, an optical path whose start point is the y -th communication node, and an optical path whose end point is the y -th communication node do not exist is number a , and the number a is smaller than the number b ; and controlling ON/OFF and an oscillation wavelength of the wavelength-tunable optical light source integrated optical transmitter so as to establish an optical path between the x -th communication node and the y -th communication node upon the wavelength band of a -th priority ranking; and a step of establishing an optical path between the x -th communication node

and the y -th communication node upon the wavelength band of the a -th priority ranking, and thereafter controlling ON/OFF and the oscillation wavelength of the wavelength-tunable optical light source integrated optical transmitter so as to cancel the optical path which was established between the x -th communication node and the y -th communication node upon the wavelength band of b -th priority ranking.

[0059] Yet further, the present invention is an optical path management program which causes a computer to execute the steps of the above-described optical path management method.

[0060] Even yet further, the present invention is a recording medium which can be read by a computer, upon which this optical path management program is recorded.

[0061] Document JP 2001 008244A aims at increasing transmission capacity without increasing hardware by branching an inputted wavelength division-multiplexed optical signal into groups of wavelength with plural different wavelength carriers and routing them by optical switches. To this end, optical signals from respective input ports 4-1 to 4- n are separated into m -groups of wavelength with different wavelength by every input port 4-1 to 4- n by optical signal branching parts 2-1 to 2- n , m wavelength groups are routed by an optical switch 1- m . In addition, the optical switches 1-1 to 1- m in operation devices decide what inputted optical signal is routed to where. The routed optical signal is optical wavelength division-multiplexed by the optical signal branching parts 3-1 to 3- n and outputted from output ports 5-1 to 5- n . Namely, the routes of the optical signals with the wavelength belonging to the same group of wavelength are set by the same optical switch altogether.

[0062] Document JP 2002 262319 describes an optical communication network provided with a plurality of the optical path cross connectors and a wavelength multiple transmission link interconnecting them wherein a wavelength path led to the wavelength multiple transmission link is subjected to the routing processing by the optical path cross connector on the basis of its wavelength, each optical path cross connector is configured such that the wavelength paths of the link are divided into wavelength group of N -sets (N is an integer greater than or equal to 2 consisting of G -sets each (G is an integer greater than or equal to 2) of the wavelength paths of the wavelength multiple transmission link, and applies the routing processing in the unit of the wavelength group paths.

[0063] Prior art for different cross-connect architectures using wavelength routing elements, implemented with optical switches, and wavelength-sorting elements, implemented with AWG, can be found in OKAYAMA H. ET AL: "Multiwavelength highway photonic switches using wavelength-sorting elements- design", J. OF LIGHT-WAVE TECHNOLOGY, vol. 15, no. 4, April 1997 (1997-04), pages 607-615, XP000691026.

Brief Description of Drawings

[0064]

FIG. 1 is a figure showing the overall structure of an optical communication system according to the first embodiment according to the present invention. 5

FIG. 2 is a figure for explanation of a wavelength-band demultiplexer of the optical communication system according to the first embodiment according to the present invention. 10

FIG. 3 is a figure for explanation of a wavelength-band multiplexer of the optical communication system according to the first embodiment according to the present invention. 15

FIG. 4 is a figure showing the relationship between the input and output ports of an arrayed-waveguide grating and wavelengths, for the first embodiment according to the present invention. 20

FIG. 5 is a figure showing the relationship between the input and output ports of an arrayed-waveguide grating and wavelength, for the first embodiment according to the present invention. 25

FIG. 6 is a figure showing the relationship between the input and output ports of an arrayed-waveguide grating and wavelength, for the first embodiment according to the present invention. 30

FIG. 7 is a figure showing the relationship between the input and output ports of an arrayed-waveguide grating and wavelength, for the first embodiment according to the present invention. 35

FIG. 8 is a block diagram showing the structure of optical transceiver sections of respective communication nodes, in the first embodiment according to the present invention. 40

FIG. 9 is a block diagram for the second embodiment according to the present invention, showing a structural example of initial construction of an optical transceiver section of a communication node. 45

FIG. 10 is a block diagram for a communication node of the second embodiment according to the present invention, for explanation of a structural example after increase of an optical transceiver section of a different wavelength band. 50

FIG. 11 is a block diagram for a communication node of the second embodiment according to the present invention, for explanation of a structural example after increase of an optical transceiver section of a different wavelength band. 55

FIG. 12 is a block diagram showing a structural example of an optical transceiver section of a communication node of the third embodiment according to the present invention.

FIG. 13 is a block diagram for explanation of the structure of an optical transceiver section of respective communication nodes of the fourth embodiment according to the present invention.

FIGS. 14A through 14H are block diagrams showing

the structure of a transmission module and a reception module in the fourth embodiment according to the present invention.

FIG. 15 is a block diagram showing the connection relationship of a control device for transceiver and an optical path management device; in the fourth embodiment according to the present invention.

FIG. 16 is a block diagram showing the structure of an optical path management device in the fourth embodiment according to the present invention.

FIG. 17 is a figure showing an example of a database of an optical path management device of the fourth embodiment according to the present invention.

FIG. 18 is a structural diagram of the fifth embodiment according to the present invention.

FIG. 19A through 19D are explanatory figures showing an example of a database in which optical paths of an optical matrix switch is recorded.

FIG. 20 is a flowchart of the processing of the optical path management device of the fifth embodiment according to the present invention.

FIG. 21 is a flowchart of the processing of the optical path management device of the fifth embodiment according to the present invention.

FIG. 22 is a flowchart of the processing of the optical path management device of the fifth embodiment according to the present invention.

FIG. 23 is a structural diagram showing the sixth embodiment according to the present invention.

FIG. 24 is a structural diagram showing the seventh embodiment according to the present invention.

FIG. 25 is a block diagram showing the structure of a conventional optical communication network system based on wavelength path routing which is implemented using an arrayed-waveguide grating.

FIG. 26 is a figure showing the relationship between the input and output ports of the conventional arrayed-waveguide grating and wavelengths.

FIG. 27 is a figure showing the relationship between the input and output ports of the conventional arrayed-waveguide grating and wavelengths.

FIG. 28 is a block diagram showing a structural example of a conventional optical network system which takes advantage of a wavelength-band.

FIG. 29 is a block diagram showing another structural example of a conventional optical network system which takes advantage of a wavelength-band.

FIG. 30 is a structural diagram showing an example of a conventional optical cross connect device.

FIGS. 31A through 31D are explanatory figures showing an example of optical paths between input optical fibers and output optical fibers, when the optical paths are not arranged.

FIGS. 32A through 32D are explanatory figures showing an example of optical paths between input optical fibers and output optical fibers, when the optical paths are arranged.

Best Mode for Carrying Out the Invention

[0065] In the following, respective embodiments according to the present invention will be explained based upon the figures.

[0066] It should be understood that although, in the first through the fourth embodiments according to the present invention, the explanation is made by taking 4 as the number N of both the device input ports and the device output ports of the wavelength-routing device in the optical communication network system according to the present invention, this is not to be considered as being limiting; provided that N is an integer greater than or equal to 2, this will be acceptable.

THE FIRST EMBODIMENT

[0067] FIG. 1 is a structural figure showing the optical communication network system of the first embodiment according to the present invention. In FIG. 1, 200-1 through 200-4 are communication nodes, 210 is a wavelength-routing device, and 250-1 through 250-4 and 260-1 through 260-4 are optical transmission lines (optical fibers) which connect the communication nodes 200-1 through 200-4 and the wavelength-routing device 210.

[0068] Furthermore, the wavelength-routing device 210 comprises four device input ports 210-11 through 210-14 and four device output ports 210-21 through 210-24, wavelength-band demultiplexers 220-1 through 220-4, wavelength-band multiplexers 230-1 through 230-4, and 4x4 arrayed-waveguide gratings 241 through 244.

[0069] The communication node 200-1, along with being connected to the first device input port 210-11 of the wavelength-routing device 210 via the optical transmission line 250-1, is also connected to the first device output port 210-21 of the wavelength-routing device 210 via the optical transmission line 260-1.

[0070] The communication node 200-2, along with being connected to the second device input port 210-12 of the wavelength-routing device 210 via the optical transmission line 250-2, is also connected to the second device output port 210-22 of the wavelength-routing device 210 via the optical transmission line 260-2.

[0071] The communication node 200-3, along with being connected to the third device input port 210-13 of the wavelength-routing device 210 via the optical transmission line 250-3, is also connected to the third device output port 210-23 of the wavelength-routing device 210 via the optical transmission line 260-3.

[0072] The communication node 200-4, along with being connected to the fourth device input port 210-14 of the wavelength-routing device 210 via the optical transmission line 250-4, is also connected to the fourth device output port 210-24 of the wavelength-routing device 210 via the optical transmission line 260-4.

[0073] Each of the wavelength-band demultiplexers

220-1 through 220-4 comprises a single input port 221 and four output ports 222-1 through 222-4, and the input port 221 of the first wavelength-band demultiplexer 220-1 is connected to the first device input port 210-11. Furthermore, the input port 221 of the second wavelength-band demultiplexer 220-2 is connected to the second device input port 210-12, the input port 221 of the third wavelength-band demultiplexer 220-3 is connected to the third device input port 210-13, and the input port 221 of the fourth wavelength-band demultiplexer 220-4 is connected to the fourth device input port 210-14.

[0074] Each of the wavelength-band multiplexers 230-1 through 230-4 comprises a single output port 232 and four input ports 232-1 through 232-4, and the output port 232 of the first wavelength-band multiplexer 230-1 is connected to the first device output port 210-11. Furthermore, the output port 232 of the second wavelength-band multiplexer 230-2 is connected to the second device output port 210-22, the output port 232 of the third wavelength-band multiplexer 230-3 is connected to the third device output port 210-23, and the output port 232 of the fourth wavelength-band multiplexer 230-4 is connected to the fourth device output port 210-24.

[0075] It should be understood that each of the wavelength-band demultiplexers 220-1 through 220-4 and each of the wavelength-band multiplexers 230-1 through 230-4 may, for example, be made using a dielectric multilayer filter, an optical coupler which is made with an optical fiber, or an optical coupler which is made with a planar optical waveguide, or the like.

[0076] The 4x4 arrayed-waveguide grating 241 is made, for example, from a quartz type optical waveguide, and, along with having a cyclic-wavelength characteristic, also has four input ports 2411-1 through 2411-4 and four output ports 2412-1 through 2412-4; and the first through the fourth input ports 2411-1 through 2411-4 are respectively connected in one to one correspondence to the first output ports 222-1 of the first through the fourth wavelength-band demultiplexers 220-1 through 220-4 in the order described, while the first through the fourth output ports 2412-1 through 2412-4 are respectively connected in one to one correspondence to the first input ports 231-1 of the first through the fourth wavelength-band multiplexers 230-1 through 230-4 in the order described.

[0077] The 4x4 arrayed-waveguide grating 242 has four input ports 2421-1 through 2421-4 and four output ports 2422-1 through 2422-4; and the first through the fourth input ports 2421-1 through 2421-4 are respectively connected in one to one correspondence to the second output ports 222-2 of the first through the fourth wavelength-band demultiplexers 220-1 through 220-4 in the order described, while the first through the fourth output ports 2422-1 through 2422-4 are respectively connected in one to one correspondence to the second input ports 231-2 of the first through the fourth wavelength-band multiplexers 230-1 through 230-4 in the order described.

[0078] The 4x4 arrayed-waveguide grating 243 has

four input ports 2431-1 through 2431-4 and four output ports 2432-1 through 2432-4; and the first through the fourth input ports 2431-1 through 2431-4 are respectively connected in one to one correspondence to the third output ports 222-3 of the first through the fourth wavelength-band demultiplexers 220-1 through 220-4 in the order described, while the first through the fourth output ports 2432-1 through 2432-4 are respectively connected in one to one correspondence to the third input ports 231-3 of the first through the fourth wavelength-band multiplexers 230-1 through 230-4 in the order described.

[0079] The 4x4 arrayed-waveguide grating 244 has four input ports 2441-1 through 2441-4 and four output ports 2442-1 through 2442-4; and the first through the fourth input ports 2441-1 through 2441-4 are respectively connected in one to one correspondence to the fourth output ports 222-4 of the first through the fourth wavelength-band demultiplexers 220-1 through 220-4 in the order described, while the first through the fourth output ports 2442-1 through 2442-4 are respectively connected in one to one correspondence to the fourth input ports 231-4 of the first through the fourth wavelength-band multiplexers 230-1 through 230-4 in the order described.

[0080] Next, the components which make up the wavelength-routing device 210 will be explained in detail.

[0081] As shown in FIG. 2, the wavelength-band demultiplexer 220 (220-1 through 220-4) has a single input port 221 and four output ports 222-1 through 222-4, and an optical signal whose wavelength is included in the wavelength band $\lambda B_1 \pm \Delta\lambda_1$ (where λB_1 and $\Delta\lambda_1$ respectively denote wavelengths) is outputted from the first output port 222-1, while an optical signal whose wavelength is included in the wavelength band $\lambda B_2 \pm \Delta\lambda_2$ (where λB_2 and $\Delta\lambda_2$ respectively denote wavelengths) is outputted from the second output port 222-2. Furthermore, an optical signal whose wavelength is included in the wavelength band $\lambda B_3 \pm \Delta\lambda_3$ (where λB_3 and $\Delta\lambda_3$ respectively denote wavelengths) is outputted from the third output port 222-3, while an optical signal whose wavelength is included in the wavelength band $\lambda B_4 \pm \Delta\lambda_4$ (where λB_4 and $\Delta\lambda_4$ respectively denote wavelengths) is outputted from the fourth output port 222-4.

[0082] This embodiment employs the wavelength-band demultiplexers 220-1 through 220-4 which use dielectric multilayer filters, $\lambda B_1 = 1511$ nm, $\lambda B_2 = 1531$ nm, $\lambda B_3 = 1551$ nm, $\lambda B_4 = 1571$ nm, and $\Delta\lambda_1, \Delta\lambda_2 = \Delta\lambda_3 = \Delta\lambda_4 = 9$ nm.

[0083] As shown in FIG. 3, the wavelength-band multiplexer 230 (230-1 through 230-4) has four input ports 231-1 through 231-4 and a single output port 232; and: an optical signal whose wavelength is included in the wavelength band $\lambda B_1 \pm \Delta\lambda_1$ (where λB_1 and $\Delta\lambda_1$ respectively denote wavelengths) is inputted to the first input port 231-1; an optical signal whose wavelength is included in the wavelength band $\lambda B_2 \pm \Delta\lambda_2$ (where λB_2 and $\Delta\lambda_2$ respectively denote wavelengths) is inputted to the second input port 231-2; an optical signal whose wavelength is included in the wavelength band $\lambda B_3 \pm \Delta\lambda_3$

(where λB_3 and $\Delta\lambda_3$ respectively denote wavelengths) is inputted to the third input port 231-3; and an optical signal whose wavelength is included in the wavelength band $\lambda B_4 \pm \Delta\lambda_4$ (where λB_4 and $\Delta\lambda_4$ respectively denote wavelengths) is inputted to the fourth input port 231-4; and the optical signals which have been inputted to these four input ports 231-1 through 231-4 are multiplexed and are outputted from the output port 232.

[0084] This embodiment uses the wavelength-band multiplexers 230-1 through 230-4 which use dielectric multilayer filters, $\lambda B_1 = 1511$ nm, $\lambda B_2 = 1531$ nm, $\lambda B_3 = 1551$ nm, $\lambda B_4 = 1571$ nm, and $\Delta\lambda_1 = \Delta\lambda_2 = \Delta\lambda_3 = \Delta\lambda_4 = 9$ nm.

[0085] As previously described, the arrayed-waveguide gratings 241 through 244 have four input ports and four output ports, and the arrayed-waveguide grating 241 is one whose wavelength-routing characteristic is designed for a wavelength which is included in the wavelength band $\lambda B_1 \pm \Delta\lambda_1$; and the relationship between its respective input and output ports and the wavelengths $\lambda_{11}, \lambda_{12}, \lambda_{13}$, and λ_{14} is as shown in FIG. 4. Moreover, it is arranged for $\lambda_{11}, \lambda_{12}, \lambda_{13}$, and λ_{14} to be mutually different, and for the relationship $\lambda B_1 - \Delta\lambda_1 < \lambda_{11}, \lambda_{12}, \lambda_{13}, \lambda_{14} < \lambda B_1 + \Delta\lambda_1$ to be satisfied.

[0086] The arrayed-waveguide grating 242 is one whose wavelength-routing characteristic is designed for a wavelength which is included in the wavelength band $\lambda B_2 \pm \Delta\lambda_2$, and the relationship between its respective input and output ports and the wavelengths $\lambda_{21}, \lambda_{22}, \lambda_{23}$, and λ_{24} is as shown in FIG. 5. Moreover, it is arranged for $\lambda_{21}, \lambda_{22}, \lambda_{23}$, and λ_{24} to be mutually different, and for the relationship $\lambda B_2 - \Delta\lambda_2 < \lambda_{21}, \lambda_{22}, \lambda_{23}, \lambda_{24} < \lambda B_2 + \Delta\lambda_2$ to be satisfied.

[0087] The arrayed-waveguide grating 243 is one whose wavelength-routing characteristic is designed for a wavelength which is included in the wavelength band $\lambda B_3 \pm \Delta\lambda_3$, and the relationship between its respective input and output ports and the wavelengths $\lambda_{31}, \lambda_{32}, \lambda_{33}$, and λ_{34} is as shown in FIG. 6. Moreover, it is arranged for $\lambda_{31}, \lambda_{32}, \lambda_{33}$, and λ_{34} to be mutually different, and for the relationship $\lambda B_3 - \Delta\lambda_3 < \lambda_{31}, \lambda_{32}, \lambda_{33}, \lambda_{34} < \lambda B_3 + \Delta\lambda_3$ to be satisfied.

[0088] The arrayed-waveguide grating 244 is one whose wavelength-routing characteristic is designed for a wavelength which is included in the wavelength band $\lambda B_4 \pm \Delta\lambda_4$, and the relationship between its respective input and output ports and the wavelengths $\lambda_{41}, \lambda_{42}, \lambda_{43}$, and λ_{44} is as shown in FIG. 7. Moreover, it is arranged for $\lambda_{41}, \lambda_{42}, \lambda_{43}$, and λ_{44} to be mutually different, and for the relationship $\lambda B_4 - \Delta\lambda_4 < \lambda_{41}, \lambda_{42}, \lambda_{43}, \lambda_{44} < \lambda B_4 + \Delta\lambda_4$ to be satisfied.

[0089] It should be understood that, in this embodiment, quartz type optical waveguide types are used as the arrayed-waveguide gratings 241 through 244.

[0090] Next, the structure of the communication nodes 200-1 through 200-4 will be explained.

[0091] FIG. 8 is a block diagram showing the structure of the optical transceiver section of each of the commu-

nication nodes 200-1 through 200-4. In FIG. 8, 201 denotes an optical transceiver section, 250 denotes an optical transmission line which conducts the optical signals which have been outputted from the communication node 200-1 through 200-4 to the wavelength-routing device 210, and 260 is an optical transmission line which conducts the optical signal which has been outputted from the wavelength-routing device 210 to the communication nodes 200-1 through 200-4.

[0092] The optical transceiver section 201 comprises a wavelength-band multiplexer 230 which has four input ports and one output port, a wavelength-band demultiplexer 220 which has one input port and four output ports, four optical transmission sections 290-1 through 290-4, and four optical reception sections 300-1 through 300-4.

[0093] It should be understood that each of the wavelength-band demultiplexer 220 and the wavelength-band multiplexer 230 is made using, for example, a dielectric multilayer filter, an optical coupler which is made with an optical fiber, or an optical coupler which is made with a planar optical waveguide, or the like.

[0094] The optical transmission line 250 is connected to the output port 230-21 of the wavelength-band multiplexer 230, and the optical signal output from the first optical transmission section 290-1 is inputted to the first input port 230-11. Furthermore, the optical signal output from the second optical transmission section 290-2 is inputted to the second input port 230-12 of the wavelength-band multiplexer 230; the optical signal output from the third optical transmission section 290-3 is inputted to the third input port 230-13; and the optical signal output from the fourth optical transmission section 290-4 is inputted to the fourth input port 230-14.

[0095] The first optical transmission section 290-1 is an optical transmission section of the wavelength band $\lambda B_1 \pm \Delta\lambda_1$, and comprises a wavelength division multiplexer 271 which has four input ports 271-11 through 271-14 and one output port 271-21, and four optical transmitters 2711-1 through 2711-4 which are connected to the input ports 271-11 through 271-14. Furthermore, the optical transmitters 2711-1 through 2711-4 convert electrical data signals which have been inputted into optical signals of respective wavelengths λ_{11} , λ_{12} , λ_{13} , and λ_{14} and outputs them.

[0096] The second optical transmission section 290-2 is an optical transmission section of the wavelength band $\lambda B_2 \pm \Delta\lambda_2$, and comprises a wavelength division multiplexer 272 which has four input ports 272-11 through 272-14 and one output port 272-21, and four optical transmitters 2712-1 through 2712-4 which are connected to the input ports 272-11 through 272-14. Furthermore, the optical transmitters 2712-1 through 2712-4 convert electrical data signals which have been inputted into optical signals of respective wavelengths λ_{21} , λ_{22} , λ_{23} , and λ_{24} and outputs them.

[0097] The third optical transmission section 290-3 is an optical transmission section of the wavelength band $\lambda B_3 \pm \Delta\lambda_3$, and comprises a wavelength division multi-

plexer 273 which has four input ports 273-11 through 273-14 and one output port 273-21, and four optical transmitters 2713-1 through 2713-4 which are connected to the input ports 273-11 through 273-14. Furthermore, the optical transmitters 2713-1 through 2713-4 convert electrical data signals which have been inputted into optical signals of respective wavelengths λ_{31} , λ_{32} , λ_{33} , and λ_{34} and outputs them.

[0098] The fourth optical transmission section 290-4 is an optical transmission section of the wavelength band $\lambda B_4 \pm \Delta\lambda_4$, and comprises a wavelength division multiplexer 274 which has four input ports 274-11 through 274-14 and one output port 274-21, and four optical transmitters 2714-1 through 2714-4 which are connected to the input ports 274-11 through 274-14. Furthermore, the optical transmitters 2714-1 through 2714-4 convert electrical data signals which have been inputted into optical signals of respective wavelengths λ_{41} , λ_{42} , λ_{43} , and λ_{44} and outputs them.

[0099] The optical transmission line 260 is connected to the input port 220-11 of the wavelength-band demultiplexer 220, and the optical signal which is outputted from the first output port 220-21 is inputted to the first optical reception section 300-1. Furthermore, the optical signal which is outputted from the second output port 220-22 of the wavelength-band demultiplexer 220 is inputted to the second optical reception section 300-2, the optical signal which is outputted from the third output port 220-23 is inputted to the third optical reception section 300-3, and the optical signal which is outputted from the fourth output port 220-24 is inputted to the fourth optical reception section 300-4.

[0100] The first optical reception section 300-1 comprises a wavelength division demultiplexer 281 which comprises one input port 281-11 and four output ports 281-21 through 281-24, and four optical receivers 2811-1 through 2811-4 which are connected to the output ports 281-21 through 281-24.

[0101] The wavelength division demultiplexer 281 is one whose wavelength division demultiplexing characteristic is designed for a wavelength which is included in the wavelength band $\lambda B_1 \pm \Delta\lambda_1$, and, when optical signals of wavelengths λ_{11} , λ_{12} , λ_{13} , and λ_{14} are inputted to its input port 281-11, the optical signal of the wavelength λ_{11} is outputted at the first output port 281-21, the optical signal of the wavelength λ_{12} is outputted at the second output port 281-22, the optical signal of the wavelength λ_{13} is outputted at the third output port 281-23, and the optical signal of the wavelength λ_{14} is outputted at the fourth output port 281-24. Furthermore, each of the four optical receivers 2811-1 through 2811-4 converts the optical signal which has been inputted into an electrical signal, and outputs it as a data signal.

[0102] The second optical reception section 300-2 comprises a wavelength division demultiplexer 282 which comprises one input port 282-11 and four output ports 282-21 through 282-24, and four optical receivers 2812-1 through 2812-4 which are connected to the output

ports 282-21 through 282-24.

[0103] The wavelength division demultiplexer 282 is one whose wavelength division demultiplexing characteristic is designed for a wavelength which is included in the wavelength band $\lambda B_2 \pm \Delta\lambda_2$, and, when optical signals of wavelengths λ_{21} , λ_{22} , λ_{23} , and λ_{24} are inputted to its input port 282-11, the optical signal of the wavelength λ_{21} is outputted at the first output port 282-21, the optical signal of the wavelength λ_{22} is outputted at the second output port 282-22, the optical signal of the wavelength λ_{23} is outputted at the third output port 282-23, and the optical signal of the wavelength λ_{24} is outputted at the fourth output port 282-24. Furthermore, each of the four optical receivers 2812-1 through 2812-4 converts the optical signal which has been inputted into an electrical signal, and outputs it as a data signal.

[0104] The third optical reception section 300-3 comprises a wavelength division demultiplexer 283 which comprises one input port 283-11 and four output ports 283-21 through 283-24, and four optical receivers 2813-1 through 2813-4 which are connected to the output ports 283-21 through 283-24.

[0105] The wavelength division demultiplexer 283 is one whose wavelength division demultiplexing characteristic is designed for a wavelength which is included in the wavelength band $\lambda B_3 \pm \Delta\lambda_3$, and, when optical signals of wavelengths λ_{31} , λ_{32} , λ_{33} , and λ_{34} are inputted to its input port 283-11, the optical signal of the wavelength λ_{31} is outputted at the first output port 283-21, the optical signal of the wavelength λ_{32} is outputted at the second output port 283-22, the optical signal of the wavelength λ_{33} is outputted at the third output port 283-23, and the optical signal of the wavelength λ_{34} is outputted at the fourth output port 283-24. Furthermore, each of the four optical receivers 2813-1 through 2813-4 converts the optical signal which has been inputted into an electrical signal, and outputs it as a data signal.

[0106] The fourth optical reception section 300-4 comprises a wavelength division demultiplexer 284 which comprises one input port 284-11 and four output ports 284-21 through 284-24, and four optical receivers 2814-1 through 2814-4 which are connected to the output ports 284-21 through 284-24.

[0107] The wavelength division demultiplexer 284 is one whose wavelength division demultiplexing characteristic is designed for a wavelength which is included in the wavelength band $\lambda B_4 \pm \Delta\lambda_4$, and, when optical signals of wavelengths λ_{41} , λ_{42} , λ_{43} , and λ_{44} are inputted to its input port 284-11, the optical signal of the wavelength λ_{41} is outputted at the first output port 284-21, the optical signal of the wavelength λ_{42} is outputted at the second output port 284-22, the optical signal of the wavelength λ_{43} is outputted at the third output port 284-23, and the optical signal of the wavelength λ_{44} is outputted at the fourth output port 284-24. Furthermore, each of the four optical receivers 2814-1 through 2814-4 converts the optical signal which has been inputted into an electrical signal, and outputs it as a data signal.

[0108] Next, the operation of the optical communication network system according to this first embodiment according to the present invention will be explained with reference to FIGS. 1 through 8. Here, by way of example, the case in which the communication node 200-1 performs data communication with the communication node 200-3 will be explained.

[0109] At the communication node 200-1, the optical signal S13-p of the wavelength λp_3 which has been outputted from the optical transmitter 271p-3 of the optical transmission section 290-p which is included in the optical transmitter which sends out the optical signal of the wavelength band $\lambda B_p \pm \Delta\lambda_p$ (where p is an integer variable, and, in this embodiment, p is 1, 2, 3, or 4, and can take the same value in the explanation below) is outputted to the optical transmission line 250 via the wavelength division multiplexer 27p and the wavelength-band multiplexer 230.

[0110] Furthermore, the optical signal S13-p is transmitted along the optical transmission line 250, and arrives at the input port 221 of the wavelength-band demultiplexer 220-1 of the wavelength-routing device 210 and is outputted from the output port 222-p.

[0111] The optical signal S13-p which has been outputted from the output port 222-p is inputted to the first input port 24p1-1 of the arrayed-waveguide grating 24p.

[0112] From the relationships between the input and output ports of the arrayed-waveguide grating 24p and wavelengths shown in FIGS. 4 through 7, the optical signal S13-p is outputted by the third output port 24p2-3 of the arrayed-waveguide grating 24p.

[0113] The optical signal S13-p which has been outputted from the third output port 24p2-3 of the arrayed-waveguide grating 24p is inputted to the p-th input port 231-p of the wavelength-band multiplexer 230-3, and is outputted from the output port 232.

[0114] The optical signal S13-p which has been outputted from the output port 232 of the wavelength-band multiplexer 230-3 is transmitted along the optical transmission line 260-3, and arrives at the input port 220-11 of the wavelength-band demultiplexer 220 of the communication node 200-3.

[0115] The optical signal S13-p is outputted from the output port 220-2p of the wavelength-band demultiplexer 220 of the communication node 200-3, is inputted to the wavelength division demultiplexer 28p, is outputted from the output port 28p-23 of the wavelength division demultiplexer 28p, and is received by the optical receiver 281p-3.

[0116] In this manner, when transmitting data from the communication node 200-1 to the communication node 200-3, it is possible to do this by using the optical signal S13-p of the wavelength λp_3 which is sent out from the optical transmitter 271p-3, which is provided in the optical transmission section 290-p of the wavelength band $\lambda B_p \pm \Delta\lambda_p$ of the communication node 200-1.

[0117] In other words, in this embodiment, it is possible to use the four optical paths S13-1, S13-2, S13-3, and

S13-4. By doing the same as above, in this embodiment, it is possible to perform communication via four optical paths between two communication nodes.

[0118] In the above manner, although with this embodiment, just as in the conventional example, the communication nodes 200-1 through 200-4 and the wavelength-routing device 210 which make up the optical communication system are connected by a pair of optical fibers, in this embodiment, by arranging the arrayed-wavelength gratings 241 through 244 independently in each wavelength band in the wavelength-routing device 210, and by performing the wavelength-band multiplexing of wavelength bands and the wavelength-band demultiplexing of wavelength bands in each of the communication nodes 200-1 through 200-4 and the wavelength-routing device 210, it is possible to establish a single optical path between the communication nodes for each wavelength band.

[0119] Accordingly, although in the conventional example it was possible to establish only a single optical path between the communication nodes with one pair of optical fibers, by utilizing the structure of this embodiment, it is possible to establish, at maximum, the same number of optical paths as wavelength bands, and thus it is possible to increase the transmission capacity between the communication nodes in an easy manner.

THE SECOND EMBODIMENT

[0120] Next, the second embodiment according to the present invention will be explained.

[0121] As has already been explained with regard to the first embodiment, although it is possible to establish four optical paths using four wavelength bands (the wavelength band $\lambda B_1 \pm \Delta\lambda_1$, the wavelength band $\lambda B_2 \pm \Delta\lambda_2$, the wavelength band $\lambda B_3 \pm \Delta\lambda_3$, and the wavelength band $\lambda B_4 \pm \Delta\lambda_4$), in the initial construction of an optical communication network system, as shown in FIG. 9, it is possible to provide an optical transmission section and an optical reception section of the single wavelength band $\lambda B_p \pm \Delta\lambda_p$ (where p is an integer variable, and p is any one of 1, 2, 3, and 4) to each of the communication nodes 200-1 through 200-4, and thus to increase the wavelength bands according to the transmission capacity between the communication nodes (in FIG. 9, by way of example, the case of p = 1 is shown).

[0122] For example, FIG. 10 is an example in which another optical transmission section 290-2 and another optical reception section 300-2 of a further wavelength band have been added to each of the communication nodes 200-1 through 200-4 of the second embodiment shown in FIG. 9. By doing this, two optical paths are established between the respective communication nodes.

[0123] Yet further, although in FIG. 10 an optical receiver section for a wavelength band was added to all of the communication nodes 200-1 through 200-4, it would also be possible to add a wavelength band only between those communication nodes for which it is desired to add

a communication band. For example, an initial optical communication network structure may be supposed which is made up from the communication node 200-1 through the communication node 200-4 as shown in FIG. 9, and each of the communication nodes 200-1 through 200-4 has established an optical path at the wavelength band $\lambda B_1 \pm \Delta\lambda_1$ for performing communication.

[0124] Subsequently, if an additional communication band (an optical path) between the communication node 200-1 and the communication node 200-3 has become necessary, it would be acceptable to add, only to the communication node 200-1 and to the communication node 200-3, the optical transmission section 290-2 and the optical reception section 300-2 of the wavelength band $\lambda B_p \pm \Delta\lambda_p$ in which only the optical transmitter 2712-3 and the optical receiver 2812-3 which are necessary for communication between the communication node 200-1 and the communication node 200-3 are implemented as shown in FIG. 11. It should be understood that, in FIG. 11, by way of example, the case p = 2 is shown.

THE THIRD EMBODIMENT

[0125] Next, the third embodiment according to the present invention will be explained with reference to FIG. 12. It should be understood that, in FIG. 12, to structural elements which are the same as in the first embodiment described above, the same reference symbols are affixed, and their explanation will be curtailed. In this embodiment, for each of the communication nodes 200-1 through 200-4, wavelength-tunable optical light source integrated optical transmitters 400-1 and 400-2 are implemented in the optical transmission section 290-2 and the optical transmission section 290-3, respectively, and moreover optical receivers 500-1 and 500-2 are implemented in the optical reception section 300-2 and the optical reception section 300-3, respectively.

[0126] The output port of the wavelength-tunable optical light source integrated optical transmitter 400-1 is connected to the input port 230-12 of the wavelength-band multiplexer 230, while the output port of the wavelength-tunable optical light source integrated optical transmitter 400-2 is connected to the input port 230-13 of the wavelength-band multiplexer 230.

[0127] The wavelength-tunable optical light source integrated optical transmitter 400-1 can output light of the wavelengths λ_{21} , λ_{22} , λ_{23} , and λ_{24} belonging to the wavelength band $\lambda B_2 \pm \Delta\lambda_2$, and moreover the wavelength-tunable optical light source integrated optical transmitter 400-2 can output light of the wavelengths λ_{31} , λ_{32} , λ_{33} , and λ_{34} belonging to the wavelength band $\lambda B_3 \pm \Delta\lambda_3$. **[0125]**

[0128] Furthermore, the input port of the optical receiver 500-1 is connected to the output port 220-22 of the wavelength-band demultiplexer 220, while the input port of the optical receiver 500-2 is connected to the output port 220-23 of the wavelength-band demultiplexer 220.

[0129] Accordingly, each of the communication nodes 200-1 through 200-4 can increase the number of the optical paths by setting the wavelengths of the optical signals which are outputted from the wavelength-tunable optical light source integrated optical transmitters 400-1 and 400-2 to values for routing the optical signals to the communication nodes for which it is required to establish optical paths by the wavelength-routing device 210.

[0130] Specifically, if the communication node 200-1 performs communication with the communication node 200-3 by using an optical signal of a wavelength which belongs to the wavelength band $\lambda B_2 \pm \Delta\lambda_2$, the wavelength of the optical signal S13-2 which is outputted from the wavelength-tunable optical light source integrated optical transmitter 400-1 of the communication node 200-1 is set to λ_{23} . This optical signal S13-2 is routed by the wavelength-routing device 210, and is received by the optical receiver 500-1 of the communication node 200-3. Furthermore, if the communication node 200-1 performs communication with the communication node 200-4 by using an optical signal of a wavelength which belongs to the wavelength band $\lambda B_3 \pm \Delta\lambda_3$, the wavelength of the optical signal S14-3 which is outputted from the wavelength-tunable optical light source integrated optical transmitter 400-2 of the communication node 200-1 is set to λ_{34} . This optical signal S14-3 is routed by the wavelength-routing device 210, and is received by the optical receiver 500-2 of the communication node 200-4.

[0131] As described above, by providing an optical transmission section which is equipped with a wavelength-tunable optical light source integrated optical transmitter in the communication nodes 200-1 through 200-4, it becomes possible to flexibly select a communication node which communicates in a wavelength band to which the optical transmission section belongs.

[0132] As the above-described wavelength-tunable optical light source integrated optical transmitters 400-1 and 400-2, it is possible to use, for example, a distributed feedback semiconductor laser, or a multi electrode distributed reflector semiconductor laser, or the like. Furthermore, for a distributed feedback semiconductor laser, by equipping it with a means for varying its temperature, it is possible to vary the wavelength of the optical signal which is output from the semiconductor laser according to its temperature; while, with a multi electrode distributed reflector semiconductor laser, by equipping it with a means for varying the value of the energizing electrical current, it is possible to vary the wavelength of the optical signal which is output from the semiconductor laser according to the value of the current flow.

[0133] It should be understood that the above-described embodiment is no more than a concrete example of the present invention, and that the present invention is not limited only to the structure of the above-described embodiment. For example, although in the above-described embodiment the explanation was made by taking, by way of example, both the number of communica-

tion nodes and the number N of device input ports and device output ports of the wavelength-routing device as being 4, this is not to be considered as being limitative; it goes without saying that any value of N will be acceptable, provided that it is an integer greater than or equal to 2.

THE FOURTH EMBODIMENT

[0134] Next, the fourth embodiment according to the present invention will be explained with reference to FIG. 13. It should be understood that, in FIG. 13, to structural elements which are the same as in the first embodiment described above, the same reference symbols are affixed, and their explanation will be curtailed. In this embodiment, for each of the communication nodes 200-1 through 200-4, transmission modules 310 are implemented in the optical transmission section 290-a (where a is an integer from 1 through 4), and reception modules 311 are implemented in the optical reception section 300-a.

[0135] The structures of the transmission modules 310 and the reception modules 311 are shown in FIGS. 14A through 14H.

[0136] In FIGS. 14A through 14H, 301 are optical transmitters, 302 is a wavelength division multiplexer, 303 is a wavelength division demultiplexer, 304 are optical receivers, 305 are wavelength-tunable optical light source integrated optical transmitters, 306 is an optical coupler, 307 are wavelength-tunable filters, and 308 is an optical splitter. There are four types of transmission modules 310-1 through 310-4, and there are four types of reception modules 311-1 through 311-4.

[0137] In the following, the structures of the transmission modules from 310-1 through 310-4 and of the reception modules from 311-1 through 311-4 will be explained in detail.

[0138] In the transmission module 310-1, two or more streams of transmitted data are converted into optical signals of wavelengths which are determined by respectively different optical transmitters 301, and these are wavelength division multiplexed and are outputted by the wavelength division multiplexer 302. In the reception module 311, the wavelength division multiplexed optical signals which have been inputted are demultiplexed by wavelength by the wavelength division demultiplexer 303, and are converted into received signals by the respective optical receivers 304. In the subsequent discussion, the combination of this transmission module 310-1 and this reception module 311-1 will be termed a first transceiving module. It should be understood that, in this first transceiving module, according to requirements, it will also be acceptable to reduce the number of the optical transmitters 301 and the optical receivers 304.

[0139] In the transmission module 310-2, a single stream of transmitted data is converted into an optical signal of a wavelength determined by the optical transmitter 301, and is outputted. In the reception module

311-2, the optical signal of a single wavelength which is inputted is converted by the optical receiver 304 into a received signal. In the subsequent discussion, the combination of this transmission module 310-2 and this reception module 311-2 will be termed a second transceiving module.

[0140] In the transmission module 310-3, a single stream of transmitted data is converted into an optical signal of a wavelength which is determined by the wavelength-tunable optical light source integrated optical transmitter 305, and is outputted. In the reception module 311-3, the optical signal of a single wavelength which is inputted is converted by the optical receiver 304 into a received signal. In the subsequent discussion, the combination of this transmission module 310-3 and this reception module 311-3 will be termed a third transceiving module.

[0141] In the transmission module 310-4, two or more streams of transmitted data are converted into optical signals of respectively different wavelengths which are determined by the N (where N is an integer greater than or equal to 2) wavelength-tunable optical light source integrated optical transmitters 305, and are combined by the optical coupler 306 and are outputted. In the reception module 311-4, the multiplexed optical signal of N or fewer wavelengths which is inputted is distributed into N routes by the optical splitter 308. These distributed optical signals are made into an optical signal of a single wavelength by the wavelength-tunable filters 307 each of which only transmits a signal of a single wavelength, and are respectively converted into received signals by the optical receivers 304. In FIGS. 14G and 14H the case is shown in which N is 4, but the value of N is not to be considered as being limited by this. In the subsequent discussion, the combination of this transmission module 310-4 and this reception module 311-4 will be termed a fourth transceiving module.

[0142] In this embodiment, at an optical transmission section 290-a (where a is an integer from 1 through 4) and an optical reception section 300-a of each communication node which send and receive signals of the same wavelength band, either any one of the first through the fourth transceiving modules may be provided, or alternatively none may be provided. In these cases, it is not absolutely necessary for the transceiving module at another communication node which transmits and receives signals of the same wavelength band to be the same.

[0143] FIG. 15 is a figure showing the structure of the control system which performs the control of this embodiment. In this figure, 211-1 through 211-4 are control devices for transceiver, 213 is an optical path management device, 214 is a communication circuit (network), 200-1 through 200-4 are communication nodes, 220-1 through 220-4 are wavelength-band demultiplexers, 230-1 through 230-4 are wavelength-band multiplexers, and 241, 242, 243 and 244 are 4x4 arrayed-waveguide gratings.

[0144] The control devices for transceiver 211-1

through 211-4 are connected to the four communication nodes 200-1 to 200-4, and perform control of the optical transceiving modules. This control of the optical transceiving modules is performed based upon control signals which are received from the optical path management device 213. A drive signal or a stop signal is transmitted to the optical transmitter 301 which is to be the object of control, a drive signal, a stop signal, or an output wavelength control signal is transmitted to the wavelength-tunable optical light source integrated optical transmitter 305, a transmission wavelength band control signal is transmitted to the wavelength-tunable filters 307, and thereby the optical transceiving module is controlled.

[0145] The optical path management device 213 performs management of the optical path which will be described hereinafter. In order to do this, the optical path management device 213 is connected with the control devices for transceiver 211-1 through 211-4 via the communication circuit 214, and sends and receives control signals to and from them. The internal structure of this optical path management device 213 is shown in FIG. 16. Mainly, this optical path management device 213 is made up from a processor section 3010, a storage medium 3030, and a control signal input-output interface 3020. In this embodiment memory is utilized as the storage medium, but anything may be used as the storage medium, provided that information can be read from it and written to it.

[0146] In the optical path management device 213, databases which maintain the types of the transceiving modules which are implemented at each communication node, and the states of the optical transmitters within the transceiving modules, the wavelength-tunable optical light source integrated optical transmitters, and the wavelength-tunable filters are held in the storage medium 3030.

[0147] When additionally providing or canceling a path between communication nodes based upon these databases with the optical path management device 213, it is decided by the processor section 3010 which of the optical transmitters, wavelength-tunable optical light source integrated optical transmitters, and wavelength-tunable filters at each of the communication nodes should be controlled or not. The results of these decisions are transmitted via the control signal input-output interface 3020 to the control devices for transceiver 211-1 through 211-4 as control signals, and controls the optical transceiving modules so as to be able to additionally provide or to cancel the desired optical path. Furthermore, the optical path management device 213, for each wavelength band, creates and maintains a database in which the optical paths between communication nodes are recorded.

[0148] FIG. 17 shows an example of a database, in which a table is shown which relates to the wavelength band $\lambda B_1 \pm \Delta\lambda_1$. It should be understood that, in FIG. 17, "TLD" means a wavelength-tunable optical light source (Tunable Laser Diode).

[0149] Each row of the database corresponds to a respective one of the communication nodes, and maintains the state of the transmitters which are included in the communication node. In FIG. 17, the first row corresponds to the communication node 200-1, the second row corresponds to the communication node 200-2, the third row corresponds to the communication node 200-3, and the fourth row corresponds to the communication node 200-4.

[0150] Each column of the database maintains information which is related to the optical transmitters of the respective communication nodes.

[0151] The fifth column of the database maintains the types of the transceiving modules which are implemented at the communication nodes. In FIG. 17, the case is shown in which a first transceiving module is implemented at the communication node 200-1, a second transceiving module is implemented at the communication node 200-2, a third transceiving module is implemented at the communication node 200-3, and a fourth transceiving module is implemented at the communication node 200-4.

[0152] The sixth column maintains the numbers of the wavelength-tunable optical light source integrated optical transmitters which are implemented at the communication nodes. In FIG. 17, the case is shown in which no wavelength-tunable optical light source integrated optical transmitters are implemented at the communication node 200-1 and at the communication node 200-2, while a single wavelength-tunable optical light source integrated optical transmitter is implemented at the communication node 200-3, and two wavelength-tunable optical light source integrated optical transmitters are implemented at the communication node 200-4.

[0153] The seventh column maintains, among the wavelength-tunable optical light source integrated optical transmitters which are implemented at the communication nodes, the number thereof which are actually being used. In FIG. 17, the case is shown in which no wavelength-tunable optical light source integrated optical transmitters are being used at the communication node 200-1 and at the communication node 200-2, one wavelength-tunable optical light source integrated optical transmitter is being used at the communication node 200-3, and one wavelength-tunable optical light source integrated optical transmitter is being used at the communication node 200-4.

[0154] The upper entries in the first through the fourth columns maintain the optical wavelengths for transmitting signals to the respective communication nodes 200-1, 200-2, 200-3, and 200-4, while the lower entries therein maintain the states of the optical transmitters for sending signals to these respective communication nodes 200-1, 200-2, 200-3, and 200-4. If a first or a second transceiving module is implemented, the state of the optical transmitter which is maintained shown in the lower entries is one of: "NA" which shows the state in which no optical transmitter which sends a signal to the relevant

communication node is implemented; or "OFF" which shows the state in which an optical transmitter which sends a signal to the relevant communication node is implemented but is not being used; or "ON" which shows the state in which an optical transmitter which sends a signal to the relevant communication node is implemented and is being used. Furthermore, if a third or a fourth transceiving module is implemented, it is one of "OFF" which shows the state in which no wavelength-tunable optical light source integrated optical transmitter which sends an optical signal at a wavelength which sends a signal to the relevant communication node exists, or the "number of the wavelength-tunable optical light source integrated optical transmitter", which shows that a wavelength-tunable optical light source integrated optical transmitter exists which sends an optical signal at a wavelength which sends a signal to the relevant communication node, and which specifies the relevant wavelength-tunable optical light source integrated optical transmitter.

[0155] In the management of the optical paths between the communication nodes, the optical path management device 213 refers to and changes the database when establishing a new optical path between communication nodes and when stopping an already existing optical path between communication nodes, and controls the control devices for transceiver 211-1 through 211-4 via the communication circuit 214.

[0156] First, the operation of the optical path management device 213 when an optical path is newly established between a communication node 200-x and a communication node 200-y (where both x and y are integers greater than or equal to 1 and less than or equal to 4). Here, one example of the trigger for establishment of an optical path between the communication node 200-x and the communication node 200-y is an explicit command for optical path establishment via input from the operator of this system to a console not shown in the figures which is connected to the optical path management device 213. Furthermore, another example of such trigger is that the optical path management device receives monitor information of communication traffic within the system, and that it decides to establish a new optical path between the communication nodes based upon this information.

[0157] The optical path management device 213 searches, from among the four databases which are provided for each of the wavelength bands, a database in which, for both the x-th row and the y-th row, the entry in the fifth column is "1" or "2", or the entry in the fifth column is "3" or "4" and the entry in the sixth column is greater than the entry in the seventh column. Next, within the applicable databases, it searches for the databases in which the lower entries both in the x-th row and the y-th column and in the y-th row and the x-th column are "OFF". If the result of this search is that a plurality of databases are applicable, then it obtains its search results based upon some type of priority ranking; for example, based upon a priority ranking in which a database which corresponds to a shorter wavelength band is accorded priority.

[0158] The optical path management device 213, along with transmitting a command for establishing an optical path between the communication node 200-x and the communication node 200-y upon the wavelength band which corresponds to the database which was obtained as the result of the search via the communication circuit 214 to the control devices for transceiver 211-x and 211-y, also updates the database.

[0159] The signal which is transmitted to the control device for transceiver 211-x will now be explained in concrete terms by way of an example. If the communication node 200-x is implemented with the first or the second transceiving module, then a signal is transmitted for creating a drive signal for the optical transmitter 301 which outputs the wavelength which is maintained in the upper entry of the x-th row and the y-th column of the database. At the same time, "ON" is written into the lower entry of the x-th row and the y-th column of the database. If the communication node 200-x is implemented with the third transceiving module, a signal is transmitted for creating a transmission wavelength setting signal which sets the wavelength which is outputted by the wavelength-tunable optical light source integrated optical transmitter 305 to the wavelength which is maintained in the upper entry of the x-th row and the y-th column of the database. At the same time, a signal is transmitted for creating a drive signal for the wavelength-tunable optical light source integrated optical transmitter 305. Furthermore, at the same time, "1" is written into the lower entry of the x-th row and the y-th column of the database, and "1" is written into the seventh row entry. If the communication node 200-x is implemented with the fourth transceiving module, a signal is transmitted for creating a transmission wavelength setting signal which sets the wavelength which is outputted by the wavelength-tunable optical light source integrated optical transmitter 305 of the lowest number among the ones of the wavelength-tunable optical light source integrated optical transmitters 305 which are unused to the wavelength which is maintained in the upper entry of the x-th row and the y-th column of the database. At the same time, a signal is transmitted for creating a drive signal for the wavelength-tunable optical light source integrated optical transmitter 305. Moreover, a signal is transmitted for creating a transmission wavelength band control signal which sets the transmission wavelength band of the wavelength-tunable filter 307 which is paired with the wavelength-tunable optical light source integrated optical transmitter 305 to the wavelength which is maintained in the upper entry of the x-th row and the y-th column of the database. At the same time as the above tasks, the number of the wavelength-tunable optical light source integrated optical transmitter which has been driven is written into the lower entry in the x-th row and the y-th column of the database, and 1 is added to the seventh row entry.

[0160] It should be understood that, when searching the databases, if no applicable database exists, the fact that it is not possible to add an optical path is transmitted

to the source of the request.

[0161] Next, the operation of the optical path management device 213 will be explained when a requirement has arisen to cancel the optical path between a communication node 200-xx and a communication node 200-yy (where xx and yy are both integers which are greater than or equal to 1 and less than or equal to 4) between which an optical path is already established. Here, one example of the trigger for cancellation of the optical path between the communication node 200-xx and the communication node 200-yy is an explicit command for optical path cancellation via input from the operator of this optical communication network system to a console not shown in the figures which is connected to the optical path management device 213. Furthermore, another example of such trigger is that the optical path management device receives monitor information of communication traffic within the system, and that it decides to cancel the new optical path between the communication nodes based upon this information.

[0162] The optical path management device 213 searches, from among the four databases which are provided for each of the wavelength bands, a database in which the lower entry in the xx-th row and the yy-th column and the lower entry in the yy-th row and the xx-th column are both "ON" or both of them are the number of wavelength-tunable optical light source integrated optical transmitters. If the result of this search is that a plurality of databases are applicable, then it obtains its search results based upon some type of priority ranking; for example, based upon a priority ranking in which a database which corresponds to a shorter wavelength band is accorded priority.

[0163] The optical path management device 213, along with transmitting a command for canceling the optical path between the communication node 200-xx and the communication node 200-yy upon the wavelength band which corresponds to the database which was obtained as the result of the search via the communication circuit 214 to the control devices for transceiver 211-xx and 211-yy, also updates the database.

[0164] The signal which is transmitted to the control device for transceiver 211-xx will now be explained in concrete terms by way of an example. If the communication node 200-xx is implemented with the first or the second transceiving module, a signal is transmitted for creating a cancellation signal for the optical transmitter 301 which outputs the wavelength which is maintained in the upper entry of the xx-th row and the yy-th column of the database. At the same time, "OFF" is written into the lower entry of the xx-th row and the yy-th column of the database. If the communication node 200-xx is implemented with the third transceiving module, a signal is transmitted for creating a cancellation signal for the wavelength-tunable optical light source integrated optical transmitter 305. At the same time, "OFF" is written into the lower entry in the xx-th row and the yy-th column of the database, and "0" is written into the seventh row. If

the communication node 200-x is implemented with the fourth transceiving module, a signal is transmitted for creating a cancellation signal for the wavelength-tunable optical light source integrated optical transmitter 305 whose number is written in the lower entry in the xx-th row and the yy-th column of the database. At the same time, "OFF" is written into the lower entry in the xx-th row and the yy-th column of the database, and 1 is subtracted from the seventh row entry.

[0165] It should be understood that, when searching the databases, if no applicable database exists, the fact that it is not possible to cancel the optical path is transmitted to the source of the request.

[0166] It is possible to manage the optical paths between the communication nodes by doing as described above. It should be understood that the management method for the optical paths between the communication nodes need not absolutely necessarily be according to this embodiment; any method which is able to implement the same functions will be acceptable, and such a method is also to be considered as being included within the scope of the present invention.

[0167] For example, it would also be acceptable to implement the function of the optical path management device 213 in any one of the control devices for transceiver 211-1 through 211-4, and to omit the optical path management device 213.

[0168] Next, the theory of the optimal wavelength control and management method of an optical path which are applied to this embodiment will be explained in detail with reference to examples according to the fifth through seventh embodiments.

[0169] It should be understood that here the objects which are taken for control and management are the wavelength-tunable optical light source integrated optical transmitters 400-1 and 400-2. Attention is directed to the wavelength bands with which the wavelength-tunable optical light source integrated optical transmitters 400-1 and 400-2 are equipped, in other words to the wavelength bands $\lambda B_2 \pm \Delta\lambda_2$ and $\lambda B_3 \pm \Delta\lambda_3$. That is, for at least the wavelength bands which are the objects of control and management, it is presupposed that all of the communication nodes are provided with wavelength-tunable optical light source integrated optical transmitters. To put it in another manner, with regard to the wavelength bands which are not the objects of control and management, there is no specific constraint on optical transmitters and optical receivers which are provided in the respective communication nodes. For this reason, it is not necessary for the structures of the transmitters and the receivers to be the same at all of the communication nodes.

[0170] Furthermore, in this explanation of the theory, each of the wavelength bands $\lambda B_2 \pm \Delta\lambda_2$ and $\lambda B_3 \pm \Delta\lambda_3$ is treated as a single wavelength, and the wavelength-band demultiplexer 220 and the wavelength-band multiplexer 230 are respectively treated as a wavelength division demultiplexing circuit 1 and a wavelength division multiplexing circuit 2. Yet further, the 4x4 arrayed-

waveguide gratings 241 through 244 are treated as optical matrix switches 3 and 6. At this time, controlling the wavelengths transmitted by the wavelength-tunable optical light source integrated optical transmitters 400-1 and 400-2 within the corresponding wavelength bands corresponds to controlling the optical paths of the matrix switches in the following explanation.

THE FIFTH EMBODIMENT

[0171] FIG. 18 is a figure showing the fifth embodiment according to the present invention. In this figure, 1-1, 1-2, ..., 1-N are wavelength division demultiplexing circuits, 2-1, 2-2, ... 2-N are wavelength division multiplexing circuits, 3-1, 3-2, ... 3-m are optical matrix switches, 4-1, 4-2, ... 4-N are input optical fibers, 5-1, 5-2, ... 5-N are output optical fibers, 11-1, 11-2, ... 11-N are control devices for transceiver, 12 is an optical matrix switch control device, 13 is an optical path management device, and 14 is a communication circuit (a network).

[0172] Here, although it is possible to utilize a circuit which employs an arrayed-waveguide grating or a dielectric multilayer filter as the wavelength division demultiplexing circuit and the wavelength division multiplexing circuit, the particular method by which they are implemented is of no importance, provided that the same functions are implemented. Furthermore although, as the optical matrix switches, it is possible to employ optical switches which use the thermo-optic effect, waveguide type switches, MEMS optical switches, bubble optical switches, N input N output arrayed-waveguide gratings, or the like, the particular method by which they are implemented is of no importance, provided that the same functions are implemented. Yet further, the particular method by which the entire structure is implemented is of no importance, provided that the same input and output characteristics are implemented.

[0173] The control devices for transceiver 11-1 through 11-N are respectively connected to transceivers (not shown in the figures) of N communication nodes, and they perform control of the wavelength and the like of the optical signals which are transmitted and received by these transceivers.

[0174] The optical matrix switch control device 12 is connected to the optical matrix switches 3-1 through 3-N, and performs control of the optical paths between the input and output ports of each of the optical matrix switches 3-1 through 3-N.

[0175] The optical path management device 13 is connected to the control devices for transceiver 11-1 through 11-N and to the optical matrix switch control device 12 via the communication circuit 14, and performs transmission and reception of information signals and management of the optical path based upon the present invention, as will be described hereinafter.

[0176] In the following, the optical path management method of the present invention will be explained by taking, as an example, the case in which the number of input

optical fibers and output optical fibers is 8, and the number of multiplexed wavelengths is 4. However, the scale of the optical communication network system to which the present invention can be applied is not to be considered as being limited by this.

[0177] Based upon the numbers of the input optical fibers and the output optical fibers and the number of multiplexed wavelengths, four 8-input 8-output optical matrix switches are provided in the optical communication network system. It will be supposed that numbers 1 through 4 are appended to these four optical matrix switches which specify their respective mutually differing priority rankings, and furthermore that numbers 1 through 8 are appended to the groups of a communication node, an input optical fiber along which passes the output signal of the communication node, an input port of the optical matrix switch which is connected to the input optical fiber, the output optical fiber along which passes an input signal to the communication node, and an output port of the optical matrix switch which is connected to the output optical fiber.

[0178] The optical path management device 13 creates and maintains a database (not shown in the figures) in which the optical paths for each of the optical matrix switches are recorded.

[0179] FIGS. 19A through 19D are figures showing an example of the database which consists of tables which respectively correspond to the four optical matrix switches.

[0180] In these four tables, the number in the first row specifies the priority ranking of the optical matrix switch, while the number in the second column specifies the number of the destination communication node of the optical path which is established between the destination communication node and the communication node specified by the number of the first column via the optical matrix switch. Furthermore, here, for communication nodes which are not used in the relevant optical matrix switches, "0" is recorded as the number of the destination communication node of the optical path.

[0181] In the management of the optical paths between the input optical fibers and the output optical fibers (between the input communication nodes and the destination communication nodes of the optical path), it becomes necessary to refer to and to change the database when establishing a new optical path, when canceling an already existing optical path, and when changing over an optical path between the optical matrix switches.

[0182] First, the operation of the optical path management device 13 will be explained when a requirement has arisen newly to establish an optical path between the xx-th communication node and the yy-th communication node.

[0183] The flow of the processing of the optical path management device when establishing a new optical path as described above is shown in FIG. 20.

[0184] The optical path management device 13 searches in the database for an optical matrix switch

which is not in use by both the xx-th communication node and the yy-th communication node in the order from the data which corresponds to the optical matrix switch which has the priority ranking whose number is the lowest (in the step S1). For example, in the state of the databases shown in FIGS. 19A through 19D, if a requirement has arisen newly to establish an optical path between the communication node 3 and the communication node 4, the second optical matrix switch whose priority ranking number is the smallest is obtained as the search result, from among the optical matrix switches which are not used by both the communication node 3 and the communication node 4.

[0185] When a search result is obtained (YES in the step S2), the optical path management device 13 transmits (in the step S3) a command for newly establishing an optical path according to the search result to the control devices for transceiver 11 of the xx-th communication node and of the yy-th communication node and the optical matrix switch control device 12, via the communication circuit 14, here, it transmits a command to execute communication by an optical signal of the wavelength λ_2 to the control devices for transceiver of the communication node 3 and of the communication node 4, and it causes an optical path to be established in the optical matrix switch control device 12 between the third input port and the fourth output port of the second optical matrix switch, and moreover, along with transmitting the command to cause an optical path to be established between the fourth input port and the third output port, it registers the optical path which has newly been established in the database (in the step S4), here, writes 4 as the destination communication node of the optical path of the input communication node 3 in the table which corresponds to the second optical matrix switch, and writes 3 as the destination communication node of the optical path of the input communication node 4.

[0186] Next, the operation of the optical path management device 13 will be explained, when the necessity for an optical path which is already established between the xxx-th communication node and the yyy-th communication node has ceased.

[0187] The flow of the processing of the optical path management device when canceling an already existing optical path as described above is shown in FIG. 21.

[0188] The optical path management device 13 searches in the database, for an optical matrix switch which establishes an optical path between the xxx-th communication node and the yyy-th communication node in the order from the data which corresponds to the optical matrix switch which has the priority ranking whose number is the highest (in the step S11). For example if, in the state of the databases shown in FIGS. 19A through 19D, the optical path between the communication node 1 and the communication node 3 has become unnecessary, the fourth optical matrix switch whose priority ranking number is the highest is the search result, among the optical matrix switches which establish optical paths be-

tween the communication node 1 and the communication node 3.

[0189] When a search result is obtained (YES in the step S12), the optical path management device 13 transmits (in the step S13) a command for canceling an optical path according to the search result to the control devices for transceiver 11 of the xxx-th communication node and of the yyy-th communication node and the optical matrix switch control device 12, via the communication circuit 14; here, it transmits a command to stop communication by an optical signal of the wavelength λ_4 to the control devices for transceiver of the communication node 1 and of the communication node 3, and it causes the optical path in the optical matrix switch control device 12 between the first input port and the third output port of the fourth optical matrix switch to be cancelled, and moreover, along with transmitting the command to cause the optical path to be cancelled between the third input port and the first output port, it deletes the optical path which has been cancelled from the database (in the step S14), here, writes 0 as the destination communication node of the optical path of the input communication node 1 in the table which corresponds to the fourth optical matrix switch, and writes 0 as the destination communication node of the optical path of the input communication node 3.

[0190] Next, the operation of the optical path management device 13 when changing over an optical path between the optical matrix switches will be explained.

[0191] The flow of the processing of the optical path management device when changing over an optical path between the optical matrix switches as described above is shown in FIG. 22.

[0192] The optical path management device 13 searches, in an order which is determined in advance for all the combinations of x and y, the number b of the one of the highest priority ranking among the optical matrix switches which establish optical paths between the x-th communication node and the y-th communication node, and the number a of the one of the lowest priority ranking among the optical matrix switches which does not use the x-th communication node and the y-th communication node, and extracts the combinations of x, y, a, and b for which the number a is smaller than the number b (in the step S21). For example, in the state of the database shown in FIGS. 19A through 19D, it extracts (x, y, a, b) = (2, 5, 1, 2), (2, 8, 1, 3), and (1, 3, 2, 4).

[0193] Next, if the search result as now described is obtained (YES in the step S22), the optical path management device 13, if there is one combination which has thus been extracted (NO in the step S23), selects it, while, if there are several (YES in the step S23), selects any one thereof (in the step S24), and performs changing over of the optical path.

[0194] In other words, it transmits a command for newly establishing an optical path between the x-th communication node and the y-th communication node via the a-th optical matrix switch of the selected group to the

control devices for transceiver 11 of the x-th communication node and of the y-th communication node and the optical matrix switch control device 12 via the communication circuit 14 (in the step S25). Subsequently, it transmits a command for canceling the optical path between the x-th communication node and the y-th communication node via the b-th optical matrix switch of the selected group to the control devices for transceiver 11 of the x-th communication node and of the y-th communication node and the optical matrix switch control device 12 via the communication circuit 14 (in the step S26). Next, it updates the database; in other words, along with registering the optical path which has newly been established in the database, it also deletes from the database the optical path which has been cancelled (in the step S27).

[0195] At this time, the reason for first establishing the optical path via the a-th optical matrix switch is in order not to interrupt the optical path between the communication node x and the communication node y.

[0196] When the changing over of the optical path has ended, the combinations of (x, y, a, b) which meet the previously described conditions are again extracted, and changing over of the optical path is performed. This task is repeated until no combinations of (x, y, a, b) which meet the previously described conditions come to be extracted.

[0197] It should be understood that, a state in which the optical paths are not arranged will not be generated only by establishing a new optical path with the above-described method. However, it is desirable to perform changing over of the optical paths between the optical matrix switches after cancellation of an already existing optical path, since there is a possibility of causing a state in which the optical paths are not arranged after cancellation of an already existing optical path.

[0198] If the management of the optical paths between the communication nodes is performed by doing the above, the optical paths between the communication nodes come to be always in an arranged state, and it is possible to enhance the efficiency of use of the optical cross connect devices.

[0199] It should be understood that the management method for the optical paths between the communication nodes need not absolutely necessarily be according to this embodiment; it will be sufficient for it to be able to implement the same functions, and such a type of method is also included within the scope of the present invention.

THE SIXTH EMBODIMENT

[0200] FIG 23 is a figure showing the sixth embodiment according to the present invention, and this figure shows an example in which, in the fifth embodiment, along with utilizing the passive optical matrix switch, the optical matrix switch control device is omitted.

[0201] In detail, in this figure, 6-1, 6-2, ... 6-m are passive optical matrix switches, in which an optical signal which has been inputted from a certain input port is out-

putted from a different output port, according to the physical nature of this optical signal. As an example, the case may be considered in which an N input N output arrayed-waveguide gratings are utilized for these optical matrix switches. At this time, if a wavelength division demultiplexing circuit 1 and a wavelength division multiplexing circuit 2 are supposed to handle signals over a sufficiently wide wavelength band $\Delta\lambda$ as signals of the same wavelength, the wavelengths of the optical signals which are inputted to the arrayed-waveguide grating may be supposed to be different within the range of $\Delta\lambda$, and, due to the input-output characteristic of an arrayed-waveguide grating, an optical signal which has been inputted from a certain input port is outputted from a different output port according to the physical nature of the optical signal which is inputted, i.e. according to its wavelength. Accordingly, in this embodiment, an optical path management device, for example 13a, as a command for establishing or for canceling an optical path, only performs command to the control devices for transceiver 11-1 through 11-N of a wavelength of the optical signal to start or to stop transmission and reception by the transceivers of the communication nodes. It should be understood that the other structures and operations of this embodiment are the same as in the case of the fifth embodiment.

THE SEVENTH EMBODIMENT

[0202] FIG. 24 is a figure showing the seventh embodiment according to the present invention; and, in this figure, there is shown an example in which, in the sixth embodiment, the function of an optical path management device is implemented by one among the N control devices for transceiver.

[0203] That is to say, in this figure, 11-1a is a control device for transceiver which implements the function of the optical path management device 13a which was explained with regard to the sixth embodiment, and this is connected via communication circuits 14 with the other control devices for transceiver 11-2 through 11-N and sends and receives information thereby, and performs management of the optical path in the same manner as in the case of the sixth embodiment. It should be understood that the other structure and operations of this embodiment are the same as in the case of the fifth and the sixth embodiments.

[0204] It should be understood that it would also be acceptable to record a program for implementing the wavelength control and management of optical paths which has been explained above for the fourth through the seventh embodiments upon a recording medium which is capable of being read by a computer, and to arrange for the program which is written upon this recording medium to be read and executed by a computer system.

[0205] Here, the computer system includes an operating system and hardware such as peripheral devices and the like. Furthermore, if the WWW system is taken ad-

vantage of, the computer system also includes a home page presentation environment (or a home page display environment).

[0206] Yet further, a recording medium which can be read by a computer includes a transportable medium such as a flexible disk, an opto-magnetic disk, a ROM, a CD-ROM or the like, or a storage device which is housed within a computer system such as a hard disk or the like. Even further, the recording medium which can be read by a computer includes a medium upon which the program is stored for a certain time period, such as a volatile memory (RAM) internal to a computer system which constitutes a server or a client, when the program has been transmitted via a network such as the internet or the like, or via a communication circuit such as a telephone circuit or the like.

[0207] Moreover, the above-described program may acceptably be transmitted from a computer system in which this program is stored upon a storage device or the like to another computer system via a transmission medium or via a transmission wave through a transmission medium. Here, a transmission medium which transmits the program includes a medium which is provided with the function of transmitting information, such as a network (a communication network) such as the internet or the like, or a communication circuit (a communication line) such as a telephone circuit or the like. Yet further, the above-described program may acceptably be one for implementing a portion of the above-described functions. Even further, it would be acceptable for it to be a so-called differential file (differential program) which is able to implement the above-described functions in combination with a program which is already recorded upon the computer system.

Industrial Applicability

[0208] According to the present invention, in an optical communication network system which takes advantage of a plurality of communication nodes and wavelength-routing to establish communication between these communication nodes by route control according to the wavelength of an optical signal, an arrayed-waveguide grating is provided independently for each wavelength band in a wavelength-routing device, and wavelength-band multiplexing of the wavelength bands and wavelength-band demultiplexing of the wavelength bands are performed in the communication nodes and in the wavelength-routing device. Accordingly, it is possible to form one optical path between the communication nodes for each wavelength band. As a result, although with the conventional technique in which only one optical path is established between communication nodes there is a difficulty in establishing a plurality of optical paths between the communication nodes, by applying the structure of the present invention, it is possible to form, at a maximum, the same number of optical paths between the communication nodes as the number of wavelength bands, so

that it is possible to easily increase the transmission capacity between the communication nodes. Furthermore, with the optical communication network system of the present invention, when increasing the number of optical paths, it will be sufficient to add the required equipment only between the communication nodes for which this increase of the number of optical paths is required, so that the extremely excellent and beneficial effect is obtained that the flexibility and the economy are both superb. Yet further, with a conventional optical communication system in which the optical paths are formed between the communication nodes for each wavelength-band, when the number of communication nodes exceeds the number of the wavelength-bands, it is necessary to pass via a different communication node. In contrast, according to the present invention, it is possible to implement an optical communication network system which provides full mesh connectivity in which optical paths between all the communication nodes are provided. Accordingly, even if the number of communication nodes exceeds the number of the wavelength-bands, it is not necessary to pass via a different communication node. Furthermore, according to the present invention, in an optical cross connect device which is formed by a combination of a plurality of small scale optical matrix switches, the optical paths between the communication nodes are always arranged, so that it is possible to enhance the efficiency of utilization of the optical cross connect device.

Claims

1. An optical communication network system comprising:

a plurality of communication nodes (200-1 to 200-4);
 a wavelength-routing device (210) which establishes communication between the communication nodes based upon route control according to the wavelength of an optical signal; and
 an optical transmission line (250-1 to 250-4, 260-1 to 260-4) which forms a communication path which connects the communication nodes and the wavelength-routing device,
 wherein the optical communication network system is **characterized in that**
 the wavelength-routing device comprises:

N device input ports (210-11 to 210-14), where N being an integer greater than or equal to 2, which are connected via the optical transmission line to the communication nodes;
 N device output ports (210-21 to 210-24) which are connected via the optical transmission line to the communication nodes;

a plurality of wavelength-band demultiplexers (220-1 to 220-4) which are provided to each of the N device input ports, and each has a single input port (221) and a plurality of output ports (222-1 to 222-4), and the input port is connected to one of the device input ports;

a plurality of wavelength-band multiplexers (230-1 to 230-4) which are provided to each of the N device output ports, and each has a plurality of input ports (231-1 to 231-4) and a single output port (232), and the output port is connected to one of the device output ports; and

R KxK arrayed-waveguide gratings (241 to 244), where R being an integer greater than or equal to J and J being an integer greater than or equal to 2, which have K input ports (2411-1 to 2411-4, 2421-1 to 2421-4, 2431-1 to 2431-4, 2441-1 to 2441-4) and K output ports (2412-1 to 2412-4, 2422-1 to 2422-4, 2432-1 to 2432-4, 2442-1 to 2442-4), where K being an integer that satisfies $K \geq N$, which have wavelength-routing characteristics in which optical signals having different wavelengths which are inputted to one input port are output at different output ports depending on the wavelengths of the inputted optical signals and in which optical signals having different wavelengths which are outputted from one output port are optical signals which have been inputted to different input ports, and

wherein the wavelength-band demultiplexers comprise a means which demultiplexes by wavelength band a wavelength division multiplexed signal in which a respective predetermined number of wavelengths have been wavelength division multiplexed for each wavelength band which is transmitted from the communication nodes, where wavelength band = central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$, with $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, where $1 \leq m \leq R-1$, with m being an integer, and outputs the results at different output ports,
 the wavelength-band multiplexers comprise a means which multiplexes optical signals which have been inputted from the plurality of input ports for each wavelength band and which outputs a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed at the output port,
 the KxK arrayed-waveguide gratings are provided with a wavelength-routing characteristic for each wavelength band of central

- wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \lambda B_3 - \Delta\lambda_3$), ..., central wavelength $\lambda B_R \pm$ wavelength band width $\Delta\lambda_R$ ($\lambda B_{R-1} + \Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$), the output ports of the wavelength-band demultiplexers which are respectively connected to the N device input ports are one to one connected to the input ports of the KxK arrayed-waveguide gratings which have wavelength-routing characteristics at the wavelength bands of the optical signals which are outputted from the output ports of the wavelength-band demultiplexers, and
- the output ports of the KxK arrayed-waveguide gratings are one to one connected to the input ports of any one of the plurality of wavelength-band multiplexers which can multiplex optical signals of wavelengths which belong to the wavelength bands of the optical signals which are outputted from the output ports of the KxK arrayed-waveguide gratings.
2. An optical communication network system as described in Claim 1, wherein each of the communication nodes comprises:
- a Jx1 wavelength-band multiplexer (230), where J being an integer greater than or equal to 2, which has J input ports IP [1], IP [2], IP [3], ... IP [J] (230-11 to 230-14) and a single output port (230-21), and output at the single output port optical signals of wavelengths which belong to the wavelength bands of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to the respective J input ports, where $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 \leq m \leq J-1$, where m being an integer; a plurality of wavelength division multiplexers (271 to 274) which are provided at each of the input ports IP [1], IP [2], IP [3], ... IP [J] of the Jx1 wavelength-band multiplexer, and which have two or more input ports (271-11 to 271-14, 272-11 to 272-14, 273-11 to 273-14, 274-11 to 274-14) and one output port (271-21, 272-21, 273-21, 274-21), with the output ports being connected to the input ports of the Jx1 wavelength-band multiplexer; and
- a plurality of optical transmitters (2711-1 to 2711-4, 2712-1 to 2712-4, 2713-1 to 2713-4, 2714-1 to 2714-4) which are connected to the

input ports of the wavelength division multiplexers, and which emit light of wavelengths which belong to wavelength bands of central wavelengths, $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$, and

wherein the output port of the Jx1 wavelength-band multiplexer is connected via an optical waveguide (250) to the device input ports of the wavelength-routing device.

3. An optical communication network system as described in Claim 1 or Claim 2, wherein each of the communication nodes comprises:

a 1xJ wavelength-band demultiplexer (220), where J being an integer greater than or equal to 2, which has J output ports OP[1], OP[2], OP[3], ... OP[J] (220-21 to 220-24) and a single input port (220-11), and which outputs at the J output ports optical signals of wavelengths which belong to the wavelength band widths which are inputted to the single input port of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, where $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, where m being an integer;

a plurality of wavelength division demultiplexers (281 to 284) which are provided to each of the output ports OP[1], OP[2], OP[3], ... OP[J] of the 1xJ wavelength-band demultiplexer, each of which has two or more output ports (281-21 to 281-24, 282-21 to 282-24, 283-21 to 283-24, 284-21 to 284-24) and a single input port (281-11, 282-11, 283-11, 284-11), and the input port is connected to one of the output ports of the 1xJ wavelength-band demultiplexers; and a plurality of optical receivers (2811-1 to 2811-4, 2812-1 to 2812-4, 2813-1 to 2813-4, 2814-1 to 2814-4) which are connected to the output ports of the wavelength division demultiplexers, and wherein the single input port of the 1xJ wavelength-band demultiplexer is connected via an optical waveguide (260) to one of the device output ports of the wavelength-routing device.

4. An optical communication network system as described in Claim 1, wherein each of the communication nodes comprises:

a Jx1 wavelength-band multiplexer (230), where J being an integer greater than or equal to 2, which has J input ports IP [1], IP [2], IP [3], ... IP [J] (230-11 to 230-14) and a single output port (230-21), and outputs at the single output port optical signals of wavelengths which belong to the wavelength bands of central wavelength λB_1

$\pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to each of the J input ports, where $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 \leq m \leq J-1$, where m being an integer; at least one wavelength-tunable optical light source integrated optical transmitter (400-1, 400-2) which is connected to any one of the input ports IP [1], IP [2], IP [3], ... IP [J] of the Jx1 wavelength-band multiplexer, which is provided with a wavelength-tunable optical light source which can be set to a wavelength within a wavelength band which belongs to the input port which is connected, and which outputs light of the wavelength;

a plurality of wavelength division multiplexers (271, 274) which are provided to each of the input ports of the Jx1 wavelength-band multiplexer, other than the input port to which the wavelength-tunable optical light source integrated optical transmitter is connected, and which have two or more input ports (271-11 to 271-14, 274-11 to 274-14) and one output port (271-21, 274-21), with the output port being connected to one of the input ports of the Jx1 wavelength-band multiplexer;

a plurality of optical transmitters (2711-1 to 2711-4, 2714-1 to 2714-4) which are connected to the input ports of the wavelength division multiplexer, and which emit light of wavelength which belongs to a wavelength band of central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$ a 1xJ wavelength-band demultiplexer (220), where J being an integer greater than or equal to 2, which has J output ports OP[1], OP[2], OP[3], ... OP[J] (220-21 to 220-24) and a single input port (220-11), and the outputs at the J output ports optical signals of wavelengths which belong to the wavelength band widths of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to the single input port, where $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 \leq m \leq J$, where m being an integer; an optical receiver (500-1, 500-2) which is connected to that output port, among the output ports OP[1], OP[2], OP[3], ... OP[J] of the 1xJ wavelength-band demultiplexer, which belongs to the wavelength band to which the wavelength-tunable optical light source integrated optical transmitter is provided, and which receives an optical signal of the wavelength which is outputted from the wavelength-tunable optical light source integrated optical transmitter;

a plurality of wavelength division demultiplexers (281, 284) which are provided to each of the output ports of the 1xJ wavelength-band demultiplexer, except for the output port to which the optical receiver is connected, which have two or more output ports (281-21 to 281-24, 284-21 to 284-24) and a single input port (281-11, 284-11), and the input port is connected to one of the output ports of the 1xJ wavelength-band demultiplexer; and

a plurality of optical receivers (2811-1 to 2811-4, 2814-1 to 2814-4) which are connected to the output ports of the wavelength division demultiplexers, and

wherein the single input port of the 1xJ wavelength-band demultiplexer is connected via an optical waveguide (260) to one of the device output ports of the wavelength-routing device.

5. An optical communication network system as described in Claim 4, further comprising an optical path management means (211-1 to 211-4) which controls an optical path between two different communication nodes, and
- wherein if at least one group of the wavelength-tunable optical light source integrated optical transmitters exists which are provided to all the communication nodes and which output optical signals of the same wavelength band, and if there are K wavelength bands, where K being an integer greater than or equal to 2, which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, the optical path management means assigns mutually different priority rankings from 1 to K to the wavelength bands which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, and when, among the wavelength bands which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, the highest numbered priority ranking among the wavelength bands for which optical paths exist between x-th communication node and y-th communication node is number b, and the lowest numbered priority ranking among the wavelength bands for which an optical path whose start point is the x-th communication node, an optical path whose end point is the x-th communication node, an optical path whose start point is the y-th communication node, and an optical path whose end point is the y-th communication node do not exist is number a, and the number a is smaller than the number b, the optical path management means establishes an optical path between the x-th communication node and the y-th communication node upon the wave-

length band of a-th priority ranking, and thereafter controls ON/OFF and an oscillation wavelength of the wavelength-tunable optical light source integrated optical transmitter so as to cancel the optical path which was established between the x-th communication node and the y-th communication node upon the wavelength band of b-th priority ranking.

6. An optical communication network system as described in Claim 5, further comprising:

a database (3030) which records an optical path for each wavelength band;

a first search means (3010) which, when a requirement has arisen newly to establish an optical path between xx-th communication node and yy-th communication node, searches in the database, in order from data which correspond to a wavelength band whose priority ranking is the lowest, for a wavelength band which is not in use by the xx-th communication node and the yy-th communication node;

a first transmission means (3010) which transmits to the optical path management means a command for establishing an optical path according to the result of searching by the first search means;

a second search means (3010) which, when a requirement for an optical path which is already established between xxx-th communication node and yyy-th communication node has ceased, searches in the database, in order from data which correspond to a wavelength band whose priority ranking is the highest, for a wavelength band upon which an optical path is established between the xxx-th communication node and the yyy-th communication node;

a second transmission means (3010) which transmits to the optical path management means a command for canceling an optical path according to the result of searching by the second search means;

an extraction means (3010) which searches in the database the number b of the highest priority ranking among the wavelength bands upon which optical paths are established between the x-th communication node and the y-th communication node, and the number a of the lowest priority ranking among the wavelength bands upon which an optical path whose start point is the x-th communication node, an optical path whose end point is the x-th communication node, an optical path whose start point is the y-th communication node, and an optical path whose end point is the y-th communication node do not exist, for all the combinations of x and y in a predetermined order, and extracts combinations of x, y, a, and b for which the number a

is smaller than the number b;

a third transmission means (3010) which, when an applicable combination exists, transmits to the optical path management means a command for establishing an optical path using the a-th wavelength band between the x-th communication node and the y-th communication node, and thereafter transmits to the optical path management means a command for canceling an optical path using the b-th wavelength band between the x-th communication node and the y-th communication node; and

a database update means (3010) which registers an optical path which has been newly established in the database, and deletes an optical path which has been cancelled from the database.

7. An optical communication network system as described in Claim 1, wherein the KxK arrayed-waveguide gratings have cyclic-wavelength characteristics.

8. A wavelength-routing device (210) which is provided to an optical communication network system comprising a plurality of communication nodes (200-1 to 200-4) and an optical transmission line (250-1 to 250-4, 260-1 to 260-4) which forms a communication path, connected with the communication nodes by the optical transmission line, and which establishes communication between the communication nodes based upon route control according to the wavelength of an optical signal, the wavelength-routing device being **characterized by** comprising:

N device input ports (210-11 to 210-14), where N being an integer greater than or equal to 2, which are connected via the optical transmission line to the communication nodes;

N device output ports (210-21 to 210-24) which are connected via the optical transmission line to the communication nodes;

a plurality of wavelength-band demultiplexers (220-1 to 220-4) which are provided to each of the N device input ports, and each has a single input port (22L) and a plurality of output ports (222-1 to 222-4), and the input port is connected to one of the device input ports;

a plurality of wavelength-band multiplexers (230-1 to 230-4) which are provided to each of the N device output ports, and each has a plurality of input ports (231-1 to 231-4) and a single output port (232), and the output port is connected to one of the device output ports; and

R KxK arrayed-waveguide gratings (241 to 244), where R being an integer greater than or equal to J and J being an integer greater than or equal to 2, which have K input ports (2411-1 to 2411-4,

2421-1 to 2421-4, 2431-1 to 2431-4, 2441-1 to 2441-4) and K output ports (2412-1 to 2412-4, 2422-1 to 2422-4, 2432-1 to 2432-4, 2442-1 to 2442-4), where K being an integer that satisfies $K \geq N$, which have wavelength-routing characteristics in which optical signals having different wavelengths which are inputted to one input port are output at different output ports depending on the wavelengths of the inputted optical signals and in which optical signals having different wavelengths which are outputted from one output port are optical signals which have been inputted to different input ports, and wherein the wavelength-band demultiplexers comprise a means which demultiplexes by wavelength band a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed for each wavelength band which is transmitted from the communication nodes, where wavelength band = central wavelength $\lambda_{B_m} \pm$ wavelength band width $\Delta\lambda_m$, with $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$, where $1 \leq m \leq R - 1$, with m being an integer, and outputs the results at different output ports, the wavelength-band multiplexers comprise a means which multiplexes optical signals which have been inputted from the plurality of input ports for each wavelength band and which outputs a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed at the output port, the KxK arrayed-waveguide gratings are provided with a wavelength-routing characteristic for each wavelength band of central wavelength $\lambda_{B_1} \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda_{B_2} \pm$ wavelength band width $\Delta\lambda_2$ ($\lambda_{B_1} + \Delta\lambda_1 < \lambda_{B_2} - \Delta\lambda_2$), central wavelength $\lambda_{B_3} \pm$ wavelength band width $\Delta\lambda_3$ ($\lambda_{B_2} + \Delta\lambda_2 < \lambda_{B_3} - \Delta\lambda_3$), ..., central wavelength $\lambda_{B_R} \pm$ wavelength band width $\Delta\lambda_R$ ($\lambda_{B_{R-1}} + \Delta\lambda_{R-1} < \lambda_{B_R} - \Delta\lambda_R$), the output ports of the wavelength-band demultiplexers which are respectively connected to the N device input ports are one to one connected to the input ports of the KxK arrayed-waveguide gratings which have wavelength-routing characteristics at the wavelength bands of the optical signals which are outputted from the output ports of the wavelength-band demultiplexers, and the output ports of the KxK arrayed-waveguide gratings are one to one connected to the input ports of any one of the plurality of wavelength-band multiplexers which can multiplex optical signals of wavelengths which belong to the wavelength bands of the optical signals which are outputted from the output ports of the KxK

arrayed-waveguide gratings.

9. An optical path management device (211-1 to 211-4) which controls an optical path between two different communication nodes in an optical communication network system which comprises a plurality of communication nodes (200-1 to 200-4), a wavelength-routing device (210) which establishes communication between the communication nodes based upon route control according to the wavelength of an optical signal, and an optical transmission line (250-1 to 250-4, 260-1 to 260-4) which forms a communication path which connects the communication nodes and the wavelength-routing device, **characterized in that** the wavelength-routing device comprises:

N device input ports (210-11 to 210-14), where N being an integer greater than or equal to 2, which are connected via the optical transmission line to the communication nodes;
 N device output ports (210-21 to 210-24) which are connected via the optical transmission line to the communication nodes;
 a plurality of wavelength-band demultiplexers (220-1 to 220-4) which are provided to each of the N device input ports, and each has a single input port (221) and a plurality of output ports (222-1 to 222-4), and the input port is connected to one of the device input ports;
 a plurality of wavelength-band multiplexers (230-1 to 230-4) which are provided to each of the N device output ports, and each has a plurality of input ports (231-1 to 231-4) and a single output port (232), and the output port is connected to one of the device output ports; and
 R KxK arrayed-waveguide gratings (241 to 244), where R being an integer greater than or equal to J and J being an integer greater than or equal to 2, which have K input ports (2411-1 to 2411-4, 2421-1 to 2421-4, 2431-1 to 2431-4, 2441-1 to 2441-4) and K output ports (2412-1 to 2412-4, 2422-1 to 2422-4, 2432-1 to 2432-4, 2442-1 to 2442-4), where K being an integer that satisfies $K \geq N$, which have wavelength-routing characteristics in which optical signals having different wavelengths which are inputted to one input port are output at different output ports depending on the wavelengths of the inputted optical signals and in which optical signals having different wavelengths which are outputted from one output port are optical signals which have been inputted to different input ports, and wherein the wavelength-band demultiplexers comprise a means which demultiplexes by wavelength band a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division

multiplexed for each wavelength band which is transmitted from the communication nodes, wherein wavelength band = central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$, with $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, where $1 \leq m \leq R - 1$, with m being an integer, and outputs the results at different output ports,

the wavelength-band multiplexers comprise a means which multiplexes optical signals which have been inputted from the plurality of input ports for each wavelength band and which outputs a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed at the output port,

the KxK arrayed-waveguide gratings are provided with a wavelength-routing characteristic for each wavelength band of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \lambda B_3 - \Delta\lambda_3$), ..., central wavelength $\lambda B_R \pm$ wavelength band width $\Delta\lambda_R$ ($\lambda B_{R-1} + \Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$),

the output ports of the wavelength-band demultiplexers which are respectively connected to the N device input ports are one to one connected to the input ports of the KxK arrayed-waveguide gratings which have wavelength-routing characteristics at the wavelength bands of the optical signals which are outputted from the output ports of the wavelength-band demultiplexers, and

the output ports of the KxK arrayed-waveguide gratings are one to one connected to the input ports of any one of the plurality of wavelength-band multiplexers which can multiplex optical signals of wavelengths which belong to the wavelength bands of the optical signals which are outputted from the output ports of the KxK arrayed-waveguide gratings, and

each of the communication nodes comprises:

a Jx1 wavelength-band multiplexer (230), where J being an integer greater than or equal to 2, which has J input ports IP [1], IP [2], IP [3], ... IP [J] (230-11 to 230-14) and a single output port (230-21), and outputs at the single output port optical signals of wavelengths which belong to the wavelength bands of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to each of the J input ports, where $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 \leq m \leq J - 1$, where m being an integer;

at least one wavelength-tunable optical light source integrated optical transmitter (400-1, 400-2) which is connected to any one of the input ports IP [1], IP [2], IP [3], ... IP [J] of the Jx1 wavelength-band multiplexer, which is provided with a wavelength-tunable optical light source which can be set to a wavelength within a wavelength band which belongs to the input port which is connected, and which outputs light of the wavelength;

a plurality of wavelength division multiplexers (271, 274) which are provided to each of the input ports of the Jx1 wavelength-band multiplexer, other than the input port to which the wavelength-tunable optical light source integrated optical transmitter is connected, and which have two or more input ports (271-11 to 271-14, 274-11 to 274-14) and one output port (271-21, 274-21), with the output port being connected to one of the input ports of the Jx1 wavelength-band multiplexer;

a plurality of optical transmitters (2711-1 to 2711-4, 2714-1 to 2714-4) which are connected to the input ports of the wavelength division multiplexer, and which emit light of wavelength which belongs to a wavelength band of central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$;

a 1xJ wavelength-band demultiplexer (220), where J being an integer greater than or equal to 2, which has J output ports OP[1], OP[2], OP[3], ... OP[J] (220-21 to 2,20-24) and a single input port (220-11), and outputs at the J output ports optical signals of wavelengths which belong to the wavelength band widths of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to the single input port, where $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 \leq m \leq J$, where m being an integer;

an optical receiver (500-1, 500-2) which is connected to that output port, among the output ports OP[1], OP[2], OP[3], ... OP[J] of the 1xJ wavelength-band demultiplexer, which belongs to the wavelength band to which the wavelength-tunable optical light source integrated optical transmitter is provided, and which receives an optical signal of the wavelength which is outputted from the wavelength-tunable optical light source integrated optical transmitter;

a plurality of wavelength division demultiplexers (281, 284) which are provided to each of the output ports of the 1xJ wavelength-band demultiplexer, except for the output port to which the optical receiver is connected, which have two or more output ports (281-21 to 281-24, 284-21 to

284-24) and a single input port (281-11, 284-11), and the input port is connected to one of the output ports of the 1xJ wavelength-band demultiplexer; and
 a plurality of optical receivers (2811-1 to 2811-4, 2814-1 to 2814-4) which are connected to the output ports of the wavelength division demultiplexers; and
 wherein the single input port of the 1xJ wavelength-band demultiplexer is connected via an optical waveguide (260) to one of the device output ports of the wavelength-routing device, and

wherein the optical path management device comprises:

a means which, if at least one group of the wavelength-tunable optical light source integrated optical transmitters exists which are provided to all the communication nodes and which output optical signals of the same wavelength band, and if there are K wavelength bands, where K being an integer greater than or equal to 2, which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, assigns mutually different priority rankings from 1 to K to the wavelength bands which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters;
 a means which detects that, among the wavelength bands which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, the highest numbered priority ranking among the wavelength bands of optical paths between x-th communication node and y-th communication node is number b, and the lowest numbered priority ranking among the wavelength bands which are not used for an optical path whose start point is the x-th communication node, an optical path whose end point is the x-th communication node, an optical path whose start point is the y-th communication node, and an optical path whose end point is the y-th communication node is number a, and the number a is smaller than the number b; and
 a means which, if it has been detected that the number a is smaller than the number b, establishes an optical path between the x-th communication node and the y-th communication node upon the wavelength band of a-th priority ranking, and thereafter controls ON/OFF and an oscillation wavelength of the wavelength-tunable optical light source integrated optical transmitter

so as to cancel the optical path which was established between the x-th communication node and the y-th communication node upon the wavelength band of b-th priority ranking.

10. An optical path management method which controls an optical path between two different communication nodes in an optical communication network system which comprises a plurality of communication nodes (200-1 to 200-4), a wavelength-routing device (210) which establishes communication between the communication nodes based upon route control according to the wavelength of an optical signal, and an optical transmission line (250-1 to 250-4, 260-1 to 260-4) which forms a communication path which connects the communication nodes and the wavelength-routing device, **characterized in that** the wavelength-routing device comprises:

N device input ports (210-11 to 210-14), where N being an integer greater than or equal to 2, which are connected via the optical transmission line to the communication nodes;
 N device output ports (210-21 to 210-24) which are connected via the optical transmission line to the communication nodes;
 a plurality of wavelength-band demultiplexers (220-1 to 220-4) which are provided to each of the N device input ports, and each has a single input port (221) and a plurality of output ports (222-1 to 222-4), and the input port is connected to one of the device input ports;
 a plurality of wavelength-band multiplexers (230-1 to 230-4) which are provided to each of the N device output ports, and each has a plurality of input ports (231-1 to 231-4) and a single output port (232), and the output port is connected to one of the device output ports; and
 R KxK arrayed-waveguide gratings (241 to 244), where R being an integer greater than or equal to J and J being an integer greater than or equal to 2, which have K input ports (2411-1 to 2411-4, 2421-1 to 2421-4, 2431-1 to 2431-4, 2441-1 to 2441-4) and K output ports (2412-1 to 2412-4, 2422-1 to 2422-4, 2432-1 to 2432-4, 2442-1 to 2442-4), where K being an integer that satisfies $K \geq N$, which have wavelength-routing characteristics in which optical signals having different wavelengths which are inputted to one input port are output at different output ports depending on the wavelengths of the inputted optical signals and in which optical signals having different wavelengths which are outputted from one output port are optical signals which have been inputted to different input ports,
 wherein the wavelength-band demultiplexers comprise a means which demultiplexes by wavelength band a wavelength division multi-

plexed optical signal in which a predetermined number of wavelengths have been wavelength division multiplexed for each wavelength band which is transmitted from the communication nodes, where wavelength band = central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$, with $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, where $1 \leq m \leq R - 1$, with m being an integer, and outputs the results at different output ports,

the wavelength-band multiplexers comprise a means which multiplexes optical signals which have been inputted from the plurality of input ports for each wavelength band and which outputs a wavelength division multiplexed signal in which a predetermined number of wavelengths have been wavelength division multiplexed at the output port,

the KxK arrayed-waveguide gratings are provided with a wavelength-routing characteristic for each wavelength band of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \lambda B_3 - \Delta\lambda_3$), ..., central wavelength $\lambda B_R \pm$ wavelength band width $\Delta\lambda_R$ ($\lambda B_{R-1} \pm \Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$), the output ports of the wavelength-band demultiplexers which are respectively connected to the N device input ports are one to one connected to the input ports of the KxK arrayed-waveguide gratings which have wavelength-routing characteristics at the wavelength bands of the optical signals which are outputted from the output ports of the wavelength-band demultiplexers, and

the output ports of the KxK arrayed-waveguide gratings are one to one connected to the input ports of any one of the plurality of wavelength-band multiplexers which can multiplex optical signals of wavelengths which belong to the wavelength bands of the optical signals which are outputted from the output ports of the KxK arrayed-waveguide gratings, and

each of the communication nodes comprises:

a Jx1 wavelength-band multiplexer (230), where J being an integer greater than or equal to 2, which has J input ports IP [1], IP [2], IP [3], ... IP [J] (230-11 to 230-14) and a single output port (230-21), and outputs at the single output port optical signals of wavelengths which belong to the wavelength bands of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to each of

the J input ports, where $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 \leq m \leq J - 1$, where m being an integer; at least one wavelength-tunable optical light source integrated optical transmitter (400-1, 400-2) which is connected to any one of the input ports IP [1], IP [2], IP [3], ... IP [J] of the Jx1 wavelength-band multiplexer, which is provided with a wavelength-tunable optical light source which can be set to a wavelength within a wavelength band which belongs to the input port which is connected, and which outputs light of the wavelength;

a plurality of wavelength division multiplexers (271, 274) which are provided to each of the input ports of the Jx1 wavelength-band multiplexer, other than the input port to which the wavelength-tunable optical light source integrated optical transmitter is connected, and which have two or more input ports (271-11 to 271-14, 274-11 to 274-14) and one output port (271-21, 274-21), with the output port being connected to one of the input ports of the Jx1 wavelength-band multiplexer;

a plurality of optical transmitters (2711-1 to 2711-4, 2714-1 to 2714-4) which are connected to the input ports of the wavelength division multiplexer, and which emit light of wavelength which belongs to a wavelength band of central wavelength $\lambda B_m \pm$ wavelength band width $\Delta\lambda_m$;

a 1xJ wavelength-band demultiplexer (220), where J being an integer greater than or equal to 2, which has J output ports OP[1], OP[2], OP[3], ... OP[J] (220-21 to 220-24) and a single input port (220-11), and outputs at the J output ports optical signals of wavelengths which belong to the wavelength band widths of central wavelength $\lambda B_1 \pm$ wavelength band width $\Delta\lambda_1$, central wavelength $\lambda B_2 \pm$ wavelength band width $\Delta\lambda_2$, central wavelength $\lambda B_3 \pm$ wavelength band width $\Delta\lambda_3$, ..., central wavelength $\lambda B_J \pm$ wavelength band width $\Delta\lambda_J$, which are inputted to the single input port, where $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, for $1 \leq m \leq J$, where m being an integer;

an optical receiver (500-1, 500-2) which is connected to that output port, among the output ports OP[1], OP[2], OP[3], ... OP[J] of the 1xJ wavelength-band demultiplexer, which belongs to the wavelength band to which the wavelength-tunable optical light source integrated optical transmitter is provided, and which receives an optical signal of the wavelength which is outputted from the wavelength-tunable optical light source integrated optical transmitter;

a plurality of wavelength division demultiplexers (281, 284) which are provided to each of the output ports of the 1xJ wavelength-band demul-

tiplexer, except for the output port to which the optical receiver is connected, which have two or more output ports (281-21 to 281-24, 284-21 to 284-24) and a single input port (281-11, 284-11), and the input port is connected to one of the output ports of the 1xJ wavelength-band demultiplexer; and
 a plurality of optical receivers (2811-1 to 2811-4, 2814-1 to 2814-4) which are connected to the output ports of the wavelength division demultiplexers, and
 wherein the single input port of the 1xJ wavelength-band demultiplexer is connected via an optical waveguide (260) to one of the device output ports of the wavelength-routing device, and

the optical path management method comprises:

a step of, if at least one group of the wavelength-tunable optical light source integrated optical transmitters exists which are provided to all the communication nodes and which output optical signals of the same wavelength band, and if there are K wavelength bands, where K being an integer greater than or equal to 2, which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters, assigning mutually different priority rankings from 1 to K to the wavelength bands which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitters;
 a step of, when, among the wavelength bands which belong to the input ports of the Jx1 wavelength-band multiplexer which are connected to the wavelength-tunable optical light source integrated optical transmitter, the highest numbered priority ranking among the wavelength bands for which an optical path exists between x-th communication node and y-th communication node is number b, and the lowest numbered priority ranking among the wavelength bands for which an optical path whose start point is the x-th communication node, an optical path whose end point is the x-th communication node, an optical path whose start point is the y-th communication node, and an optical path whose end point is the y-th communication node do not exist is number a, and the number a is smaller than the number b; and controlling ON/OFF and an oscillation wavelength of the wavelength-tunable optical light source integrated optical transmitter so as to establish an optical path between the x-th communication node and the y-th communication node upon the wavelength band of a-th priority ranking; and

a step of establishing an optical path between the x-th communication node and the y-th communication node upon the wavelength band of the a-th priority ranking, and thereafter controlling ON/OFF and the oscillation wavelength of the wavelength-tunable optical light source integrated optical transmitter so as to cancel the optical path which was established between the x-th communication node and the y-th communication node upon the wavelength band of b-th priority ranking.

11. An optical path management program which causes a computer to execute the steps of the optical path management method as described in Claim 10.
12. A recording medium which can be read by a computer, upon which the optical path management program as described in Claim 11 is recorded.

Patentansprüche

1. Optisches Kommunikationsnetzwerkssystem, umfassend:

Eine Mehrzahl von Kommunikationsknoten (200-1 bis 200-4);
 eine Wellenlängenroutingvorrichtung (210), die Kommunikation zwischen den Kommunikationsknoten basierend auf einer Routensteuerung gemäß der Wellenlänge eines optischen Signals herstellt; und
 eine optische Übertragungsleitung (250-1 bis 250-4, 260-1 bis 260-4), die einen Kommunikationspfad bildet, der die Kommunikationsknoten und die Wellenlängenroutingvorrichtung verbindet,
 wobei das optische Kommunikationsnetzwerkssystem **dadurch gekennzeichnet ist, dass** die Wellenlängenroutingvorrichtung umfasst:

N Vorrichtungseingangsport (210-11 bis 210-14), wobei N eine ganze Zahl größer oder gleich 2 ist, die über die optische Übertragungsleitung mit den Kommunikationsknoten verbunden sind;
 N Vorrichtungsausgangsport (210-21 bis 210-24), die über die optische Übertragungsleitung mit den Kommunikationsknoten verbunden sind;
 eine Mehrzahl von Wellenlängenbanddemultiplexern (220-1 bis 220-4), die an jedem der N Vorrichtungseingangsport vorgesehen sind, und die jeweils einen einzigen Eingangsport (221) und eine Mehrzahl von Ausgangsport (222-1 bis 222-4) haben, und wobei der Eingangsport mit einem der

Vorrichtungseingangsports verbunden ist; eine Mehrzahl von Wellenlängenbandmultiplexern (230-1 bis 230-4), die an jedem der N Vorrichtungsausgangsports vorgesehen sind, und die jeweils eine Mehrzahl von Eingangsports (231-1 bis 231-4) und einen einzelnen Ausgangsport (232) haben, und wobei der Ausgangsport mit einem der Vorrichtungsausgangsports verbunden ist; und R KxK Wellenleiterfeldgitter (241 bis 244), wobei R eine ganze Zahl größer oder gleich J ist und wobei J eine ganze Zahl größer oder gleich 2 ist, die K Eingangsports (2411-1 bis 2411-4, 2421-1 bis 2421-4, 2431-1 bis 2431-4, 2441-1 bis 2441-4) sowie K Ausgangsports (2412-1 bis 2412-4, 2422-1 bis 2422-4, 2432-1 bis 2432-4, 2442-1 bis 2442-4) haben, wobei K eine ganze Zahl ist, welche $K \geq N$ erfüllt, die Wellenlängenroutingeigenschaften haben, bei denen optische Signale mit verschiedenen Wellenlängen, die an einem Eingangsport eingegeben werden, abhängig von den Wellenlängen der eingegebenen optischen Signale an verschiedenen Ausgangsports ausgegeben werden, und bei denen optische Signale mit verschiedenen Wellenlängen, die von einem Ausgangsport ausgegeben werden, optische Signale sind, die an verschiedenen Eingangsports eingegeben wurden, und wobei die Wellenlängenbanddemultiplexer eine Einrichtung umfassen, die eine Demultiplexierung gemäß Wellenlängenband vornimmt bei einem wellenlängenmultiplexierten Signal, in welchem eine jeweils vorbestimmte Zahl von Wellenlängen wellenlängenmultiplexiert wurden, für jedes Wellenlängenband, das von den Kommunikationsknoten übertragen wird, wobei Wellenlängenband = zentrale Wellenlänge $\lambda B_m \pm$ Wellenlängenbandbreite $\Delta\lambda_m$, mit $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, wobei $1 \leq m \leq R-1$, wobei m eine ganze Zahl ist, und die Ergebnisse an verschiedenen Ausgangsports ausgibt, wobei die Wellenlängenbandmultiplexer eine Einrichtung umfassen, die eine Multiplexierung bei optischen Signalen vornimmt, die von der Mehrzahl von Eingangsports eingegeben wurden, für jedes Wellenlängenband, und die ein wellenlängenmultiplexiertes Signal am Ausgangsport ausgibt, bei dem eine vorbestimmte Zahl von Wellenlängen wellenlängenmultiplexiert wurde, wobei die KxK Wellenleiterfeldgitter mit einer Wellenlängenroutingeigenschaft vor-

gesehen sind für jedes Wellenlängenband mit zentraler Wellenlänge $\lambda B_1 \pm$ Wellenlängenbandbreite $\Delta\lambda_1$, zentrale Wellenlänge $\lambda B_2 \pm$ Wellenlängenbandbreite $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), zentrale Wellenlänge $\lambda B_3 \pm$ Wellenlängenbandbreite $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \lambda B_3 - \Delta\lambda_3$), ..., zentrale Wellenlänge $\lambda B_R \pm$ Wellenlängenbandbreite $\Delta\lambda_R$ ($\lambda B_{R-1} + \Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$), wobei die Ausgangsports der Wellenlängenbanddemultiplexer, die jeweils mit den N Vorrichtungseingangsports verbunden sind, eins-zu-eins mit den Eingangsports der KxK Wellenleiterfeldgitter verbunden sind, die Wellenlängenroutingeigenschaften bei den Wellenlängenbändern der optischen Signale haben, welche von den Ausgangsports der Wellenlängenbanddemultiplexer ausgegeben werden, und wobei die Ausgangsports der KxK Wellenleiterfeldgitter eins-zu-eins mit den Eingangsports eines der Mehrzahl von Wellenlängenbandmultiplexern verbunden sind, der optische Signale mit Wellenlängen multiplexieren kann, welche zu den Wellenlängenbändern der optischen Signale gehören, die von den Ausgangsports der KxK Wellenleiterfeldgitter ausgegeben werden.

2. Optisches Kommunikationsnetzwerkssystem nach Anspruch 1, wobei jeder der Kommunikationsknoten umfasst:

Einen Jx1 Wellenlängenbandmultiplexer (230), wobei J eine ganze Zahl größer oder gleich 2 ist, der J Eingangsports IP[1], IP[2], IP[3], ... IP[J] (230-11 bis 230-14) sowie einen einzelnen Ausgangsport (230-21) hat, und an dem einzelnen Ausgangsport optische Signale mit Wellenlängen ausgibt, die zu den Wellenlängenbändern gehören mit zentraler Wellenlänge $\lambda B_1 \pm$ Wellenlängenbandbreite $\Delta\lambda_1$, zentraler Wellenlänge $\lambda B_2 \pm$ Wellenlängenbandbreite $\Delta\lambda_2$, zentraler Wellenlänge $\lambda B_3 \pm$ Wellenlängenbandbreite $\Delta\lambda_3$, ... zentraler Wellenlänge $\lambda B_J \pm$ Wellenlängenbandbreite $\Delta\lambda_J$, die an den jeweiligen J Eingangsports eingegeben werden, wobei $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, für $1 \leq m \leq J-1$, wobei m eine ganze Zahl ist; eine Mehrzahl von Wellenlängenmultiplexern (271 bis 274), die an jedem der Eingangsports IP[1], IP[2], IP[3], ... IP[J] des Jx1 Wellenlängenbandmultiplexers vorgesehen sind, und die zwei oder mehr Eingangsports (271-11 bis 271-14, 272-11 bis 272-14, 273-11 bis 273-14, 274-11 bis 274-14) und einen Ausgangsport (271-21, 272-21, 273-21, 274-21) haben, wobei die Ausgangsports mit den Eingangsports des Jx1 Wel-

Wellenlängenbandmultiplexers verbunden sind; und

eine Mehrzahl von optischen Sendern (2711-1 bis 2711-4, 2712-1 bis 2712-4, 2713-1 bis 2713-4, 2714-1 bis 2714-4), die mit den Eingangsports der Wellenlängenmultiplexer verbunden sind, und die Licht mit Wellenlängen emittieren, welche zu Wellenlängenbändern mit zentralen Wellenlängen $\lambda B_m \pm$ Wellenlängenbandbreite $\Delta\lambda_m$ gehören, und wobei der Ausgangsport des Jx1 Wellenlängenbandmultiplexers über einen optischen Wellenleiter (250) mit den Vorrichtungseingangsports der Wellenlängenroutingvorrichtung verbunden ist.

3. Optisches Kommunikationsnetzwerkssystem nach Anspruch 1 oder Anspruch 2, wobei jeder der Kommunikationsknoten umfasst:

Einen 1xJ Wellenlängenbanddemultiplexer (220), wobei J eine ganze Zahl größer oder gleich 2 ist, der J Ausgangsports OP[1], OP[2], OP[3], ... OP[J] (220-21 bis 220-24) sowie einen einzelnen Eingangsport (220-11) hat, und der an den J Ausgangsports optische Signale mit Wellenlängen ausgibt, die zu den Wellenlängenbandbreiten gehören, welche an dem einzelnen Eingangsport eingegeben werden mit zentraler Wellenlänge $\lambda B_1 \pm$ Wellenlängenbandbreite $\Delta\lambda_1$, zentraler Wellenlänge $\lambda B_2 \pm$ Wellenlängenbandbreite $\Delta\lambda_2$, zentraler Wellenlänge $\lambda B_3 \pm$ Wellenlängenbandbreite $\Delta\lambda_3$, ... , zentraler Wellenlänge $\lambda B_J \pm$ Wellenlängenbandbreite $\Delta\lambda_J$, wobei $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, wobei m eine ganze Zahl ist; eine Mehrzahl von Wellenlängendemultiplexern (281 bis 284), die an jedem der Ausgangsports OP[1], OP[2], OP[3], ... OP[J] des 1xJ Wellenlängendemultiplexers vorgesehen sind, von denen jeder zwei oder mehr Ausgangsports (281-21 bis 281-24, 282-21 bis 282-24, 283-21 bis 283-24, 284-21 bis 284-24) und einen einzelnen Eingangsport (281-11, 282-11, 283-11, 284-11) hat und wobei der Eingangsport mit einem der Ausgangsports des 1xJ Wellenlängenbanddemultiplexers verbunden ist; und eine Mehrzahl von optischen Empfängern (2811-1 bis 2811-4, 2812-1 bis 2812-4, 2813-1 bis 2813-4, 2814-1 bis 2814-4), die mit den Ausgangsports der Wellenlängendemultiplexer verbunden sind, und wobei der einzelne Eingangsport des 1xJ Wellenlängenbanddemultiplexers über einen optischen Wellenleiter (260) mit einem der Vorrichtungsausgangsports der Wellenlängenroutingvorrichtung verbunden ist.

4. Optisches Kommunikationsnetzwerk nach Anspruch 1, wobei jeder der Kommunikationsknoten umfasst:

Einen Jx1 Wellenlängenbandmultiplexer (230), wobei J eine ganze Zahl größer oder gleich 2 ist, welcher J Eingangsports IP[1], IP[2], IP[3], ... IP[J] (230-11 bis 230-14) und einen einzelnen Ausgangsport (230-21) hat, und der an dem einzelnen Ausgangsport optische Signale mit Wellenlängen ausgibt, die zu den Wellenlängenbändern mit zentraler Wellenlänge $\lambda B_1 \pm$ Wellenlängenbandbreite $\Delta\lambda_1$, zentraler Wellenlänge $\lambda B_2 \pm$ Wellenlängenbandbreite $\Delta\lambda_2$, zentraler Wellenlänge $\lambda B_3 \pm$ Wellenlängenbandbreite $\Delta\lambda_3$, ... , zentraler Wellenlänge $\lambda B_J \pm$ Wellenlängenbandbreite $\Delta\lambda_J$ gehören, die an jeden der J Eingangsports eingegeben werden, wobei $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$ für $1 \leq m \leq J-1$, wobei m eine ganze Zahl ist;

wenigstens einen mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sender (400-1, 400-2), der mit einem der Eingangsports IP[1], IP[2], IP[3], ... IP[J] des Jx1 Wellenlängenbandmultiplexers verbunden ist, der mit einer wellenlängeneinstellbaren optischen Lichtquelle versehen ist, welche auf eine Wellenlänge innerhalb eines Wellenlängenbands eingestellt werden kann, das zu dem verbundenen Eingangsport gehört, und die Licht mit der Wellenlänge ausgibt;

eine Mehrzahl von Wellenlängenmultiplexern (271, 274), die an jedem der Eingangsports des Jx1 Wellenlängenbandmultiplexers vorgesehen sind, außer an dem Eingangsport, mit dem der mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierte optische Sender verbunden ist, und die zwei oder mehr Eingangsports (271-11 bis 271-14, 274-11 bis 274-14) sowie einen Ausgangsport (271-21, 274-21) haben, wobei der Ausgangsport mit einem der Eingangsports des Jx1 Wellenlängenbandmultiplexers verbunden ist;

eine Mehrzahl von optischen Sendern (2711-1 bis 2711-4, 2714-1 bis 2714-4), die mit den Eingangsports des Wellenlängenmultiplexers verbunden sind, und die Licht mit einer Wellenlänge emittieren, welche zu einem Wellenlängenband mit zentraler Wellenlänge $\lambda B_m \pm$ Wellenlängenbandbreite $\Delta\lambda_m$ gehört;

einen 1xJ Wellenlängenbanddemultiplexer (220), wobei J eine ganze Zahl größer oder gleich 2 ist, der J Ausgangsports OP[1], OP[2], OP[3], ... OP[J] (220-21 bis 220-24) sowie einen einzelnen Eingangsport (220-11) hat und der an den J Ausgangsports optische Signale mit Wellenlängen ausgibt, die zu den Wellenlängenbandbreiten mit zentraler Wellenlänge $\lambda B_1 \pm$

- Wellenlängenbandbreite $\Delta\lambda_1$, zentrale Wellenlänge $\lambda_{B_2} \pm$ Wellenlängenbandbreite $\Delta\lambda_2$, zentraler Wellenlänge $\lambda_{B_3} \pm$ Wellenlängenbandbreite $\Delta\lambda_3$, ..., zentraler Wellenlänge $\lambda_{B_J} \pm$ Wellenlängenbandbreite $\Delta\lambda_J$ gehören, welche an den einzelnen Eingangsport eingegeben werden, wobei $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$ für $1 \leq m \leq J$, wobei m eine ganze Zahl ist; einen optischen Empfänger (500-1, 500-2), der an denjenigen Ausgangsport von den Ausgangsports OP[1], OP[2], OP[3],... OP[J] des 1xJ Wellenlängenbanddemultiplexers verbunden ist, der zu dem Wellenlängenband gehört, bei dem der mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierte optische Sender vorgesehen ist, und der ein optisches Signal der Wellenlänge empfängt, welche von dem mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sender ausgegeben wird; eine Mehrzahl von Wellenlängendemultiplexern (281, 284), die an jedem der Ausgangsports des 1xJ Wellenlängenbanddemultiplexers vorgesehen sind, ausgenommen den Ausgangsport, mit welchem der optische Empfänger verbunden ist, und die zwei oder mehr Ausgangsports (281-21 bis 281-24, 284-21 bis 284-24) sowie einen einzelnen Eingangsport (281-11, 284-11) haben, und wobei der Eingangsport mit einem der Ausgangsports des 1xJ Wellenlängenbanddemultiplexers verbunden ist; und eine Mehrzahl von optischen Empfängern (2811-1 bis 2811-4, 2814-1 bis 2814-4), die mit den Ausgangsports des Wellenlängendemultiplexers verbunden sind, und wobei der einzelne Eingangsport des 1xJ Wellenlängenbanddemultiplexers über einen optischen Wellenleiter (260) mit einem der Vorrichtungsausgangsports der Wellenlängenroutingvorrichtung verbunden ist.
5. Optisches Kommunikationsnetzwerkssystem nach Anspruch 4, ferner umfassend eine Optikpfadmanagementeinrichtung (211-1 bis 211-4), die einen Optikpfad zwischen zwei verschiedenen Kommunikationsknoten steuert, und wobei dann, wenn wenigstens eine Gruppe der mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sender existiert, die bei allen Kommunikationsknoten vorgesehen sind und die optische Signale des gleichen Wellenlängenbands ausgeben, und wenn es K Wellenlängenbänder gibt, wobei K eine ganze Zahl größer oder gleich 2 ist, die zu den Eingangsports des Jx1 Wellenlängenbandmultiplexers gehören, die mit den mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sendern verbunden sind, die Optikpfadmanagementeinrichtung wechselseitig

verschiedene Prioritätsrangfolgen von 1 bis K zu den Wellenlängenbändern zuweist, die zu den Eingangsports des Jx1 Wellenlängenbandmultiplexers gehören, welche mit den mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sendern verbunden sind, und wenn bei den Wellenlängenbändern, die zu den Eingangsports des Jx1 Wellenlängenbandmultiplexers gehören, welche mit den mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sendern verbunden sind, die Prioritätsrangfolge mit der höchsten Nummer unter den Wellenlängenbändern, für die optische Pfade zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten existieren, eine Zahl b ist, und die Prioritätsrangfolge mit der niedrigsten Nummer unter den Wellenlängenbändern, für welche kein optischer Pfad existiert, dessen Startpunkt der x-te Kommunikationsknoten ist, kein optischer Pfad, dessen Endpunkt der x-te Kommunikationsknoten ist, kein optischer Pfad, dessen Startpunkt der y-te Kommunikationsknoten ist, und kein optischer Pfad, dessen Endpunkt der y-te Kommunikationsknoten ist, eine Zahl a ist, und wenn die Zahl a kleiner als die Zahl b ist, die Optikpfadmanagementeinrichtung einen Optikpfad zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten auf dem Wellenlängenband der a-ten Prioritätsreihenfolge herstellt und danach EIN/AUS sowie eine Oszillationswellenlänge des mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Senders derart steuert, dass der Optikpfad, der zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten auf dem Wellenlängenband der b-ten Prioritätsrangfolge hergestellt worden war, gelöscht wird.

6. Optisches Kommunikationsnetzwerkssystem nach Anspruch 5, ferner umfassend:

Eine Datenbank (3030), die einen Optikpfad für jedes Wellenlängenband speichert; eine erste Sucheinrichtung (3010), die dann, wenn eine Notwendigkeit entstanden ist, neu einen Optikpfad zwischen einem xx-ten Kommunikationsknoten und einem yy-ten Kommunikationsknoten herzustellen, in der Datenbank in der Reihenfolge von Daten entsprechend einem Wellenlängenband, dessen Prioritätsrangfolge die niedrigste ist, nach einem Wellenlängenband sucht, welches durch den xx-ten Kommunikationsknoten und den yy-ten Kommunikationsknoten nicht verwendet wird; eine erste Sendeeinrichtung (3010), die der Optikpfadmanagementeinrichtung einen Befehl sendet zur Herstellung eines Optikpfads gemäß dem Ergebnis der Suche durch die erste Sucheinrichtung;

eine zweite Sucheinrichtung (3010), die dann, wenn eine Notwendigkeit für einen Optikpfad, der bereits zwischen einem xxx-ten Kommunikationsknoten und einem yyy-ten Kommunikationsknoten hergestellt worden ist, verschwindet, in der Datenbank in der Reihenfolge von Daten entsprechend einem Wellenlängenband, dessen Prioritätsrangfolge die höchste ist, nach einem Wellenlängenband sucht, auf dem ein Optikpfad zwischen dem xxx-ten Kommunikationsknoten und dem yyy-ten Kommunikationsknoten hergestellt ist;

eine zweite Sendeeinrichtung (3010), die der Optikpfadmanagementschaltung einen Befehl zum Löschen eines Optikpfades gemäß dem Ergebnis der Suche durch die zweite Sucheinrichtung sendet;

eine Extraktionseinrichtung (3010), die in der Datenbank die Zahl b der höchsten Prioritätsrangfolge aus den Wellenlängenbändern sucht, auf denen Optikpfade zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten hergestellt sind, sowie die Zahl a der niedrigsten Prioritätsrangfolge aus den Wellenlängenbändern, auf denen kein Optikpfad existiert, dessen Startpunkt der x-te Kommunikationsknoten ist, kein Optikpfad, dessen Endpunkt der x-te Kommunikationsknoten ist, kein Optikpfad, dessen Startpunkt der y-te Kommunikationsknoten ist und kein Optikpfad, dessen Endpunkt der y-te Kommunikationsknoten ist, für alle Kombinationen von x und y in einer vorbestimmten Reihenfolge, und die Kombinationen von x, y, a und b extrahiert, für die die Zahl a kleiner als die Zahl b ist;

eine dritte Sendeeinrichtung (3010), die dann, wenn eine anwendbare Kombination existiert, der Optikpfadmanagementschaltung einen Befehl sendet zur Herstellung eines Optikpfades unter Verwendung des a-ten Wellenlängenbands zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten, und danach der Optikpfadmanagementschaltung einen Befehl zur Löschung eines Optikpfades sendet, der das b-te Wellenlängenband zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten verwendet; und

eine Datenbank-Update-Einrichtung (3010), die einen neu hergestellten Optikpfad in der Datenbank speichert und einen gelöschten Optikpfad aus der Datenbank löscht.

7. Optisches Kommunikationsnetzwerkssystem nach Anspruch 1, wobei die KxK Wellenleiterfeldgitter zyklische Wellenlängeneigenschaften haben.
8. Wellenlängenroutingvorrichtung (210), die bei ei-

nem optischen Kommunikationsnetzwerkssystem vorgesehen ist, umfassend eine Mehrzahl von Kommunikationsknoten (200-1 bis 200-4) und eine optische Übertragungsleitung (250-1 bis 250-4, 260-1 bis 260-4), die einen Kommunikationspfad bildet, verbunden mit den Kommunikationsknoten durch die optische Übertragungsleitung, und die Kommunikation zwischen den Kommunikationsknoten basierend auf einer Routensteuerung gemäß der Wellenlänge eines optischen Signals herstellt, wobei die Wellenlängenroutingvorrichtung **dadurch gekennzeichnet ist, dass** sie umfasst:

N Vorrichtungseingangsport (210-11 bis 210-14), wobei N eine ganze Zahl größer oder gleich 2 ist, die über die optische Übertragungsleitung mit den Kommunikationsknoten verbunden sind;

N Vorrichtungsausgangsport (210-21 bis 210-24), die über die optische Übertragungsleitung mit den Kommunikationsknoten verbunden sind;

eine Mehrzahl von Wellenlängenbandmultiplexern (220-1 bis 220-4), die an jedem der N Vorrichtungseingangsport vorgesehen sind, und die jeweils einen einzigen Eingangsport (221) und eine Mehrzahl von Ausgangsport (222-1 bis 222-4) haben, und wobei der Eingangsport mit einem der Vorrichtungseingangsport verbunden ist;

eine Mehrzahl von Wellenlängenbandmultiplexern (230-1 bis 230-4), die an jedem der N Vorrichtungsausgangsport vorgesehen sind, und die jeweils eine Mehrzahl von Eingangsport (231-1 bis 231-4) und einen einzelnen Ausgangsport (232) haben, und wobei der Ausgangsport mit einem der Vorrichtungsausgangsport verbunden ist; und

R KxK Wellenleiterfeldgitter (241 bis 244), wobei R eine ganze Zahl größer oder gleich J ist und wobei J eine ganze Zahl größer oder gleich 2 ist, die K Eingangsport (2411-1 bis 2411-4, 2421-1 bis 2421-4, 2431-1 bis 2431-4, 2441-1 bis 2441-4) sowie K Ausgangsport (2412-1 bis 2412-4, 2422-1 bis 2422-4, 2432-1 bis 2432-4, 2442-1 bis 2442-4) haben, wobei K eine ganze Zahl ist, welche $K \geq N$ erfüllt, die Wellenlängeneigenschaften haben, bei denen optische Signale mit verschiedenen Wellenlängen, die an einem Eingangsport eingegeben werden, abhängig von den Wellenlängen der eingegebenen optischen Signale an verschiedenen Ausgangsport ausgegeben werden, und bei denen optische Signale mit verschiedenen Wellenlängen, die von einem Ausgangsport ausgegeben werden, optische Signale sind, die an verschiedenen Eingangsport eingegeben wurden, und

wobei die Wellenlängenbanddemultiplexer eine Einrichtung umfassen, die eine Demultiplexierung gemäß Wellenlängenband vornimmt bei einem wellenlängenmultiplexierten Signal, in welchem eine jeweils vorbestimmte Zahl von Wellenlängen wellenlängenmultiplexiert wurden, für jedes Wellenlängenband, das von den Kommunikationsknoten übertragen wird, wobei Wellenlängenband = zentrale Wellenlänge $\lambda B_m \pm$ Wellenlängenbandbreite $\Delta\lambda_m$ mit $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, wobei $1 \leq m \leq R-1$, wobei m eine ganze Zahl ist, und die Ergebnisse an verschiedenen Ausgangsports ausgibt, wobei die Wellenlängenbandmultiplexer eine Einrichtung umfassen, die eine Multiplexierung bei optischen Signalen vornimmt, die von der Mehrzahl von Eingangsports eingegeben wurden, für jedes Wellenlängenband, und die ein wellenlängenmultiplexiertes Signal am Ausgangsport ausgibt, bei dem eine vorbestimmte Zahl von Wellenlängen wellenlängenmultiplexiert wurde, wobei die KxK Wellenleiterfeldgitter mit einer Wellenlängenroutingeigenschaft vorgesehen sind für jedes Wellenlängenband mit zentraler Wellenlänge $\lambda B_1 \pm$ Wellenlängenbandbreite $\Delta\lambda_1$, zentrale Wellenlänge $\lambda B_2 \pm$ Wellenlängenbandbreite $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), zentrale Wellenlänge $\lambda B_3 \pm$ Wellenlängenbandbreite $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \lambda B_3 - \Delta\lambda_3$), ..., zentrale Wellenlänge $\lambda B_R \pm$ Wellenlängenbandbreite $\Delta\lambda_R$ ($\lambda B_{R-1} + \Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$), wobei die Ausgangsports der Wellenlängenbanddemultiplexer, die jeweils mit den N Vorrichtungseingangsports verbunden sind, einzu-eins mit den Eingangsports der KxK Wellenleiterfeldgitter verbunden sind, die Wellenlängenroutingeigenschaften bei den Wellenlängenbändern der optischen Signale haben, welche von den Ausgangsports der Wellenlängenbanddemultiplexer ausgegeben werden, und wobei die Ausgangsports der KxK Wellenleiterfeldgitter eins-zu-eins mit den Eingangsports eines der Mehrzahl von Wellenlängenbandmultiplexern verbunden sind, der optische Signale mit Wellenlängen multiplexieren kann, welche zu den Wellenlängenbändern der optischen Signale gehören, die von den Ausgangsports der KxK Wellenleiterfeldgitter ausgegeben werden.

9. Optikpfadmanagementvorrichtung (211-1 bis 211-4), die einen Optikpfad zwischen zwei verschiedenen Kommunikationsknoten in einem optischen Kommunikationsnetzwerkssystem steuert, das eine Mehrzahl von Kommunikationsknoten (200-1 bis 200-4) umfasst, eine Wellenlängenroutingvorrichtung (210), welche Kommunikation zwischen den Kommunikationsknoten basierend auf einer Routen-

steuerung gemäß der Wellenlänge eines optischen Signals herstellt, sowie eine optische Übertragungsleitung (250-1 bis 250-4, 260-1 bis 260-4), die einen Kommunikationspfad bildet, welcher die Kommunikationsknoten und die Wellenlängenroutingvorrichtung verbindet, **dadurch gekennzeichnet, dass** die Wellenlängenroutingvorrichtung umfasst:

N Vorrichtungseingangsports (210-11 bis 210-14), wobei N eine ganze Zahl größer oder gleich 2 ist, die über die optische Übertragungsleitung mit den Kommunikationsknoten verbunden sind;

N Vorrichtungsausgangsports (210-21 bis 210-24), die über die optische Übertragungsleitung mit den Kommunikationsknoten verbunden sind;

eine Mehrzahl von Wellenlängenbanddemultiplexern (220-1 bis 220-4), die an jedem der N Vorrichtungseingangsports vorgesehen sind, und die jeweils einen einzigen Eingangsport (221) und eine Mehrzahl von Ausgangsports (222-1 bis 222-4) haben, und wobei der Eingangsport mit einem der Vorrichtungseingangsports verbunden ist;

eine Mehrzahl von Wellenlängenbandmultiplexern (230-1 bis 230-4), die an jedem der N Vorrichtungsausgangsports vorgesehen sind, und die jeweils eine Mehrzahl von Eingangsports (231-1 bis 231-4) und einen einzelnen Ausgangsport (232) haben, und wobei der Ausgangsport mit einem der Vorrichtungsausgangsports verbunden ist; und

R KxK Wellenleiterfeldgitter (241 bis 244), wobei R eine ganze Zahl größer oder gleich J ist und wobei J eine ganze Zahl größer oder gleich 2 ist, die K Eingangsports (2411-1 bis 2411-4, 2421-1 bis 2421-4, 2431-1 bis 2431-4, 2441-1 bis 2441-4) sowie K Ausgangsports (2412-1 bis 2412-4, 2422-1 bis 2422-4, 2432-1 bis 2432-4, 2442-1 bis 2442-4) haben, wobei K eine ganze Zahl ist, welche $K \geq N$ erfüllt, die Wellenlängenroutingeigenschaften haben, bei denen optische Signale mit verschiedenen Wellenlängen, die an einem Eingangsport eingegeben werden, abhängig von den Wellenlängen der eingegebenen optischen Signale an verschiedenen Ausgangsports ausgegeben werden, und bei denen optische Signale mit verschiedenen Wellenlängen, die von einem Ausgangsport ausgegeben werden, optische Signale sind, die an verschiedenen Eingangsports eingegeben wurden, und

wobei die Wellenlängenbanddemultiplexer eine Einrichtung umfassen, die eine Demultiplexierung gemäß Wellenlängenband vornimmt bei einem wellenlängenmultiplexierten Signal, in welchem eine jeweils vorbestimmte Zahl von Wel-

lenlängen wellenlängenmultiplexiert wurden, für
 jedes Wellenlängenband, das von den Kommu-
 nikationsknoten übertragen wird, wobei Wellen-
 längenband = zentrale Wellenlänge $\lambda B_m \pm$ Wel-
 lenlängenbandbreite $\Delta\lambda_m$ mit $\lambda B_m + \Delta\lambda_m \leq$
 $\lambda B_{m+1} - \Delta\lambda_{m+1}$, wobei $1 \leq m \leq R-1$, wobei m eine
 ganze Zahl ist, und die Ergebnisse an verschie-
 denen Ausgangsports ausgibt,
 wobei die Wellenlängenbandmultiplexer eine
 Einrichtung umfassen, die eine Multiplexierung
 bei optischen Signalen vornimmt, die von der
 Mehrzahl von Eingangsports eingegeben wur-
 den, für jedes Wellenlängenband, und die ein
 wellenlängenmultiplexiertes Signal am Aus-
 gangsport ausgibt, bei dem eine vorbestimmte
 Zahl von Wellenlängen wellenlängenmultiple-
 xiert wurde,
 wobei die KxK Wellenleiterfeldgitter mit einer
 Wellenlängenroutingeigenschaft vorgesehen
 sind für jedes Wellenlängenband mit zentraler
 Wellenlänge $\lambda B_1 \pm$ Wellenlängenbandbreite
 $\Delta\lambda_1$, zentrale Wellenlänge $\lambda B_2 \pm$ Wellenlängen-
 bandbreite $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), zentrale
 Wellenlänge $\lambda B_3 \pm$ Wellenlängenbandbreite
 $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \Delta\lambda_3$), ... , zentrale Wellenlänge
 $\lambda B_R \pm$ Wellenlängenbandbreite $\Delta\lambda_R$ ($\lambda B_{R-1} +$
 $\Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$),
 wobei die Ausgangsports der Wellenlängen-
 banddemultiplexer, die jeweils mit den N Vor-
 richtungseingangsports verbunden sind, eins-
 zu-eins mit den Eingangsports der KxK Wellen-
 leiterfeldgitter verbunden sind, die Wellenlän-
 genroutingeigenschaften bei den Wellenlän-
 genbändern der optischen Signale haben, wel-
 che von den Ausgangsports der Wellenlängen-
 banddemultiplexer ausgegeben werden, und
 wobei die Ausgangsports der KxK Wellenleiter-
 feldgitter eins-zu-eins mit den Eingangsports ei-
 nes der Mehrzahl von Wellenlängenbandmulti-
 plexern verbunden sind, der optische Signale
 mit Wellenlängen multiplexieren kann, welche
 zu den Wellenlängenbändern der optischen Si-
 gnale gehören, die von den Ausgangsports der
 KxK Wellenleiterfeldgitter ausgegeben werden,
 und
 jeder der Kommunikationsknoten umfasst:

Einen Jx1 Wellenlängenbandmultiplexer (230), wo-
 bei J eine ganze Zahl größer oder gleich 2 ist, wel-
 cher J Eingangsports IP[1], IP[2], IP[3], ... IP[J]
 (230-11 bis 230-14) und einen einzelnen Ausgangs-
 port (230-21) hat, und der an dem einzelnen Aus-
 gangsport optische Signale mit Wellenlängen aus-
 gibt, die zu den Wellenlängenbändern mit zentraler
 Wellenlänge $\lambda B_1 \pm$ Wellenlängenbandbreite $\Delta\lambda_1$,
 zentraler Wellenlänge $\lambda B_2 \pm$ Wellenlängenband-
 breite $\Delta\lambda_2$, zentraler Wellenlänge $\lambda B_3 \pm$ Wellenlän-
 genbandbreite $\Delta\lambda_3$, ... , zentraler Wellenlänge λB_J

$\pm$ Wellenlängenbandbreite $\Delta\lambda_J$ gehören, die an je-
 den der J Eingangsports eingegeben werden, wobei
 $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$ für $1 \leq m \leq J-1$, wobei
 m eine ganze Zahl ist;

wenigstens einen mit einer wellenlängeneinstellba-
 ren optischen Lichtquelle integrierten optischen
 Sender (400-1, 400-2), der mit einem der Eingangs-
 ports IP[1], IP[2], IP[3], ... IP[J] des Jx1 Wellenlän-
 genbandmultiplexers verbunden ist, der mit einer
 wellenlängeneinstellbaren optischen Lichtquelle
 versehen ist, welche auf eine Wellenlänge innerhalb
 eines Wellenlängenbands eingestellt werden kann,
 das zu dem verbundenen Eingangsport gehört, und
 die Licht mit der Wellenlängen ausgibt;

eine Mehrzahl von Wellenlängenmultiplexern (271,
 274), die an jedem der Eingangsports des Jx1 Wel-
 lenlängenbandmultiplexers vorgesehen sind, außer
 an dem Eingangsport, mit dem der mit einer wellen-
 längeneinstellbaren optischen Lichtquelle integrier-
 te optische Sender verbunden ist, und die zwei oder
 mehr Eingangsports (271-11 bis 271-14, 274-11 bis
 274-14) sowie einen Ausgangsport (271-21, 274-21)
 haben, wobei der Ausgangsport mit einem der Ein-
 gangsports des Jx1 Wellenlängenbandmultiplexers
 verbunden ist;

eine Mehrzahl von optischen Sendern (2711-1 bis
 2711-4, 2714-1 bis 2714-4), die mit den Eingangs-
 ports des Wellenlängenmultiplexers verbunden
 sind, und die Licht mit einer Wellenlänge emittieren,
 welche zu einem Wellenlängenband mit zentraler
 Wellenlänge $\lambda B_m \pm$ Wellenlängenbandbreite $\Delta\lambda_m$
 gehört;

einen 1xJ Wellenlängenbanddemultiplexer (220),
 wobei J eine ganze Zahl größer oder gleich 2 ist, der
 J Ausgangsports OP[1], OP[2], OP[3], ... OP[J]
 (220-21 bis 220-24) sowie einen einzelnen Ein-
 gangsport (220-11) hat und der an den J Ausgangs-
 ports optische Signale mit Wellenlängen ausgibt, die
 zu den Wellenlängenbandbreiten mit zentraler Wel-
 lenlänge $\lambda B_1 \pm$ Wellenlängenbandbreite $\Delta\lambda_1$, zen-
 trale Wellenlänge $\lambda B_2 \pm$ Wellenlängenbandbreite
 $\Delta\lambda_2$, zentraler Wellenlänge $\lambda B_3 \pm$ Wellenlängen-
 bandbreite $\Delta\lambda_3$, ..., zentraler Wellenlänge $\lambda B_J \pm$
 Wellenlängenbandbreite $\Delta\lambda_J$ gehören, welche an
 den einzelnen Eingangsport eingegeben werden,
 wobei $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$ für $1 \leq m \leq J$,
 wobei m eine ganze Zahl ist;

einen optischen Empfänger (500-1, 500-2), der an
 denjenigen Ausgangsport von den Ausgangsports
 OP[1], OP[2], OP[3], ... OP[J] des 1xJ Wellenlän-
 genbanddemultiplexers verbunden ist, der zu dem Wel-
 lenlängenband gehört, bei dem der mit einer wellen-
 längeneinstellbaren optischen Lichtquelle integrier-
 te optische Sender vorgesehen ist, und der ein op-
 tisches Signal der Wellenlänge empfängt, welche
 von dem mit einer wellenlängeneinstellbaren opti-
 schen Lichtquelle integrierten optischen Sender
 ausgegeben wird;

eine Mehrzahl von Wellenlängendemultiplexern (281, 284), die an jedem der Ausgangsports des 1xJ Wellenlängenbanddemultiplexers vorgesehen sind, ausgenommen den Ausgangsport, mit welchem der optische Empfänger verbunden ist, und die zwei oder mehr Ausgangsports (281-21 bis 281-24, 284-21 bis 284-24) sowie einen einzelnen Eingangsport (281-11, 284-11) haben, und wobei der Eingangsport mit einem der Ausgangsports des 1xJ Wellenlängenbanddemultiplexers verbunden ist; und eine Mehrzahl von optischen Empfängern (2811-1 bis 2811-4, 2814-1 bis 2814-4), die mit den Ausgangsports des Wellenlängendemultiplexers verbunden sind, und wobei der einzelne Eingangsport des 1xJ Wellenlängenbanddemultiplexers über einen optischen Wellenleiter (260) mit einem der Vorrichtungsausgangsports der Wellenlängenroutingvorrichtung verbunden ist, und wobei die Optikpfadmanagementvorrichtung umfasst:

eine Einrichtung, die dann, wenn wenigstens eine Gruppe der mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sender existiert, die bei allen Kommunikationsknoten vorgesehen sind und die optische Signale des gleichen Wellenlängenbands ausgeben, und wenn es K Wellenlängenbänder gibt, wobei K eine ganze Zahl größer oder gleich 2 ist, die zu den Eingangsports des Jx1 Wellenlängenbandmultiplexers gehören, die mit den mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sendern verbunden sind, die Optikpfadmanagementschaltung wechselseitig verschiedene Prioritätsrangfolgen von 1 bis K zu den Wellenlängenbändern zuweist, die zu den Eingangsports des Jx1 Wellenlängenbandmultiplexers gehören, welche mit den mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sendern verbunden sind; eine Einrichtung, die erfasst, dass aus den Wellenlängenbändern, die zu den Eingangsports des Jx1 Wellenlängenbandmultiplexers gehören, welche mit den mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sendern verbunden sind, die Prioritätsrangfolge mit der höchsten Nummer unter den Wellenlängenbändern, für die optische Pfade zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten existieren, eine Zahl b ist, und die Prioritätsrangfolge mit der niedrigsten Nummer unter den Wellenlängenbändern, die nicht verwendet werden für einen optischen Pfad, dessen Startpunkt der x-te Kommunikationsknoten ist, einen optischen

Pfad, dessen Endpunkt der x-te Kommunikationsknoten ist, einen optischen Pfad, dessen Startpunkt der y-te Kommunikationsknoten und einen optischen Pfad, dessen Endpunkt der y-te Kommunikationsknoten ist, eine Zahl a ist, und wenn die Zahl a kleiner als die Zahl b ist; und eine Einrichtung, die dann, wenn erfasst worden ist, dass die Zahl a kleiner ist als die Zahl b, einen Optikpfad zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten auf dem Wellenlängenband der a-ten Prioritätsreihenfolge herstellt und danach EIN/AUS sowie eine Oszillationswellenlänge des mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Senders derart steuert, dass der Optikpfad, der zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten auf dem Wellenlängenband der b-ten Prioritätsrangfolge hergestellt worden war, gelöscht wird.

10. Optikpfadmanagementverfahren (211-1 bis 211-4), welches einen Optikpfad zwischen zwei verschiedenen Kommunikationsknoten in einem optischen Kommunikationsnetzwerkssystem steuert, das eine Mehrzahl von Kommunikationsknoten (200-1 bis 200-4) umfasst, eine Wellenlängenroutingvorrichtung (210), welche Kommunikation zwischen den Kommunikationsknoten basierend auf einer Routensteuerung gemäß der Wellenlänge eines optischen Signals herstellt, sowie eine optische Übertragungsleitung (250-1 bis 250-4, 260-1 bis 260-4), die einen Kommunikationspfad bildet, welcher die Kommunikationsknoten und die Wellenlängenroutingvorrichtung verbindet, **dadurch gekennzeichnet, dass** die Wellenlängenroutingvorrichtung umfasst:

N Vorrichtungseingangsports (210-11 bis 210-14), wobei N eine ganze Zahl größer oder gleich 2 ist, die über die optische Übertragungsleitung mit den Kommunikationsknoten verbunden sind;

N Vorrichtungsausgangsports (210-21 bis 210-24), die über die optische Übertragungsleitung mit den Kommunikationsknoten verbunden sind;

eine Mehrzahl von Wellenlängenbanddemultiplexern (220-1 bis 220-4), die an jedem der N Vorrichtungseingangsports vorgesehen sind, und die jeweils einen einzigen Eingangsport (221) und eine Mehrzahl von Ausgangsports (222-1 bis 222-4) haben, und wobei der Eingangsport mit einem der Vorrichtungseingangsports verbunden ist;

eine Mehrzahl von Wellenlängenbandmultiplexern (230-1 bis 230-4), die an jedem der N Vorrichtungsausgangsports vorgesehen sind, und die jeweils eine Mehrzahl von Eingangsports

(231-1 bis 231-4) und einen einzelnen Ausgangsport (232) haben, und wobei der Ausgangsport mit einem der Vorrichtungsausgangsporten verbunden ist; und

R KxK Wellenleiterfeldgitter (241 bis 244), wobei R eine ganze Zahl größer oder gleich J ist und wobei J eine ganze Zahl größer oder gleich 2 ist, die K Eingangsporte (2411-1 bis 2411-4, 2421-1 bis 2421-4, 2431-1 bis 2431-4, 2441-1 bis 2441-4) sowie K Ausgangsporte (2412-1 bis 2412-4, 2422-1 bis 2422-4, 2432-1 bis 2432-4, 2442-1 bis 2442-4) haben, wobei K eine ganze Zahl ist, welche $K \geq N$ erfüllt, die Wellenlängeneigenschaften haben, bei denen optische Signale mit verschiedenen Wellenlängen, die an einem Eingangsport eingegeben werden, abhängig von den Wellenlängen der eingegebenen optischen Signale an verschiedenen Ausgangsporten ausgegeben werden, und bei denen optische Signale mit verschiedenen Wellenlängen, die von einem Ausgangsport ausgegeben werden, optische Signale sind, die an verschiedenen Eingangsporten eingegeben wurden, und

wobei die Wellenlängenbanddemultiplexer eine Einrichtung umfassen, die eine Demultiplexierung gemäß Wellenlängenband vornimmt bei einem wellenlängenmultiplexierten Signal, in welchem eine jeweils vorbestimmte Zahl von Wellenlängen wellenlängenmultiplexiert wurden, für jedes Wellenlängenband, das von den Kommunikationsknoten übertragen wird, wobei Wellenlängenband = zentrale Wellenlänge $\lambda_{B_m} \pm$ Wellenlängenbandbreite $\Delta\lambda_m$ mit $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$, wobei $1 \leq m \leq R-1$, wobei m eine ganze Zahl ist, und die Ergebnisse an verschiedenen Ausgangsporten ausgibt,

wobei die Wellenlängenbandmultiplexer eine Einrichtung umfassen, die eine Multiplexierung bei optischen Signalen vornimmt, die von der Mehrzahl von Eingangsporten eingegeben wurden, für jedes Wellenlängenband, und die ein wellenlängenmultiplexiertes Signal am Ausgangsport ausgibt, bei dem eine vorbestimmte Zahl von Wellenlängen wellenlängenmultiplexiert wurde,

wobei die KxK Wellenleiterfeldgitter mit einer Wellenlängenroutingeigenschaft vorgesehen sind für jedes Wellenlängenband mit zentraler Wellenlänge $\lambda_{B_1} \pm$ Wellenlängenbandbreite $\Delta\lambda_1$, zentrale Wellenlänge $\lambda_{B_2} \pm$ Wellenlängenbandbreite $\Delta\lambda_2$ ($\lambda_{B_1} + \Delta\lambda_1 < \lambda_{B_2} - \Delta\lambda_2$), zentrale Wellenlänge $\lambda_{B_3} \pm$ Wellenlängenbandbreite $\Delta\lambda_3$ ($\lambda_{B_2} + \Delta\lambda_2 < \lambda_{B_3} - \Delta\lambda_3$), ..., zentrale Wellenlänge $\lambda_{B_R} \pm$ Wellenlängenbandbreite $\Delta\lambda_R$ ($\lambda_{B_{R-1}} + \Delta\lambda_{R-1} < \lambda_{B_R} - \Delta\lambda_R$), wobei die Ausgangsporten der Wellenlängenbanddemultiplexer, die jeweils mit den N Vor-

richtungseingangsporten verbunden sind, eins-zu-eins mit den Eingangsporten der KxK Wellenleiterfeldgitter verbunden sind, die Wellenlängeneigenschaften bei den Wellenlängenbändern der optischen Signale haben, welche von den Ausgangsporten der Wellenlängenbanddemultiplexer ausgegeben werden, und wobei die Ausgangsporten der KxK Wellenleiterfeldgitter eins-zu-eins mit den Eingangsporten eines der Mehrzahl von Wellenlängenbandmultiplexern verbunden sind, der optische Signale mit Wellenlängen multiplexieren kann, welche zu den Wellenlängenbändern der optischen Signale gehören, die von den Ausgangsporten der KxK Wellenleiterfeldgitter ausgegeben werden, und

jeder der Kommunikationsknoten umfasst:

Einen Jx1 Wellenlängenbandmultiplexer (230), wobei J eine ganze Zahl größer oder gleich 2 ist, welcher J Eingangsporte IP[1], IP[2], IP[3], ... IP[J] (230-11 bis 230-14) und einen einzelnen Ausgangsport (230-21) hat, und der an dem einzelnen Ausgangsport optische Signale mit Wellenlängen ausgibt, die zu den Wellenlängenbändern mit zentraler Wellenlänge $\lambda_{B_1} \pm$ Wellenlängenbandbreite $\Delta\lambda_1$, zentraler Wellenlänge $\lambda_{B_2} \pm$ Wellenlängenbandbreite $\Delta\lambda_2$, zentraler Wellenlänge $\lambda_{B_3} \pm$ Wellenlängenbandbreite $\Delta\lambda_3$, ..., zentraler Wellenlänge $\lambda_{B_J} \pm$ Wellenlängenbandbreite $\Delta\lambda_J$ gehören, die an jeden der J Eingangsporten eingegeben werden, wobei $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$ für $1 \leq m \leq J-1$, wobei m eine ganze Zahl ist;

wenigstens einen mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sender (400-1, 400-2), der mit einem der Eingangsporten IP[1], IP[2], IP[3], ... IP[J] des Jx1 Wellenlängenbandmultiplexers verbunden ist, der mit einer wellenlängeneinstellbaren optischen Lichtquelle versehen ist, welche auf eine Wellenlänge innerhalb eines Wellenlängenbands eingestellt werden kann, das zu dem verbundenen Eingangsport gehört, und die Licht mit der Wellenlängen ausgibt;

eine Mehrzahl von Wellenlängenmultiplexern (271, 274), die an jedem der Eingangsporten des Jx1 Wellenlängenbandmultiplexers vorgesehen sind, außer an dem Eingangsport, mit dem der mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierte optische Sender verbunden ist, und die zwei oder mehr Eingangsporten (271-11 bis 271-14, 274-11 bis 274-14) sowie einen Ausgangsport (271-21, 274-21) haben, wobei der Ausgangsport mit einem der Eingangsporten des Jx1 Wellenlängenbandmultiplexers verbunden ist;

eine Mehrzahl von optischen Sendern (2711-1 bis 2711-4, 2714-1 bis 2714-4), die mit den Eingangsporten des Wellenlängenmultiplexers verbunden sind, und die Licht mit einer Wellenlänge emittieren,

weiche zu einem Wellenlängenband mit zentraler Wellenlänge $\lambda_{Bm} \pm$ Wellenlängenbandbreite $\Delta\lambda_m$ gehört;
 einen 1xJ Wellenlängenbanddemultiplexer (220), wobei J eine ganze Zahl größer oder gleich 2 ist, der J Ausgangsports OP[1], OP[2], OP[3], ... OP[J] (220-21 bis 220-24) sowie einen einzelnen Eingangsport (220-11) hat und der an den J Ausgangsports optische Signale mit Wellenlängen ausgibt, die zu den Wellenlängenbandbreiten mit zentraler Wellenlänge $\lambda_{B_1} \pm$ Wellenlängenbandbreite $\Delta\lambda_1$, zentrale Wellenlänge $\lambda_{B_2} \pm$ Wellenlängenbandbreite $\Delta\lambda_2$, zentraler Wellenlänge $\lambda_{B_3} \pm$ Wellenlängenbandbreite $\Delta\lambda_3$, ... , zentraler Wellenlänge $\lambda_{B_J} \pm$ Wellenlängenbandbreite $\Delta\lambda_J$ gehören, welche an den einzelnen Eingangsport eingegeben werden, wobei $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$ für $1 \leq m \leq J$, wobei m eine ganze Zahl ist;
 einen optischen Empfänger (500-1, 500-2), der an denjenigen Ausgangsport von den Ausgangsports OP[1], OP[2], OP[3], ... OP[J] des 1xJ Wellenlängenbanddemultiplexers verbunden ist, der zu dem Wellenlängenband gehört, bei dem der mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierte optische Sender vorgesehen ist, und der ein optisches Signal der Wellenlänge empfängt, welche von dem mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sender ausgegeben wird;
 eine Mehrzahl von Wellenlängendemultiplexern (281, 284), die an jedem der Ausgangsports des 1xJ Wellenlängenbanddemultiplexers vorgesehen sind, ausgenommen den Ausgangsport, mit welchem der optische Empfänger verbunden ist, und die zwei oder mehr Ausgangsports (281-21 bis 281-24, 284-21 bis 284-24) sowie einen einzelnen Eingangsport (281-11, 284-11) haben, und wobei der Eingangsport mit einem der Ausgangsports des 1xJ Wellenlängenbanddemultiplexers verbunden ist; und
 eine Mehrzahl von optischen Empfängern (2811-1 bis 2811-4, 2814-1 bis 2814-4), die mit den Ausgangsports des Wellenlängendemultiplexers verbunden sind, und
 wobei der einzelne Eingangsport des 1xJ Wellenlängenbanddemultiplexers über einen optischen Wellenleiter (260) mit einem der Vorrichtungsausgangsports der Wellenlängenroutingvorrichtung verbunden ist, und
 wobei das Optikpfadmanagementverfahren umfasst:

einen Schritt, bei dem dann, wenn wenigstens eine Gruppe der mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sender existiert, die bei allen Kommunikationsknoten vorgesehen sind und die optische Signale des gleichen Wellenlängenbands aus-

geben, und wenn es K Wellenlängenbänder gibt, wobei K eine ganze Zahl größer oder gleich 2 ist, die zu den Eingangsports des Jx1 Wellenlängenbandmultiplexers gehören, die mit den mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sendern verbunden sind, die Optikpfadmanagementeinrichtung wechselseitig verschiedene Prioritätsrangfolgen von 1 bis K zu den Wellenlängenbändern zuweist, die zu den Eingangsports des Jx1 Wellenlängenbandmultiplexers gehören, welche mit den mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sendern verbunden sind;
 einen Schritt, bei dem dann, wenn aus den Wellenlängenbändern, die zu den Eingangsports des Jx1 Wellenlängenbandmultiplexers gehören, welche mit den mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Sendern verbunden sind, die Prioritätsrangfolge mit der höchsten Nummer unter den Wellenlängenbändern, für die ein optischer Pfad zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten existiert, eine Zahl b ist, und die Prioritätsrangfolge mit der niedrigsten Nummer unter den Wellenlängenbändern, für welche kein optischer Pfad existiert, dessen Startpunkt der x-te Kommunikationsknoten ist, kein optischer Pfad, dessen Endpunkt der x-te Kommunikationsknoten ist, kein optischer Pfad, dessen Startpunkt der y-te Kommunikationsknoten ist, und kein optischer Pfad, dessen Endpunkt der y-te Kommunikationsknoten ist, eine Zahl a ist, und wenn die Zahl a kleiner als die Zahl b ist, EIN/AUS sowie eine Oszillationswellenlänge des mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Senders derart steuert, dass ein Optikpfad zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten auf dem Wellenlängenband der a-ten Prioritätsrangfolge hergestellt wird; und
 einen Schritt zum Herstellen eines Optikpfads zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten auf dem Wellenlängenband der a-ten Prioritätsreihenfolge und danach Steuern von EIN/AUS sowie der Oszillationswellenlänge des mit einer wellenlängeneinstellbaren optischen Lichtquelle integrierten optischen Senders derart, dass der Optikpfad, der zwischen dem x-ten Kommunikationsknoten und dem y-ten Kommunikationsknoten auf dem Wellenlängenband der b-ten Prioritätsrangfolge hergestellt worden war, gelöscht wird.

11. Optikpfadmanagementprogramm, das einen Computer dazu veranlasst, die Schritte des Optikpfad-

managementverfahrens nach Anspruch 10 durchzuführen.

12. Speichermedium, das von einem Computer gelesen werden kann, auf dem das Optikpfadmanagementprogramm nach Anspruch 11 gespeichert ist. 5

Revendications

1. Système de réseau de communication optique comprenant : 10

une pluralité de noeuds de communication (200-1 à 200-4) ; 15
un dispositif de routage de longueur d'onde (210) qui établit une communication entre les noeuds de communication sur la base d'un contrôle de route selon la longueur d'onde d'un signal optique ; et 20
une ligne de transmission optique (250-1 à 250-4, 260-1 à 260-4) qui forme un trajet de communication qui connecte les noeuds de communication et le dispositif de routage de longueur d'onde, 25
dans lequel le système de réseau de communication optique est **caractérisé en ce que**
le dispositif de routage de longueur d'onde comprend : 30

N ports d'entrée de dispositif (210-11 à 210-14), où N est un entier supérieur ou égal à 2, qui sont connectés via la ligne de transmission optique aux noeuds de communication ; 35
N ports de sortie de dispositif (210-21 à 210-24) qui sont connectés via la ligne de transmission optique aux noeuds de communication ;
une pluralité de démultiplexeurs de bande de longueur d'onde (220-1 à 220-4) qui sont fournis à chacun des N ports d'entrée de dispositif, et chacun a un seul port d'entrée (221) et une pluralité de ports de sortie (222-1 à 222-4), et le port d'entrée est connecté à l'un des ports d'entrée de dispositif ; 40
une pluralité de multiplexeurs de bande de longueur d'onde (230-1 à 230-4) qui sont fournis à chacun des N ports de sortie de dispositif, et chacun a une pluralité de ports d'entrée (231-1 à 231-4) et un seul port de sortie (232), et le port de sortie est connecté à l'un des ports de sortie de dispositif ; et 45
R réseaux sélectifs planaires KxK (241 à 244), où R est un entier supérieur ou égal à J et J est un entier supérieur ou égal à 2, qui ont K ports d'entrée (2411-1 à 2411-4, 2421-1 à 2421-4, 2431-1 à 2431-4, 2441-1 50

à 2441-4) et K ports de sortie (2412-1 à 2412-4, 2422-1 à 2422-4, 2432-1 à 2432-4, 2442-1 à 2442-4), où K est un entier qui satisfait à $K \geq N$, qui ont des caractéristiques de routage de longueur d'onde dans lesquelles des signaux optiques ayant des longueurs d'onde différentes qui sont entrés dans un port d'entrée sont sortis au niveau de ports de sortie différents en fonction des longueurs d'onde des signaux optiques entrés et dans lesquelles des signaux optiques ayant des longueurs d'onde différentes qui sont sortis d'un port de sortie sont des signaux optiques qui ont été entrés dans des ports d'entrée différents, et dans lequel les démultiplexeurs de bande de longueur d'onde comprennent un moyen qui démultiplexe par bande de longueur d'onde un signal multiplexé par répartition en longueur d'onde dans lequel un nombre prédéterminé respectif de longueurs d'onde ont été multiplexées par répartition en longueur d'onde pour chaque bande de longueur d'onde qui est transmise depuis les noeuds de communication, où la bande de longueur d'onde = la longueur d'onde centrale $\lambda B_m \pm$ la largeur de bande de longueur d'onde $\Delta \lambda_m$, avec $\lambda B_m + \Delta \lambda_m \leq \lambda B_{m+1} - \Delta \lambda_{m+1}$, où $1 \leq m \leq R - 1$, m étant un entier, et sort les résultats au niveau de ports de sortie différents,
les multiplexeurs de bande de longueur d'onde comprennent un moyen qui multiplexe des signaux optiques qui ont été entrés depuis la pluralité de ports d'entrée pour chaque bande de longueur d'onde et qui sort un signal multiplexé par répartition en longueur d'onde dans lequel un nombre prédéterminé de longueurs d'onde ont été multiplexées par répartition en longueur d'onde au niveau du port de sortie,
les réseaux sélectifs planaires KxK sont pourvus d'une caractéristique de routage de longueur d'onde pour chaque bande de longueur d'onde de longueur d'onde centrale $\lambda B_1 \pm$ largeur de bande de longueur d'onde $\Delta \lambda_1$, longueur d'onde centrale $\lambda B_2 \pm$ largeur de bande de longueur d'onde $\Delta \lambda_2$ ($\lambda B_1 + \Delta \lambda_1 < \lambda B_2 - \Delta \lambda_2$), longueur d'onde centrale $\lambda B_3 \pm$ largeur de bande de longueur d'onde $\Delta \lambda_3$ ($\lambda B_2 + \Delta \lambda_2 < \lambda B_3 - \Delta \lambda_3$), ..., longueur d'onde centrale $\lambda B_R \pm$ largeur de bande de longueur d'onde $\Delta \lambda_R$ ($\lambda B_{R-1} + \Delta \lambda_{R-1} < \lambda B_R - \Delta \lambda_R$),
les ports de sortie des démultiplexeurs de bande de longueur d'onde qui sont connectés respectivement aux N ports d'entrée de dispositif sont connectés un à un aux ports 55

- d'entrée des réseaux sélectifs planaires KxK qui ont des caractéristiques de routage de longueur d'onde au niveau des bandes de longueur d'onde des signaux optiques qui sont sortis des ports de sortie des démultiplexeurs de bande de longueur d'onde, et
- les ports de sortie des réseaux sélectifs planaires KxK sont connectés un à un aux ports d'entrée de l'un quelconque de la pluralité de multiplexeurs de bande de longueur d'onde qui peuvent multiplexer des signaux optiques de longueurs d'onde qui appartiennent aux bandes de longueur d'onde des signaux optiques qui sont sortis des ports de sortie des réseaux sélectifs planaires KxK.
2. Système de réseau de communication optique selon la revendication 1, dans lequel chacun des noeuds de communication comprend :
- un multiplexeur de bande de longueur d'onde Jx1 (230), où J est un entier supérieur ou égal à 2, qui a J ports d'entrée IP[1], IP[2], IP[3], ... IP[J] (230-11 à 230-14) et un seul port de sortie, et sort au niveau du seul port de sortie des signaux optiques de longueurs d'onde qui appartiennent aux bandes de longueur d'onde de longueur d'onde centrale $\lambda B_1 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda B_2 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$, longueur d'onde centrale $\lambda B_3 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$, ..., longueur d'onde centrale $\lambda B_J \pm$ largeur de bande de longueur d'onde $\Delta\lambda_J$, qui sont entrés dans les J ports d'entrée respectifs, où $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, pour $1 \leq m \leq J - 1$, où m est un entier ; une pluralité de multiplexeurs à répartition en longueur d'onde (271 à 274) qui sont fournis au niveau de chacun des ports d'entrée IP[1], IP[2], IP[3], ..., IP[J] du multiplexeur de bande de longueur d'onde Jx1, et qui ont deux ports d'entrée ou plus (271-11 à 271-14, 272-11 à 272-14, 273-11 à 273-14, 274-11 à 274-14) et un port de sortie (271-21, 272-21, 273-21, 274-21), avec les ports de sortie qui sont connectés aux ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 ; et
- une pluralité d'émetteurs optiques (2711-1 à 2711-4, 2712-1 à 2712-4, 2713-1 à 2713-4, 2714-1 à 2714-4) qui sont connectés aux ports d'entrée des multiplexeurs à répartition en longueur d'onde, et qui émettent de la lumière de longueurs d'onde qui appartiennent à des bandes de longueur d'onde de longueurs d'onde centrales, $\lambda B_m \pm$ largeur de bande de longueur d'onde $\Delta\lambda_m$, et
- dans lequel le port de sortie du multiplexeur de bande de longueur d'onde Jx1 est connecté via un guide d'ondes optique (250) aux ports d'entrée de dispositif du dispositif de routage de longueur d'onde.
3. Système de réseau de communication optique selon la revendication 1 ou la revendication 2, dans lequel chacun des noeuds de communication comprend :
- un démultiplexeur de bande de longueur d'onde 1xJ (220), où J est un entier supérieur ou égal à 2, qui a J ports de sortie OP[1], OP[2], OP[3], ..., OP[J] (220-21 à 220-24) et un seul port d'entrée (220-11), et qui sort au niveau des J ports de sortie des signaux optiques de longueurs d'onde qui appartiennent aux largeurs de bande de longueur d'onde qui sont entrés dans le seul port d'entrée de longueur d'onde centrale $\lambda B_1 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda B_2 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$, longueur d'onde centrale $\lambda B_3 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$, ..., longueur d'onde centrale $\lambda B_J \pm$ largeur de bande de longueur d'onde $\Delta\lambda_J$, où $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, où m est un entier ;
- une pluralité de démultiplexeurs à répartition en longueur d'onde (281 à 284) qui sont fournis à chacun des ports de sortie OP[1], OP[2], OP[3], ..., OP[J] du démultiplexeur de bande de longueur d'onde 1xJ, dont chacun a deux ports de sortie ou plus (281-21 à 281-24, 282-21 à 282-24, 283-21 à 283-24, 284-21 à 284-24) et un seul port d'entrée (281-11, 282-11, 283-11, 284-11), et le port d'entrée est connecté à l'un des ports de sortie du démultiplexeur de bande de longueur d'onde 1xJ ; et
- une pluralité de récepteurs optiques (2811-1 à 2811-4, 2812-1 à 2812-4, 2813-1 à 2813-4, 2814-1 à 2814-4) qui sont connectés aux ports de sortie des démultiplexeurs à répartition en longueur d'onde, et
- dans lequel le seul port d'entrée du démultiplexeur de bande de longueur d'onde 1xJ est connecté via un guide d'ondes optique (260) à l'un des ports de sortie de dispositif du dispositif de routage de longueur d'onde.
4. Système de réseau de communication optique selon la revendication 1, dans lequel chacun des noeuds de communication comprend :
- un multiplexeur de bande de longueur d'onde Jx1 (230), où J est un entier supérieur ou égal à 2, qui a J ports d'entrée IP[1], IP[2], IP[3], ... IP[J] (230-11 à 230-14) et un seul port de sortie, et sort au niveau du seul port de sortie des si-

gnaux optiques de longueurs d'onde qui appartiennent aux bandes de longueur d'onde de longueur d'onde centrale $\lambda B_1 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda B_2 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$, longueur d'onde centrale $\lambda B_3 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$, ..., longueur d'onde centrale $\lambda B_J \pm$ largeur de bande de longueur d'onde $\Delta\lambda_J$, qui sont entrés dans chacun des J ports d'entrée, où $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, pour $1 \leq m \leq J - 1$, où m est un entier ; au moins un émetteur optique à source de lumière optique accordable en longueur d'onde intégrée (400-1, 400-2) qui est connecté à l'un quelconque des ports d'entrée IP[1], IP[2], IP[3], ... IP[J] du multiplexeur de bande de longueur d'onde Jx1, qui est pourvu d'une source de lumière optique accordable en longueur d'onde qui peut être fixée à une longueur d'onde à l'intérieur d'une bande de longueur d'onde qui appartient au port d'entrée qui est connecté, et qui sort de la lumière de la longueur d'onde ; une pluralité de multiplexeurs à répartition en longueur d'onde (271, 274) qui sont fournis à chacun des ports d'entrée du multiplexeur de bande de longueur d'onde Jx1, autres que le port d'entrée auquel l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée est connecté, et qui ont deux port d'entrée ou plus (271-11 à 271-14, 274-11 à 274-14) et un port de sortie (271-21, 274-21), avec le port de sortie qui est connecté à l'un des ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 ; une pluralité d'émetteurs optiques (2711-1 à 2711-4, 2714-1 à 2714-4) qui sont connectés aux ports d'entrée du multiplexeur à répartition en longueur d'onde, et qui émettent de la lumière de longueur d'onde qui appartient à une bande de longueur d'onde de longueur d'onde centrale $\lambda B_m \pm$ largeur de bande de longueur d'onde $\Delta\lambda_m$; un démultiplexeur de bande de longueur d'onde 1xJ (220), où J est un entier supérieur ou égal à 2, qui a J ports de sortie OP[1], OP[2], OP[3], ... OP[J] (220-21 à 220-24) et un seul port d'entrée (220-11), et sort au niveau des J ports de sortie des signaux optiques de longueurs d'onde qui appartiennent aux largeurs de bande de longueur d'onde de longueur d'onde centrale $\lambda B_1 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda B_2 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$, longueur d'onde centrale $\lambda B_3 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$, ..., longueur d'onde centrale $\lambda B_J \pm$ largeur de bande de longueur d'onde $\Delta\lambda_J$, qui sont entrés dans le seul port d'entrée, où $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, pour $1 \leq m \leq J$, où m

est un entier ;

un récepteur optique (500-1, 500-2) qui est connecté à ce port de sortie, parmi les ports de sortie OP[1], OP[2], OP[3], ... OP[J] du démultiplexeur de bande de longueur d'onde 1xJ, qui appartient à la bande de longueur d'onde à laquelle l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée est fourni, et qui reçoit un signal optique de la longueur d'onde qui est sortie de l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée ;

une pluralité de démultiplexeurs à répartition en longueur d'onde (281, 284) qui sont fournis à chacun des ports de sortie du démultiplexeur de bande de longueur d'onde 1xJ, à l'exception du port de sortie auquel le récepteur optique est connecté, qui ont deux ports de sortie ou plus (281-21 à 281-24, 284-21 à 284-24) et un seul port d'entrée (281-11, 284-11), et le port d'entrée est connecté à l'un des ports de sortie du démultiplexeur de bande de longueur d'onde 1xJ ; et

une pluralité de récepteurs optiques (2811-1 à 2811-4, 2814-1 à 2814-4) qui sont connectés aux ports de sortie des démultiplexeurs à répartition en longueur d'onde, et

dans lequel le seul port d'entrée du démultiplexeur de bande de longueur d'onde 1xJ est connecté via un guide d'ondes optique (260) à l'un des ports de sortie de dispositif du dispositif de routage de longueur d'onde.

5. Système de réseau de communication optique selon la revendication 4, comprenant en outre un moyen de gestion de trajet optique (211-1 à 211-4) qui contrôle un trajet optique entre deux noeuds de communication différents, et dans lequel si au moins un groupe des émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée existe qui sont fournis à tous les noeuds de communication et qui sortent des signaux optiques de la même bande de longueur d'onde, et s'il y a K bandes de longueur d'onde, où K est un entier supérieur ou égal à 2, qui appartiennent aux ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 qui sont connectés aux émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée, le moyen de gestion de trajet optique affecte des classements de priorité mutuellement différents de 1 à K aux bandes de longueur d'onde qui appartiennent aux ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 qui sont connectés aux émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée, et lorsque, parmi les bandes de longueur d'onde qui appartiennent aux ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 qui sont

connectés aux émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée, le classement de priorité portant la numérotation la plus haute parmi les bandes de longueur d'onde pour lesquelles des trajets optiques existent entre un x-ième noeud de communication et un y-ième noeud de communication est le numéro b, et le classement de priorité portant la numérotation la plus basse parmi les bandes de longueur d'onde pour lesquelles un trajet optique dont le point de départ est le x-ième noeud de communication, un trajet optique dont le point final est le x-ième noeud de communication, un trajet optique dont le point de départ est le y-ième noeud de communication, et un trajet optique dont le point final est le y-ième noeud de communication n'existent pas est le numéro a, et le numéro a est inférieur au numéro b, le moyen de gestion de trajet optique établit un trajet optique entre le x-ième noeud de communication et le y-ième noeud de communication sur la bande de longueur d'onde de l'a-ième classement de priorité, et contrôle par la suite MARCHE/ARRET et une longueur d'onde d'oscillation de l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée afin d'annuler le trajet optique qui a été établi entre le x-ième noeud de communication et le y-ième noeud de communication sur la bande de longueur d'onde du b-ième classement de priorité.

6. Système de réseau de communication optique selon la revendication 5, comprenant en outre :

une base de données (3030) qui enregistre un trajet optique pour chaque bande de longueur d'onde ;

un premier moyen de recherche (3010) qui, lorsqu'une exigence est nouvellement survenue d'établir un trajet optique entre un xx-ième noeud de communication et un yy-ième noeud de communication, recherche dans la base de données, dans l'ordre à partir de données qui correspondent à une bande de longueur d'onde dont le classement de priorité est le plus bas, une bande de longueur d'onde qui n'est pas utilisée par le xx-ième noeud de communication et le yy-ième noeud de communication ;

un premier moyen de transmission (3010) qui transmet au moyen de gestion de trajet optique une commande pour établir un trajet optique selon le résultat de la recherche par le premier moyen de recherche ;

un second moyen de recherche (3010) qui, lorsqu'une exigence pour un trajet optique qui est déjà établi entre un xxx-ième noeud de communication et un yyy-ième noeud de communication a cessé, recherche dans la base de données, dans l'ordre à partir de données qui correspondent à une bande de longueur d'onde

dont le classement de priorité est le plus haut, une bande de longueur d'onde sur laquelle un trajet optique est établi entre le xxx-ième noeud de communication et le yyy-ième noeud de communication ;

un deuxième moyen de transmission (3010) qui transmet au moyen de gestion de trajet optique une commande pour annuler un trajet optique selon le résultat de la recherche par le second moyen de recherche ;

un moyen d'extraction (3010) qui recherche dans la base de données le numéro b du classement de priorité le plus haut parmi les bandes de longueur d'onde sur lesquelles des trajets optiques sont établis entre le x-ième noeud de communication et le y-ième noeud de communication, et le numéro a du classement de priorité le plus bas parmi les bandes de longueur d'onde sur lesquelles un trajet optique dont le point de départ est le x-ième noeud de communication, un trajet optique dont le point final est le x-ième noeud de communication, un trajet optique dont le point de départ est le y-ième noeud de communication, et un trajet optique dont le point final est le y-ième noeud de communication n'existent pas, pour toutes les combinaisons de x et y dans un ordre prédéterminé, et extrait des combinaisons de x, y, a, et b pour lesquelles le numéro a est inférieur au numéro b ;

un troisième moyen de transmission (3010) qui, lorsqu'une combinaison applicable existe, transmet au moyen de gestion de trajet optique une commande pour établir un trajet optique en utilisant l'a-ième bande de longueur d'onde entre le x-ième noeud de communication et le y-ième noeud de communication, et transmet par la suite au moyen de gestion de trajet optique une commande pour annuler un trajet optique en utilisant la b-ième bande de longueur d'onde entre le x-ième noeud de communication et le y-ième noeud de communication ; et un moyen de mise à jour de base de données (3010) qui enregistre un trajet optique qui a été nouvellement établi dans la base de données, et supprime un trajet optique qui a été annulé de la base de données.

7. Système de réseau de communication optique selon la revendication 1, dans lequel les réseaux sélectifs planaires KxK ont des caractéristiques de longueur d'onde cyclique.

8. Dispositif de routage de longueur d'onde (210) qui est fourni à un système de réseau de communication optique comprenant une pluralité de noeuds de communication (200-1 à 200-4) et une ligne de transmission optique (250-1 à 250-4, 260-1 à 260-4) qui forme

un trajet de communication, connecté avec les noeuds de communication par la ligne de transmission optique, et qui établit une communication entre les noeuds de communication sur la base d'un contrôle de route selon la longueur d'onde d'un signal optique, le dispositif de routage de longueur d'onde étant **caractérisé en ce qu'il** comprend :

N ports d'entrée de dispositif (210-11 à 210-14), où N est un entier supérieur ou égal à 2, qui sont connectés via la ligne de transmission optique aux noeuds de communication ;

N ports de sortie de dispositif (210-21 à 210-24) qui sont connectés via la ligne de transmission optique aux noeuds de communication ;

une pluralité de démultiplexeurs de bande de longueur d'onde (220-1 à 220-4) qui sont fournis à chacun des N ports d'entrée de dispositif, et chacun a un seul port d'entrée (221) et une pluralité de ports de sortie (222-1 à 222-4), et le port d'entrée est connecté à l'un des ports d'entrée de dispositif ;

une pluralité de multiplexeurs de bande de longueur d'onde (230-1 à 230-4) qui sont fournis à chacun des N ports de sortie de dispositif, et chacun a une pluralité de ports d'entrée (231-1 à 231-4) et un seul port de sortie (232), et le port de sortie est connecté à l'un des ports de sortie de dispositif ; et

R réseaux sélectifs planaires KxK (241 à 244), où R est un entier supérieur ou égal à J et J est un entier supérieur ou égal à 2, qui ont K ports d'entrée (2411-1 à 2411-4, 2421-1 à 2421-4, 2431-1 à 2431-4, 2441-1 à 2441-4) et K ports de sortie (2412-1 à 2412-4, 2422-1 à 2422-4, 2432-1 à 2432-4, 2442-1 à 2442-4), où K est un entier qui satisfait à $K \geq N$, qui ont des caractéristiques de routage de longueur d'onde dans lesquelles des signaux optiques ayant des longueurs d'onde différentes qui sont entrés dans un port d'entrée sont sortis au niveau de ports de sortie différents en fonction des longueurs d'onde des signaux optiques entrés et dans lesquelles des signaux optiques ayant des longueurs d'onde différentes qui sont sortis d'un port de sortie sont des signaux optiques qui ont été entrés dans des ports d'entrée différents, et dans lequel les démultiplexeur de bande de longueur d'onde comprennent un moyen qui démultiplexe par bande de longueur d'onde un signal multiplexé par répartition en longueur d'onde dans lequel un nombre prédéterminé de longueurs d'onde ont été multiplexées par répartition en longueur d'onde pour chaque bande de longueur d'onde qui est transmise depuis les noeuds de communication, où la bande de longueur d'onde = la longueur d'onde centrale $\lambda_{B_m} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_m$,

avec $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$, où $1 \leq m \leq R - 1$, m étant un entier, et sort les résultats au niveau de ports de sortie différents,

les multiplexeurs de bande de longueur d'onde comprennent un moyen qui multiplexe des signaux optiques qui ont été entrés depuis la pluralité de ports d'entrée pour chaque bande de longueur d'onde et qui sort un signal multiplexé par répartition en longueur d'onde dans lequel un nombre prédéterminé de longueurs d'onde ont été multiplexées par répartition en longueur d'onde au niveau du port de sortie,

les réseaux sélectifs planaires KxK sont pourvus d'une caractéristique de routage de longueur d'onde pour chaque bande de longueur d'onde de longueur d'onde centrale $\lambda_{B_1} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda_{B_2} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$ ($\lambda_{B_1} + \Delta\lambda_1 < \lambda_{B_2} - \Delta\lambda_2$), longueur d'onde centrale $\lambda_{B_3} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$ ($\lambda_{B_2} + \Delta\lambda_2 < \lambda_{B_3} - \Delta\lambda_3$), ..., longueur d'onde centrale $\lambda_{B_R} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_R$ ($\lambda_{B_{R-1}} + \Delta\lambda_{R-1} < \lambda_{B_R} - \Delta\lambda_R$),

les ports de sortie des démultiplexeurs de bande de longueur d'onde qui sont connectés respectivement aux N ports d'entrée de dispositif sont connectés un à un aux ports d'entrée des réseaux sélectifs planaires KxK qui ont des caractéristiques de routage de longueur d'onde au niveau des bandes de longueur d'onde des signaux optiques qui sont sortis des ports de sortie des démultiplexeurs de bande de longueur d'onde, et

les ports de sortie des réseaux sélectifs planaires KxK sont connectés un à un aux ports d'entrée de l'un quelconque de la pluralité de multiplexeurs de bande de longueur d'onde qui peuvent multiplexer des signaux optiques de longueurs d'onde qui appartiennent aux bandes de longueur d'onde des signaux optiques qui sont sortis des ports de sortie des réseaux sélectifs planaires KxK.

9. Dispositif de gestion de trajet optique (211-1 à 211-4) qui contrôle un trajet optique entre deux noeuds de communication différents dans un système de réseau de communication optique qui comprend une pluralité de noeuds de communication (200-1 à 200-4), un dispositif de routage de longueur d'onde (210) qui établit une communication entre les noeuds de communication sur la base d'un contrôle de route selon la longueur d'onde d'un signal optique, et une ligne de transmission optique (250-1 à 250-4, 260-1 à 260-4) qui forme un trajet de communication qui connecte les noeuds de communication et le dispositif de routage de longueur d'onde, **caractérisé en ce que**

le dispositif de routage de longueur d'onde comprend :

N ports d'entrée de dispositif (210-11 à 210-14), où N est un entier supérieur ou égal à 2, qui sont connectés via la ligne de transmission optique aux noeuds de communication ;
 N ports de sortie de dispositif (210-21 à 210-24) qui sont connectés via à ligne de transmission optique aux noeuds de communication ;
 une pluralité de démultiplexeurs de bande de longueur d'onde (220-1 à 220-4) qui sont fournis à chacun des N ports d'entrée de dispositif, et chacun a un seul port d'entrée (221) et une pluralité de ports de sortie (222-1 à 222-4), et le port d'entrée est connecté à l'un des ports d'entrée de dispositif ;
 une pluralité de multiplexeurs de bande de longueur d'onde (230-1 à 230-4) qui sont fournis à chacun des N ports de sortie de dispositif, et chacun a une pluralité de ports d'entrée (231-1 à 231-4) et un seul port de sortie (232), et le port de sortie est connecté à l'un des ports de sortie de dispositif ; et
 R réseaux sélectifs planaires KxK (241 à 244), où R est un entier supérieur ou égal à J et J est un entier supérieur ou égal à 2, qui ont K ports d'entrée (2411-1 à 2411-4, 2421-1 à 2421-4, 2431-1 à 2431-4, 2441-1 à 2441-4) et K ports de sortie (2412-1 à 2412-4, 2422-1 à 2422-4, 2432-1 à 2432-4, 2442-1 à 2442-4), où K est un entier qui satisfait à $K \geq N$, qui ont des caractéristiques de routage de longueur d'onde dans lesquelles des signaux optiques ayant des longueurs d'onde différentes qui sont entrés dans un port d'entrée sont sortis au niveau de ports de sortie différents en fonction des longueurs d'onde des signaux optiques entrés et dans lesquelles des signaux optiques ayant des longueurs d'onde différentes qui sont sortis d'un port de sortie sont des signaux optiques qui ont été entrés dans des ports d'entrée différents, et dans lequel les démultiplexeurs de bande de longueur d'onde comprennent un moyen qui démultiplexe par bande de longueur d'onde un signal multiplexé par répartition en longueur d'onde dans lequel un nombre prédéterminé de longueurs d'onde ont été multiplexées par répartition en longueur d'onde pour chaque bande de longueur d'onde qui est transmise depuis les noeuds de communication, où la bande de longueur d'onde = la longueur d'onde centrale $\lambda B_m \pm$ à largeur de bande de longueur d'onde $\Delta\lambda_m$, avec $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, où $1 \leq m \leq R - 1$, m étant un entier, et sort les résultats au niveau de ports de sortie différents, les multiplexeurs de bande de longueur d'onde comprennent un moyen qui multiplexe des si-

gnaux optiques qui ont été entrés depuis la pluralité de ports d'entrée pour chaque bande de longueur d'onde et qui sort un signal multiplexé par répartition en longueur d'onde dans lequel un nombre prédéterminé de longueurs d'onde ont été multiplexées par répartition en longueur d'onde au niveau du port de sortie, les réseaux sélectifs planaires KxK sont pourvus d'une caractéristique de routage de longueur d'onde pour chaque bande de longueur d'onde de longueur d'onde centrale $\lambda B_1 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda B_2 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$ ($\lambda B_1 + \Delta\lambda_1 < \lambda B_2 - \Delta\lambda_2$), longueur d'onde centrale $\lambda B_3 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$ ($\lambda B_2 + \Delta\lambda_2 < \lambda B_3 - \Delta\lambda_3$), ..., longueur d'onde centrale $\lambda B_R \pm$ largeur de bande de longueur d'onde $\Delta\lambda_R$ ($\lambda B_{R-1} + \Delta\lambda_{R-1} < \lambda B_R - \Delta\lambda_R$), les ports de sortie des démultiplexeurs de bande de longueur d'onde qui sont connectés respectivement aux N ports d'entrée de dispositif sont connectés un à un aux ports d'entrée des réseaux sélectifs planaires KxK qui ont des caractéristiques de routage de longueur d'onde au niveau des bandes de longueur d'onde des signaux optiques qui sont sortis des ports de sortie des démultiplexeurs de bande de longueur d'onde, et les ports de sortie des réseaux sélectifs planaires KxK sont connectés un à un aux ports d'entrée de l'un quelconque de la pluralité de multiplexeurs de bande de longueur d'onde qui peuvent multiplexer des signaux optiques de longueurs d'onde qui appartiennent aux bandes de longueur d'onde des signaux optiques qui sont sortis des ports de sortie des réseaux sélectifs planaires KxK, et

chacun des noeuds de communication comprend :

un multiplexeur de bande de longueur d'onde Jx1 (230), où J est un entier supérieur ou égal à 2, qui a J ports d'entrée IP[1], IP[2], IP[3], ... IP[J] (230-11 à 230-14) et un seul port de sortie (230-21), et sort au niveau du seul port de sortie des signaux optiques de longueurs d'onde qui appartiennent aux bandes de longueur d'onde de longueur d'onde centrale $\lambda B_1 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda B_2 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$, longueur d'onde centrale $\lambda B_3 \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$, ..., longueur d'onde centrale $\lambda B_J \pm$ largeur de bande de longueur d'onde $\Delta\lambda_J$, qui sont entrés dans chacun des J ports d'entrée, où $\lambda B_m + \Delta\lambda_m \leq \lambda B_{m+1} - \Delta\lambda_{m+1}$, pour $1 \leq m \leq J - 1$, où m est un entier ;

au moins un émetteur optique à source de lumière optique accordable en longueur d'onde intégrée (400-1, 400-2) qui est connecté à l'un quelconque des ports d'entrée IP[1], IP[2], IP [3], ... IP[J] du multiplexeur de bande de longueur d'onde Jx1, qui est pourvu d'une source de lumière optique accordable en longueur d'onde qui peut être fixée à une longueur d'onde à l'intérieur d'une bande de longueur d'onde qui appartient au port d'entrée qui est connecté, et qui sort de la lumière de la longueur d'onde ;

une pluralité de multiplexeurs à répartition en longueur d'onde (271, 274) qui sont fournis à chacun des ports d'entrée du multiplexeur de bande de longueur d'onde Jx1, autres que le port d'entrée auquel l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée est connecté, et qui ont deux port d'entrée ou plus (271-11 à 271-14, 274-11 à 274-14) et un port de sortie (271-21, 274-21), avec le port de sortie qui est connecté à l'un des ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 ;

une pluralité d'émetteurs optiques (2711-1 à 2711-4, 2714-1 à 2714-4) qui sont connectés aux ports d'entrée du multiplexeur à répartition en longueur d'onde, et qui émettent de la lumière de longueur d'onde qui appartient à une bande de longueur d'onde de longueur d'onde centrale $\lambda_{Bm} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_m$;

un démultiplexeur de bande de longueur d'onde 1xJ (220), où J est un entier supérieur ou égal à 2, qui a J ports de sortie OP[1], OP[2], OP [3], ... OP[J] (220-21 à 220-24) et un seul port d'entrée (220-11), et sort au niveau des J ports de sortie des signaux optiques de longueurs d'onde qui appartiennent aux largeurs de bande de longueur d'onde de longueur d'onde centrale $\lambda_{B_1} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda_{B_2} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$, longueur d'onde centrale $\lambda_{B_3} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$, ..., longueur d'onde centrale $\lambda_{B_J} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_J$, qui sont entrés dans le seul port d'entrée, où $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$, pour $1 \leq m \leq J$, où m est un entier ;

un récepteur optique (500-1, 500-2) qui est connecté à ce port de sortie, parmi les ports de sortie OP[1], OP[2], OP[3], ... OP[J] du démultiplexeur de bande de longueur d'onde 1xJ, qui appartient à la bande de longueur d'onde à laquelle l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée est fourni, et qui reçoit un signal optique de la longueur d'onde qui est sortie de l'émetteur optique à source de lumière optique accordable en longueur d'onde

de intégrée ;

une pluralité de démultiplexeurs à répartition en longueur d'onde (281, 284) qui sont fournis à chacun des ports de sortie du démultiplexeur de bande de longueur d'onde 1xJ, à l'exception du port de sortie auquel le récepteur optique est connecté, qui ont deux ports de sortie ou plus (281-21 à 281-24, 284-21 à 284-24) et un seul port d'entrée (281-11, 284-11), et le port d'entrée est connecté à l'un des ports de sortie du démultiplexeur de bande de longueur d'onde 1xJ ; et

une pluralité de récepteurs optiques (2811-1 à 2811-4, 2814-1 à 2814-4) qui sont connectés aux ports de sortie des démultiplexeurs à répartition en longueur d'onde ; et

dans lequel le seul port d'entrée du démultiplexeur de bande de longueur d'onde 1xJ est connecté via un guide d'ondes optique (260) à l'un des ports de sortie de dispositif du dispositif de routage de longueur d'onde, et

dans lequel le dispositif de gestion de trajet optique comprend :

un moyen qui, si au moins un groupe des émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée existe qui sont fournis à tous les noeuds de communication et qui sortent des signaux optiques de la même bande de longueur d'onde, et s'il y a K bandes de longueur d'onde, où K est un entier supérieur ou égal à 2, qui appartiennent aux ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 qui sont connectés aux émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée, affecte des classements de priorité mutuellement différents de 1 à K aux bandes de longueur d'onde qui appartiennent aux ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 qui sont connectés aux émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée ;

un moyen qui détecte que, parmi les bandes de longueur d'onde qui appartiennent aux ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 qui sont connectés aux émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée, le classement de priorité portant la numérotation la plus haute parmi les bandes de longueur d'onde de trajets optiques entre un x-ième noeud de communication et un y-ième noeud de communication est le numéro b, et le classement de priorité portant la numérotation la plus basse parmi les bandes de longueur d'onde qui ne sont pas utilisées pour un trajet optique dont le point de départ est

- le x-ième noeud de communication, un trajet optique dont le point final est le x-ième noeud de communication, un trajet optique dont le point de départ est le y-ième noeud de communication, et un trajet optique dont le point final est le y-ième noeud de communication est le numéro a, et le numéro a est inférieur au numéro b ; et un moyen qui, s'il a été détecté que le numéro a est inférieur au numéro b, établit un trajet optique entre le x-ième noeud de communication et le y-ième noeud de communication sur la bande de longueur d'onde de l'a-ième classement de priorité, et contrôle par la suite MARCHE/ARRET et une longueur d'onde d'oscillation de l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée afin d'annuler le trajet optique qui a été établi entre le x-ième noeud de communication et le y-ième noeud de communication sur la bande de longueur d'onde du b-ième classement de priorité.
10. Procédé de gestion de trajet optique qui contrôle un trajet optique entre deux noeuds de communication différents dans un système de réseau de communication optique qui comprend une pluralité de noeuds de communication (200-1 à 200-4), un dispositif de routage de longueur d'onde (210) qui établit une communication entre les noeuds de communication sur la base d'un contrôle de route selon la longueur d'onde d'un signal optique, et une ligne de transmission optique (250-1 à 250-4, 260-1 à 260-4) qui forme un trajet de communication qui connecte les noeuds de communication et le dispositif de routage de longueur d'onde, **caractérisé en ce que** le dispositif de routage de longueur d'onde comprend :
- N ports d'entrée de dispositif (210-11 à 210-14), où N est un entier supérieur ou égal à 2, qui sont connectés via la ligne de transmission optique aux noeuds de communication ;
- N ports de sortie de dispositif (210-21 à 210-24) qui sont connectés via la ligne de transmission optique aux noeuds de communication ;
- une pluralité de démultiplexeurs de bande de longueur d'onde (220-1 à 220-4) qui sont fournis à chacun des N ports d'entrée de dispositif, et chacun a un seul port d'entrée (221) et une pluralité de ports de sortie (222-1 à 222-4), et le port d'entrée est connecté à l'un des ports d'entrée de dispositif ;
- une pluralité de multiplexeurs de bande de longueur d'onde (230-1 à 230-4) qui sont fournis à chacun des N ports de sortie de dispositif, et chacun a une pluralité de ports d'entrée (231-1 à 231-4) et un seul port de sortie (232), et le port de sortie est connecté à l'un des ports de sortie de dispositif ; et

R réseaux sélectifs planaires KxK (241 à 244), où R est un entier supérieur ou égal à J et J est un entier supérieur ou égal à 2, qui ont K ports d'entrée (2411-1 à 2411-4, 2421-1 à 2421-4, 2431-1 à 2431-4, 2441-1 à 2441-4) et K ports de sortie (2412-1 à 2412-4, 2422-1 à 2422-4, 2432-1 à 2432-4, 2442-1 à 2442-4), où K est un entier qui satisfait à $K \geq N$, qui ont des caractéristiques de routage de longueur d'onde dans lesquelles des signaux optiques ayant des longueurs d'onde différentes qui sont entrés dans un port d'entrée sont sortis au niveau de ports de sortie différents en fonction des longueurs d'onde des signaux optiques entrés et dans lesquelles des signaux optiques ayant des longueurs d'onde différentes qui sont sortis d'un port de sortie sont des signaux optiques qui ont été entrés dans des ports d'entrée différents, dans lequel les démultiplexeurs de bande de longueur d'onde comprennent un moyen qui démultiplexe par bande de longueur d'onde un signal multiplexé par répartition en longueur d'onde dans lequel un nombre prédéterminé de longueurs d'onde ont été multiplexées par répartition en longueur d'onde pour chaque bande de longueur d'onde qui est transmise depuis les noeuds de communication, où la bande de longueur d'onde = la longueur d'onde centrale $\lambda_{B_m} \pm$ la largeur de bande de longueur d'onde $\Delta\lambda_m$, avec $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$, ou $1 \leq m \leq R - 1$, m étant un entier, et sort les résultats au niveau de ports de sortie différents, les multiplexeurs de bande de longueur d'onde comprennent un moyen qui multiplexe des signaux optiques qui ont été entrés depuis la pluralité de ports d'entrée pour chaque bande de longueur d'onde et qui sort un signal multiplexé par répartition en longueur d'onde dans lequel un nombre prédéterminé de longueurs d'onde ont été multiplexées par répartition en longueur d'onde au niveau du port de sortie, les réseaux sélectifs planaires KxK sont pourvus d'une caractéristique de routage de longueur d'onde pour chaque bande de longueur d'onde de longueur d'onde centrale $\lambda_{B_1} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda_{B_2} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$ ($\lambda_{B_1} + \Delta\lambda_1 < \lambda_{B_2} - \Delta\lambda_2$), longueur d'onde centrale $\lambda_{B_3} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$ ($\lambda_{B_2} + \Delta\lambda_2 < \lambda_{B_3} - \Delta\lambda_3$), ..., longueur d'onde centrale $\lambda_{B_R} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_R$ ($\lambda_{B_{R-1}} + \Delta\lambda_{R-1} < \lambda_{B_R} - \Delta\lambda_R$), les ports de sortie des démultiplexeurs de bande de longueur d'onde qui sont connectés respectivement aux N ports d'entrée de dispositif sont connectés un à un aux ports d'entrée des réseaux sélectifs planaires KxK qui ont des caractéristiques de routage de longueur d'onde dans lesquelles des signaux optiques ayant des longueurs d'onde différentes qui sont entrés dans un port d'entrée sont sortis au niveau de ports de sortie différents en fonction des longueurs d'onde des signaux optiques entrés et dans lesquelles des signaux optiques ayant des longueurs d'onde différentes qui sont sortis d'un port de sortie sont des signaux optiques qui ont été entrés dans des ports d'entrée différents, dans lequel les démultiplexeurs de bande de longueur d'onde comprennent un moyen qui démultiplexe par bande de longueur d'onde un signal multiplexé par répartition en longueur d'onde dans lequel un nombre prédéterminé de longueurs d'onde ont été multiplexées par répartition en longueur d'onde pour chaque bande de longueur d'onde qui est transmise depuis les noeuds de communication, où la bande de longueur d'onde = la longueur d'onde centrale $\lambda_{B_m} \pm$ la largeur de bande de longueur d'onde $\Delta\lambda_m$, avec $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$, ou $1 \leq m \leq R - 1$, m étant un entier, et sort les résultats au niveau de ports de sortie différents, les multiplexeurs de bande de longueur d'onde comprennent un moyen qui multiplexe des signaux optiques qui ont été entrés depuis la pluralité de ports d'entrée pour chaque bande de longueur d'onde et qui sort un signal multiplexé par répartition en longueur d'onde dans lequel un nombre prédéterminé de longueurs d'onde ont été multiplexées par répartition en longueur d'onde au niveau du port de sortie,

téristiques de routage de longueur d'onde au niveau des bandes de longueur d'onde des signaux optiques qui sont sortis des ports de sortie des démultiplexeurs de bande de longueur d'onde, et

les ports de sortie des réseaux sélectifs planaires KxK sont connectés un à un aux ports d'entrée de l'un quelconque de la pluralité de multiplexeurs de bande de longueur d'onde qui peuvent multiplexer des signaux optiques de longueurs d'onde qui appartiennent aux bandes de longueur d'onde des signaux optiques qui sont sortis des ports de sortie des réseaux sélectifs planaires KxK, et

chacun des noeuds de communication comprend :

un multiplexeur de bande de longueur d'onde Jx1 (230), où J est un entier supérieur ou égal à 2, qui a J ports d'entrée IP[1], IP[2], IP[3], ... IP[J] (230-11 à 230-14) et un seul port de sortie (230-21), et sort au niveau du seul port de sortie des signaux optiques de longueurs d'onde qui appartiennent aux bandes de longueur d'onde de longueur d'onde centrale $\lambda_{B_1} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda_{B_2} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$, longueur d'onde centrale $\lambda_{B_3} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$, ..., longueur d'onde centrale $\lambda_{B_J} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_J$, qui sont entrés dans chacun des J ports d'entrée, où $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$, pour $1 \leq m \leq J - 1$, où m est un entier ;

au moins un émetteur optique à source de lumière optique accordable en longueur d'onde intégrée (400-1, 400-2) qui est connecté à l'un quelconque des ports d'entrée IP[1], IP[2], IP[3], ... IP[J] du multiplexeur de bande de longueur d'onde Jx1, qui est pourvu d'une source de lumière optique accordable en longueur d'onde qui peut être fixée à une longueur d'onde à l'intérieur d'une bande de longueur d'onde qui appartient au port d'entrée qui est connecté, et qui sort de la lumière de la longueur d'onde ;

une pluralité de multiplexeurs à répartition en longueur d'onde (271, 274) qui sont fournis à chacun des ports d'entrée du multiplexeur de bande de longueur d'onde Jx1, autres que le port d'entrée auquel l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée est connecté, et qui ont deux port d'entrée ou plus (271-11 à 271-14, 274-11 à 274-14) et un port de sortie (271-21, 274-21), avec le port de sortie qui est connecté à l'un des ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 ;

une pluralité d'émetteurs optiques (2711-1 à

2711-4, 2714-1 à 2714-4) qui sont connectés aux ports d'entrée du multiplexeur à répartition en longueur d'onde, et qui émettent de la lumière de longueur d'onde qui appartient à une bande de longueur d'onde de longueur d'onde centrale $\lambda_{B_m} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_m$;

un démultiplexeur de bande de longueur d'onde 1xJ (220), où J est un entier supérieur ou égal à 2, qui a J ports de sortie OP[1], OP[2], OP[3], ... OP[J] (220-21 à 220-24) et un seul port d'entrée (220-11), et sort au niveau des J ports de sortie des signaux optiques de longueurs d'onde qui appartiennent aux largeurs de bande de longueur d'onde de longueur d'onde centrale $\lambda_{B_1} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_1$, longueur d'onde centrale $\lambda_{B_2} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_2$, longueur d'onde centrale $\lambda_{B_3} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_3$, ..., longueur d'onde centrale $\lambda_{B_J} \pm$ largeur de bande de longueur d'onde $\Delta\lambda_J$, qui sont entrés dans le seul port d'entrée, où $\lambda_{B_m} + \Delta\lambda_m \leq \lambda_{B_{m+1}} - \Delta\lambda_{m+1}$, pour $1 \leq m \leq J$, où m est un entier ;

un récepteur optique (500-1, 500-2) qui est connecté à ce port de sortie, parmi les ports de sortie OP[1], OP[2], OP[3], ... OP[J] du démultiplexeur de bande de longueur d'onde 1xJ, qui appartient à la bande de longueur d'onde à laquelle l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée est fourni, et qui reçoit un signal optique de la longueur d'onde qui est sortie de l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée ;

une pluralité de démultiplexeurs à répartition en longueur d'onde (281, 284) qui sont fournis à chacun des ports de sortie du démultiplexeur de bande de longueur d'onde 1xJ, à l'exception du port de sortie auquel le récepteur optique est connecté, qui ont deux ports de sortie ou plus (281-21 à 281-24, 284-21 à 284-24) et un seul port d'entrée (281-11, 284-11), et le port d'entrée est connecté à l'un des ports de sortie du démultiplexeur de bande de longueur d'onde 1xJ ; et

une pluralité de récepteurs optiques (2811-1 à 2811-4, 2814-1 à 2814-4) qui sont connectés aux ports de sortie des démultiplexeurs à répartition en longueur d'onde, et dans lequel le seul port d'entrée du démultiplexeur de bande de longueur d'onde 1xJ est connecté via un guide d'ondes optique (260) à l'un des ports de sortie de dispositif du dispositif de routage de longueur d'onde, et

le procédé de gestion de trajet optique comprend :

une étape consistant à, si au moins un groupe des émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée existe qui sont fournis à tous les noeuds de communication et qui sortent des signaux optiques de la même bande de longueur d'onde, et s'il y a K bandes de longueur d'onde, où K est un entier supérieur ou égal à 2, qui appartiennent aux ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 qui sont connectés aux émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée, affecter des classements de priorité mutuellement différents de 1 à K aux bandes de longueur d'onde qui appartiennent aux ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 qui sont connectés aux émetteurs optiques à source de lumière optique accordable en longueur d'onde intégrée ;

une étape consistant à, lorsque, parmi les bandes de longueur d'onde qui appartiennent aux ports d'entrée du multiplexeur de bande de longueur d'onde Jx1 qui sont connectés à l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée, le classement de priorité portant la numérotation la plus haute parmi les bandes de longueur d'onde pour lesquelles un trajet optique existe entre un x-ième noeud de communication et un y-ième noeud de communication est le numéro b, et le classement de priorité portant la numérotation la plus basse parmi les bandes de longueur d'onde pour lesquelles un trajet optique dont le point de départ est le x-ième noeud de communication, un trajet optique dont le point final est le x-ième noeud de communication, un trajet optique dont le point de départ est le y-ième noeud de communication, et un trajet optique dont le point final est le y-ième noeud de communication n'existent pas est le numéro a, et le numéro a est inférieur au numéro b ; et contrôler MARCHE/ARRET et une longueur d'onde d'oscillation de l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée afin d'établir un trajet optique entre le x-ième noeud de communication et le y-ième noeud de communication sur la bande de longueur d'onde de l'a-ième classement de priorité ; et

une étape consistant à établir un trajet optique entre le x-ième noeud de communication et le y-ième noeud de communication sur la bande de longueur d'onde de l'a-ième classement de priorité, et contrôler par la suite MARCHE/ARRET et la longueur d'onde d'oscillation de l'émetteur optique à source de lumière optique accordable en longueur d'onde intégrée afin d'annuler le trajet optique qui a été établi entre le x-ième noeud de communication et le y-ième

noeud de communication sur la bande de longueur d'onde du b-ième classement de priorité.

11. Programmé de gestion de trajet optique qui amène un ordinateur à exécuter les étapes du procédé de gestion de trajet optique selon la revendication 10.
12. Support d'enregistrement qui peut être lu par un ordinateur, sur lequel le programme de gestion de trajet optique selon la revendication 11 est enregistré.

FIG. 1

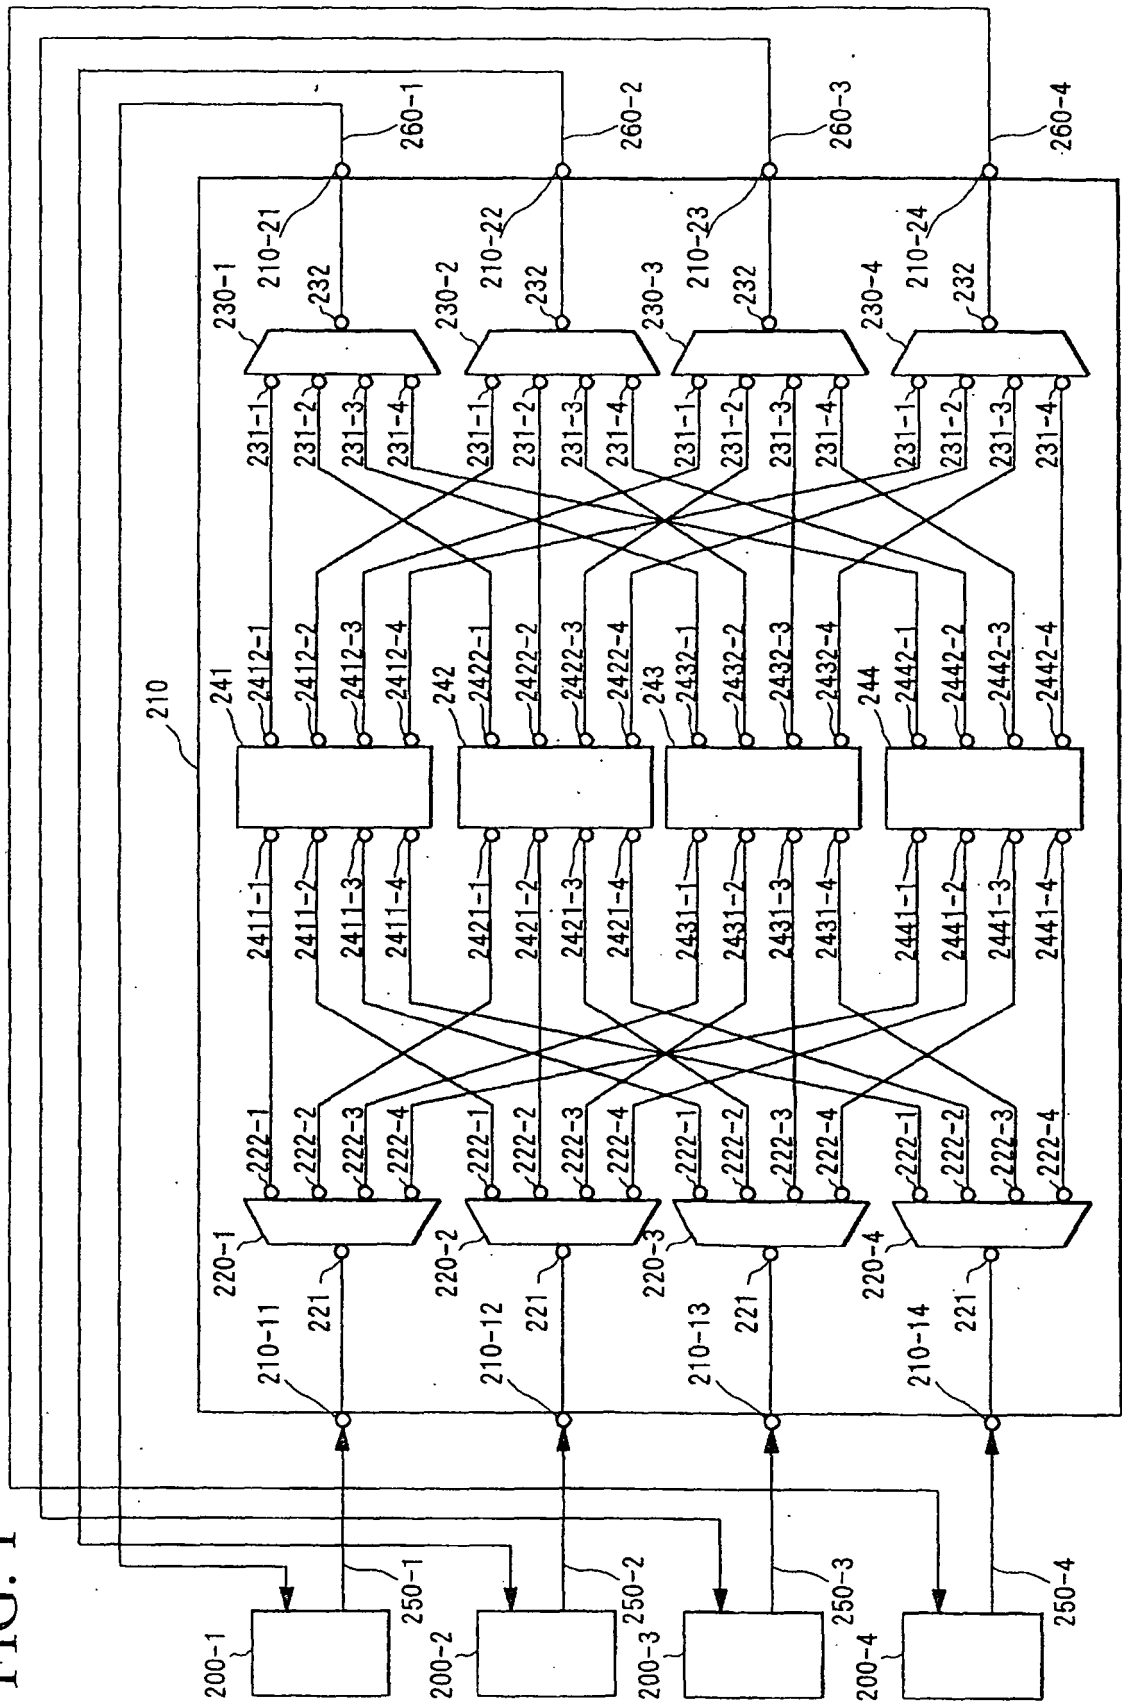


FIG. 2

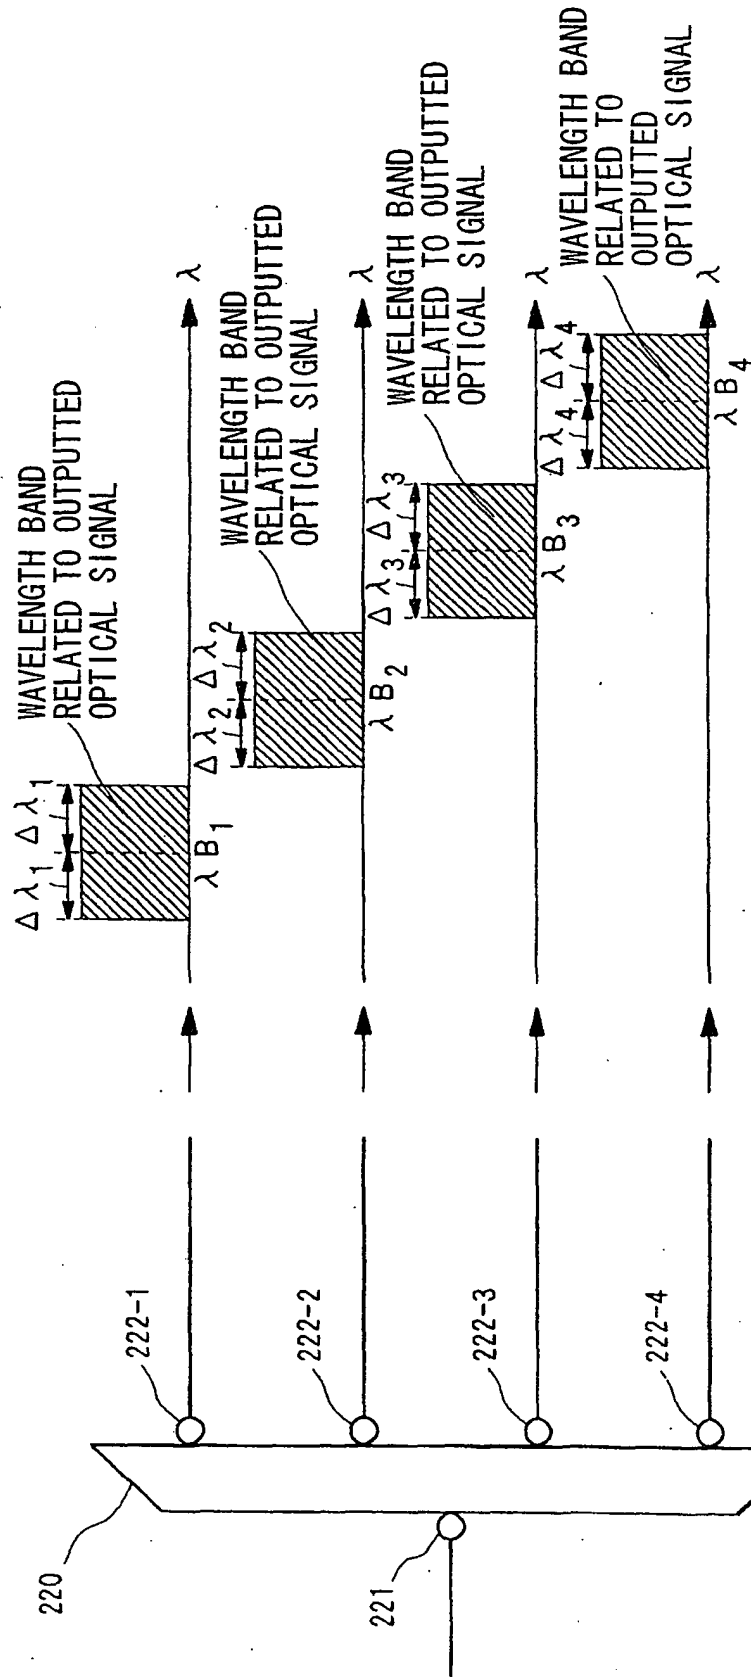


FIG. 3

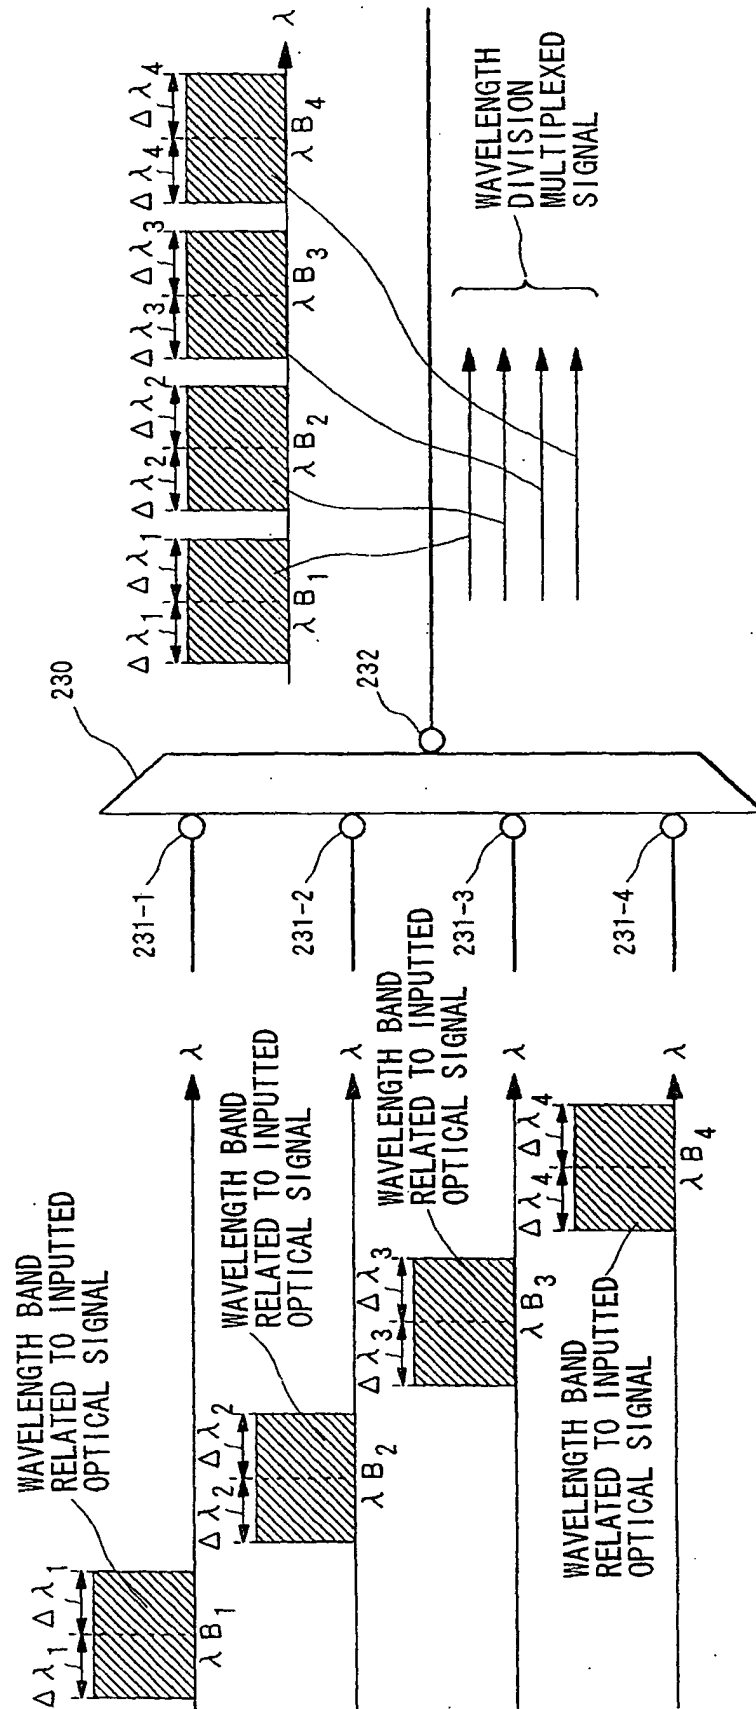


FIG. 4

	FIRST OUTPUT PORT	SECOND OUTPUT PORT	THIRD OUTPUT PORT	FOURTH OUTPUT PORT
FIRST INPUT PORT	λ_{11}	λ_{12}	λ_{13}	λ_{14}
SECOND INPUT PORT	λ_{12}	λ_{13}	λ_{14}	λ_{11}
THIRD INPUT PORT	λ_{13}	λ_{14}	λ_{11}	λ_{12}
FOURTH INPUT PORT	λ_{14}	λ_{11}	λ_{12}	λ_{13}

FIG. 5

	FIRST OUTPUT PORT	SECOND OUTPUT PORT	THIRD OUTPUT PORT	FOURTH OUTPUT PORT
FIRST INPUT PORT	λ_{21}	λ_{22}	λ_{23}	λ_{24}
SECOND INPUT PORT	λ_{22}	λ_{23}	λ_{24}	λ_{21}
THIRD INPUT PORT	λ_{23}	λ_{24}	λ_{21}	λ_{22}
FOURTH INPUT PORT	λ_{24}	λ_{21}	λ_{22}	λ_{23}


FIG. 6

	FIRST OUTPUT PORT	SECOND OUTPUT PORT	THIRD OUTPUT PORT	FOURTH OUTPUT PORT
FIRST INPUT PORT	$\lambda 31$	$\lambda 32$	$\lambda 33$	$\lambda 34$
SECOND INPUT PORT	$\lambda 32$	$\lambda 33$	$\lambda 34$	$\lambda 31$
THIRD INPUT PORT	$\lambda 33$	$\lambda 34$	$\lambda 31$	$\lambda 32$
FOURTH INPUT PORT	$\lambda 34$	$\lambda 31$	$\lambda 32$	$\lambda 33$

FIG. 7

	FIRST OUTPUT PORT	SECOND OUTPUT PORT	THIRD OUTPUT PORT	FOURTH OUTPUT PORT
FIRST INPUT PORT	$\lambda 41$	$\lambda 42$	$\lambda 43$	$\lambda 44$
SECOND INPUT PORT	$\lambda 42$	$\lambda 43$	$\lambda 44$	$\lambda 41$
THIRD INPUT PORT	$\lambda 43$	$\lambda 44$	$\lambda 41$	$\lambda 42$
FOURTH INPUT PORT	$\lambda 44$	$\lambda 41$	$\lambda 42$	$\lambda 43$

FIG. 8

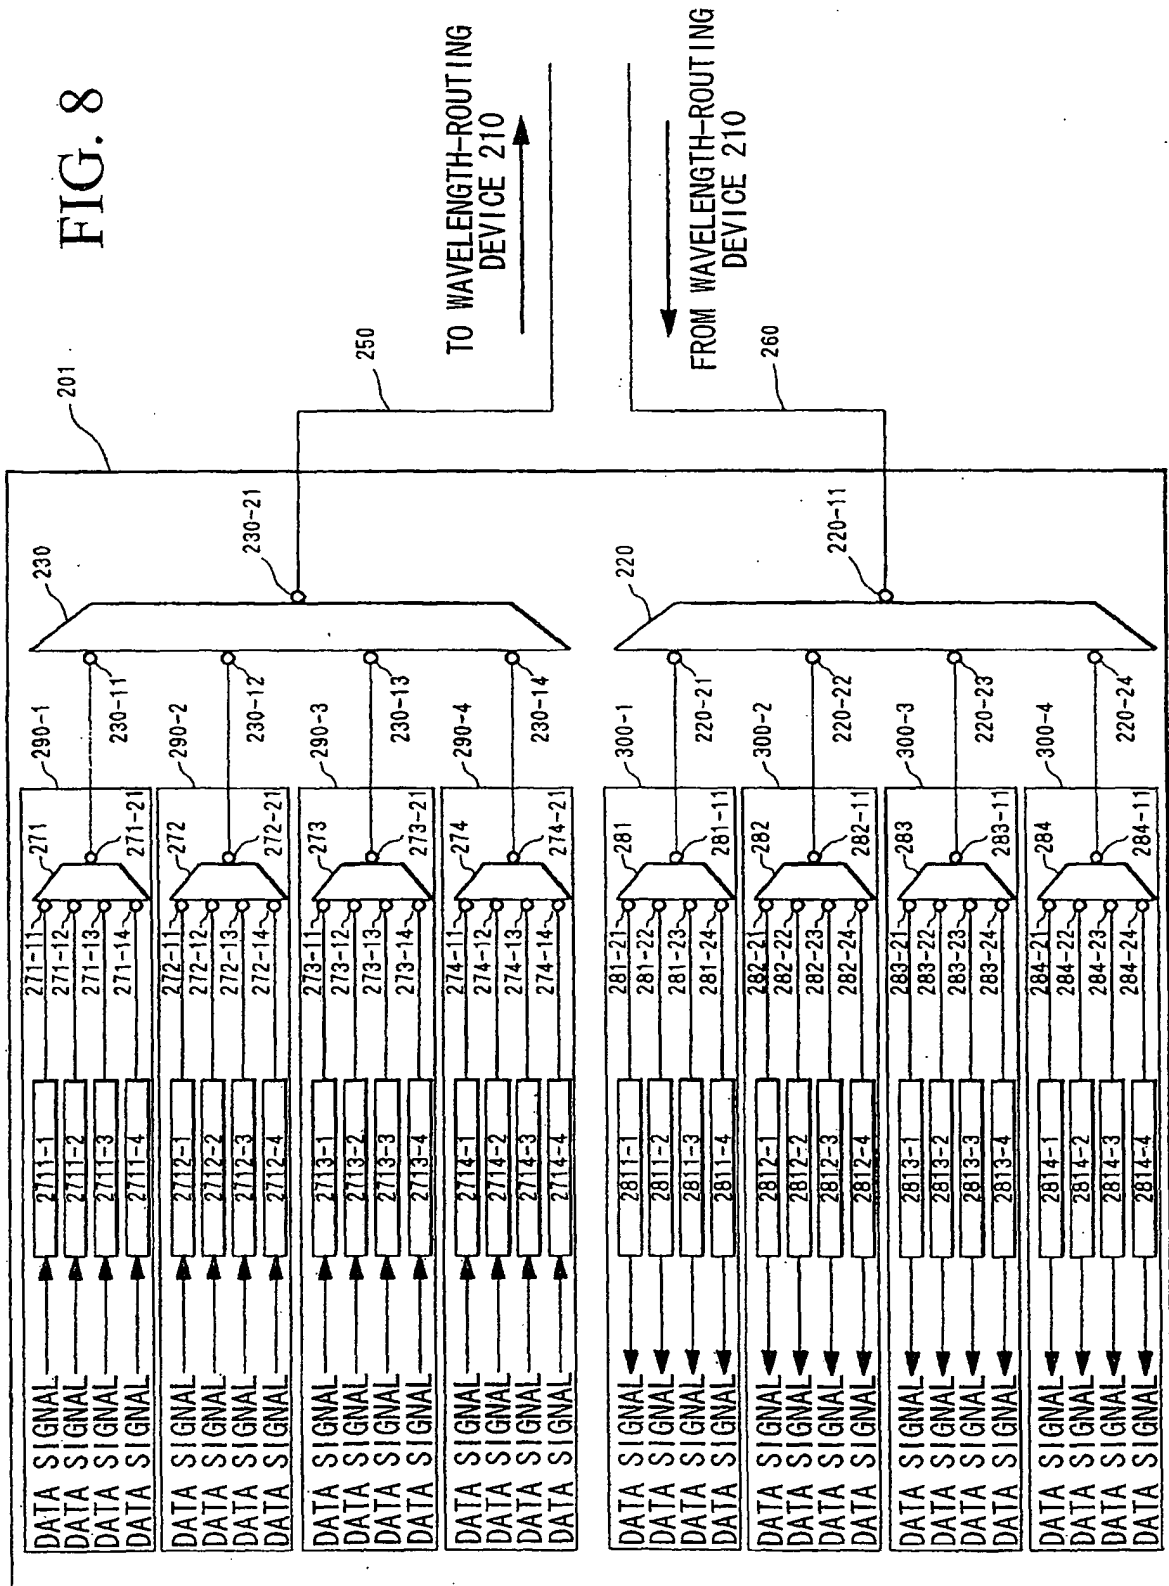

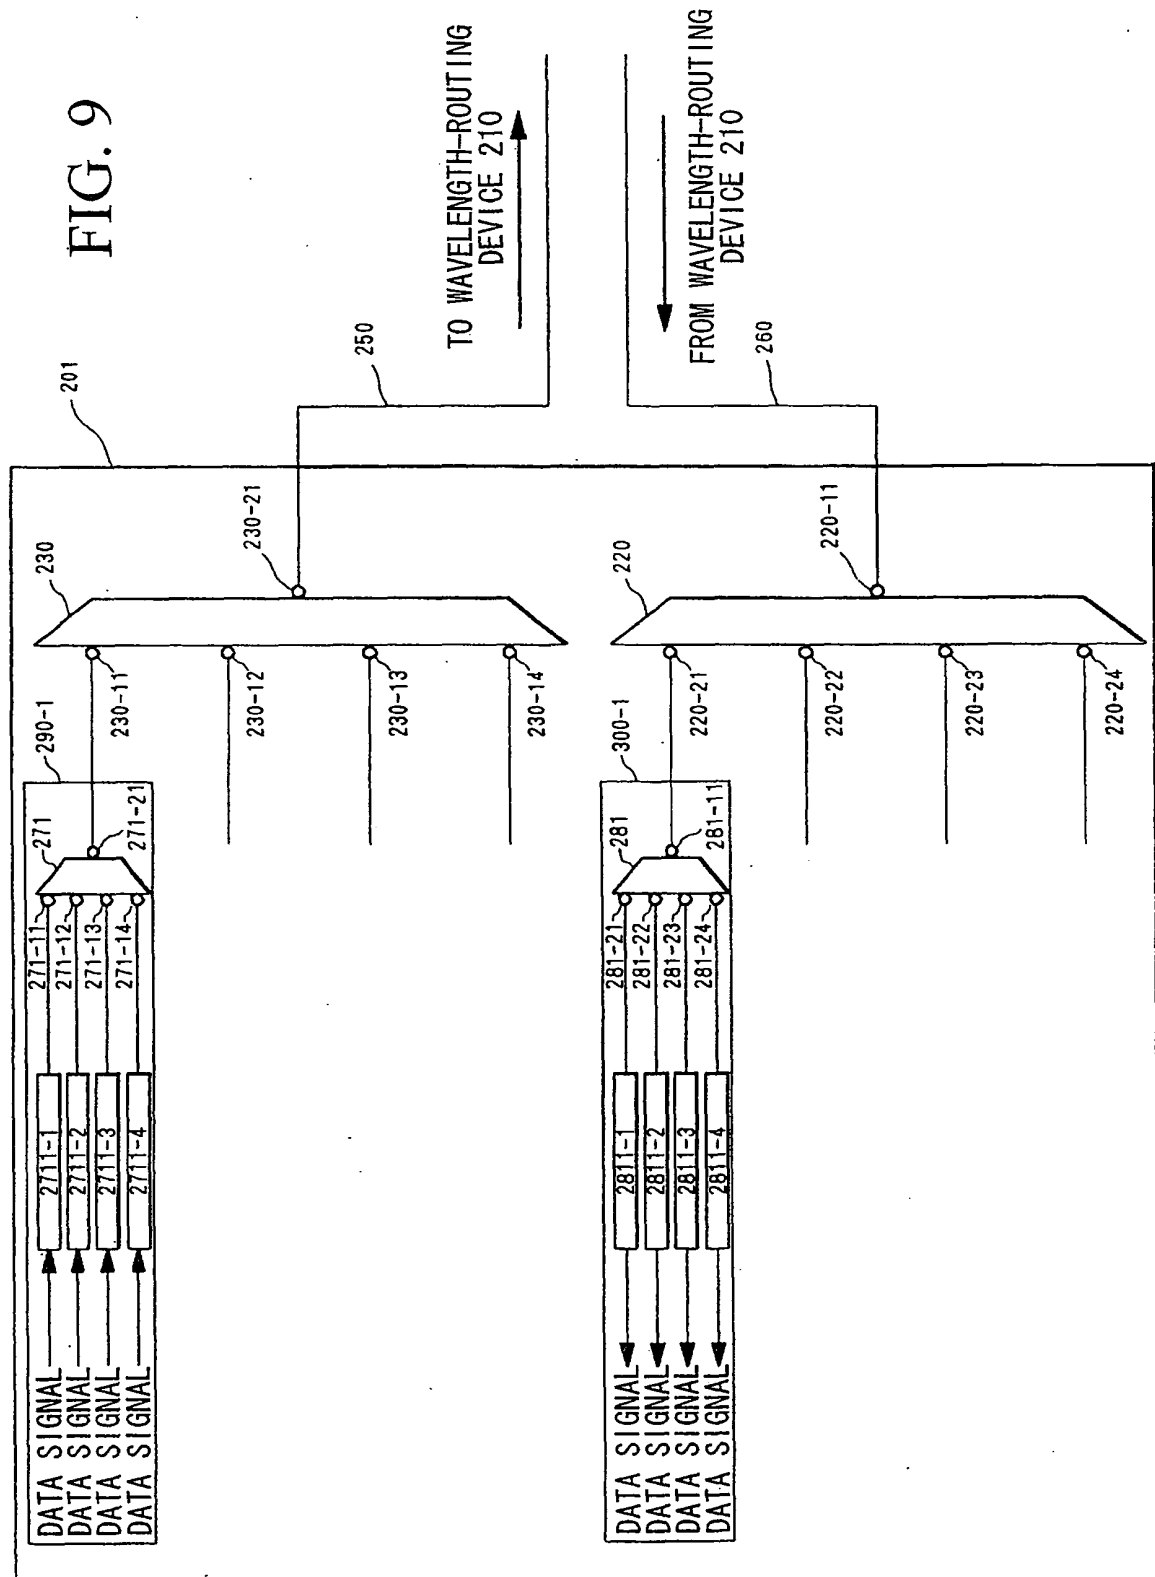
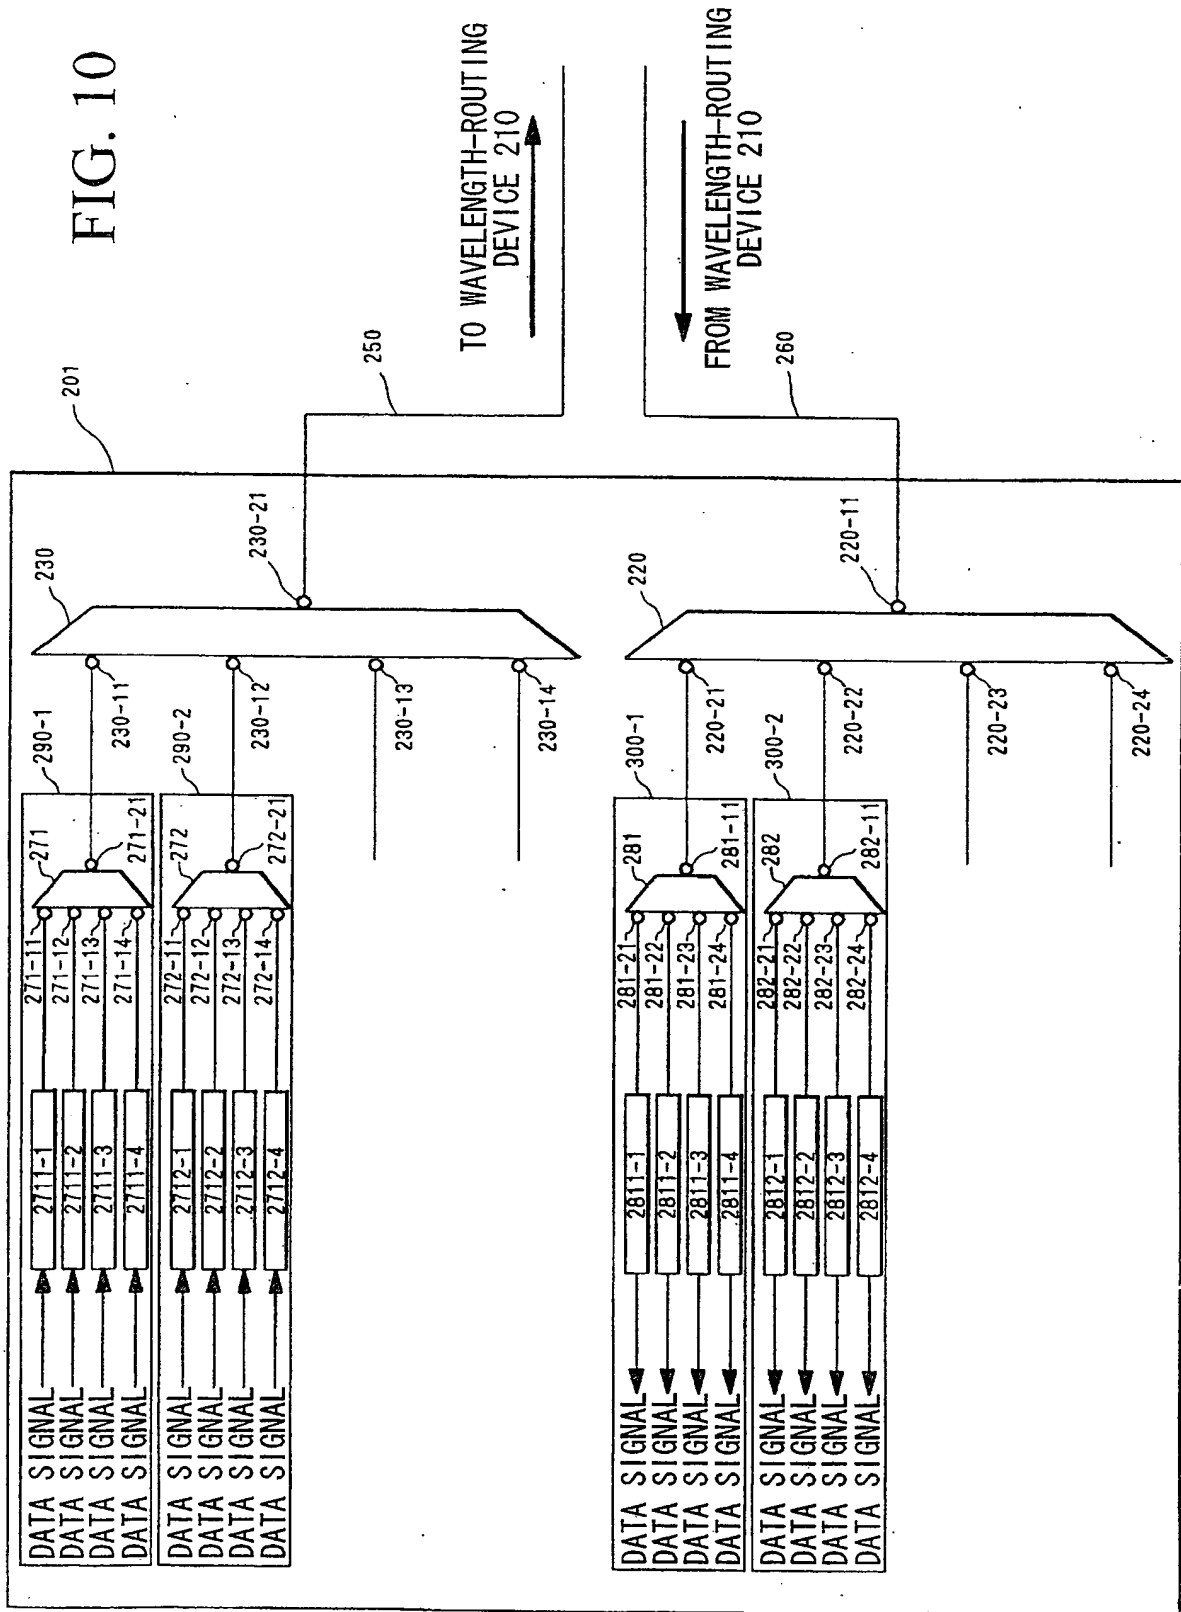


FIG. 10



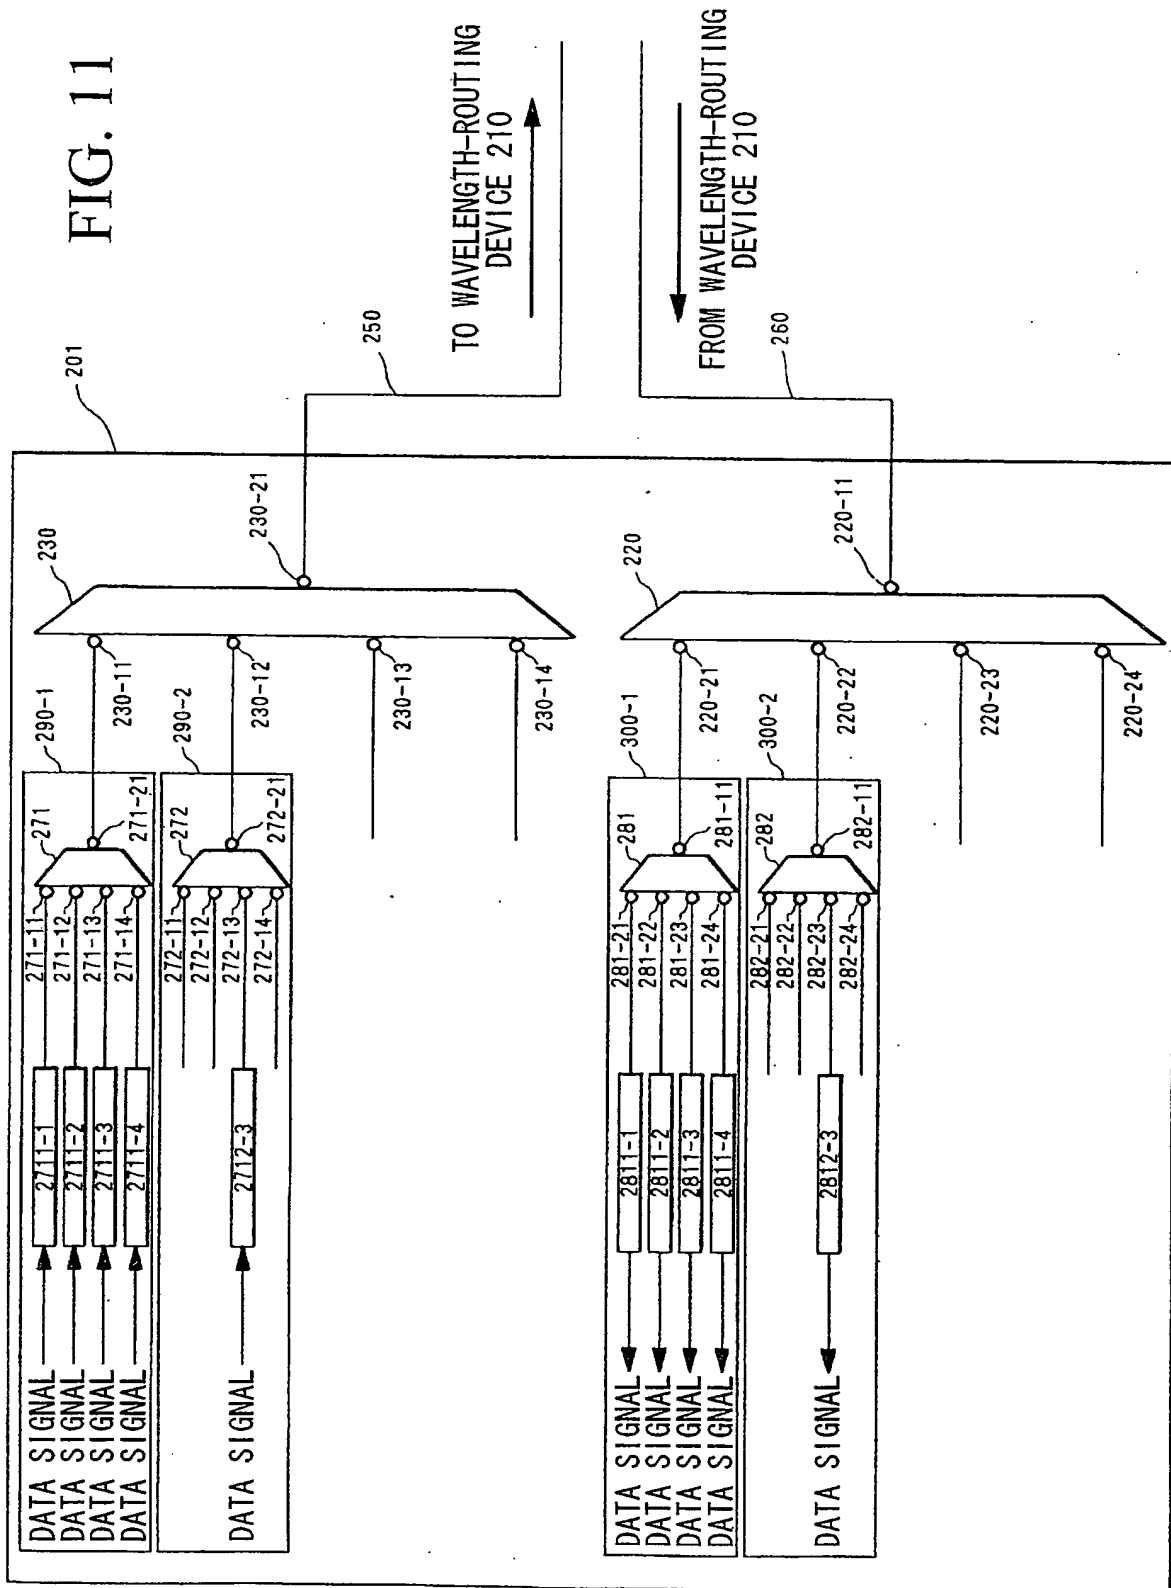


FIG. 12

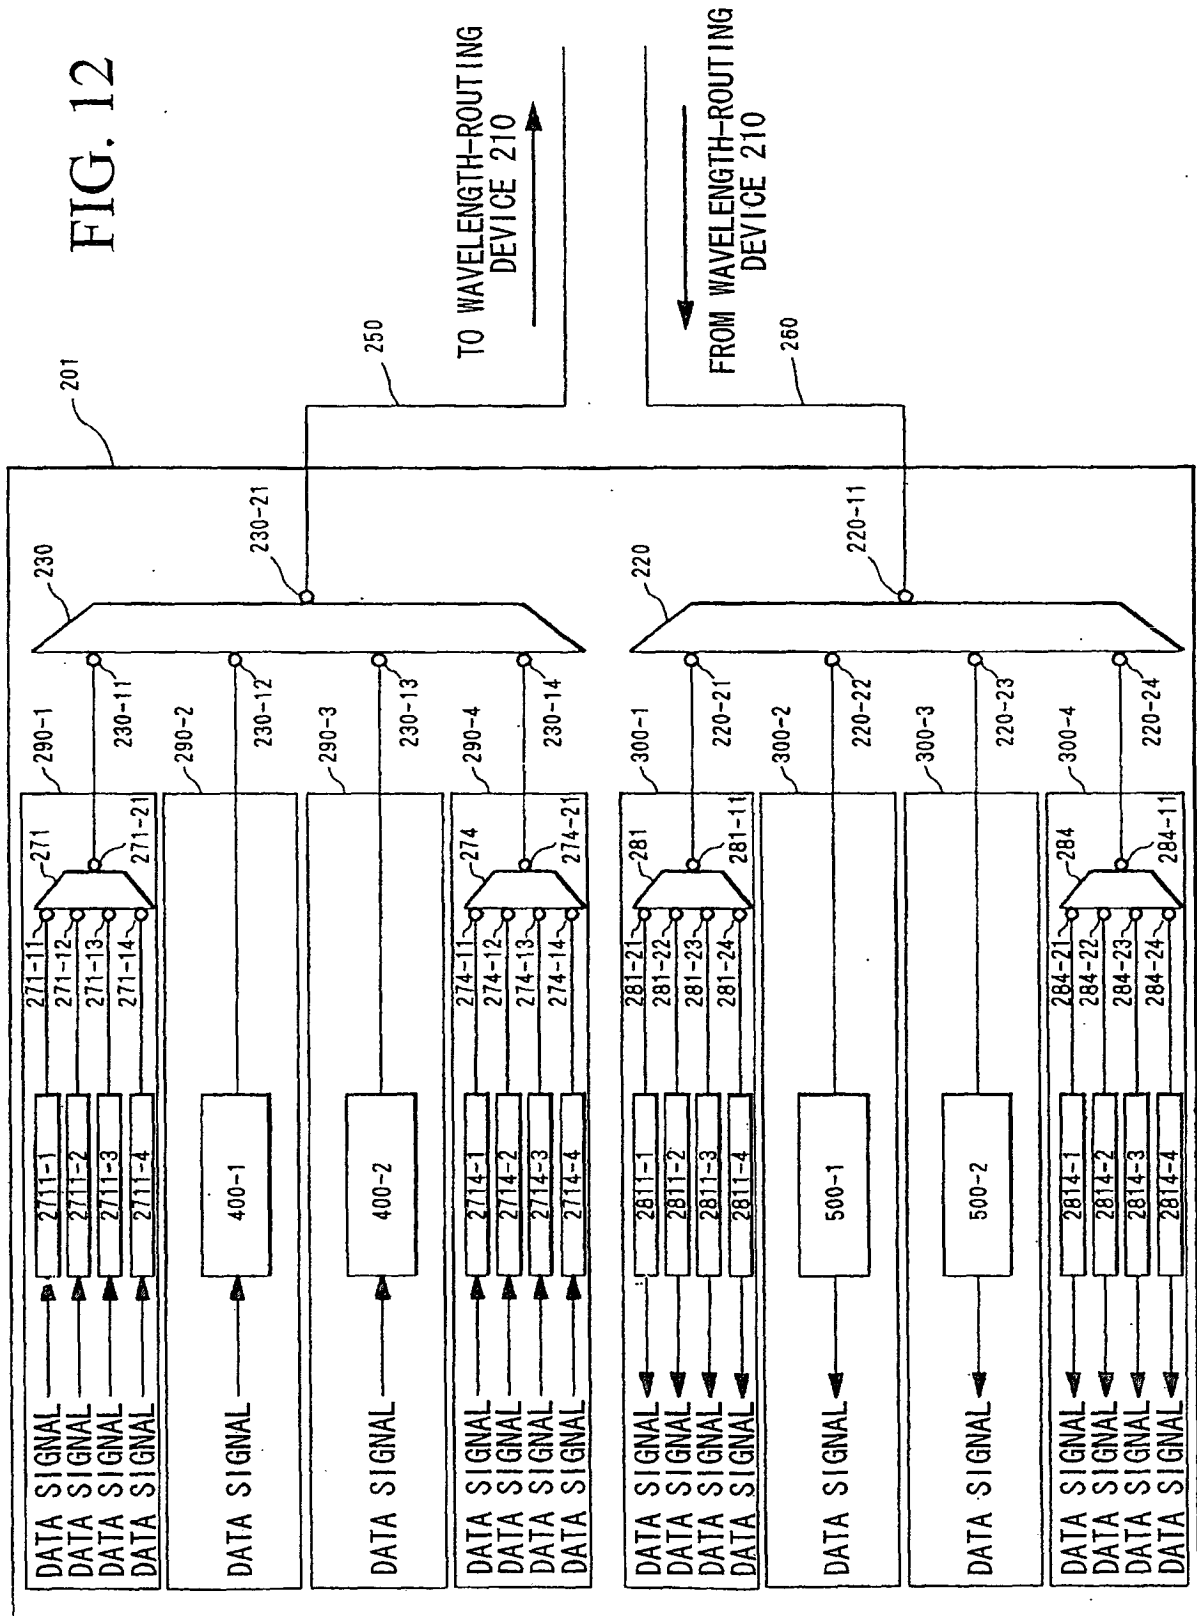


FIG. 13

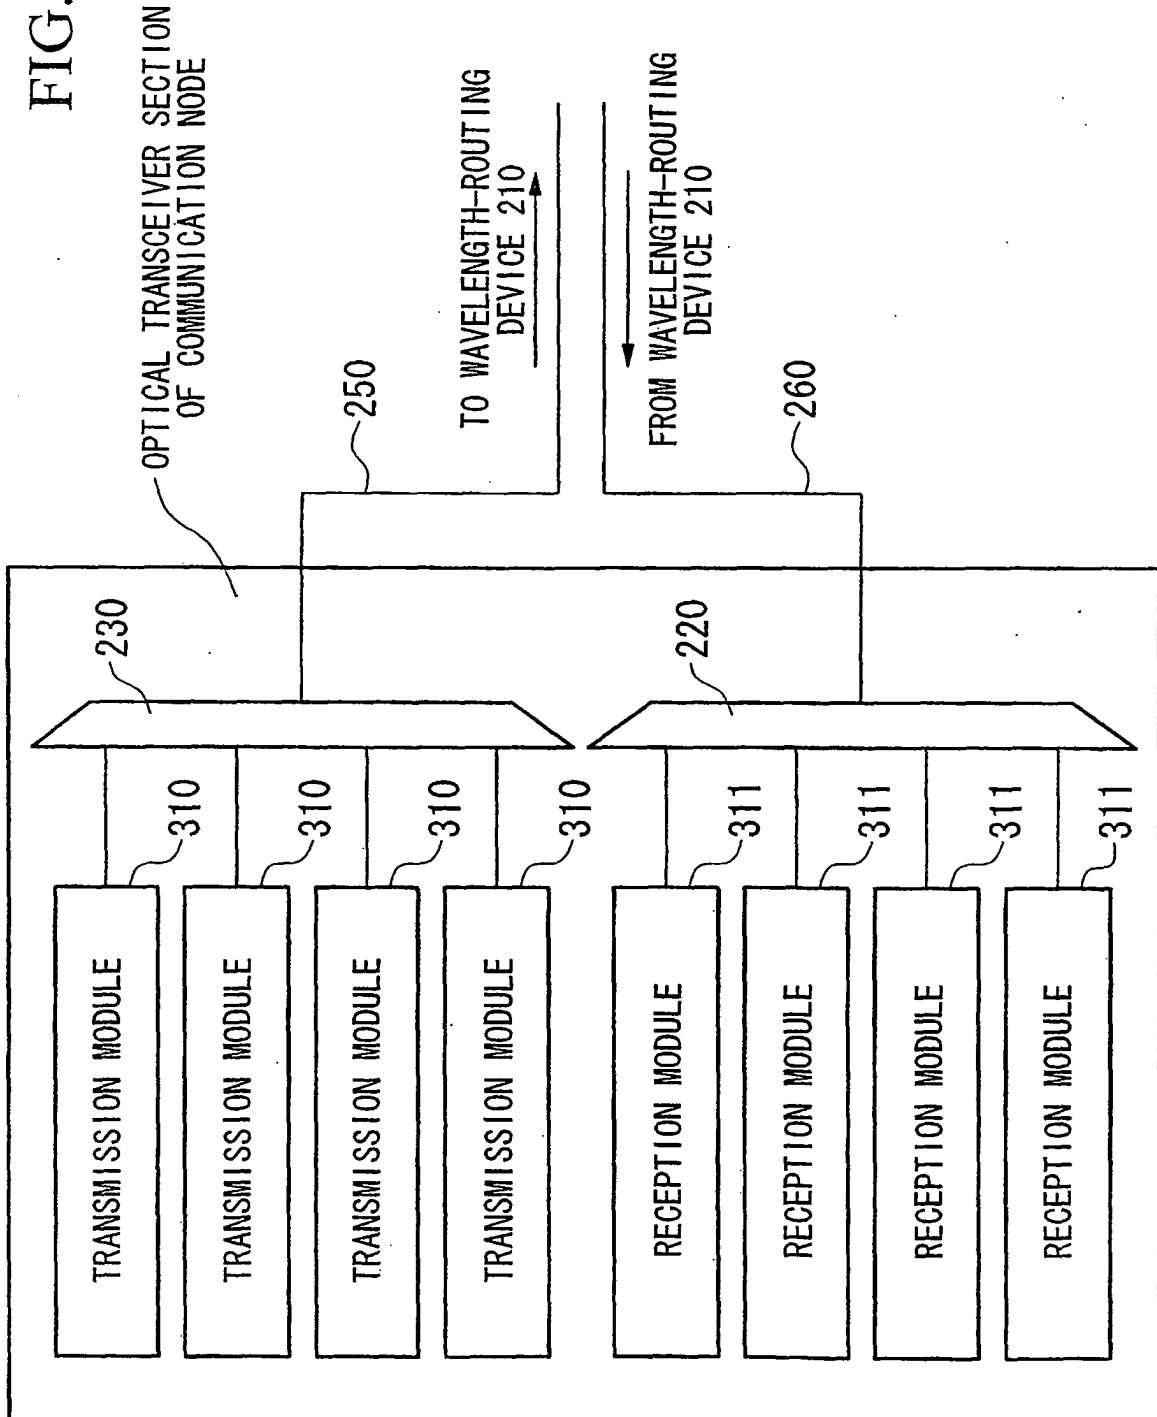


FIG. 14A

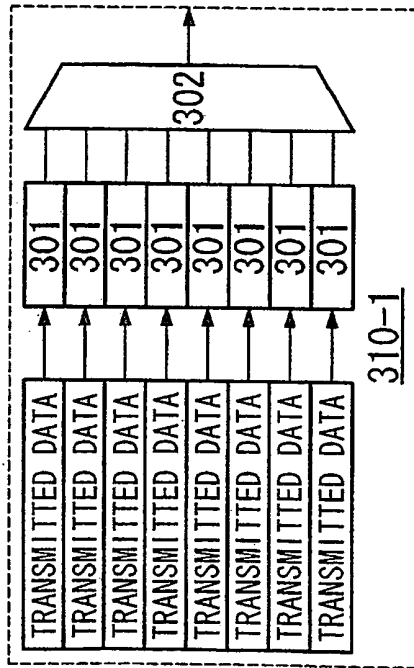


FIG. 14C

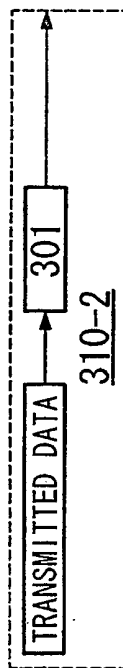


FIG. 14E

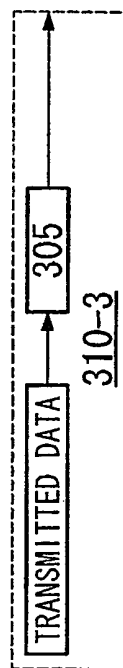


FIG. 14G

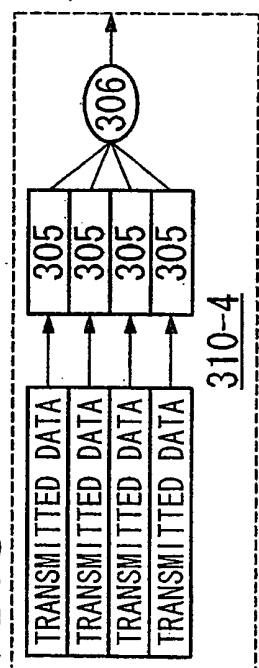


FIG. 14B

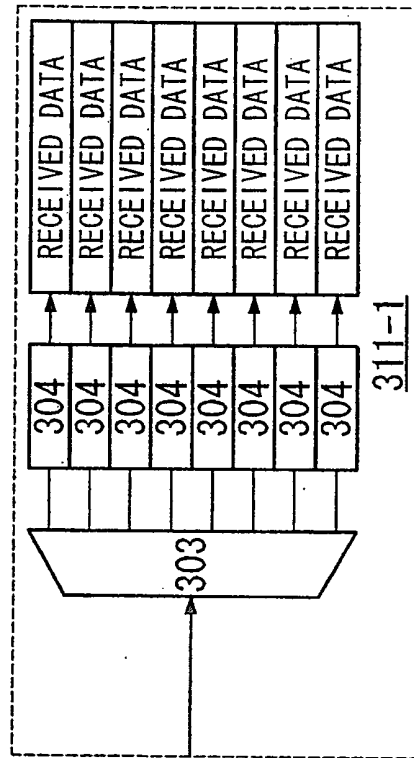


FIG. 14D

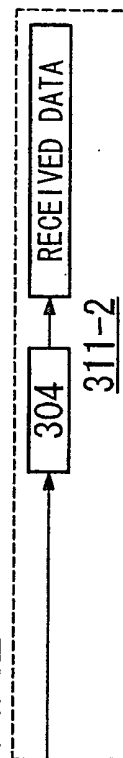


FIG. 14F

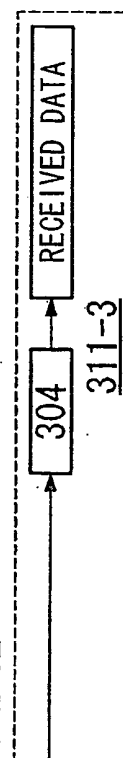
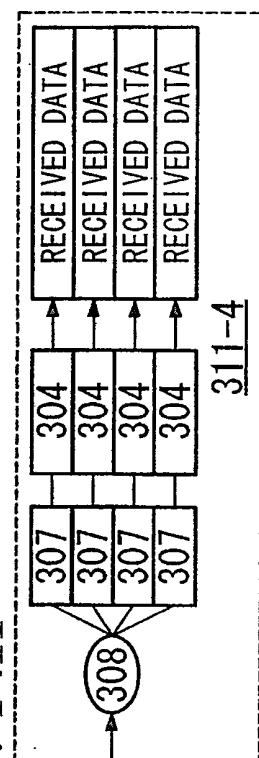


FIG. 14H



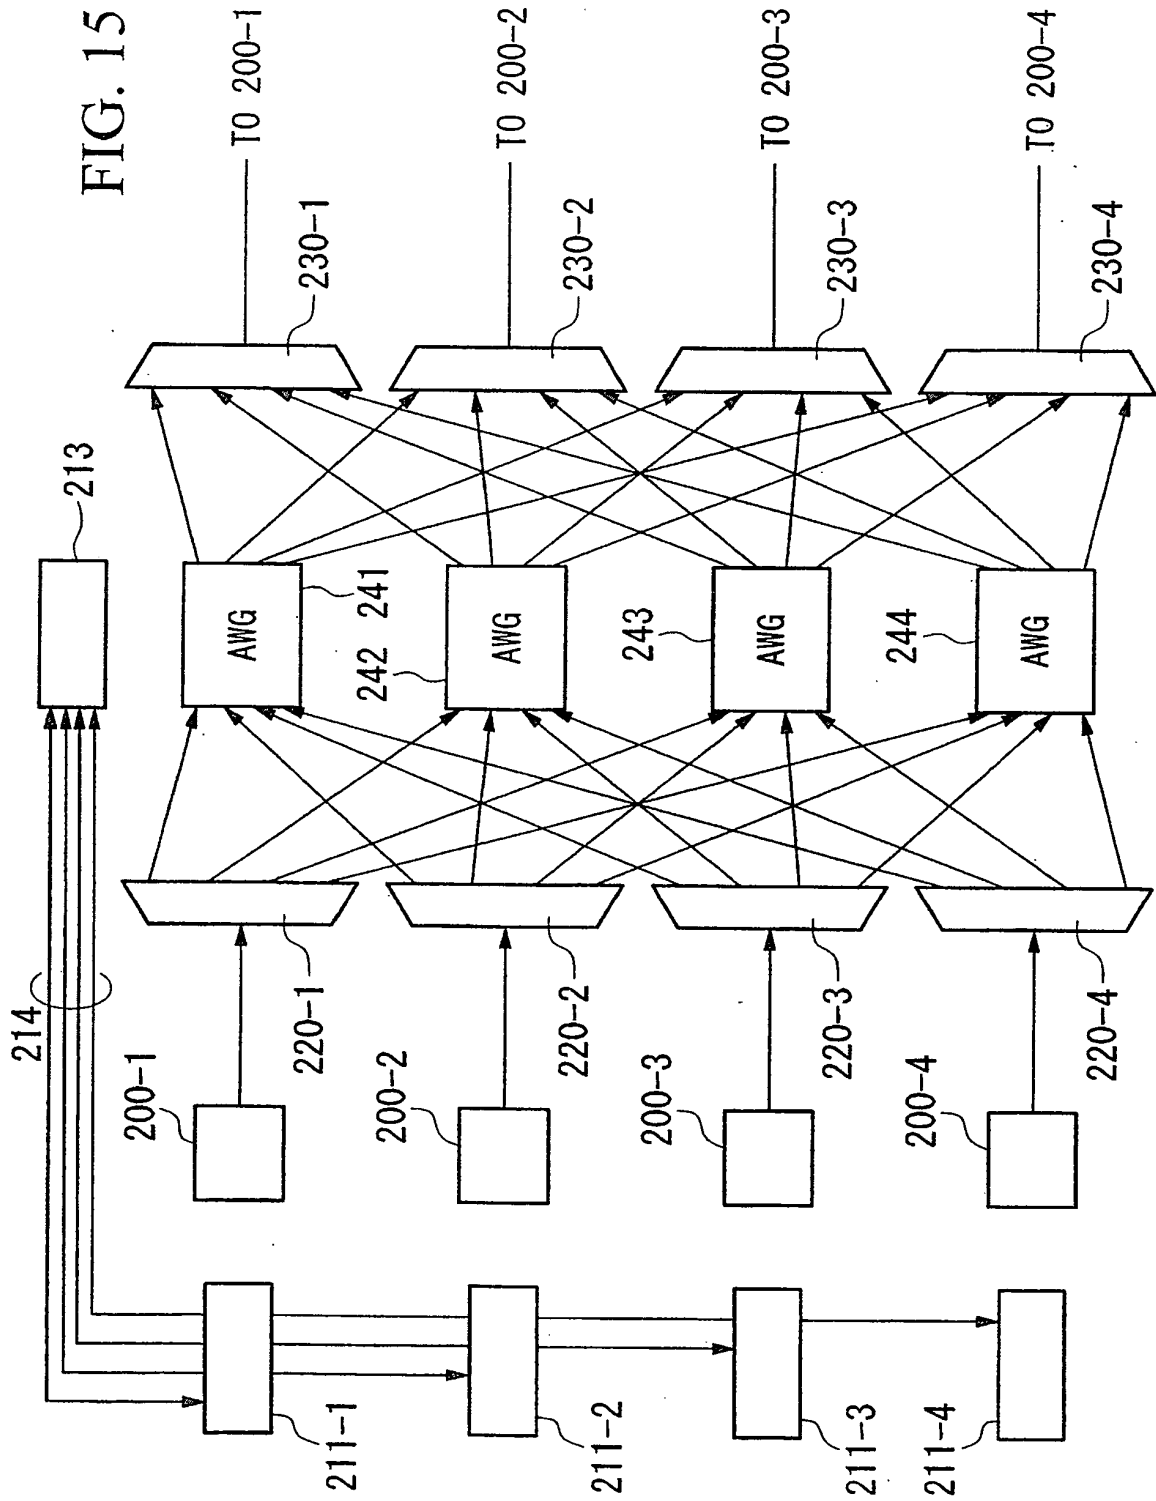


FIG. 16

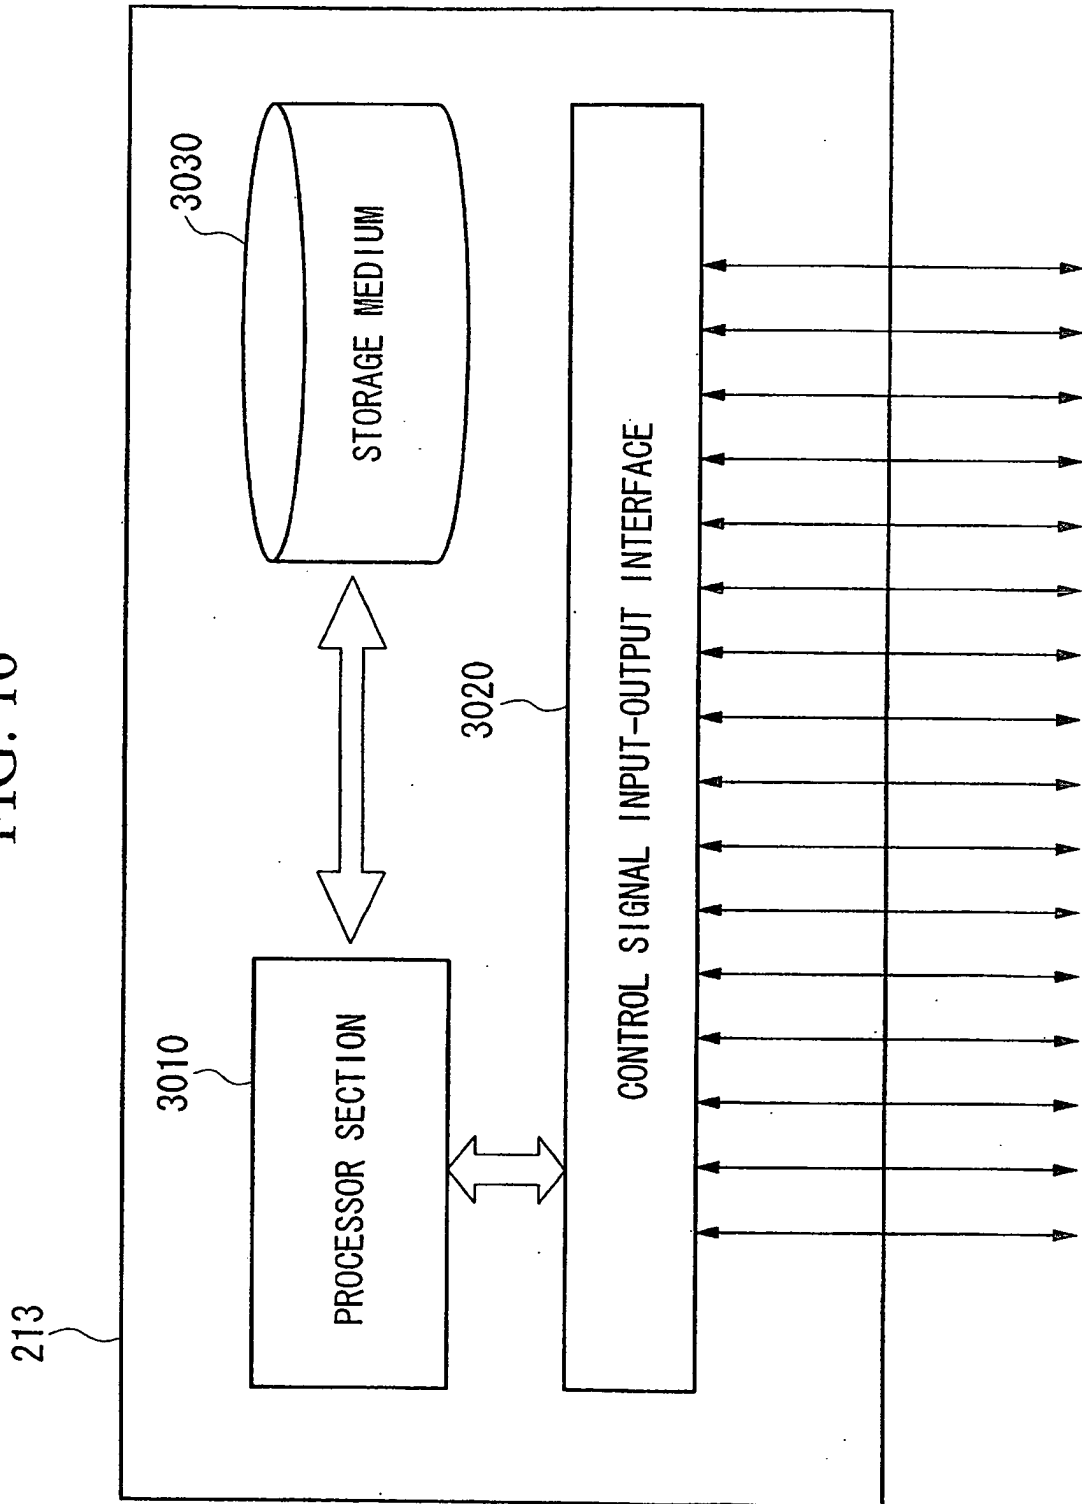


FIG. 17

	TO 200-1	TO 200-2	TO 200-3	TO 200-4	MODULE NUMBER	TOTAL TLD NUMBER	NUMBER OF TLD IN USE
FROM 200-1	$\lambda 11$ NA	$\lambda 12$ NA	$\lambda 13$ OFF	$\lambda 14$ ON	1	0	0
FROM 200-2	$\lambda 12$ NA	$\lambda 13$ NA	$\lambda 14$ ON	$\lambda 11$ NA	2	0	0
FROM 200-3	$\lambda 13$ OFF	$\lambda 14$ 1	$\lambda 11$ OFF	$\lambda 12$ OFF	3	1	1
FROM 200-4	$\lambda 14$ 1	$\lambda 11$ OFF	$\lambda 12$ OFF	$\lambda 13$ OFF	4	2	1
WAVELENGTH BAND $\lambda B_1 \pm \Delta \lambda_1$							

FIG. 18

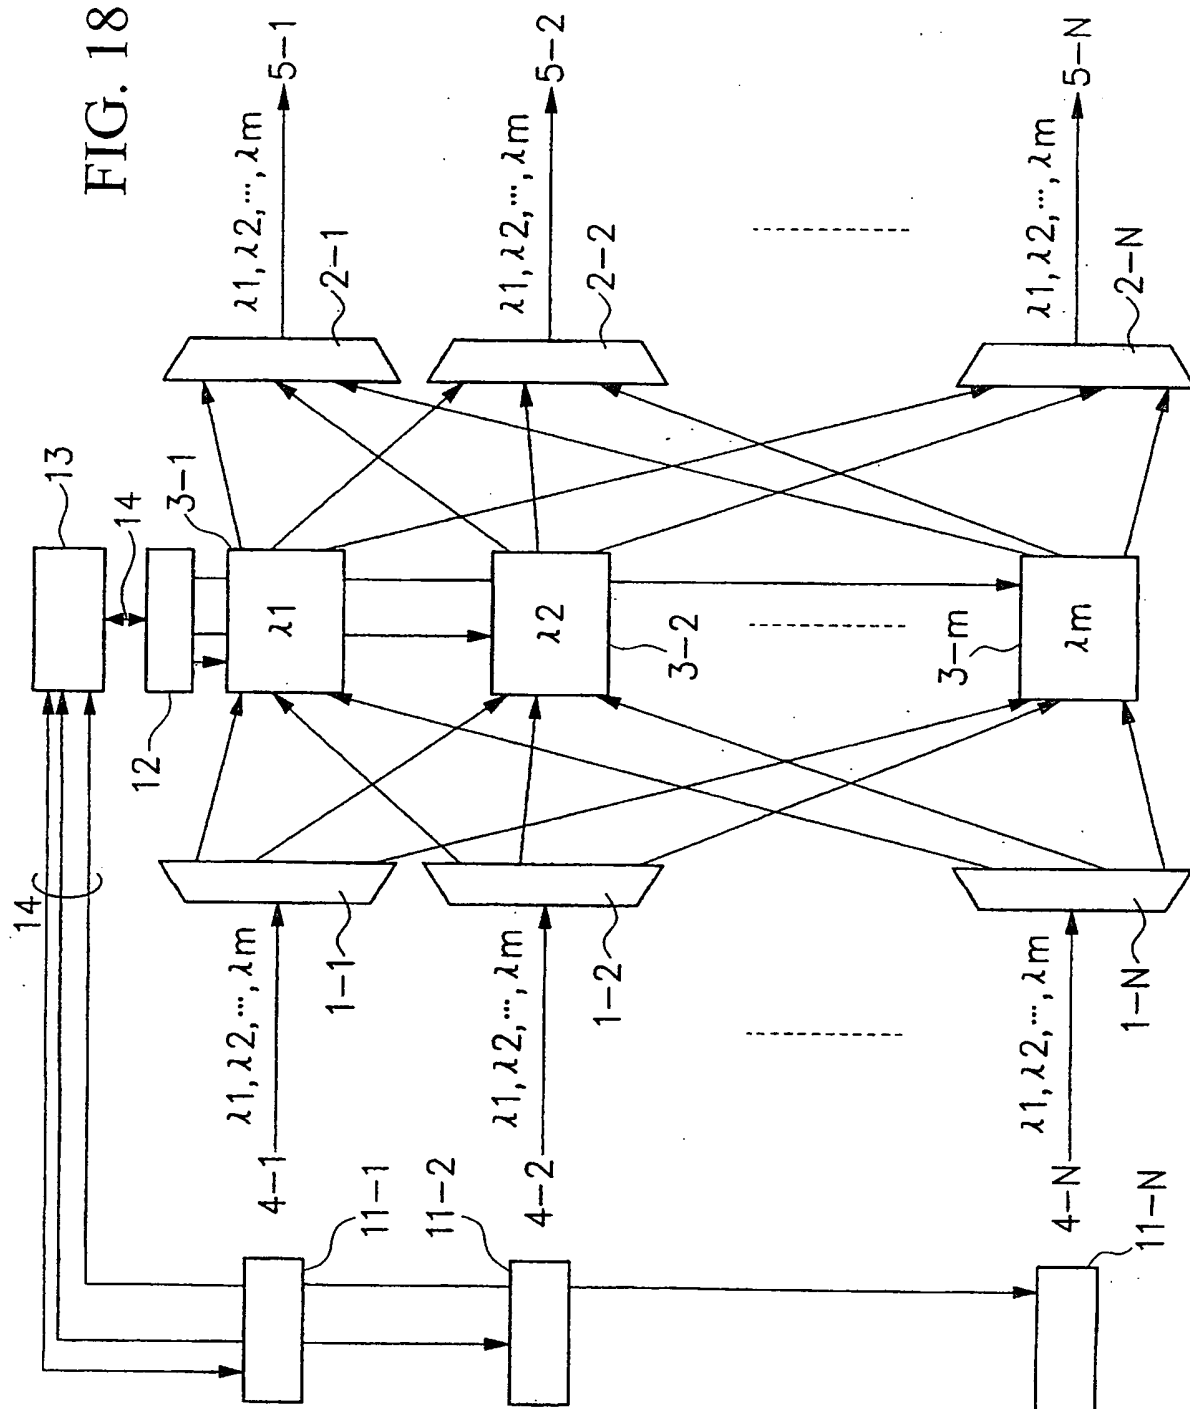


FIG. 19A

1	
INPUT COMMUNICATION NODE	DESTINATION COMMUNICATION NODE OF OPTICAL PATH
1	3
2	0
3	1
4	0
5	0
6	0
7	0
8	0

TABLE GIVING
OPTICAL PATH OF $\lambda 1$

FIG. 19B

2	
INPUT COMMUNICATION NODE	DESTINATION COMMUNICATION NODE OF OPTICAL PATH
1	0
2	5
3	0
4	0
5	2
6	0
7	0
8	0

TABLE GIVING
OPTICAL PATH OF $\lambda 2$

FIG. 19C

3	
INPUT COMMUNICATION NODE	DESTINATION COMMUNICATION NODE OF OPTICAL PATH
1	0
2	8
3	0
4	0
5	0
6	0
7	0
8	2

TABLE GIVING
OPTICAL PATH OF $\lambda 3$

FIG. 19D

4	
INPUT COMMUNICATION NODE	DESTINATION COMMUNICATION NODE OF OPTICAL PATH
1	3
2	0
3	1
4	0
5	0
6	0
7	0
8	0

TABLE GIVING
OPTICAL PATH OF $\lambda 4$

"0" MEANS THAT RELEVANT
COMMUNICATION NODE IS NOT IN USE

FIG. 20

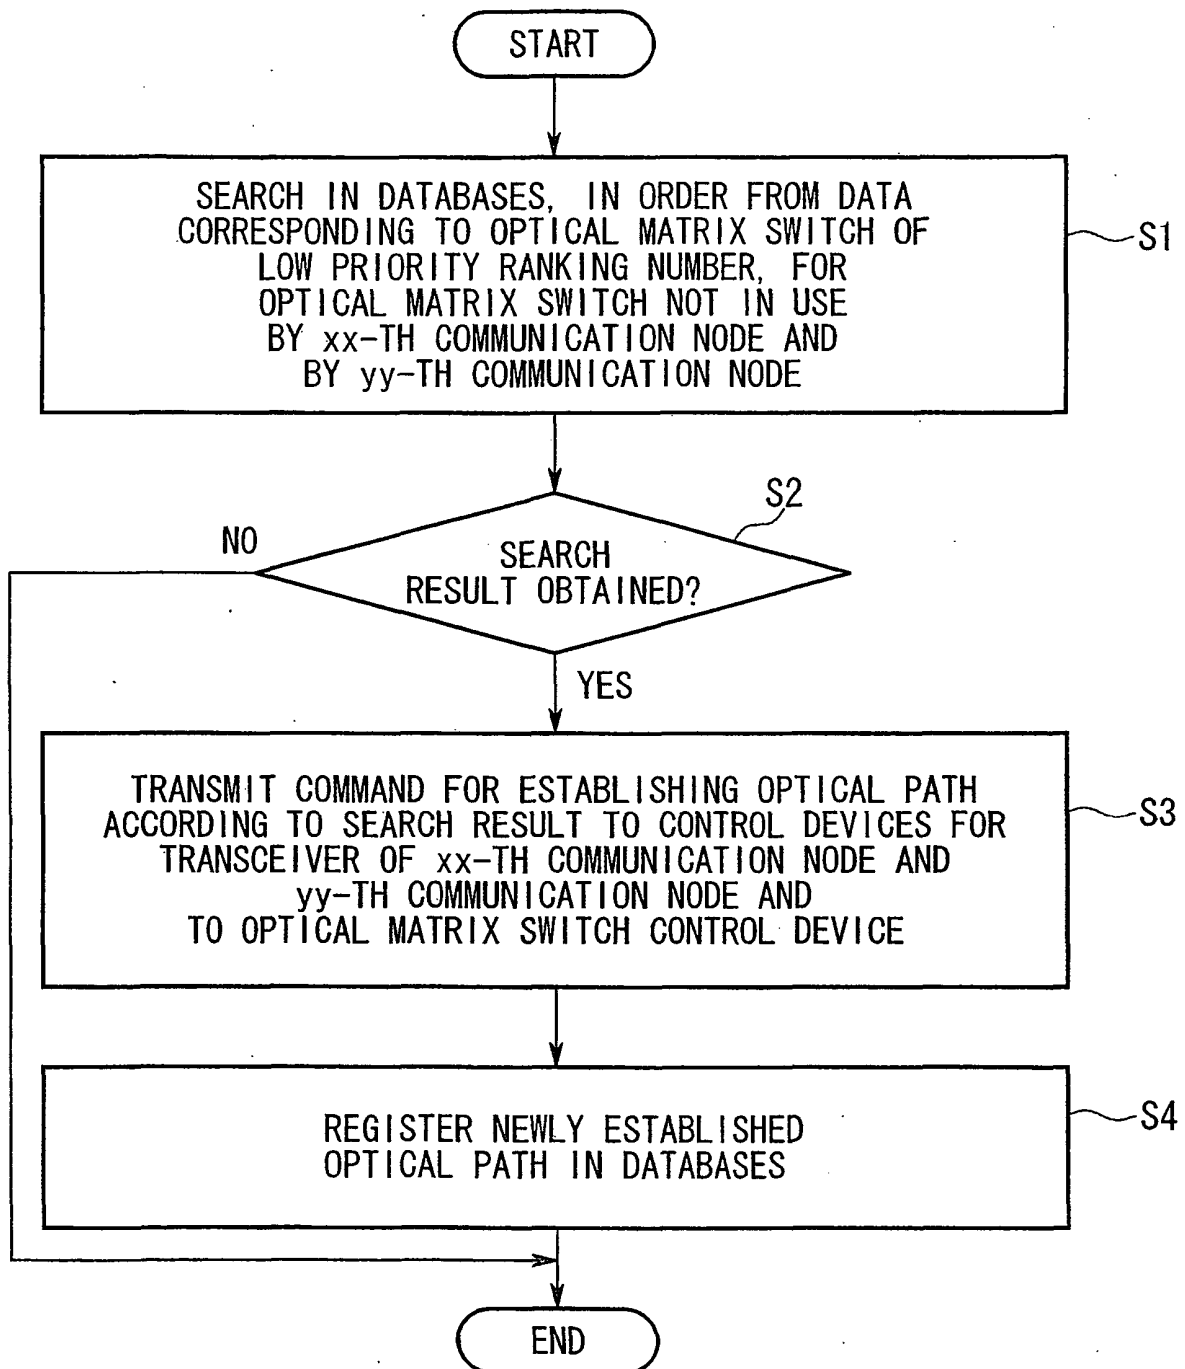


FIG. 21

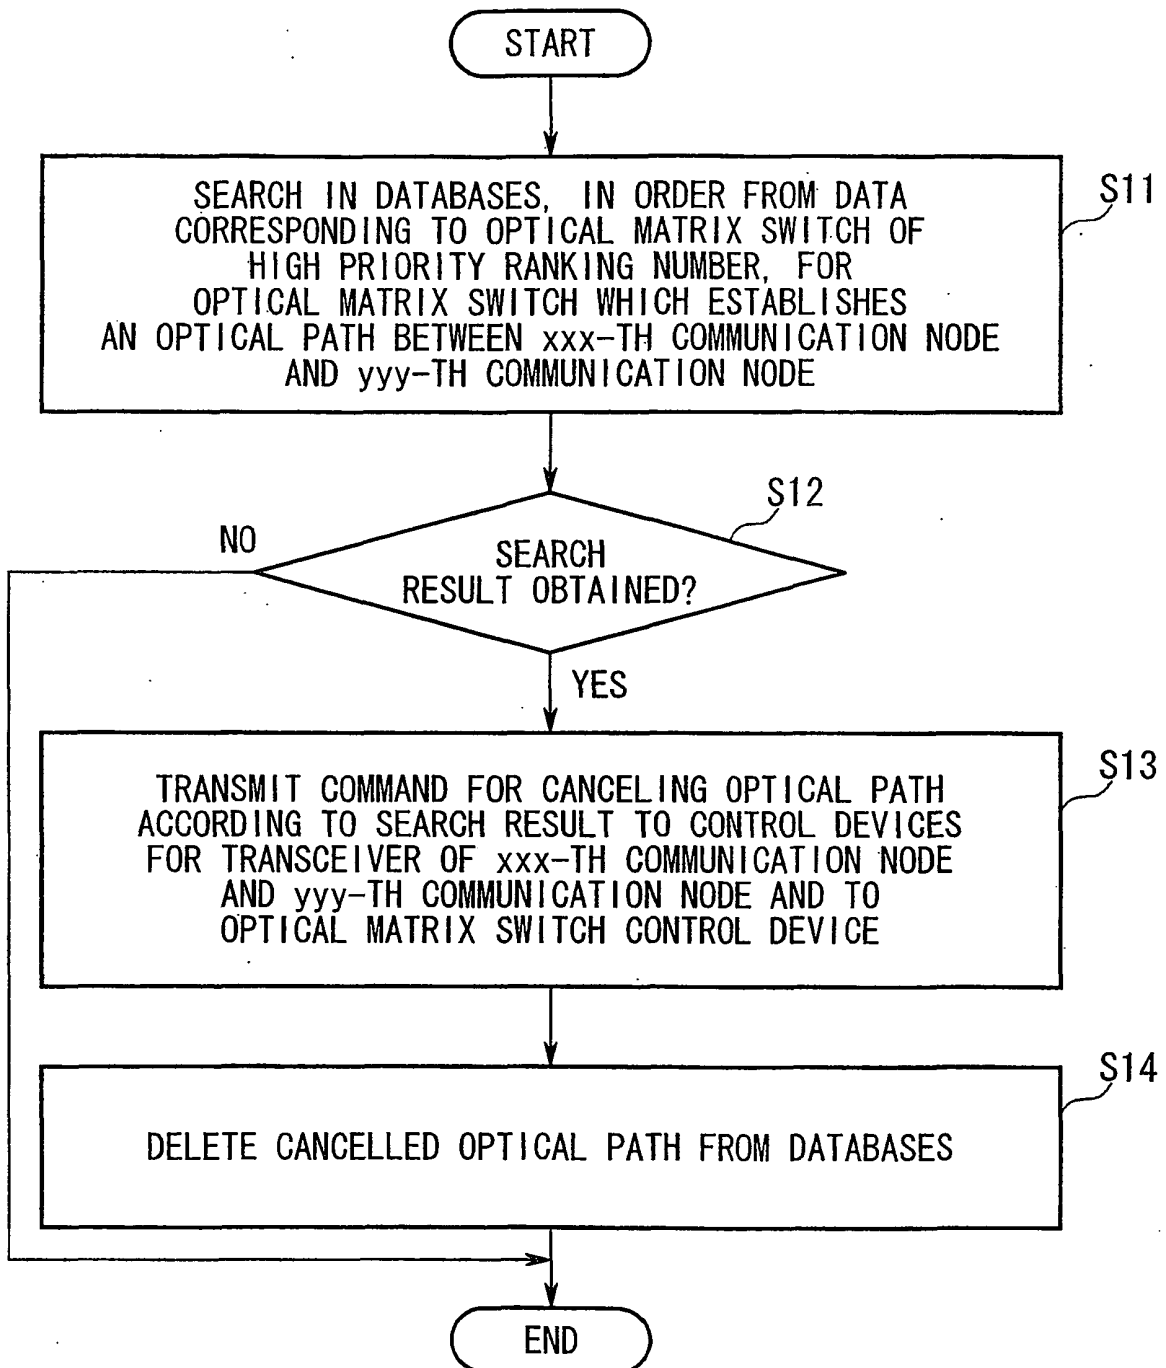
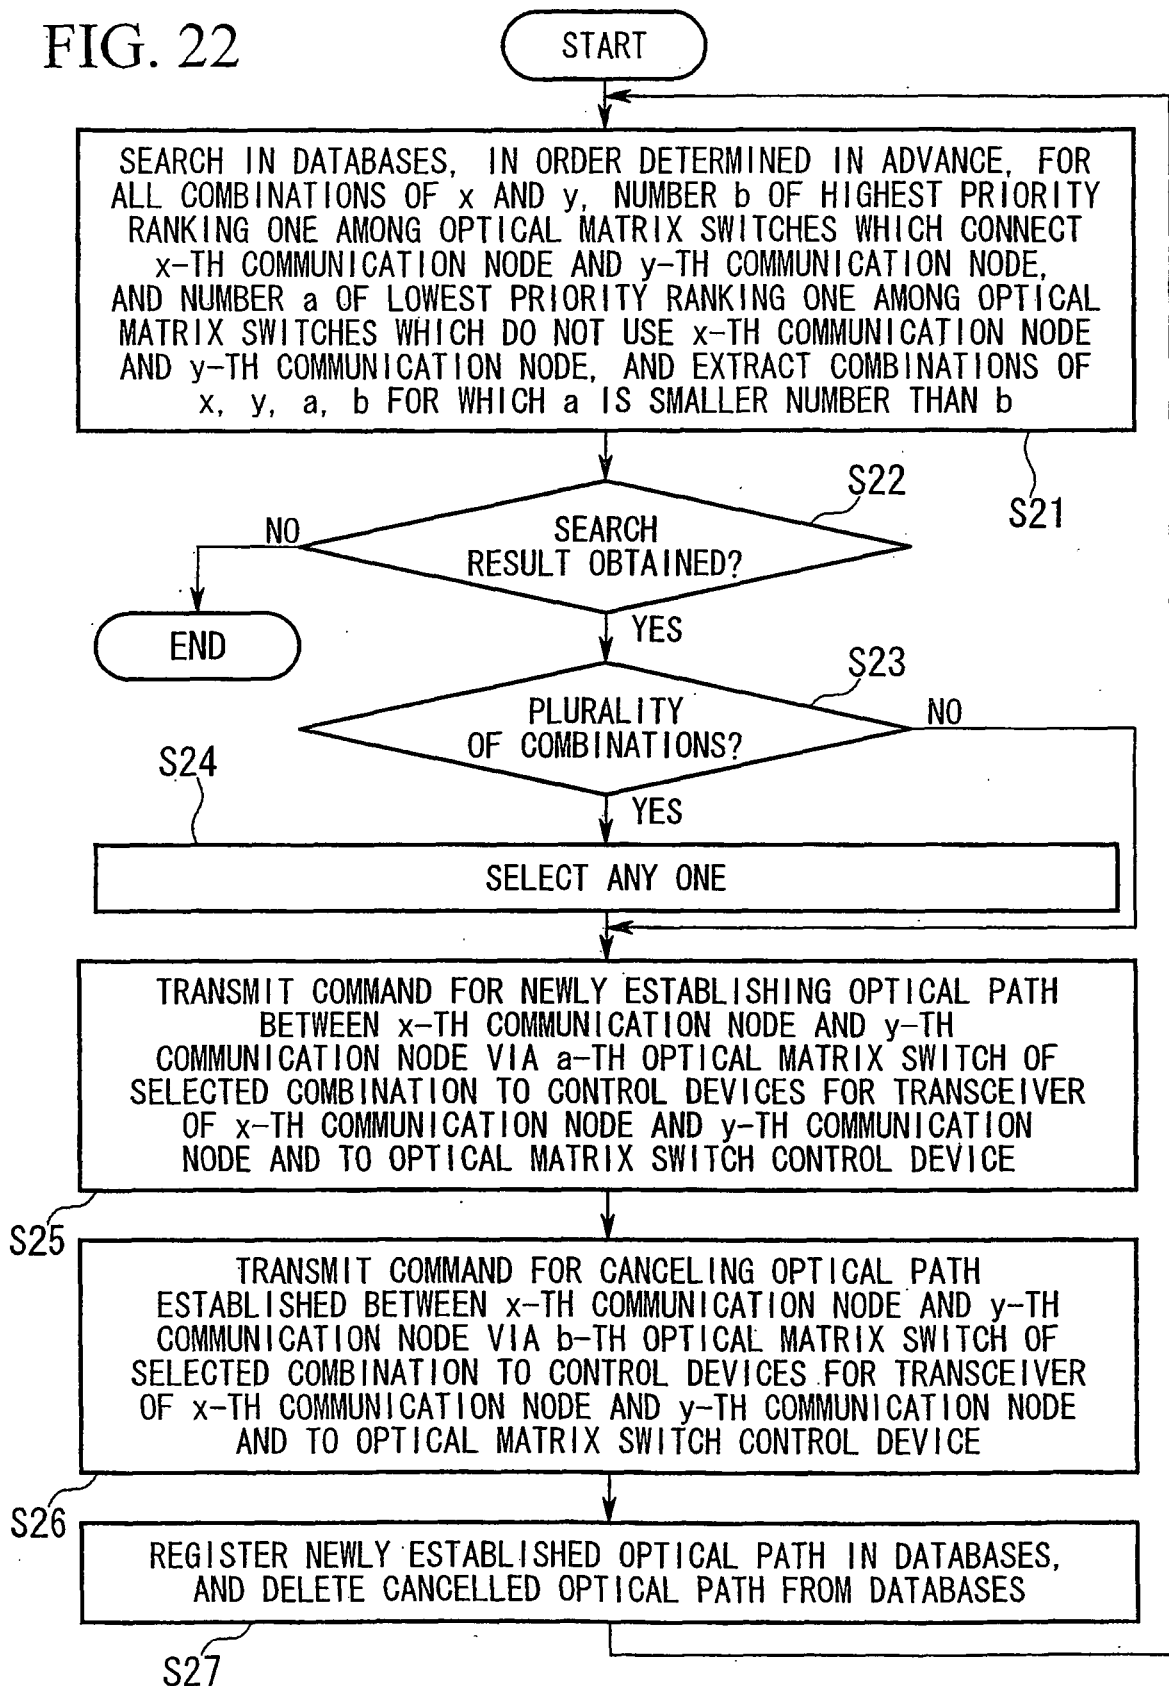


FIG. 22



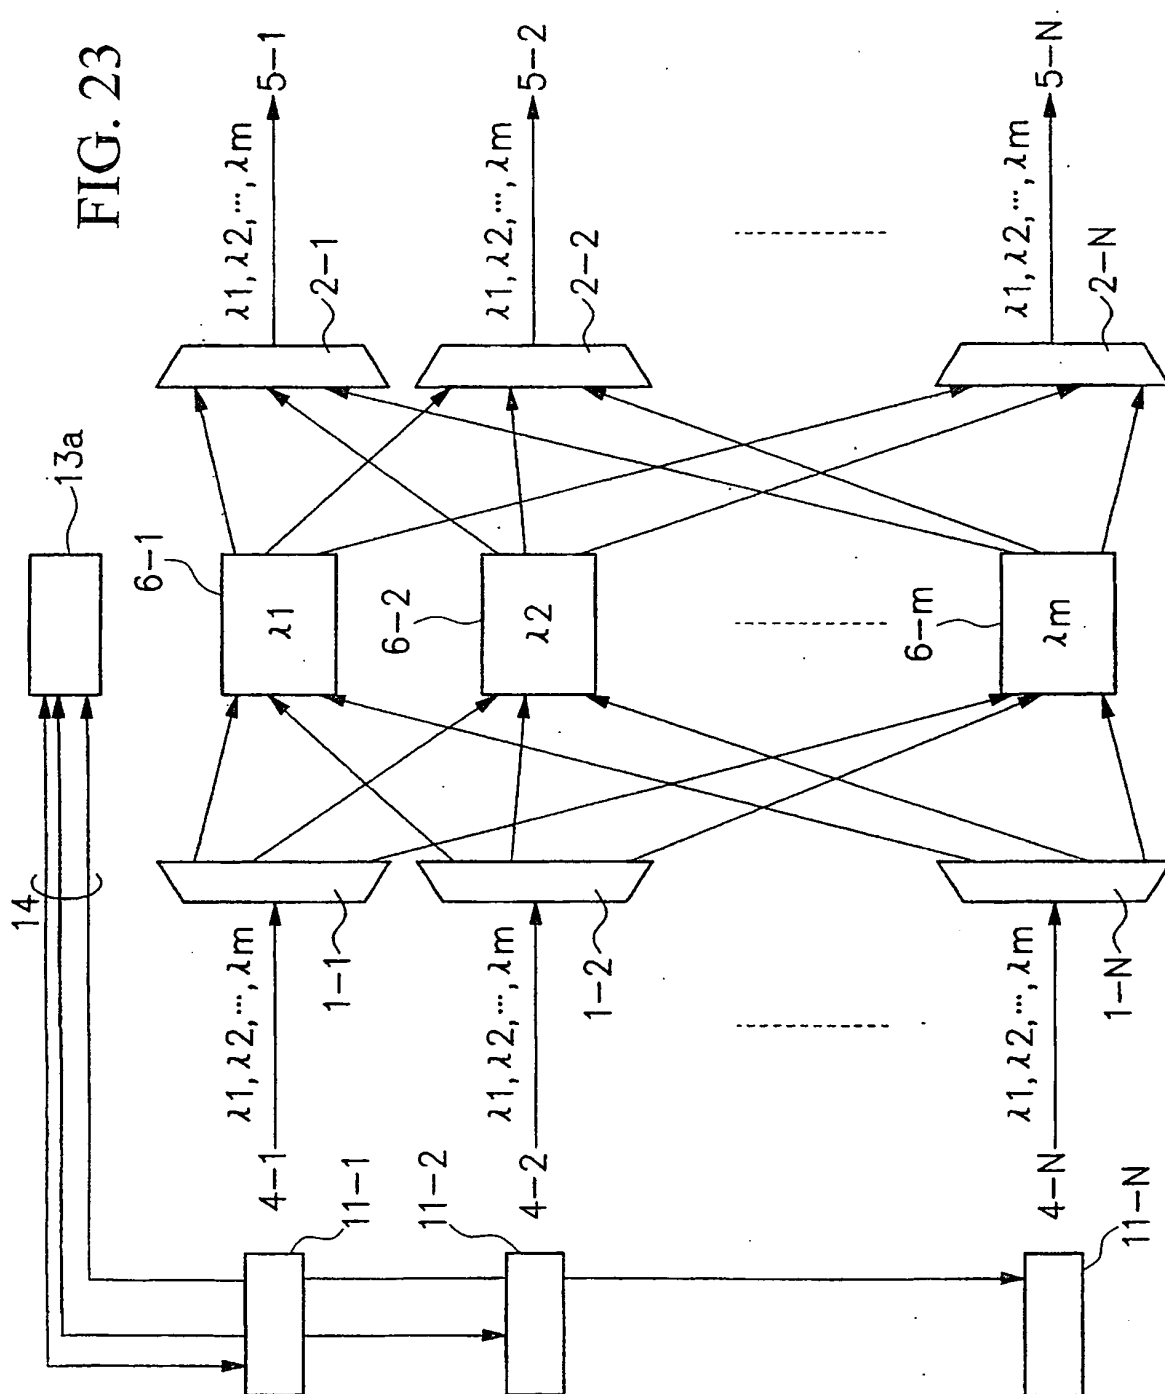


FIG. 24

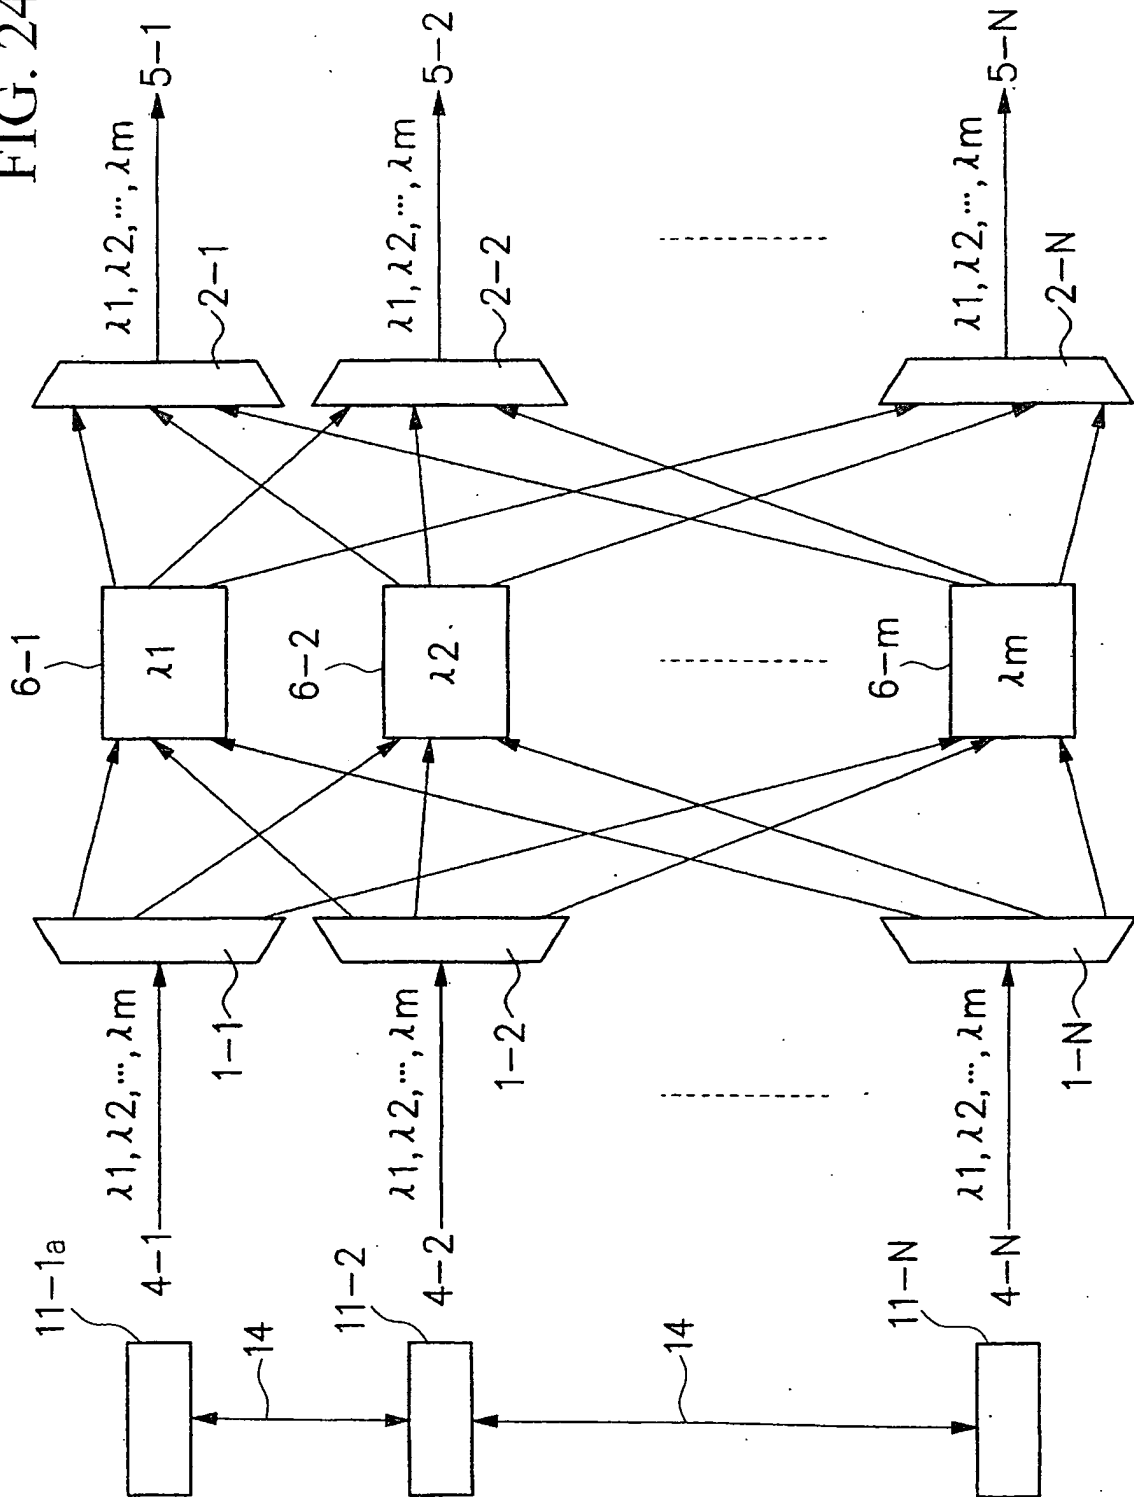


FIG. 25

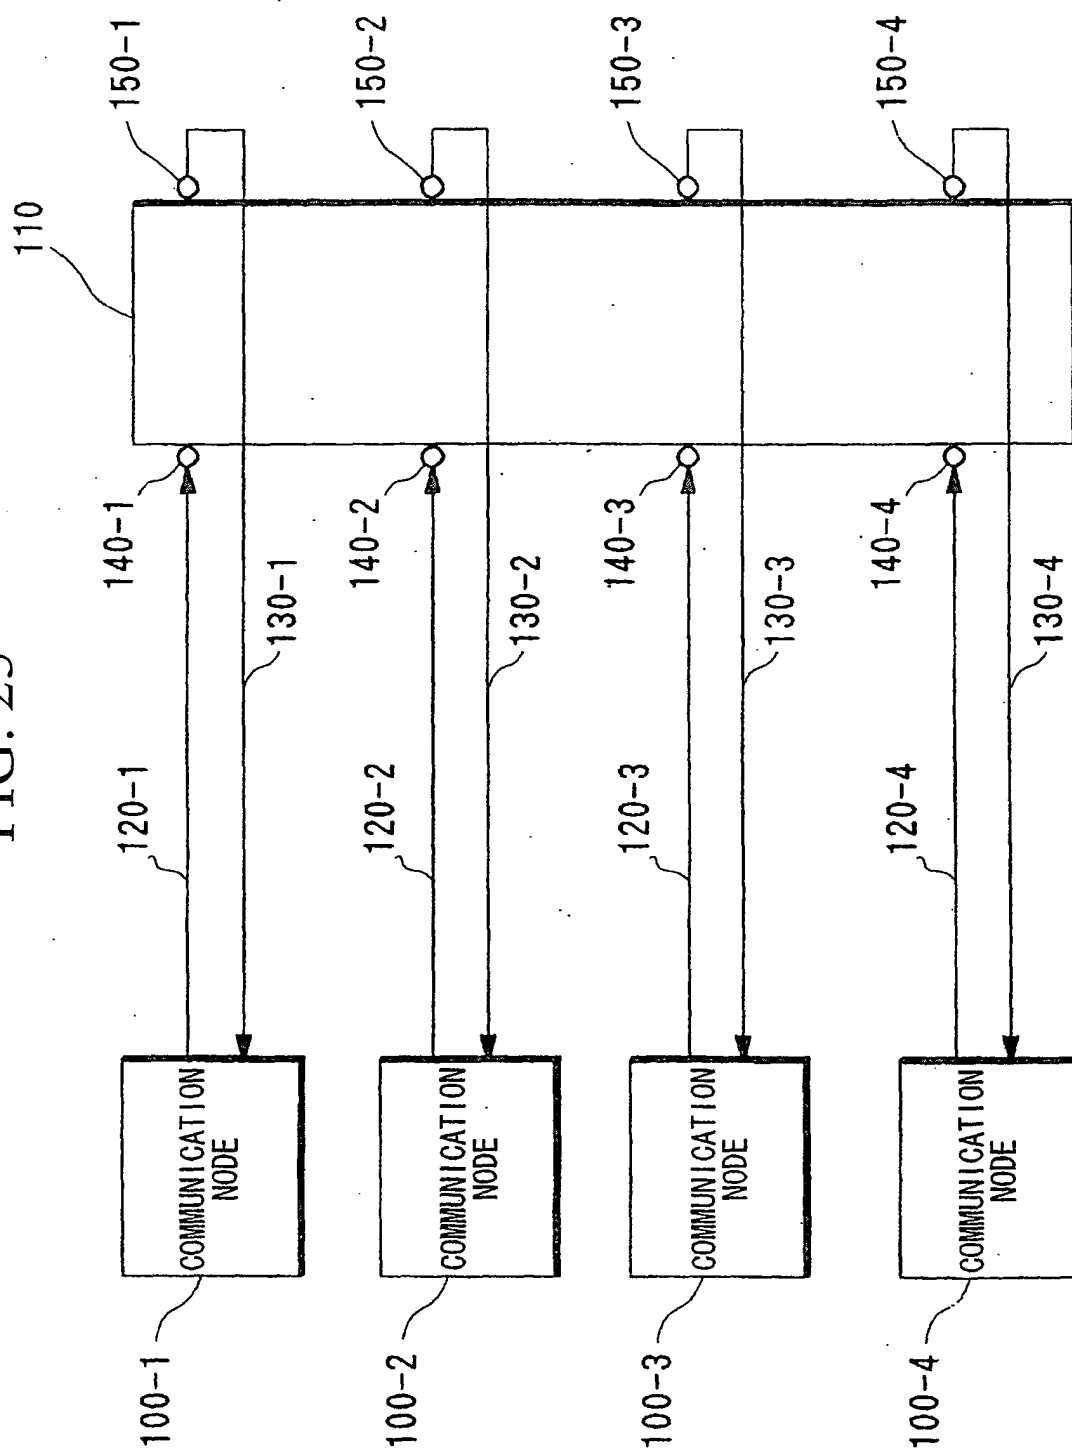
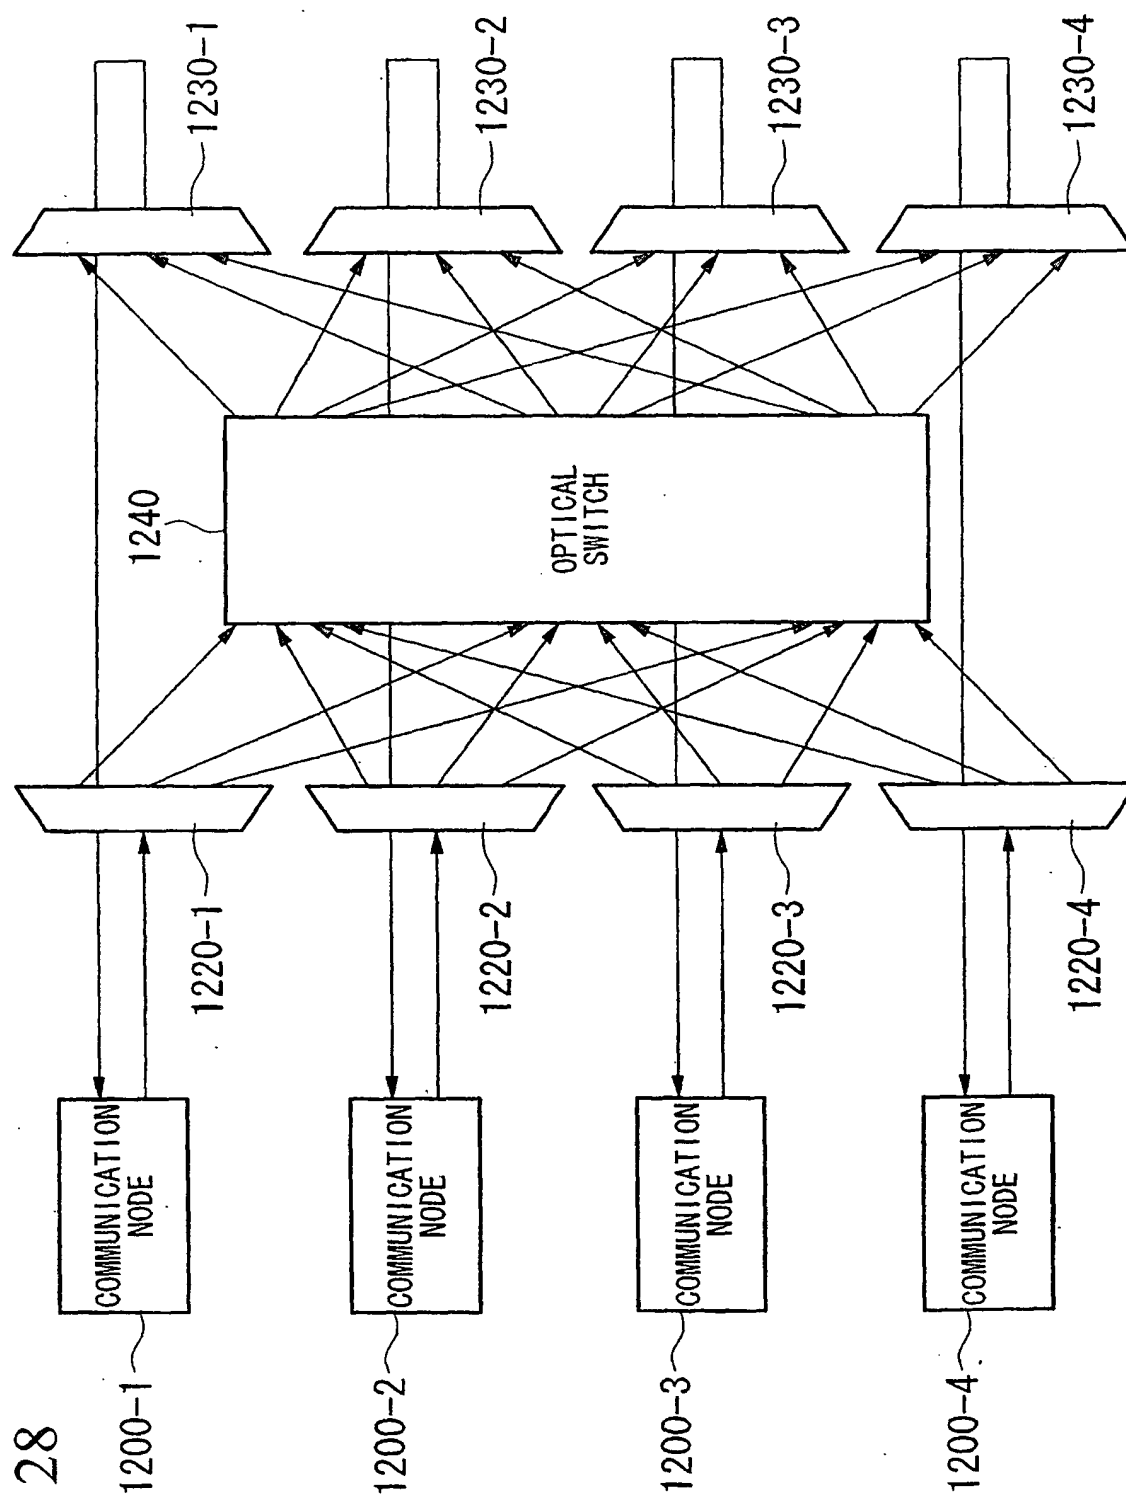


FIG. 26

		OUTPUT PORT			
INPUT PORT		150-1	150-2	150-3	150-4
	140-1	$\lambda 1$	$\lambda 2$	$\lambda 3$	$\lambda 4$
	140-2	$\lambda 2$	$\lambda 3$	$\lambda 4$	$\lambda 1$
	140-3	$\lambda 3$	$\lambda 4$	$\lambda 1$	$\lambda 2$
	140-4	$\lambda 4$	$\lambda 1$	$\lambda 2$	$\lambda 3$

FIG. 27

		OUTPUT PORT			
INPUT PORT		150-1	150-2	150-3	150-4
	140-1	$\lambda 1$	$\lambda 2$	$\lambda 3$	$\lambda 4$
	140-2	$\lambda 2$	$\lambda 3$	$\lambda 4$	$\lambda 5$
	140-3	$\lambda 3$	$\lambda 4$	$\lambda 5$	$\lambda 6$
	140-4	$\lambda 4$	$\lambda 5$	$\lambda 6$	$\lambda 7$



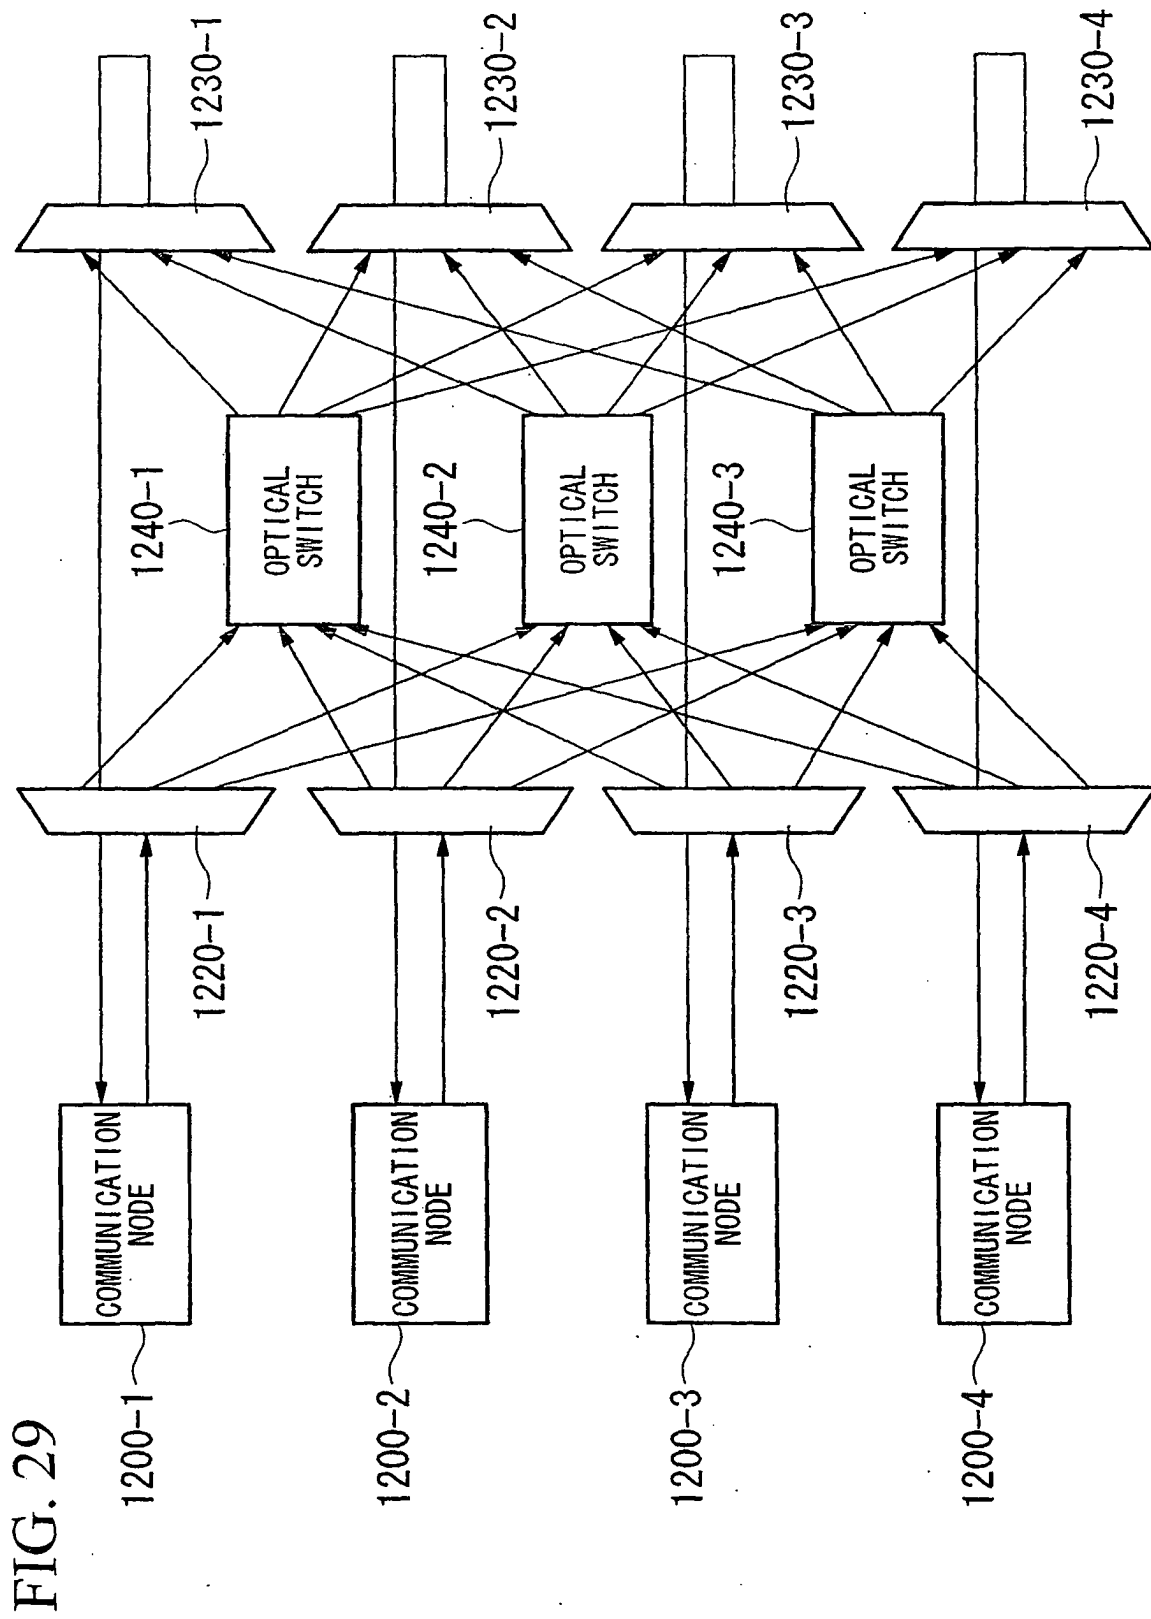


FIG. 30



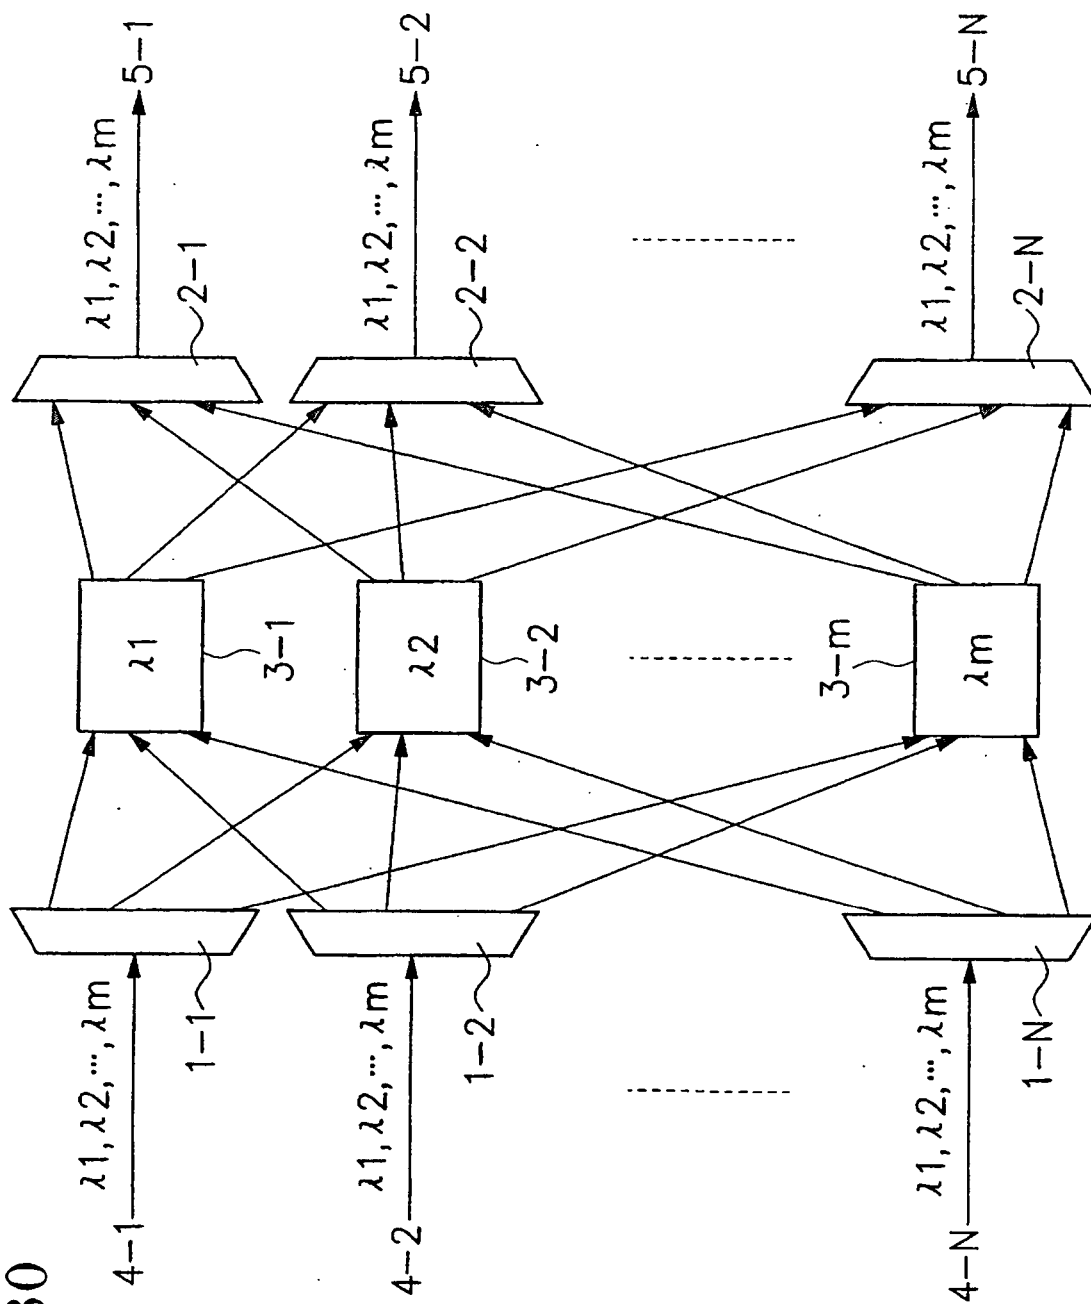


FIG. 31A

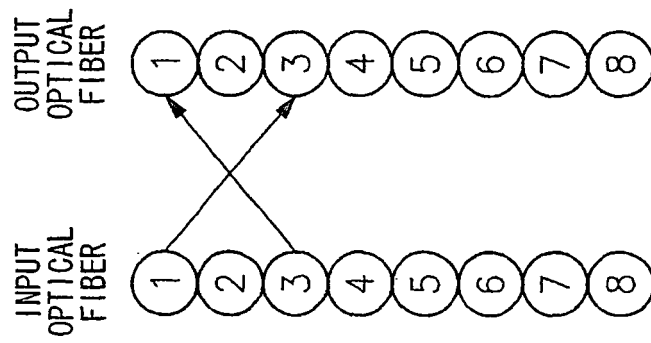


OPTICAL PATH
OF λ_1

FIG. 31B

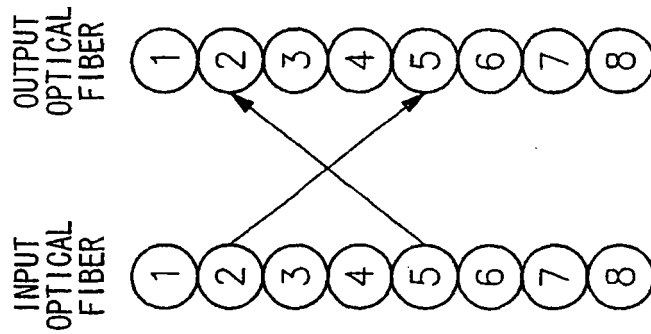


OPTICAL PATH
OF λ_2

FIG. 31C

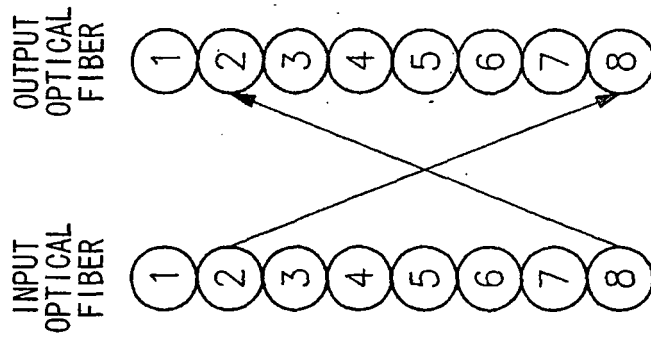

OPTICAL PATH
OF λ_3

FIG. 31D

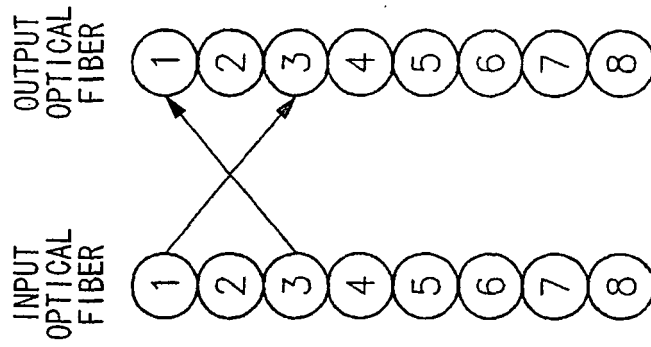

OPTICAL PATH
OF λ_4

FIG. 32A

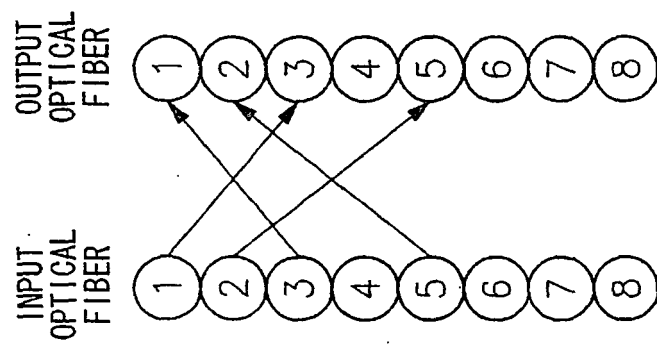


FIG. 32B

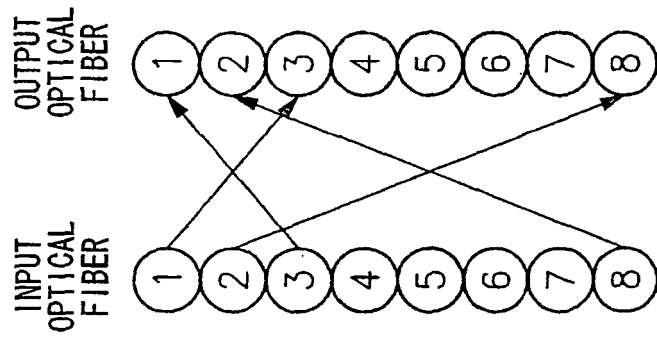


FIG. 32C


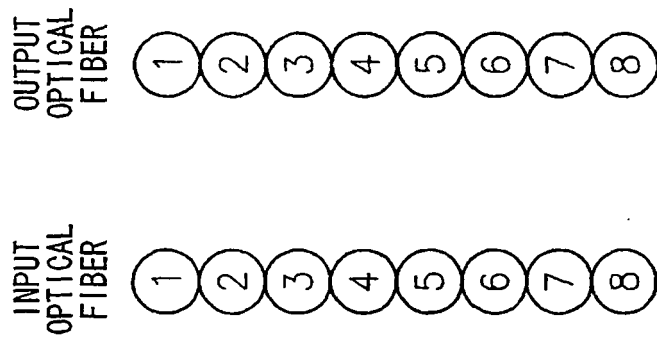


FIG. 32D

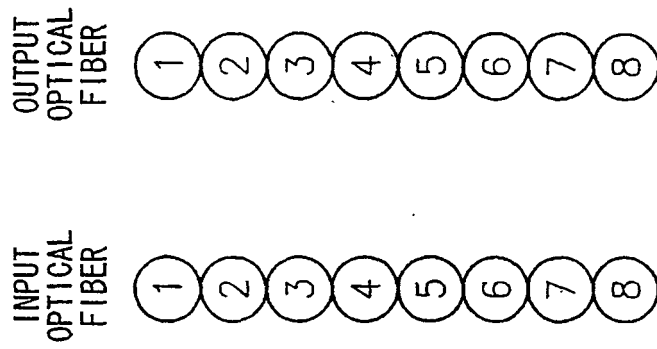

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000134649 A [0014]
- JP 2002165238 A [0014]
- JP 2002262319 A [0014] [0062]
- JP 2001008244 A [0018] [0061]
- JP 2002300137 A [0019]

Non-patent literature cited in the description

- **K. KATO.** 32x32 full-mesh (1024 path) wavelength-routing WDM network based upon uniform-loss cyclic-frequency arrayed-waveguide grating. *IEE Electron. Lett.*, 2000, vol. 36, 1294-1295 [0007]
- **R. RAMASWAMI ; K. N. SIVARAJAN.** Optical Networks. Morgan Kaufman Publishers Inc, 1998, 341 [0023]
- **OKAYAMA H. et al.** Multiwavelength highway photonic switches using wavelength-sorting elements-design. *J. OF LIGHTWAVE TECHNOLOGY*, April 1997, vol. 15 (4), 607-615 [0063]