



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
03.05.2006 Bulletin 2006/18

(51) Int Cl.:
H04J 11/00 (1974.07)

(21) Application number: **04762035.6**

(86) International application number:
PCT/CN2004/000898

(22) Date of filing: **04.08.2004**

(87) International publication number:
WO 2005/013524 (10.02.2005 Gazette 2005/06)

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(72) Inventor: **QIAO, Yuanxin**
Beijing 100083 (CN)

(30) Priority: **04.08.2003 CN 03149619**

(74) Representative: **Plougmann & Vingtoft A/S**
Sundkrogsgade 9
2100 Copenhagen (DK)

(71) Applicant: **Da Tang Mobile Communications**
Equipment Co., Ltd.
Beijing 100083 (CN)

(54) **A METHOD AND DEVICE OF THE ESTIMATING CARRIER FREQUENCY OFFSET OF
SUBSCRIBER TERMINAL**

(57) The invention discloses a method of estimating carrier frequency offset for subscriber terminal, including: determining number of effective base stations from which more than one signals are received by a subscriber terminal; combining the signals of each station corresponding to said number of effective base stations; calculating a rough estimation value of the carrier frequency offset based on combined signal. The invention also discloses a device of estimating carrier frequency offset for subscriber terminal, including: decision module, used to de-

termine the number of effective base stations from which more than one signals received by subscriber terminal, combining module, used to combine the signals of the effective base station and output the combined signal to the carrier frequency offset acquiring module; carrier frequency offset acquiring module, used to estimate the carrier frequency offset of the merged signal. According to the invention, the carrier frequency offset for the subscriber terminal will meet system requirement, and improve cell searching success probability.

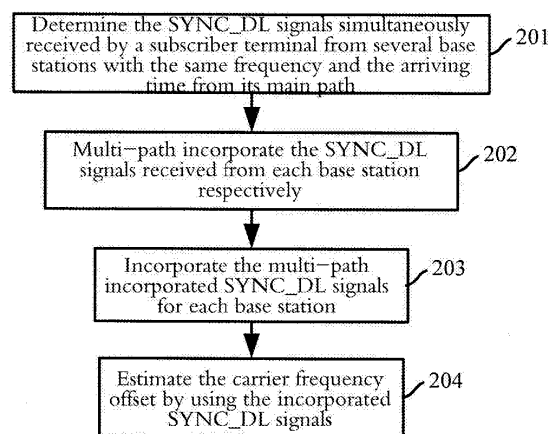


FIG. 2

Description

BACKGROUND OF THE INVENTION

5 Field of the Invention

[0001] The present invention relates to Code Division Multiple Access (CDMA) for mobile communications, more particularly to a method and device for estimating carrier frequency offset (CFO) in subscriber terminals in Time Division Synchronous Code Division Multiple Access (TD-SCDMA) system.

10 Description of the Related Art

[0002] In the TD-SCDMA system, both base stations and terminals are supposed to send and receive data with nominal carrier frequency. However, there is always some deviation between the actual transmitting and receiving frequency and the nominal frequency because of the technology limitation of the devices. In a base station, the frequency accuracy of an oscillator, in which a carrier frequency offset in a base station required by a TD-SCDMA system is less than 0.05PPM, may meet to the standard requirement, since limitations subjected by a base station from temperature, size, power consumption, cost and the like are smaller. In a subscriber terminal, however, a carrier frequency offset in a subscriber terminal required by the TD-SCDMA system is less than 0.1PPM, the frequency accuracy of a selected oscillator may not meet the standard requirement, due to the limitations subjected by the subscriber terminal from temperature, size, power consumption, cost and the like are greater. Consequently, carrier frequency offsets need to be estimated in a subscriber terminal by using a known synchronous downlink pilot signal (SYNC_DL) sent by base stations, and according to the estimated value of carrier frequency offsets to perform automatic frequency control (AFC), so that carrier frequency offsets in the subscriber terminal may meet the standard system requirements.

[0003] In a method for estimating carrier frequency offset in prior art, SYNC_DL signals only send by a single base station are utilized in a subscriber terminal to estimate the carrier frequency offset. The base station has one or more antennas to transmit signals with the same carrier frequency. FIG. 1 is a schematic diagram showing a carrier frequency offset estimation system having a plurality of base stations in the prior art.

[0004] In the TD-SCDMA system, a dedicated downlink pilot time slot (DwPTS) is set, a base station sends SYNC_DL signals at DwPTS of each frame. Codes by which a SYNC_DL signal is consisted of are used to distinguish adjacent cells using the same carrier frequency, that is, the adjacent cells with the same carrier frequency are distinguished by the SYNC_DL codes. There are 32 different SYNC_DL codes defined in the standard, length of each set of SYNC_DL codes is 64 chips. During the initial search of the cells, the subscriber terminal search the SYNC_DL codes at a specific frequency point used in a cell where it currently expects to resided in to implement the downlink synchronization, and then estimate the carrier frequency offset based on the SYNC_DL codes and adjust the carrier frequency according to the estimated carrier frequency offset value to meet the system requirements.

[0005] Provided that the system requires for carrier frequency offset estimation and rough adjusting, adjusted carrier frequency offset in a subscriber terminal is less than 1 kHz, then the subscriber terminal has only received, at a corresponding frequency point, the SYNC_DL signals transmitted by one base station or received SYNC_DL signals of the cell currently expected to resided in are much greater than the SYNC_DL signals of other cells using a same frequency. If the signal power ratio is over 6dB, it is possible for the adjusted carrier frequency offset of a subscriber terminal to meet to the system requirement. However, if the power difference between the simultaneously received SYNC_DL signals respectively in two cells with the same frequency is small, the SYNC_DL signals transmitted by one cell will interfere those transmitted by another cell. For example, when the power ratios of multiple SYNC_DL signals received by a subscriber terminal at the edge of several cells are within 3dB, there is about 10-20% probability with the existing methods for carrier frequency offset estimation and adjustment that the carrier frequency offset of the subscriber terminal can't meet the requirement of the system.

[0006] In the TD-SCDMA system, because of the short length of a SYNC_DL signal, which is only 64 chips (50μs), the carrier frequency offset after adjustment permitted by the standard is still greater, for example, less than 1kHz. Even so, as shown in FIG 1, when the subscriber terminal simultaneously receives SYNC_DL signals from several base stations, and whose power differences are small such as within 3dB by using an existing method for carrier frequency offset estimation, which only uses the received SYNC_DL signal in a cell (base station) where it currently expects to reside in, i.e., the highest power SYNC_DL signal, to make a carrier frequency offset estimation, there is about 10-20% probability that the carrier frequency offset in the subscriber terminal after automatic frequency control can't be below 1kHz. In this case, the initiate search for a cell by a subscriber terminal will not be implemented and probability of success for the initiate search for a cell will be affected.

Summary of the Invention

[0007] In view of this, an object of the present invention is to provide a method and a device for estimating carrier frequency offset in a subscriber terminal to make the carrier frequency offset in a subscriber terminal to meet the system requirements and thus improve the probability of success for the initiate search for a cell.

[0008] To achieve the above object, the present invention provides a method for estimating carrier frequency offset in a subscriber terminal, said method comprises steps:

- A. determining number of effective base stations from which more than one signals are received by a subscriber terminal and main path positions of each signal;
- B. combining the signals of each station corresponding to said number of effective base stations based on the main path positions obtained in step A;
- C. calculating a rough estimation value of the carrier frequency offset based on combined signal in step B.

[0009] Said determining number of effective base stations from which more than one signals are received by a subscriber terminal in step A comprises steps:

- A1. calculating peak power value of each signal received by a subscriber terminal, and selecting the peak power values of number of base stations from higher to lower;
- A2. determining the number of effective base stations from predefined signals are received by the subscriber terminal by comparing the ratio of the highest peak power value from the order in step A1 to the subsequent peak power values with the given threshold.

[0010] Said signals are synchronous downlink pilot signals, and said step A1 further comprises steps:

- A11. shift multiple correlating a local synchronous downlink pilot code and a received synchronous downlink pilot signal results in a power value of the synchronous downlink pilot signals received by the subscriber terminal ;
- A12. determining peak power values corresponding to each of the synchronous downlink pilot codes.

[0011] Said step A2 further comprises steps:

- A21. numbering the peak power values ordered from the highest to the lowest and setting a current sequence number as predefined number of the base stations;
- A22. determining whether the highest peak power value and a peak power value corresponding to the current sequence number are greater than the given threshold, if so, setting the number of effective base stations from which the signals are received by a subscriber terminal as the value of the current sequence number, otherwise, the current sequence number decreases by one and returns back to step A22.

[0012] The method further comprises a step before said step A: reading vector data of 128 chips while receiving synchronous downlink pilot signals at the beginning of a downlink pilot time slot.

[0013] The method further comprises a step before said step B: multi-path combining signals of each base station.

[0014] Said step of multi-path combining signals of each base station comprises steps:

- beginning from a point of previously predetermined number of the peak power value, reading data of synchronous downlink pilot signals at a point which is 2 times of the predetermined value added length of said synchronous downlink pilot code;
- performing Max Ratio Combination after eliminating phase difference between symbols of multi-path synchronous downlink pilot signal with different time delay and the phase difference of delay path.

[0015] Said step B of combining the signals of each station corresponding to the number of effective base stations is: equal gain combining or weight combining signals of each base station corresponding to said effective base station number to obtain an combined signal sequence.

[0016] Said step C is to obtain a rough estimating value of the carrier frequency offset according to the phase difference between two symbols spaced by a defined distant in said combined signal sequence.

[0017] Said step C further comprises: estimating carrier frequency offset for a predefined times, and then averaging them to get a carrier frequency offset estimation.

[0018] Said step C is to sum up the phase differences between two symbols spaced by a defined distant in said combined signal sequence, and then computing the phase angle to get the carrier frequency offset estimation.

[0019] The invention also provides a device for estimating carrier frequency offset, which comprises at least:

a decision module for determining effective base station number from which signals are received by a subscriber terminal and a main path position of signal transmitted from each base station based on the signals received by a subscriber terminal, and then outputting the number of the effective base station and the main path position of each signal to an combining module;

an combining module for combining the signals from each base station corresponding to the number of effective base stations based on the main path position of signals and then outputting the combined signals to a carrier frequency offset acquiring module;

a carrier frequency offset acquiring module for obtaining a rough estimating value of the carrier frequency offset based on the combined signals.

[0020] Said device further comprises a multi-path combining module for multi-path combining the signals of each base station, and then outputting the multi-path combined signal to the combining module, if the base station number is greater than 1

[0021] According to a solution of the invention, when a subscriber terminal simultaneously receives SYNC_DL signals sent by a plurality of base stations (more than one) and their power differences are small, it is possible to make the carrier frequency offset in a subscriber terminal, after automatic frequency control, to meet the system requirement and thus improve the probability of success for the initiate search for a cell.

[0022] The method for estimating carrier frequency offset provided by the invention is especially suitable to a condition that the strengths and SIR of SYNC_DL signals received by a mobile user from several base stations are approximate among them, i.e., a mobile user is located at the joint edge of several cells, and with the method for carrier frequency offset estimation provided by the invention, the probability of success for the initiate search for a cell can be improved greatly. Even when the SYNC_DL signal received by a mobile user from one base station is much stronger and those received from other base stations are not so strong, the accuracy of adjustment for carrier frequency offset also can be improved by using the method for estimating carrier frequency offset provided by the invention. With respect to a method utilizing the SYNC_DL signals from one base station, the closer of the SYNC_DL signal strength and SIR from several base stations, the more improvement the accuracy of carrier frequency offset adjustment.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023]

FIG. 1 shows a schematic diagram of a prior art system having several base stations for estimating carrier frequency offset;

FIG. 2 shows a flow chart for estimating carrier frequency offset in a subscriber terminal according to the invention;

FIG. 3 is a detailed flow chart showing the determination of the SYNC_DL signals simultaneously received by a subscriber terminal from several base stations with the same frequency and the arriving time from its main path in the steps as shown in FIG. 2;

FIG. 4 is a flow chart principally showing the multi-path combination of the SYNC_DL signals received from one base station;

FIG.5 shows the simulation outcome according to an embodiment of the invention.

DETAILED DESCRIPTION

[0024] Hereinafter, detailed description will be made to a method and device for estimating carrier frequency offset in a subscriber terminal in TD-SCDMA system according to the embodiments of the invention, with reference to accompanying drawings, so that the invention will be well understood by those skilled in the art.

[0025] FIG. 2 shows a flow chart for estimating carrier frequency offset in a subscriber terminal according to the invention, and FIG. 3 is a detailed flow chart showing SYNC_DL signals simultaneously received by a subscriber terminal from several effective base stations with the same frequency and arriving time from respective main path determined in step 201 shown in FIG. 2.

[0026] The first step, in step 201, determine the SYNC_DL signals simultaneously received by a subscriber terminal from several effective base stations with the same frequency and the respective arriving time of their main path.

[0027] FIG. 3 illustrates the detailed flow chart in step 201. In step 301, after the synchronization of DwPTS in a subscriber terminal, 128 chips of data r are read beginning with the start of DwPTS, where the k th element is denoted as r_k , $k=0, 1, \dots, 127$.

[0028] Then, in step 302, shift complex correlation with the data r received at DwPTS to 32 groups of local SYNC_

DL codes respectively, shifting from 0 to 63, i.e., calculate the correlation power values of each point.

[0029] In step 303, the correlated power values for K frames are averaged ($K \geq 1$).

[0030] The signal powers for two successive frames arrived at a subscriber terminal may be different because of fading, etc.,. To ensure the accuracy of the data obtained in a subscriber terminal, it is preferable to calculate the correlation power by using more frames of data and then average them.

[0031] Then, in step 304, averaged correlation power values corresponding to SYNC_DL codes of each group in 32 groups are fined out; the arriving time for the SYNC_DL signals corresponding to the SYNC_DL codes are determined by the SYNC_DL codes, i.e., the arriving time for the main path of the SYNC_DL signals corresponding to the SYNC_DL codes; and, shift complex correlation with data r to the SYNC_DL codes to obtain the peak value of correlation power, which indicates the synchronization of received signals and the corresponding SYNC_DL codes.

[0032] In step 305, the peak values of the averaged correlation power are ordered in a falling sequence, and the first $N_{\max}$ ones are selected, denoted as $P_{\max}(n)$, $n=1, 2, \dots, N_{\max}$. $N_{\max}$ is a predefined value, and represents the max number of base stations in which a subscriber terminal receives the SYNC_DL signals from different base stations simultaneously.

[0033] In step 306, since a subscriber terminal is not able to know how many SYNC_DL signals are received simultaneously from base stations when it receives SYNC_DL signals, thus it is needed to determine the number N of effective base stations from which the SYNC_DL signals have been received simultaneously, based on a threshold, set the threshold V_T , and firstly decide whether the $N_{\max}$ th peak value of the averaged correlation power meets following condition:

$$\frac{P_{\max}(1)}{P_{\max}(N_{\max})} > V_T$$

[0034] If yes, $N = N_{\max}$; otherwise, continue to decide whether the $(N_{\max} - 1)$ th peak value of the averaged correlation power values meets following condition:

$$\frac{P_{\max}(1)}{P_{\max}(N_{\max} - 1)} > V_T$$

[0035] If yes, $N = N_{\max} - 1$; otherwise, the rest may be deduced by analogy, until the number N of effective base stations, from which a subscriber terminal receives the SYNC_DL signals simultaneously, is determined, where $1 \leq N \leq N_{\max}$. The SYNC_DL codes sequence number and the peak values point corresponding to each of the N base stations are recorded as Sync_ID_n and Peak_n respectively, where $n=1, 2, \dots, N$.

[0036] In the embodiment of the invention, $N_{\max}=3$, and $V_T=4$.

[0037] The second step, in step 202, combine multipath signals of SYNC_DL received from each effective base station respectively.

[0038] Then, the complex SYNC_DL codes numbered as Sync_ID_n are operated, and the complex values of SYNC_DL codes are marked as s_n , where the kth element is $s_{n,k}$, $k=0, 1, \dots, 63$. 64+2M points of data are read beginning from M chips ahead of Peak_n in the DwPTS of the received signals, marked as a vector e , where the kth element is e_k , $k=1, 2, \dots, 63+2M$.

[0039] e is shift complex correlated with s_n , and the result cor_n is obtained:

$$\text{cor}_{n,i} = \sum_{k=0}^{63} e_{i+k} \cdot s_{n,k}^*, \quad i=0, 1, \dots, 2M,$$

then the SYNC_DL signals of each paths are combined and a vector $\underline{u}_n$ is obtained:

$$U_{n,k} = \sum_{i=0}^{2M} e_{i+k} \cdot s_{n,k}^* \cdot \text{cor}_{n,i}^*, \quad k=0, 1, \dots, 63,$$

5

where, $s_{n,k}^*$ indicates a conjugate of $s_{n,k}$, and $\text{cor}_{n,i}^*$ indicates a conjugate of $\text{cor}_{n,i}$.

10 **[0040]** The physical meaning of the formula is to perform Max Ratio Combining of multi-path SYNC_DL signals with different time delay after eliminating the phase differences both between the symbols and between the time delay paths, in which, received signals e multiplied by the conjugate of $\underline{s}_n$ corresponds to eliminating the phase difference between symbols, and multiplied by the conjugate of $\underline{\text{cor}}_n$ corresponds to eliminating the phase difference between time delay paths.

15 **[0041]** The process of step 202 of multi-path combining SYNC_DL signals received from a subscriber terminal will be further described with reference to FIG. 4, as shown in FIG.4.

[0042] In step 401, $64+2M$ points of data are read beginning from M chips ahead of Peak_n in the SYNC_DL signals received at DwPTS, i.e., $64+2M$ received data is read beginning from M chips ahead of the position of the main path, and a complex sequence of $64+2M$ is obtained, $e(k)$, $k=0, 1, \dots, 63+2M$, marked as a vector $\underline{e}$, where 64 is the length of the SYNC_DL code.

20 **[0043]** In step 402, the SYNC_DL codes numbered SYNC_ID are complex operated and the complex SYNC_DL codes are obtained, i.e., the local complex SYNC_DL code sequence $s(k)$, $k=0, 1, \dots, 63$, marked as $\underline{s}_n$.

[0044] Then, in step 406, conjugating operation of each element of the sequence $s(k)$ is performed, and a sequence $s^*(k)$ is obtained.

25 **[0045]** Because $e(k+1)$ includes a phase shift, in order to eliminate the phase shift between subsequent two phases, in step 403, $\text{letd}(0,k) = e(k)$, $k=0, 1, \dots, 63$; in step 404, let $d(1,k)=e(k+1)$, $k=0, 1, \dots, 63, \dots$, and in step 405, let $d(2M, k) = e(k + 2M)$, $k=0, 1, \dots, 63$.

[0046] In step 407, each element of the sequence $d(i, k)$ ($i = 0, 1, \dots, 2M$, $k=0, 1, \dots, 63$) obtained in steps 403-405 is multiplied by the corresponding element of the sequence $s^*(k)$ obtained in step 406 respectively.

30 **[0047]** In step 408, all elements of the sequence obtained in step 407 are summed up and then conjugated. In steps 403 -step 408, shift multiplex correlation of $\underline{e}$ and $\underline{s}_n^*$ are performed, and a result $\underline{\text{cor}}_n$ is obtained as follows:

$$\text{cor}_{n,i} = \sum_{k=0}^{63} e_{i+k} \cdot s_{n,k}^*, \quad i=0, 1, \dots, 2M,$$

35

here, e_{i+k} is the $d(i,k)$ and the $e(i+k)$.

40 **[0048]** In step 409, the result of shift multiplex correlation is multiplied by all elements of the sequence, then, in step 410, all $2M+1$ sequences, i.e., multi-path combining the SYNC_DL signal of each path, are summed up and a vector U_n is calculated as follows:

$$U_{n,k} = \sum_{i=0}^{2M} e_{i+k} \cdot s_{n,k}^* \cdot \text{cor}_{n,i}^*, \quad k=0, 1, \dots, 63,$$

45

50 **[0049]** The value of M is integrally dependent on both the time delay extension of the received signals and the effect of noise. In the embodiment of the invention, $M = 4$.

[0050] The third step, in step 203, multi-path combined SYNC_DL signals of each base station are further combined. combining the multi-path combined SYNC_DL signals of each effective base station is to combine the calculation results of the SYNC_DL codes, and equal gain combination is used:

55

$$U_k = \sum_{n=1}^N U_{n,k}, \quad k=0, 1, \dots, 63;$$

and a weighting combination may also be used:

$$U_k = \sum_{n=1}^N U_{n,k} \cdot P_n, \quad k=0, 1, \dots, 63,$$

where the weighting coefficients P_n can be obtained by the following formula:

$$P_n = \sum_{i=0}^{2M} |\text{cor}_{n,i}|^2, \quad i = 0, 1, \dots, 2M, \quad n = 1, 2, \dots, N,$$

[0051] Because there is coherent property among the SYNC_DL signals from each effective base station while non-coherent property among noises, it is possible to improve the SNR (or SIR) of available signals by combining the multi-path combined SYNC_DL signals from each effective base station so that the SYNC_DL signals received by a subscriber terminal may be efficiently utilized.

[0052] Based on theory formula, the sequence combined by the SYNC_DL signals from each effective base station can be approximately represented as follows:

$$U_k = A_k \cdot \exp(j \cdot 2\pi \cdot \Delta f \cdot k \cdot T_C + \phi_0) + N_k, \quad k=0, 1, \dots, 63,$$

where, U_k is the k th symbol value in the combined SYNC_DL signal sequence, $k=0, 1, \dots, 63$;

A_k is magnitude of combined SYNC_DL signals valid in the k th symbol;

$\exp(x)$ indicates exponent operation of complex x ;

Δf is carrier frequency offset, which is the exact value in theory;

T_C is pulse width of each chip;

ϕ_0 is initial phase of the SYNC_DL signals received by a subscriber terminal, range of which is between $0 \sim 2\pi$;

N_k is the complex noise value or interference noise value in the k th symbol.

[0053] The fourth step, in step 204, rough estimation values of carrier frequency offset are calculated by using the combined signals.

[0054] Based on the theoretical formula in step 203, it can be seen from the expression of U_k that in the combined SYNC_DL signal sequence, a variation rate of phase between symbols is associated with a carrier frequency offset Δf .

Therefore, a carrier frequency offset can be roughly estimated by using the combined SYNC_DL signal sequence. In one embodiment of the invention,

$$\hat{\Delta f} = \frac{1}{2\pi \cdot L \cdot T_C} \frac{1}{P} \sum_{k=0}^{P-1} \text{angle}(U_k^* \cdot U_{k+L}),$$

[0055] Where $\hat{\Delta f}$ is a rough estimation of the carrier frequency offset, T_C is a pulse width of each chip, and $\text{angle}(x)$ is an operation of the phase angle of complex x . Values P and L will meet formula: $P+L \leq 64$, and $P \geq 1, L \geq 1$.

[0056] Above formula indicates the effect of noise (or interference) can be minimized by using a phase difference between two symbols spaced by L to estimate the carrier frequency offset, and then averaging the estimated values for P times.

[0057] In another embodiment of the invention,

$$\Delta \hat{f} = \frac{1}{2\pi \cdot L \cdot T_C} \text{angle} \left[\sum_{k=0}^{P-1} (U_k^* \cdot U_{k+L}) \right],$$

[0058] Where $\Delta \hat{f}$ is rough estimated value of the carrier frequency offset, T_C is pulse width of each chip, and $\text{angle}(x)$ presents the operation of the phase angle of complex x . Values P and L will meet formula: $P+L \leq 64$, and $P \geq 1$, $L \geq 1$.

[0059] In order to minimize calculating amount of repeatedly calculating phase angle, the above formula indicates to firstly sum up the phase differences between two symbols spaced L , and then calculate phase angles to estimate the carrier frequency offset.

[0060] Due to the phases of two consecutive symbols are close together, an angle jitter of the multiplied phase angle will be greater. Therefore, it is preferable to multiply two symbols spaced L to avoid the angle jitter to be more great.

[0061] In the embodiment of the invention, $P = L = 320$

[0062] The invention also provides an device for estimating carrier frequency offset in a subscriber terminal, which corresponding to the steps shown in FIG.2, comprising a decision module for determining number of base stations, from which the subscriber terminal receives SYNC_DL signal, based on the SYNC_DL signal received by the subscriber terminal and the main path positions of the SYNC_DL signals from each base station, and then outputting the number of effective base stations and the main path position of each signal to an combining module; an combining module for multi-path combining the SYNC_DL signal from each effective base station based on the main path position of a signal, and then combining the multi-path combined SYNC_DL signal of each effective base station. The number of SYNC_DL signal in each effective base station to be combined is the number of effective base stations determined in the decision module, and then outputting the combined SYNC_DL signal to a frequency offset acquiring module; and a frequency offset acquiring module for estimating carrier frequency offset of the subscriber terminal according to the combined SYNC signals received. The device may further comprises a multi-path combining module for multi-path combining the signals from each effective base station and outputting the multi-path combined signal to the combining module.

[0063] FIG.5 shows the simulation outcome of the embodiment of the invention. In this simulation, we assume that the subscriber terminal (UE) receives simultaneously the SYNC_DL signal from 3 base stations having same frequency, and the relative power received from three base stations are 0dB, -0.5dB and -1dB respectively, with corresponding SNR of 3dB, 2.5dB and 2dB. The deviation of a carrier frequency from a nominal frequency of these 3 base stations are uniformly distributed within (-100Hz, 100Hz). The relative path time delays of the three SYNC signals received by the subscriber terminal are distributed uniformly within 0-4 chips, with time delay resolution of 1/8 chip. The initial carrier frequency offset of UE is distributed uniformly within (-10kHz, 10kHz). The channel condition is an additive white Gaussian noise (AWGN) channel.

[0064] UE carrier frequency offset is roughly adjusted by using the method provided by the invention. Parameters are selected as follows: $K=4$, $V_T=4$, $M=4$. The simulation outcome is shown in Figure 5. $N_{\max}=1$ indicates that the carrier frequency offset is estimated by using the SYNC signal from one base station, $N_{\max}=2$ indicates that the carrier frequency offset is estimated by using the SYNC signal from two base stations, at most, having same frequency, and $N_{\max}=3$ indicates that the carrier frequency offset is estimated by using the SYNC signal from three base stations, at most, having a same frequency. It can be seen from FIG.5, when UE simultaneously receives the SYNC signals from 3 base stations having same frequency and transmission powers from each base station is not much different from each other, if the carrier frequency offset is estimated by using the SYNC signal only from one base station ($N_{\max}=1$), then there is still about 27% of carrier frequency offset to be over 1kHz after AFC. But if the carrier frequency offset is estimated by using the SYNC signal from three base stations having same frequency, it is possible to keep the carrier frequency offset under 1kHz and the adjustment accuracy thereof will be increased greatly.

[0065] In summery, the description above is only the preferred embodiments of the invention but will not limit the protection scope of the invention.

Claims

1. A method for estimating carrier frequency offset in subscriber terminals, said method comprises steps:

- A. determining number of effective base stations from which more than one signals are received by a subscriber terminal and main path positions of each signal;
- B. combining the signals of each station corresponding to said number of effective base stations based on the main path positions obtained in step A;

C. calculating a rough estimation value of the carrier frequency offset based on combined signal in step B.

2. A method as claimed in claim 1, wherein said determining number of effective base stations from which more than one signals are received by a subscriber terminal in step A comprises steps:

A1. calculating peak power value of each signal received by a subscriber terminal, and selecting the peak power values of predefined number of base stations from higher to lower;

A2. determining the number of effective base stations from predefined number of signals are received by the subscriber terminal by comparing the ratio of the highest peak power value from the order in step A1 to the subsequent peak power values with the given threshold.

3. A method as claimed in claim 2, wherein said signals are synchronous downlink pilot signals, and said step A1 further comprises steps:

A11. shift multiple correlating a local synchronous downlink pilot code and a received synchronous downlink pilot signal results in a power value of the synchronous downlink pilot signals received by the subscriber terminal ;
A12. determining peak power values corresponding to each of the synchronous downlink pilot codes.

4. A method as claimed in claim 3, wherein said method further comprises steps in between step A11 and step A12: selecting the power values of each frame of more than one frames and averaging said power values of each frame.

5. A method as claimed in claim 2, wherein said step A2 further comprises steps:

A21. numbering the peak power values ordered from the highest to the lowest and setting a current sequence number as predefined number of the base stations;

A22. determining whether the highest peak power value and a peak power value corresponding to the current sequence number are greater than the given threshold, if so, setting the number of effective base stations from which the signals are received by a subscriber terminal as the value of the current sequence number, otherwise, the current sequence number decreases by one and returns back to step A22.

6. A method as claimed in claim 1, further comprises a step before said step A: reading vector data of 128 chips while receiving synchronous downlink pilot signals at the beginning of a downlink pilot time slot.

7. A method as claimed in claim 2, further comprises a step before said step B: multi-path combining signals of each base station.

8. A method as claimed in claim 7, wherein said step of multi-path combining signals of each base station comprises steps:

beginning from a point of previously predetermined number of the peak power value, reading data of synchronous downlink pilot signals at a point which is 2 times of the predetermined value added length of said synchronous downlink pilot code;

performing Max Ratio Combination after eliminating phase difference between symbols of multi-path synchronous downlink pilot signal with different time delay and the phase difference of delay path.

9. A method as claimed in claim 1, wherein said step B of incorporating the signals of each station corresponding to the number of base stations is:

to equal gain combining or weighting combining signals of each base station corresponding to said base station number to obtain an combined signal sequence.

10. A method as claimed in claim 9, wherein said step C is to obtain a rough estimating value of the carrier frequency offset according to the phase difference between two symbols spaced by a defined distant in said combined signal sequence.

11. A method as claimed in claim 10, wherein said step C further comprises: estimating carrier frequency offset for a predefined times, and then averaging them to get a carrier frequency offset estimation.

12. A method as claimed in claim 10, wherein said step C is to sum up the phase differences between two symbols spaced by a defined distant in said incorporated signal sequence, and then computing the phase angle to get the carrier frequency offset estimation.

13. A device for estimating carrier frequency offset, said device comprises at least:

a decision module for determining base station number from which signals are received by a subscriber terminal and a main path position of signal transmitted from each base station based on the signals received by a subscriber terminal, and then outputting the number of the effective base station and the main path position of each signal to an combining module;

a combining module for combining the signals from each base station corresponding to the number of effective base stations based on the main path position of signals and then outputting the combined signals to a carrier frequency offset acquiring module;

a carrier frequency offset acquiring module for obtaining a rough estimating value of the carrier frequency offset based on the combined signals.

14. A device as claimed in claim 13, wherein said device further comprises a multi-path combining module for multi-path combining the signals of each base station, and then outputting the multi-path combined signal to the combining module, if the effective base station number is greater than 1.

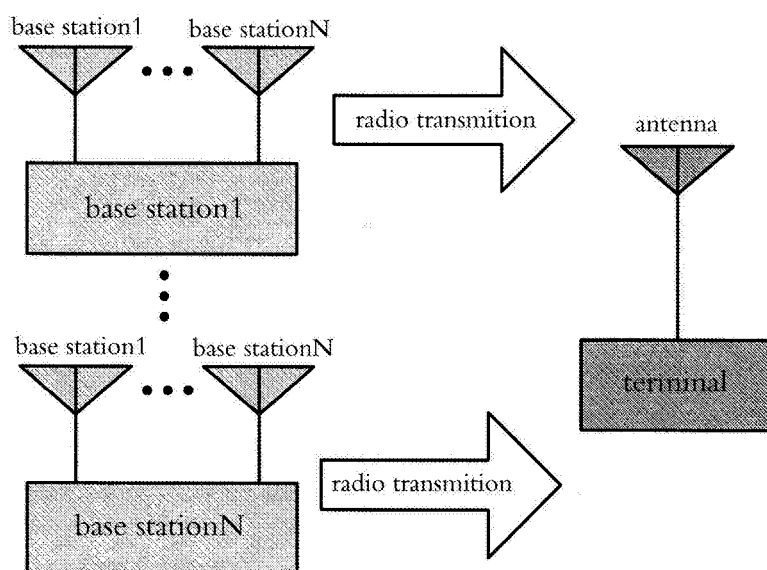


FIG. 1

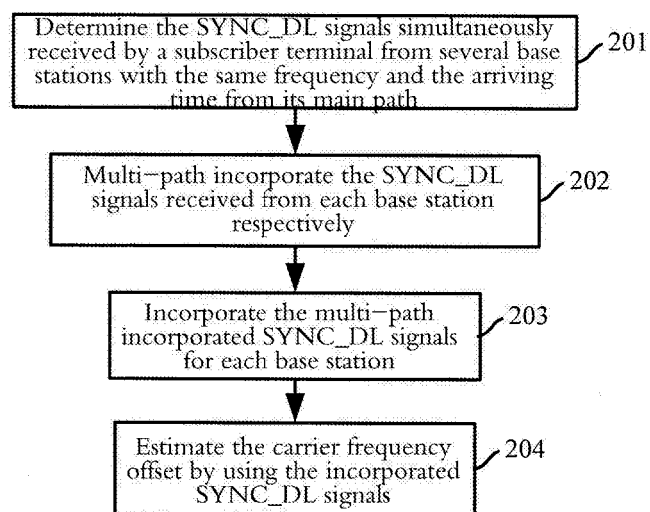


FIG. 2

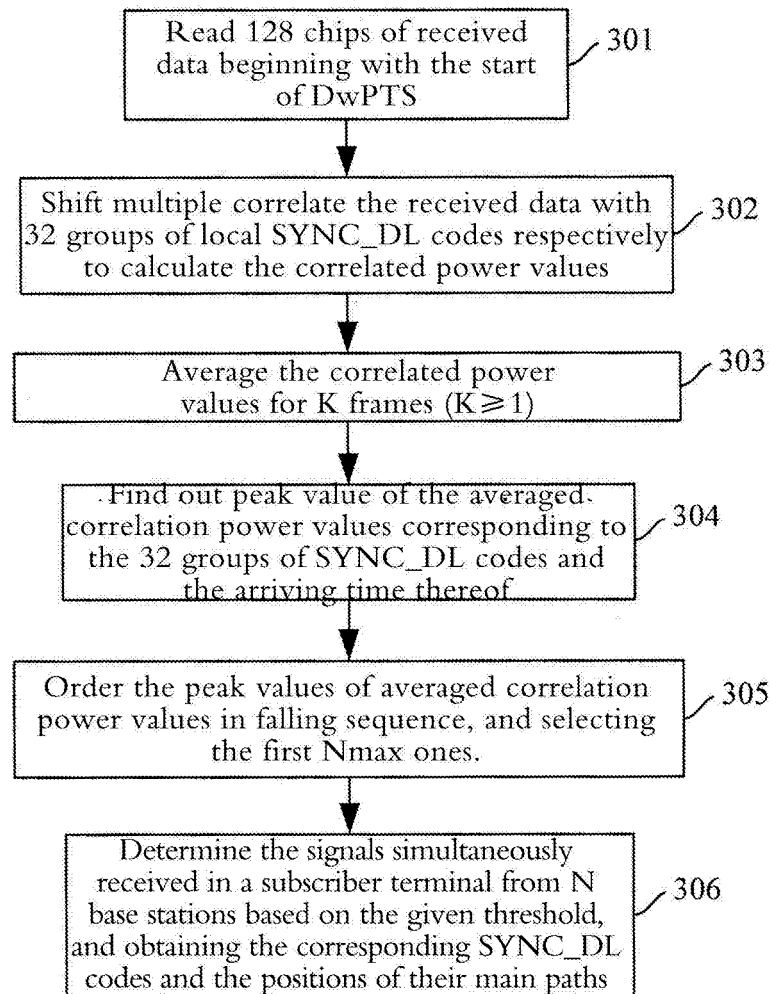


FIG. 3

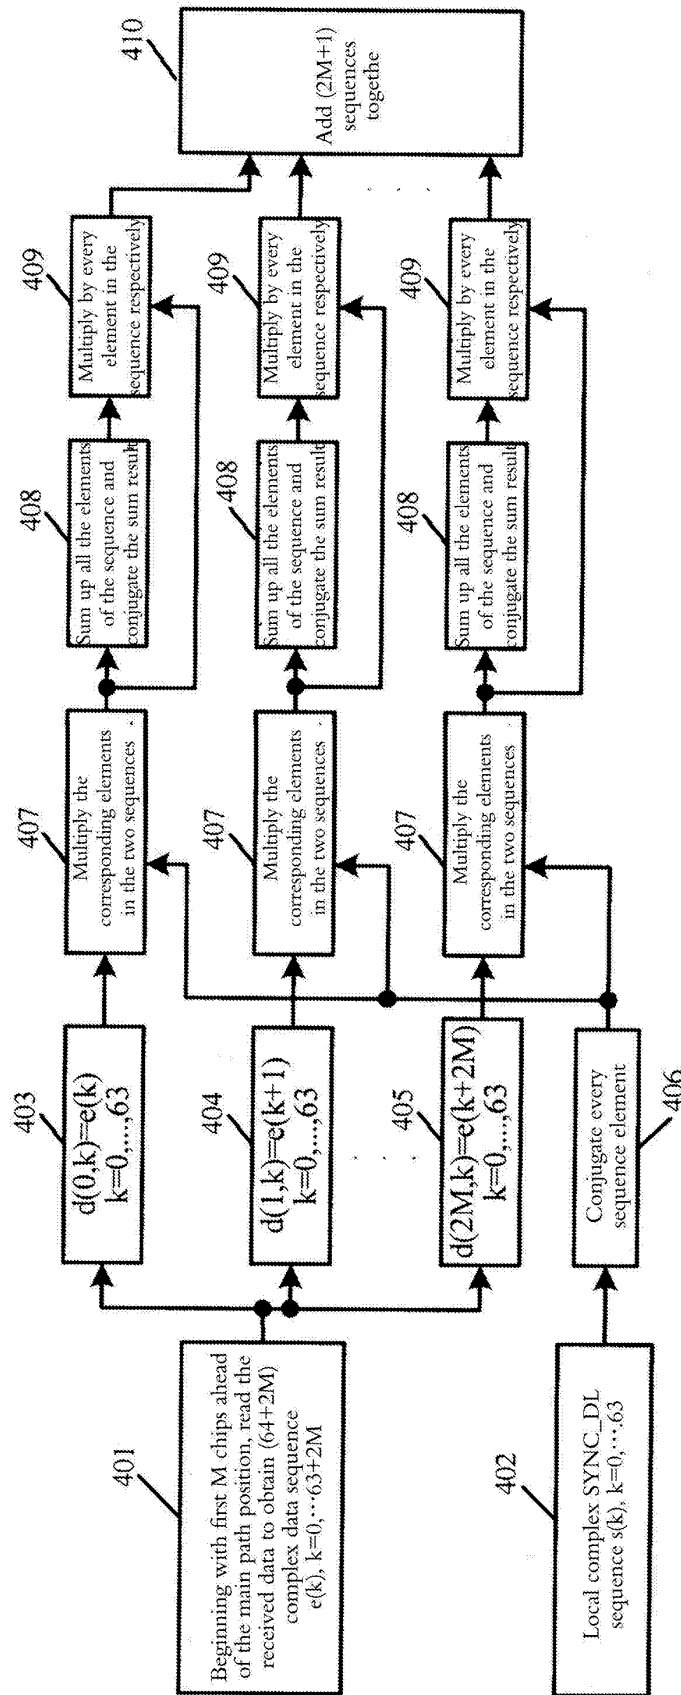


FIG. 4

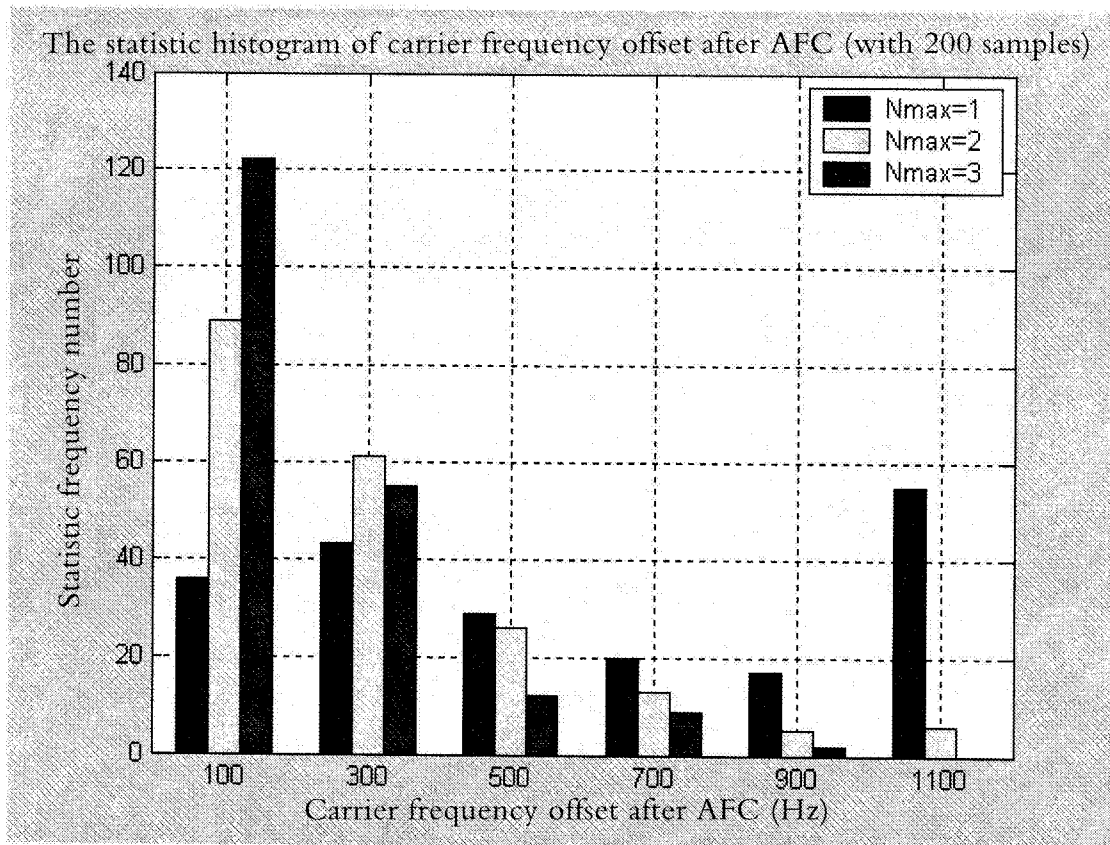


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2004/000898

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁷: H04J11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁷: H04J11/00 H04Q9/04 H04Q7/22 H04Q7/20 H04B1/707 H04N7/173 H04B7/212

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, PAJ, CNPAT

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN,A,1404662 (NEC CORP .ETAL) 19.Mar 2003 (19.03.03) see the whole document	1-14
A	CN,A,1315808 (CHINA ACAD TELECOM TECHNOLOGY ETAL) 03.Oct 2001 (03.10.01) see the whole document	1-14
A	CN,A,1286587 (ZHONGXING COMMUNICATION CO LTD SHENZHEN) 07.Mar 2001 (07.03.01) see the whole document	1-14
A	CN,A,1205142 (NOKIA TELECOM OY) 13.Jan 1999 (13.01.99) see the whole document	1-14
A	CN,A,1175171 (BEIJING XINWEI COMMUNICATION TECH CO LTD) 04.Mar 1998 (04.03.98) see the whole document	1-14

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
03, Sep 2004 (03.09.04)

Date of mailing of the international search report

16 · SEP 2004 (16 · 09 · 2004)

Name and mailing address of the ISA/
6 Xitucheng Rd., Jimen Bridge, Haidian District,
100088 Beijing, China
Facsimile No. 86-10-62019451

Authorized officer

Wang, Xiaoli

Telephone No. (86-10)62084536



INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2004/000898

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN1404662A	19.03.03	US2003142733 A1	31.07.03
		GB2359456 A	22.08.03
		WO0161880 A1	23.08.01
		AU200134091 A	27.08.01
		EP1256187 A1	13.11.02
		JP2003523688T	05.08.03
CN1315808A	03.10.01	NONE	
CN1286587A	07.03.01	NONE	
CN1205142A	13.01.99	US6282185 B1	28.08.01
		WO9810542 A2	12.03.98
		FI9603479 A	06.03.98
		AU4210697 A	26.03.98
		NO9802013 A	06.07.98
		EP0872060 A2	21.10.98
		FI102577B B1	31.12.98
		JP11514827T	14.12.99
		AU723045 B	19.08.00
CN1175171A	04.03.98	NONE	

Form PCT/ISA /210 (extra sheet) (January 2004)