



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
16.08.2006 Bulletin 2006/33

(51) Int Cl.:
H03M 7/30 (2006.01)

(21) Application number: **06250647.2**

(22) Date of filing: **07.02.2006**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**
Designated Extension States:
AL BA HR MK YU

(72) Inventors:
• **Nishide, Yoshiaki,**
c/o Sony Corporation
Shinagawa-ku,
Tokyo 141 (JP)
• **Ikeyama, Hiromasa,**
c/o Sony Corporation
Shinagawa-ku,
Tokyo 141 (JP)

(30) Priority: **08.02.2005 JP 2005031205**

(71) Applicant: **SONY CORPORATION**
Tokyo 141 (JP)


(74) Representative: **Leppard, Andrew John et al**
D Young & Co
120 Holborn
London EC1N 2DY (GB)

(54) **Quantization-precision-reproduction method, quantization-precision-reproduction device, image-pickup device, information-processing device, and program**

(57) A quantization-precision-reproduction method including the steps of reproducing an m-bit-length high-precision component lower than or equal to quantization precision of an n-bit-length digital signal on the basis of

the n-bit-length digital signal, and generating an n + m-bit-length digital signal by adding the reproduced m-bit-length high-precision component to a low-order bit of the n-bit-length digital signal is provided.

FIG. 1

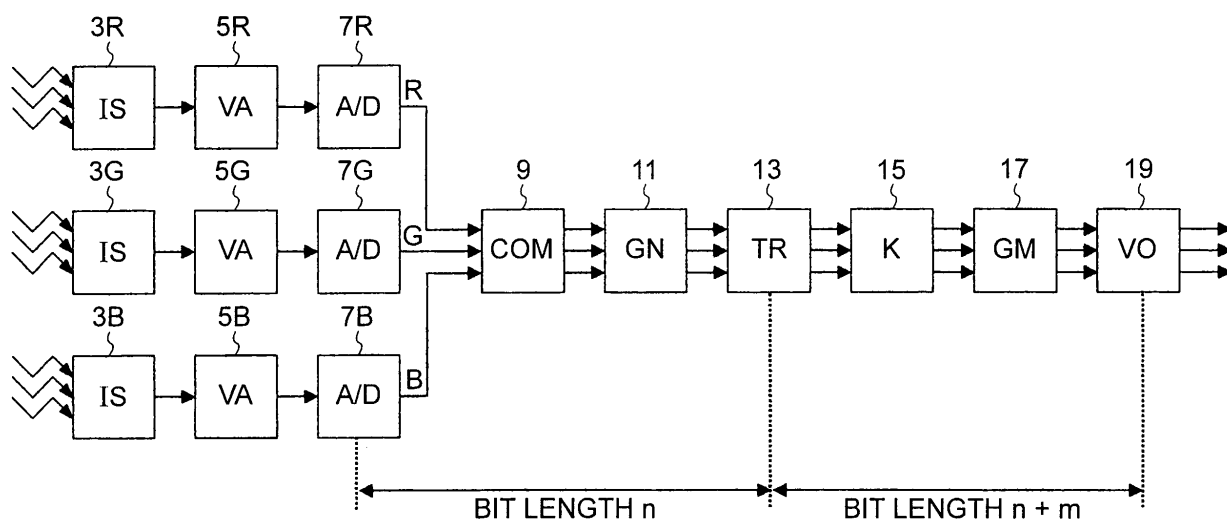

Description

[0001] The present invention relates to a method for reproducing the quantization precision of a digital signal. The present invention is achieved, so as to be used, as one of the functions of a quantization-precision-reproduction device, an image-pickup device, and an information-processing device. Further, the present invention is achieved, as a program adapted to control the above-described devices.

[0002] Here, the digital signal for processing includes a signal in an ultimate form acting on the sensory organs of a person, such as a video signal, an audio signal, and so forth, a signal transmitted from a measuring device, a communication signal, and data read from a recording medium.

[0003] When an analog signal is converted into a digital signal, the information amount of the digital signal is determined by a sampling frequency and the quantization-bit number. The sampling frequency determines the maximum frequency that can be represented by Nyquist's theorem and the quantization-bit number determines precision in an amplitude direction. Namely, the quantization-bit number determines the minimum change amount of the digital signal.

[0004] If the determined minimum change amount is too large with reference to a signal for representation, a quantization distortion is perceived by a person. Therefore, it is favorable to increase the number of quantization bits for an output signal, so as to reproduce an image with smooth gray scale.

[0005] In general, however, the performance of an analog-to-digital conversion (A/D conversion) device is limited. Therefore, it is difficult to increase the quantization-bit number appropriately. Further, it is often difficult to use an A/D converter configured to achieve a large number of quantization bits from the viewpoint of the manufacturing cost.

[0006] Subsequently, there have been proposed methods for reducing the quantization distortion, which is useful in the case where the quantization-bit number is insufficient with reference to the dynamic range of an input signal.

[0007] For example, there has been proposed a method for increasing the bit number in the least-significant-bit direction and inserting a random noise into the part corresponding to the increased bit number.

[0008] Further, there has been proposed a method for switching between an output signal transmitted from a low-pass filter and an original signal according to the characteristic of the original signal.

[0009] For example, Japanese Unexamined Patent Application Publication No. 2003-259368 discloses technologies relating to the above-described methods.

[0010] The former method described above uses the sensory characteristics of a person. Namely, the method is adapted to make the person perceive a fine value change in a part where no value change occurs. Accord-

ing to the above-described method, however, the random noise may be raised to a high-order bit and perceived by the person, when the gain of the original signal is increased.

[0011] The latter method described above allows decreasing noise components while switching between the output signal of the low-pass filter and the original signal. However, if the above-described switch is not performed successfully, there may be a significant high-frequency-component drop.

[0012] Accordingly, inventors who filed this patent application propose a configuration adapted to reproduce a high-precision component lower than or equal to the quantization precision of an original signal while maintaining the information of the original signal.

[0013] Namely, the inventors propose a quantization-precision-reproduction method including the steps of:

- (a) reproducing an m-bit-length high-precision component lower than or equal to quantization precision of an n-bit-length digital signal on the basis of the n-bit-length digital signal, and
- (b) generating an n + m-bit-length digital signal by adding the reproduced m-bit-length high-precision component to a low-order bit of the n-bit-length digital signal.

[0014] According to the above-described method, it becomes possible to reproduce a high-precision component lower than or equal to that of an original signal. Further, since information about the original signal can be maintained in a digital signal or the reproduced high-precision component, as it is, it becomes possible to prevent the original signal from being deteriorated when the high-precision component is reproduced.

[0015] Further particular and preferred aspects of the present invention are set out in the accompanying independent and dependent claims. Features of the dependent claims may be combined with features of the independent claims as appropriate, and in combinations other than those explicitly set out in the claims.

[0016] The present invention will be described further, by way of example only, with reference to preferred embodiments thereof as illustrated in the accompanying drawings, in which:

Fig. 1 shows the configuration of an example image-pickup system;

Fig. 2 shows a quantization-precision-reproduction circuit according to an embodiment of the present invention;

Fig. 3 shows example procedures performed for generating a quantization-precision-reproduction signal; Fig. 4A shows an effect produced by increasing a dynamic range;

Fig. 4B also shows the effect produced by increasing the dynamic range;

Fig. 4C also shows the effect produced by increasing

the dynamic range;

Fig. 5 shows a quantization-precision-reproduction circuit according to another embodiment of the present invention;

Fig. 6 shows the theory of high-precision-component generation using a low-pass filter;

Fig. 7 shows example procedures performed for generating another quantization-precision-reproduction signal;

Fig. 8 shows a quantization-precision-reproduction circuit according to another embodiment of the present invention;

Fig. 9 shows a quantization-precision-reproduction circuit according to another embodiment of the present invention;

Fig. 10 shows a quantization-precision-reproduction circuit according to another embodiment of the present invention;

Fig. 11 shows a quantization-precision-reproduction circuit according to another embodiment of the present invention;

Fig. 12 shows the configuration of an example communication system;

Fig. 13A shows the configuration of an example information-processing device; and

Fig. 13B shows the configuration of another example information-processing device.

[0017] Hereinafter, technologies according to embodiments of the present invention will be described.

[0018] It is to be noted that at least one of commonly and/or publicly known technologies in the field of the technologies according to the embodiments of the present invention is used for part that is not shown and/or disclosed in this specification.

[0019] Further, the present invention is not limited to any one of the following embodiments.

(A) Embodiments

[0020] In the following description, technologies related to embodiments of the present invention are used for an information-processing device configured to process image data. Here, an image-pickup system is described, as the above-described information-processing device, for example.

(A-1) System Configuration

[0021] Fig. 1 shows an example configuration of the above-described image-pickup system, wherein a signal red (R), a signal green (G), and a signal blue (B) are processed in parallel. However, the example configuration shown in Fig. 1 can be used for an image-pickup system configured to process a brightness signal and a color-difference signal in parallel and/or an image-pickup system configured to process a composite signal.

[0022] Hereinafter, each of elements of the image-

pickup system will be described.

[0023] Each of image sensors 3R, 3G, and 3B is provided, as a photoelectric-conversion element configured to convert an optical signal into an electric signal. The image sensor 3R transmits a signal red (R), the image sensor 3G transmits a signal green (G), and the image sensor 3B transmits a signal blue (B). Hereinafter, a signal transmitted from each of the image sensors 3R, 3G, and 3B is referred to as a color signal.

[0024] The above-described color signal may be either a video signal or a still-image signal.

[0025] Each of video amplifiers (VA) 5R, 5G, and 5B is provided, as an amplifier element configured to adjust the level of the color signal to a desired signal level. More specifically, each of the video amplifiers 5R, 5G, and 5B adjusts the color-signal level so that the dynamic range of an amplified electric signal agrees with the allowable input range of each of analog-to-digital (A/D) converters 7R, 7G, and 7B.

[0026] Each of the A/D converters 7R, 7G, and 7B is a processing device configured to convert the color signal which is generated, as an analog signal into a digital signal. Here, the color signal converted into the digital signal is represented as n bits, where the letter n indicates a natural number. For example, an expression $n = 8$ holds.

[0027] A correction circuit (COM) 9 is provided, as a processing device configured to perform correction including edge correction, white-balance correction, sensitivity correction, and so forth.

[0028] A gain-adjustment circuit (GN) 11 is configured to adjust the gain of each of the color signals, so as to perform appropriate post processing. At that time, each of the color signals has become an n-bit-length digital signal.

[0029] A quantization-precision-reproduction circuit (TR) 13 is a processing device configured to reproduce the quantization precision of each of the color signals.

[0030] As a rule, the quantization-precision-reproduction circuit (TR) 13 reproduces a high-precision component lower than or equal to the quantization precision of an original signal while maintaining information about the original signal. More specifically, the quantization-precision-reproduction circuit (TR) 13 reproduces m-bit-length data, as the high-precision component.

[0031] In that case, the high-precision component provided, as the m-bit-length data is reproduced from an n-bit-length color signal, that is, the original signal. The letter m indicates a natural number. For example, an expression $m = 2$ holds.

[0032] The quantization-precision-reproduction circuit (TR) 13 adds the reproduced m-bit-length data, that is, the high-precision component to a low-order bit of the n-bit-length color signal so that the n-bit-length color signal is converted into a digital signal of an $n + m$ -bit-length. As a result, it becomes possible to reduce the minimum change amount that can be represented.

[0033] A knee-correction circuit (K) 15 is a processing device configured to compress the level of the color signal

so that the dynamic range of the color signal falls within a predetermined range.

[0034] A gamma-correction circuit (GM) 17 is a processing device configured to correct the gray-scale characteristic of the color signal so that there is an inverse relationship between the gray-scale characteristic and the gamma characteristic of an output device. If a monitor is used, as the output device, the gamma coefficient thereof is usually 2.2. A printer may also be used, as the output device.

[0035] An output-signal-generation circuit (VO) 19 is a processing device configured to convert the color signal transmitted thereto into a signal in an ultimate output form and transmit the converted signal.

[0036] As has been described, the image-pickup device includes commonly known components except for the quantization-precision-reproduction circuit (TR) 13. By using the quantization-precision-reproduction circuit (TR) 13, when the data corresponding to the least significant bit is raised to a high-order bit by the gain-adjustment circuit (GN) 11 and the gamma-correction circuit (GM) 17, it becomes possible to make up for the gray-scale shortage of an output image.

[0037] The above-described image-pickup system can be used for a video-camera system and/or a digital-camera system.

(B) Configuration of Quantization-precision-reproduction circuit

[0038] Next, the configurations of quantization-precision-reproduction circuits according to embodiments of the present invention will be described. Each of the quantization-precision-reproduction circuits is configured to reproduce a digital signal with quantization precision higher than that of the digital signal obtained by each of the A/D converters 7R, 7G, and 7B.

(B-1) First Embodiment

[0039] Fig. 2 shows a quantization-precision-reproduction circuit 21 according to a first embodiment of the present invention. The quantization-precision-reproduction circuit 21 includes a high-precision-component-generation unit 23 and a high-precision-component-load unit 25.

[0040] The high-precision-component-generation unit 23 is a processing device configured to generate a signal component (a high-precision component) on the basis of a digital signal (an original signal) of n bits so that the signal component is lower than or equal to the quantization precision of the n -bit digital signal. Here, a low-order- m -bit signal component is generated, as shown by parts (A) and (B) shown in Fig. 3.

[0041] For example, where an expression $m = 1$ holds, the information corresponding to one-half of the minimum-change width of the original signal is generated. Further, where an expression $m = 2$ holds, the information

corresponding to one-fourth of the minimum-change width of the original signal is generated.

[0042] Unlike the random noise, the above-described m -bit information is highly correlated with the original signal.

[0043] The high-precision component can be generated by performing known interpolation processing. For example, the high-precision component can be generated by performing filtering, over sampling, and so forth.

[0044] The high-precision-component-addition unit 25 is a processing device configured to add the generated m -bit-high-precision component to a low-order bit of the n -bit digital signal so that a digital signal with increased quantization precision (a quantization-precision-reproduction signal) is generated (see part (C) of Fig. 3).

[0045] As is the case with part (C) of Fig. 3, the information about the original signal is used, as it is, as high-order- n -bit information. That is to say, basic waveform information is maintained, as it is, which shows that a basic waveform does not change irrespective of whether or not the high-precision component is added.

[0046] Subsequently, when the high-precision component is reproduced, the original signal does not deteriorate. On the contrary, it becomes possible to reduce noise components, which can be hardly achieved by using known technologies.

[0047] Further, since a signal with predetermined quantization precision higher than that of the A/D converter can be generated, the following effects can be expected.

[0048] For example, it becomes possible to increase the dynamic range of an analog signal transmitted to the A/D converter (see Figs. 4A and 4C). This is because the quantization-precision-reproduction circuit 21 can reproduce information with quantization precision lower than or equal to that of the original signal, even though the minimum-change level of a signal transmitted from the A/D converter increases.

[0049] In the case of the known systems, it is difficult to reproduce precision higher than that of a signal transmitted from the A/D converter by performing post processing. Therefore, it is preferable that the dynamic range of an analog signal is adjusted so that the dynamic range matches with that of the A/D converter, as shown in Fig. 4B.

[0050] Naturally, the dynamic range of the analog signal transmitted to the A/D converter is limited and part of information about the analog signal is lost.

(B-2) Second Embodiment

[0051] Fig. 5 shows a quantization-precision-reproduction circuit 31 according to a second embodiment of the present invention. The quantization-precision-reproduction circuit 31 includes a low-pass filter 33, a high-precision-component-separation unit 35, and a high-precision-component-addition unit 37. The low-pass filter 33 and the high-precision-component-separation unit 35

correspond to the above-described high-precision-component-generation unit 23.

[0052] The low-pass filter 33 generates a digital signal of an $n + m$ bit length, where the digital signal includes a signal component (a high-precision component) lower than or equal to the quantization precision of the original signal. The calculation-word length of the low-pass filter 33 corresponds to $n + m$ bits or more.

[0053] Fig. 6 shows an example signal transmitted from the low-pass filter 33, where the expression $m = 1$ holds. In the case of Fig. 6, a digital signal which is used, as the original signal, is of an 8-bit length. For example, by calculating the average value of two digital signals, an output signal of 9 bits including bit information with quantization precision lower than or equal to the quantization precision of the original signal can be generated (see part (C) of Fig. 6).

[0054] Further, part (A1) and part (A2) of Fig. 6 show two digital signals for processing. Further, part (B) of Fig. 6 shows a result obtained by adding the two digital signals to each other. Further, part (C) of Fig. 6 shows a result of adjusting the gain of the digital signal shown in part (B) of Fig. 6. In that case, the least significant bit shown in part (D) of Fig. 6 corresponds to a high-precision component.

[0055] By performing the above-described processing procedures, the low-pass filter 33 generates a low-pass-output signal of an $n + m$ -bit length, as shown by part (B) of Fig. 7. Part (A) of Fig. 7 shows a digital signal of an n -bit length, that is, the original signal.

[0056] The high-precision-component-separation unit 35 is a processing device configured to separate the digital signal corresponding to low-order m bits from a low-pass-output signal of an $n + m$ -bit length, as a high-precision component, as shown by part (C) of Fig. 7.

[0057] The high-precision-component-addition unit 37 adds the generated m -bit high-precision component to a low-order bit of the n -bit digital signal so that a digital signal with increased quantization precision is generated, as shown by part (D) of Fig. 7.

[0058] The use of the above-described quantization-precision-reproduction circuit 31 allows achieving the same effects as those of the first embodiment.

(B-3) Third Embodiment

[0059] Thus, by using the quantization-precision-reproduction circuit 31 according to the second embodiment, it becomes possible to obtain a smooth image with the gray-scale information corresponding to quantization precision higher than that of the A/D converter.

[0060] On the other hand, according to a method for reproducing quantization precision by using a filter, the frequency characteristic of a high-precision component may become lower than that of the original signal. For example, according to the second embodiment, all of high-frequency components drop slightly.

[0061] As a bit length for addition increases, the above-

described drop becomes significant. Further, as the number of reproduced bits for addition increases, the ringing of a high-pass filter often occurs, for example, at a part where the values of the high-frequency components significantly change (e.g., an edge).

[0062] On the other hand, a person has such a perception characteristic that the person easily perceives insufficient quantization precision at a flat part where the number of high-frequency components is low. On the contrary, according to the perception characteristic, a person hardly perceives insufficient quantization precision (deteriorated image quality) at a part where the number of high-frequency components is high.

[0063] In a third embodiment of the present invention, a quantization-precision-reproduction circuit configured to achieve improved image quality by using the perception characteristic of a person will be described.

[0064] Fig. 8 shows a quantization-precision-reproduction circuit 41 according to the third embodiment. In Fig. 8, the same parts as those shown in Fig. 5 are designated by the same reference numerals, so as to omit the description thereof.

[0065] The quantization-precision-reproduction circuit 41 includes the low-pass filter 33, the high-precision-component-separation unit 35, the high-precision-component-addition unit 37, a high-frequency-detection unit 43, and a high-frequency-component-adjustment-and-output unit 45. That is to say, the quantization-precision-reproduction circuit 41 is different from the above-described quantization-precision-reproduction circuits in that it includes the high-frequency-detection unit 43 and the high-frequency-component-adjustment-and-output unit 45.

[0066] The high-frequency-detection unit 43 is a processing device configured to detect at least one high-frequency component included in the n -bit-length digital signal, that is, the original signal. As the number of the high-frequency component increases, a detected output value becomes high.

[0067] The above-described determination processing may be performed for each of separated areas. Otherwise, above-described determination processing may be performed on a screen-by-screen basis.

[0068] In the third embodiment, the determination processing is performed for each color signal. However, the determination processing may be collectively performed for the three types of color signals. Further, the determination processing may be performed on the basis of a brightness signal generated from the color signal.

[0069] As a result, the high-frequency-detection unit 43 transmits information about whether or not an original signal for processing includes a large number of high-frequency components (namely, information about whether or not the number of high-frequency components is high), as a detection signal.

[0070] The high-frequency-component-adjustment-and-output unit 45 is a processing device configured to adjust the effect of quantization-precision reproduction

according to the result of high-frequency-component detection.

[0071] The high-frequency-component-adjustment-and-output unit 45 generates an output signal by increasing and/or decreasing the combination ratio of the original signal (an n-bit digital signal) and the quantization-precision-reproduction signal (= original signal + high-precision component) in a complementary manner.

[0072] For example, the output signal is generated by performing a calculation shown as "original signal $\times$ / 100 + quantization-precision-reproduction signal $\cdot$ (1 - x / 100)". Here, a variable x is determined to be from 0 to 100%.

[0073] For example, a detected high-frequency-component signal is used, as the variable x. In that case, in a part where the number of the high-frequency components is high (where an expression $x = 100$ holds), the output signal becomes equivalent to the original signal. Namely, an n-bit digital signal, or an n + m-bit digital signal is transmitted, as an output signal. Here, an m-bit-length low-order bit of the n + m-bit digital signal is determined to be "0".

[0074] On the other hand, in a part where the high-frequency-component number is low (where an expression $x = 0$ holds), the output signal becomes equivalent to the quantization-precision-reproduction signal (original signal + high-precision component). Namely, at a part where the user easily perceives insufficient quantization precision, an n + m-bit-length quantization-precision-reproduction signal generated by the high-precision-component-addition unit 37 is transmitted.

[0075] Further, when the variable x is an intermediate value (where an expression $0 < x < 10$ holds), the high-frequency-component-adjustment-and-output unit 45 transmits a mixed signal obtained by mixing the original signal with the quantization-precision-reproduction signal. By performing the above-described synthesis processing, the processing corresponding to a predetermined picture pattern can be achieved.

[0076] Further, processing that is usually referred to as alpha blend is performed, as the above-described synthesis processing.

[0077] By performing the above-described processing procedures, the quantization precision can be reproduced while maintaining the characteristics of the original signal as much as possible.

(B-4) Fourth Embodiment

[0078] A fourth embodiment of the present invention is provided, as an example modification of the third embodiment. In the fourth embodiment, the combination ratio of the original signal (the n-bit digital signal) and the quantization-precision-reproduction signal (= original signal + high-precision component) is also increased and/or decreased in the complementary manner by using the detected high-frequency-component signal, as is the case with the third embodiment.

[0079] The fourth embodiment describes a quantization-precision-reproduction circuit configured to change the detection characteristic of the high-frequency-detection unit 43, as required, according to a picture pattern obtained by the original signal.

[0080] Fig. 9 shows a quantization-precision-reproduction circuit 51 according to the fourth embodiment. In Fig. 9, the same parts as those shown in Fig. 8 are designated by the same reference numerals, so as to omit the description thereof.

[0081] The quantization-precision-reproduction circuit 51 includes the low-pass filter 33, the high-precision-component-separation unit 35, the high-precision-component-addition unit 37, the high-frequency-component-adjustment-and-output unit 45, a high-frequency-detection unit 53, and a threshold-value-set unit 55. That is to say, the quantization-precision-reproduction circuit 51 is different from the above-described quantization-precision-reproduction circuits in that it includes the high-frequency-detection unit 53 and the threshold-value-set unit 55.

[0082] The high-frequency-detection unit 53 is different from the high-frequency-detection unit 43 of the third embodiment in that the high-frequency-detection unit 53 compares the detection-output value of a high-frequency component and the threshold value thereof, and determines the level of the amount of high-frequency components included in the original signal.

[0083] Here, the high-frequency-detection unit 53 has at least one threshold value.

[0084] For example, if the high-frequency-detection unit 53 has a single threshold value, a determination-output signal functions, as a signal used for selecting either the original signal or the quantization-precision-reproduction signal (= original signal + high-precision component). Namely, if a detected high-frequency-component-output value is higher than the threshold value, which means that the high-frequency-component number is high, the determination-output signal functions, as a signal used for selecting the original signal. On the other hand, if the detected high-frequency-component-output value is lower than or equal to the threshold value, which means that the high-frequency-component number is low, the determination-output signal functions, as a signal used for selecting the quantization-precision-reproduction signal.

[0085] Of course, if the threshold-value number is increased, the number of patterns of mixing the original signal with the quantization-precision-reproduction signal increases by as much as the increased threshold-value number.

[0086] In the fourth embodiment, the threshold value is prepared for each of the color signals. The threshold-value set unit 55 is configured to set the threshold value for each of the color signal.

[0087] It is preferable that the threshold-value set unit 55 has several types of threshold values that are set on the basis of experience according to the visual charac-

teristic of a person and has a function of switching between the threshold values, as required, according to a predetermined picture pattern obtained by an original signal for processing.

[0088] Further, the threshold-value-set unit 55 may have a function of switching between the threshold values, as required, according to the intensity of the saturation of each color.

[0089] Further, the threshold-value-set unit 55 may have a function of switching between the threshold values, as required, according to the color-phase information of the original signal.

[0090] Thus, if the threshold-value-set unit 55 has at least two threshold values so that the threshold-value-set unit 55 can switch between the threshold values according to the characteristic of an original signal, the quality of an image generated by digital signals with reproduced quantization precision can be increased.

(B-5) Fifth Embodiment

[0091] A fifth embodiment of the present invention shows another quantization-precision-reproduction circuit using the perception characteristic of a person. In the fifth embodiment, a method for adjusting the gain of a high-precision component is described.

[0092] Fig. 10 shows a quantization-precision-reproduction circuit 61 according to the fifth embodiment. In Fig. 10, the same components as those shown in Fig. 5 are designated by the same reference numerals, so as to omit the description thereof.

[0093] The above-described quantization-precision-reproduction circuit 61 includes the low-pass filter 33, the high-precision-component-separation unit 35, the high-precision-component-addition unit 37, a high-frequency-detection unit 63, and a high-precision-component-amplification unit 65. Namely, the quantization-precision-reproduction circuit 61 is different from the above-described quantization-precision-reproduction circuits in that it includes the high-frequency-detection unit 63 and the high-precision-component-amplification unit 65.

[0094] The above-described high-frequency-detection unit 63 is a processing device configured to detect at least one high-frequency component included in the n-bit-length digital signal, that is, the original signal, and set the gain corresponding to the detection result. The above-described gain is used for increasing and/or decreasing an m-bit-length high-precision component. For example, the gain is set so that the gain value decreases as the high-frequency-component value increases, and increases and approaches one as high-frequency-component value decreases.

[0095] The high-precision-component-amplification unit 65 adjusts the gain of the m-bit-length high-precision component according to the gain given thereto.

[0096] According to the above-described configuration, it becomes possible to increase and/or decrease the amount of at least one high-precision component

added to the n-bit-length original signal according to the result of high-frequency-component detection.

(B-6) Sixth Embodiment

[0097] According to the above-described embodiments, an increase and/or a decrease in a direct-current (DC) component caused by an added high-precision component can be ignored. However, as the bit number of the high-precision component increases, a DC-component drift increases.

[0098] Fig. 11 shows a quantization-precision-reproduction circuit 71 according to the sixth embodiment having a function of cancelling the DC-component drift that occurs due to the added high-precision component. In Fig. 11, the same parts as those shown in Fig. 2 are designated by the same reference numerals, so as to omit the description thereof.

[0099] The above-described quantization-precision-reproduction circuit 71 includes the high-precision-component-generation unit 23, the high-precision-component-addition unit 25, and a DC-shift unit 73. Namely, the quantization-precision-reproduction circuit 71 is different from the above-described quantization-precision-reproduction circuits in that it includes the DC-shift unit 73.

[0100] The DC-shift unit 73 is a processing device configured to calculate the impact of a high-precision component on the DC level of an original signal and subtracts the impact value from the high-precision component. Namely, the DC-shift unit 73 makes the DC level of the original signal agree with that of the quantization-precision-reproduction signal.

[0101] In the fourth embodiment, the DC-shift unit 73 shifts the high-precision-component level. However, it is also possible to use a method for shifting the high-precision-component level after the quantization-precision-reproduction signal is generated.

(C) Other Systems

[0102] Thus, in the above-described embodiments, the image-pickup system has been described. Hereinafter, other systems that can include at least one of the above-described quantization-precision-reproduction circuits will be described.

(C-1) Seventh Embodiment

[0103] Fig. 12 shows the configuration of a communication system 81 according to a seventh embodiment of the present invention, where the communication system 81 includes at least one of the above-described quantization-precision-reproduction circuits. The communication system 81 includes a transmission device 83 and a reception device 85. The transmission device 83 is configured to transmit digital signals including image data, speech data, measurement data, and so forth according to a predetermined transmission format. The digital sig-

nals may be transmitted by a broadcast system or a communication system. Namely, it is only essential that information for transmission is transmitted, as digital signals.

[0104] The reception device 85 configured to receive information includes a quantization-precision-reproduction circuit 87, as the above-described quantization-precision-reproduction circuit. Information may be transmitted to the reception device 85 via a recording medium 89. Here, various types of recording mediums may be used, as the recording medium 89.

[0105] Since the quantization-precision-reproduction circuit 87 is provided in the communication system, it becomes possible to reproduce a high-precision component lower than or equal to predetermined quantization precision by the reception device 85. Namely, if the bit length of a digital signal is limited by a transmission format and/or a signal format, the communication system allows reproducing information with high quantization precision on the reception-device side.

[0106] By using the above-described advantages, it becomes possible to actively decrease the bit length of a digital signal for transmission on the transmission-device side. Namely, it becomes possible to compress data actively.

[0107] By transmitting digital signals with decreased bit lengths, or recording the digital signals with decreased bit lengths onto the recording medium, it becomes possible to transmit and/or record the digital signals by using a decreased transmission band and/or a decreased record area. Namely, it becomes possible to use transmission resources and/or record areas effectively.

(C-2) Eighth Embodiment

[0108] Fig. 13A shows an information-processing device 91 according to an eighth embodiment of the present invention. The information-processing device 91 includes at least one of the above-described quantization-precision-reproduction circuits. Fig. 13B shows an information-processing device 101 according to the eighth embodiment of the present invention. The information-processing device 91 includes at least one of the above-described quantization-precision-reproduction circuits. Each of the information-processing device 91 and the information-processing device 101 may be an electronic device including a computer, a printer, a game machine, a mobile information terminal (a mobile computer, a mobile phone, a mobile game machine, an electronic book, and so forth), an image-reproduction device (an optical-disk device, a home server, and so forth) a monitor, a TV receiver, an audio-signal-reproduction device, and so forth.

[0109] Each of the information-processing devices 91 and 101 includes a cabinet, a signal-processing unit, and an external interface. Further, each of the information-processing devices 91 and 101 includes the peripheral devices corresponding to the product form thereof, where

the peripheral devices are used in combination with the cabinet, the signal-processing unit, and the external interface.

[0110] The difference between the information-processing device 91 shown in Fig. 13A and the information-processing device 101 shown in Fig. 13B is whether or not a display unit is included in the cabinet.

[0111] The information-processing device 91 shown in Fig. 13A includes a display unit 93 provided in the cabinet thereof. A quantization-precision-reproduction circuit 95, a signal-processing unit 97, and an external interface 99 are also provided in the cabinet of the information-processing device 91.

[0112] The information-processing device 101 shown in Fig. 13B does not include a display unit in the cabinet thereof, even though a quantization-precision-reproduction circuit 103, a signal-processing unit 105, and an external interface 107 are provided in the above-described cabinet.

(D) Other embodiments

[0113]

(a) According to the above-described embodiments, the threshold value of the high-frequency-detection unit is set and/or switched according to the characteristic of an original signal.

Further, the threshold value of the high-frequency-detection unit may be set or switched to a suitable value according to fluctuations in the gain value of the gain-adjustment circuit.

(b) According to the above-described embodiments, the low-pass filter is provided in the quantization-precision-reproduction circuit so that a high-precision component lower than or equal to predetermined quantization precision is generated.

[0114] However, the quantization-precision-reproduction circuit may include a high-pass filter and/or a non-linear filter including an epsilon filter, a median filter, and so forth. Irrespective of which filter is used, a high-precision component can be generated on the basis of information of the original signal. Subsequently, the correlation between the high-precision component and the original signal becomes significant with reference to that between a random noise and the original signal.

[0115] Embodiments provide a quantization-precision-reproduction method including the steps of reproducing an m-bit-length high-precision component lower than or equal to quantization precision of an n-bit-length digital signal on the basis of the n-bit-length digital signal, and generating an n + m-bit-length digital signal by adding the reproduced m-bit-length high-precision component to a low-order bit of the n-bit-length digital signal is provided.

[0116] In so far as the embodiments of the invention described above are implemented, at least in part, using

software-controlled data processing apparatus, it will be appreciated that a computer program providing such software control and a transmission, storage or other medium by which such a computer program is provided are envisaged as aspects of the present invention.

[0117] Although particular embodiments have been described herein, it will be appreciated that the invention is not limited thereto and that many modifications and additions thereto may be made within the scope of the invention. For example, various combinations of the features of the following dependent claims can be made with the features of the independent claims without departing from the scope of the present invention.

Claims

1. A quantization-precision-reproduction method comprising the steps of:

reproducing at least one m-bit-length high-precision component lower than or equal to quantization precision of at least one n-bit-length digital signal on the basis of the n-bit-length digital signal; and
generating at least one n + m-bit-length digital signal by adding the reproduced m-bit-length high-precision component to at least one low-order bit of the n-bit-length digital signal.

2. The quantization-precision-reproduction method according to Claim 1, wherein the m-bit-length high-precision component is generated by picking up at least one signal component lower than or equal to the quantization precision of the digital signal from at least one signal component obtained by filtering the n-bit-length digital signal.

3. The quantization-precision-reproduction method according to Claim 1, further comprising the steps of:

detecting at least one high-frequency component included in the n-bit-length digital signal; controlling a combination ratio of the n + m-bit-length digital signal and the n-bit-length digital signal on the basis of the detection result; and generating the n + m-bit-length digital signal according to the combination ratio.

4. The quantization-precision-reproduction method according to Claim 1, further comprising:

detecting at least one high-frequency component included in the n-bit-length digital signal; generating at least one gain function on the basis of a result of the detection; generating at least one correction component by amplifying the m-bit-length high-precision

component on the basis of the gain function; and using the generated correction component, as the high-precision component added to the low-order bit of the n-bit-length digital signal.

5. The quantization-precision-reproduction method according to Claim 3, wherein where the at least one high-frequency component is detected, at least one determination threshold value is changed according to a predetermined picture pattern obtained by at least one digital signal for processing.

6. The quantization-precision-reproduction method according to Claim 3, wherein where the at least one high-frequency component is detected, at least one determination threshold value is changed according to at least one gain added to at least one digital signal for processing.

7. The quantization-precision-reproduction method according to Claim 3, wherein where the at least one high-frequency component is detected, at least one determination threshold value is changed according to saturation of at least one digital signal for processing.

8. The quantization-precision-reproduction method according to Claim 3, wherein where the at least one high-frequency component is detected, at least one determination threshold value is changed according to a color phase of at least one digital signal for processing.

9. The quantization-precision-reproduction method according to Claim 1, further comprising the step of correcting fluctuations in a direct-current level caused by the addition of the reproduced m-bit-length high-precision component.

10. A quantization-precision-reproduction device comprising:

at least one high-precision-component-generation unit configured to reproduce at least one m-bit-length high-precision component lower than or equal to quantization precision of at least one n-bit-length digital signal on the basis of the n-bit-length digital signal; and
at least one precision-information-addition unit configured to generate at least one n + m-bit-length digital signal by adding the reproduced m-bit-length high-precision component to at least one low-order bit of the n-bit-length digital signal.

11. An image-pickup device comprising:

an analog-to-digital conversion unit configured

to convert at least one imaging signal generated in analog-signal format into at least one n-bit-length signal generated in digital-signal format; at least one high-precision-component-generation unit configured to reproduce at least one m-bit-length high-precision component lower than or equal to quantization precision of the n-bit-length digital signal on the basis of the n-bit-length digital signal; and
 at least one precision-information-addition unit configured to generate at least one n + m-bit-length digital signal by adding the reproduced m-bit-length high-precision component to at least one low-order bit of the n-bit-length digital signal.

12. An information-processing device comprising:

at least one high-precision-component-generation unit configured to reproduce at least one m-bit-length high-precision component lower than or equal to quantization precision of at least one n-bit-length digital signal on the basis of the n-bit-length digital signal; and
 at least one precision-information-addition unit configured to generate at least one n + m-bit-length digital signal by adding the reproduced m-bit-length high-precision component to at least one low-order bit of the n-bit-length digital signal.

13. A program product which makes at least one computer perform processing comprising the steps of:

reproducing at least one m-bit-length high-precision component lower than or equal to quantization precision of at least one n-bit-length digital signal on the basis of the n-bit-length digital signal; and
 generating at least one n + m-bit-length digital signal by adding the reproduced m-bit-length high-precision component to at least one low-order bit of the n-bit-length digital signal.

45

50

55

FIG. 1

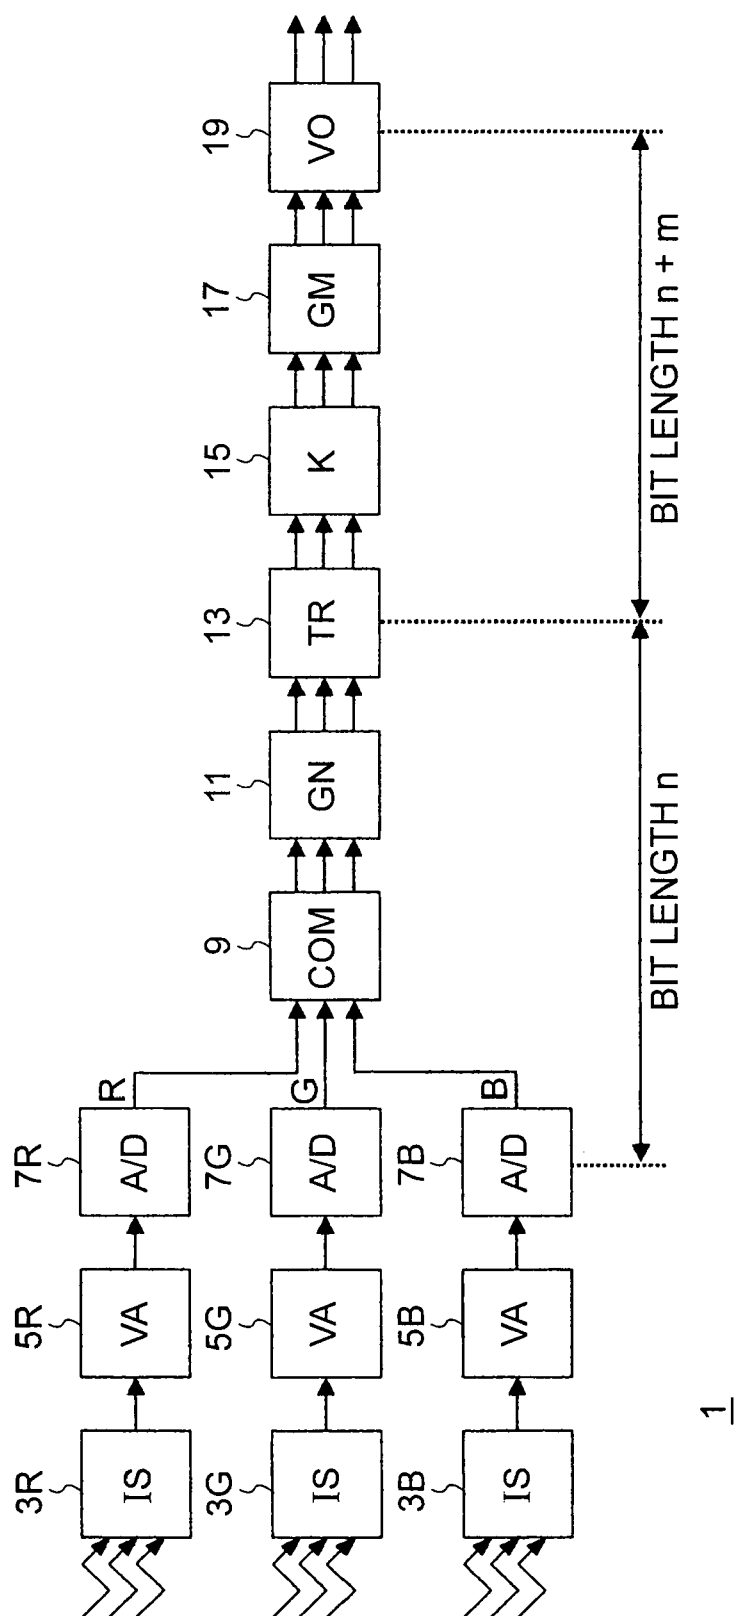


FIG. 2

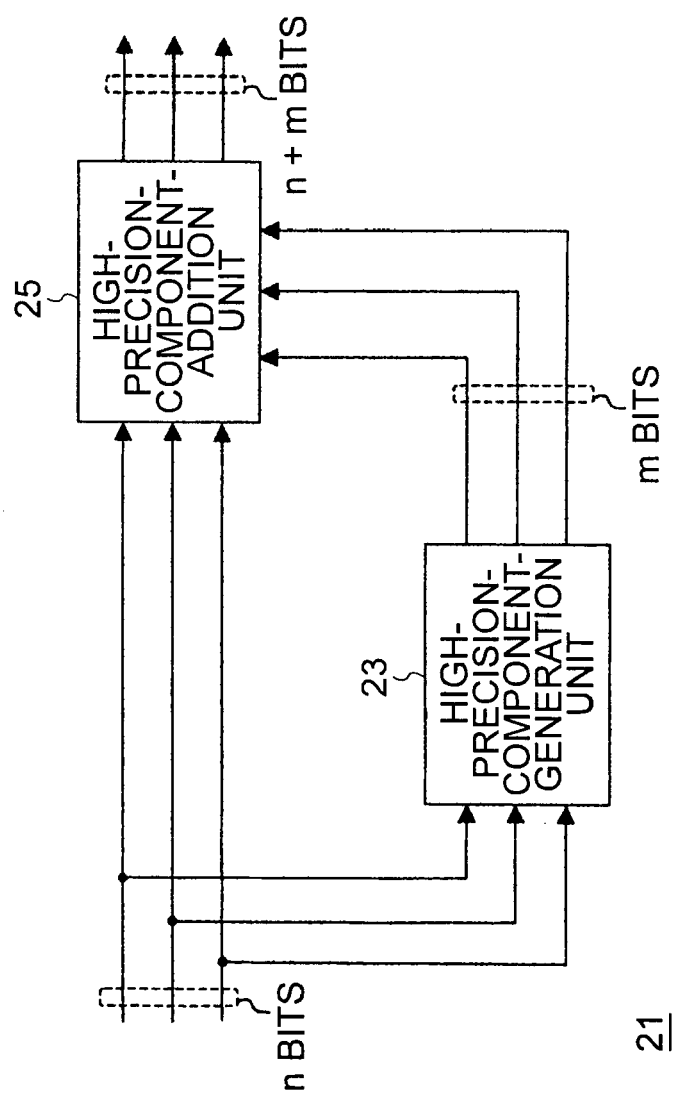


FIG. 3

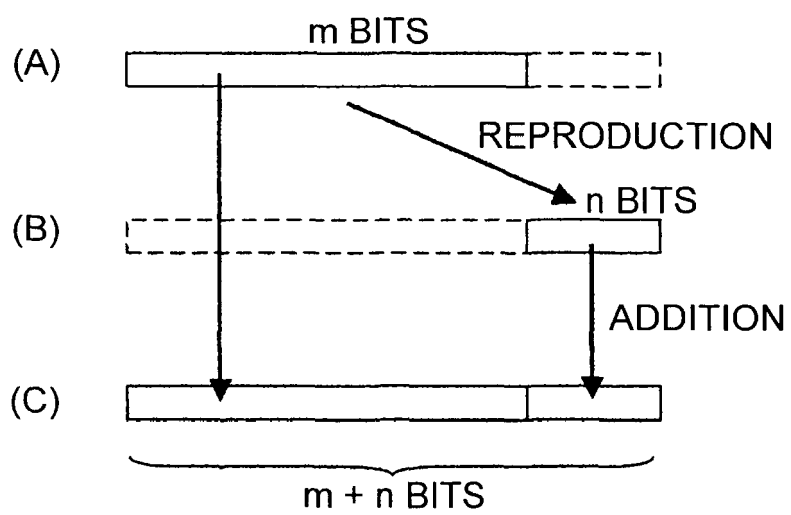


FIG. 4A



FIG. 4B

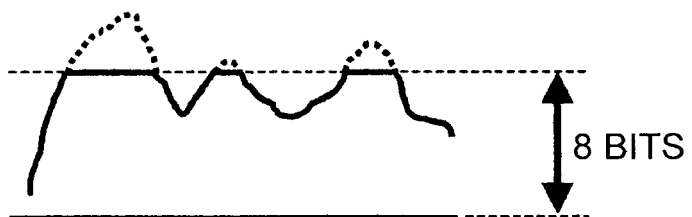


FIG. 4C



FIG. 5

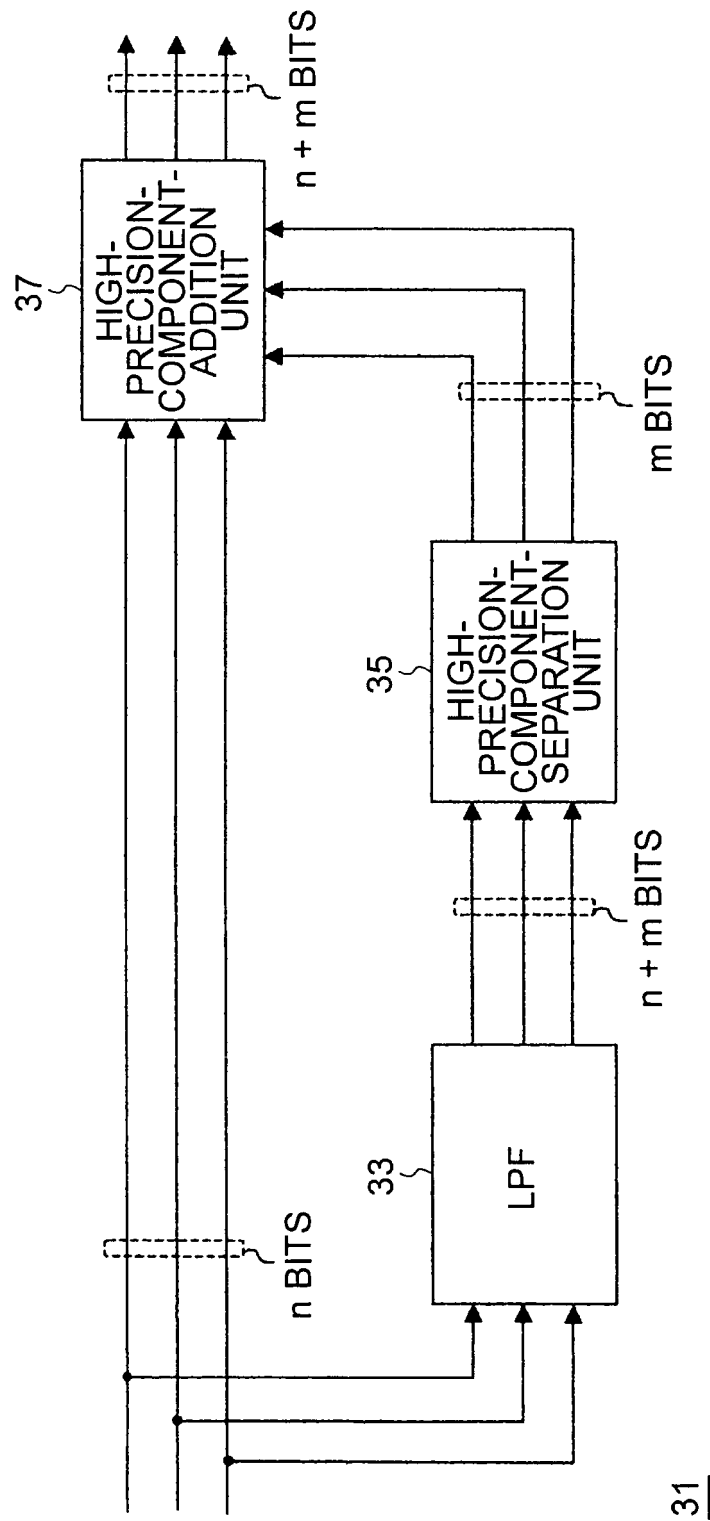


FIG. 6

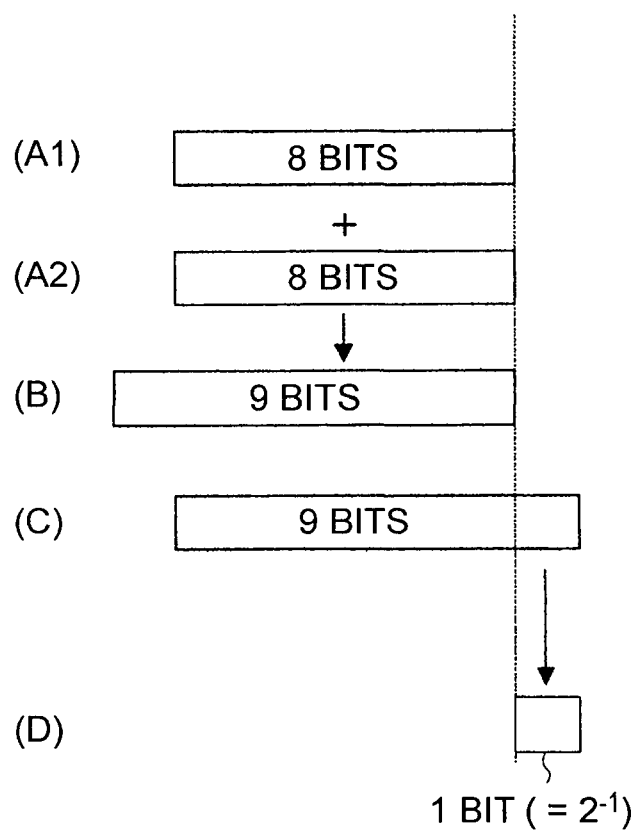


FIG. 7

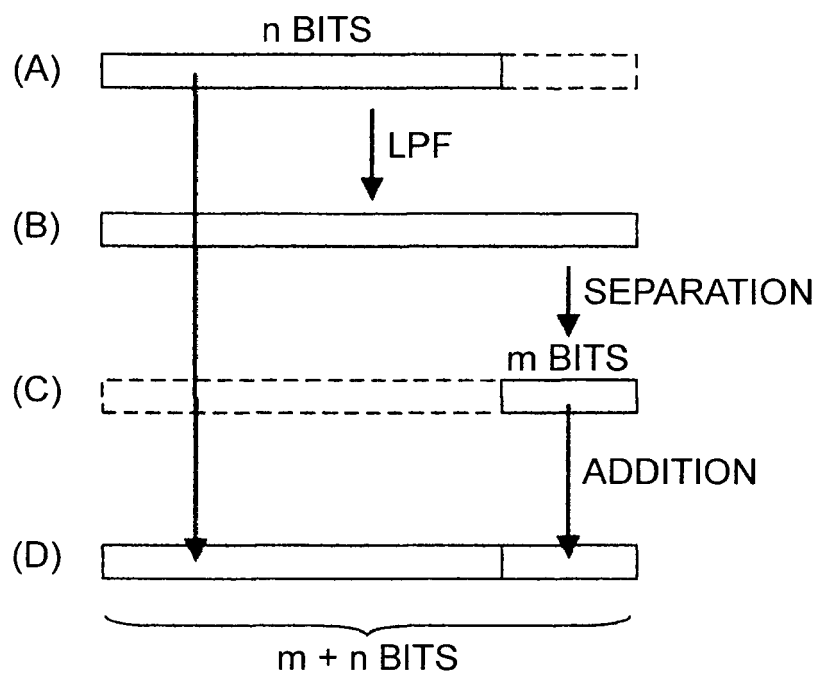


FIG. 8


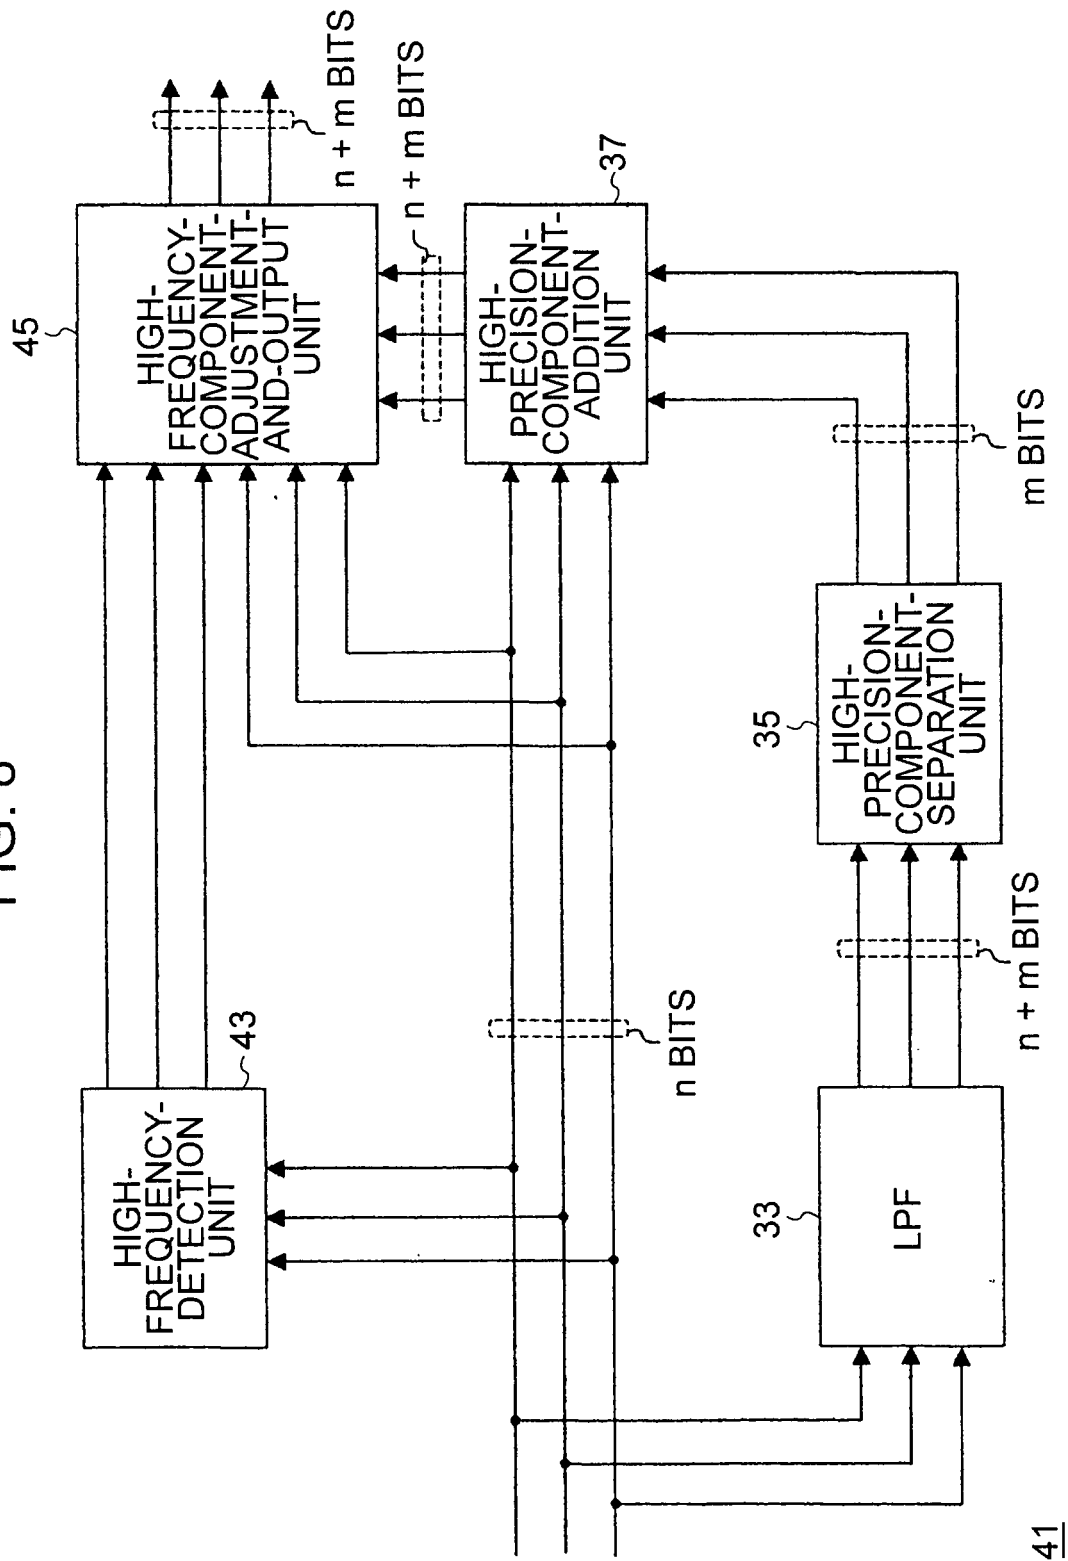


FIG. 9

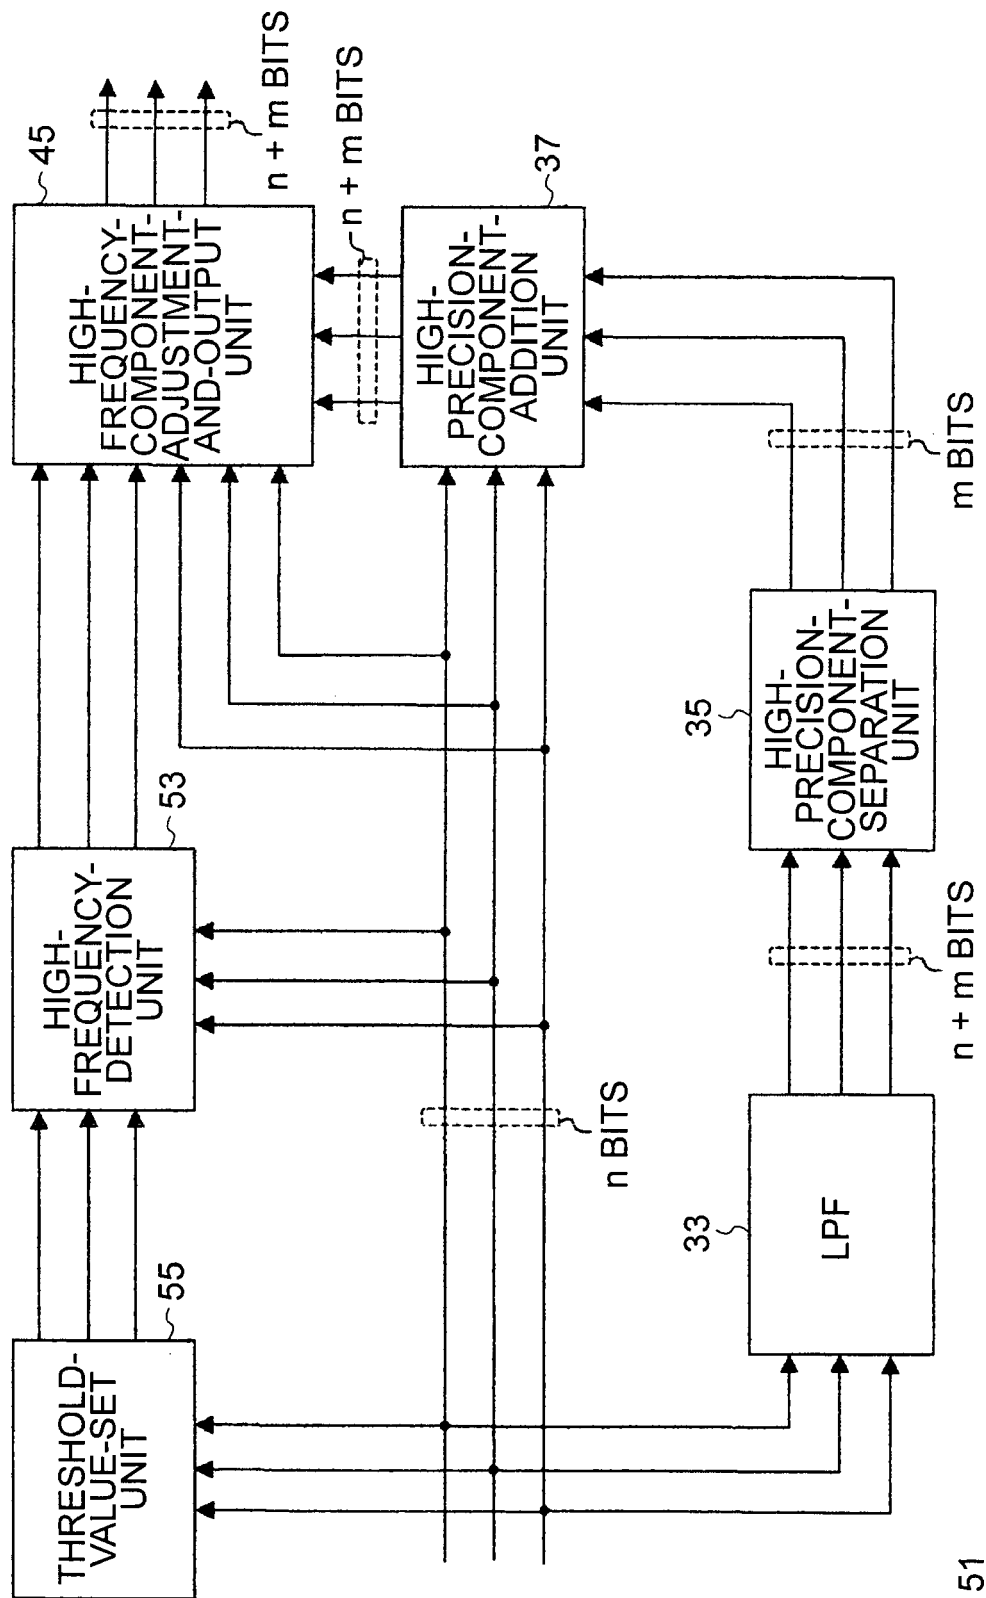

51

FIG. 10

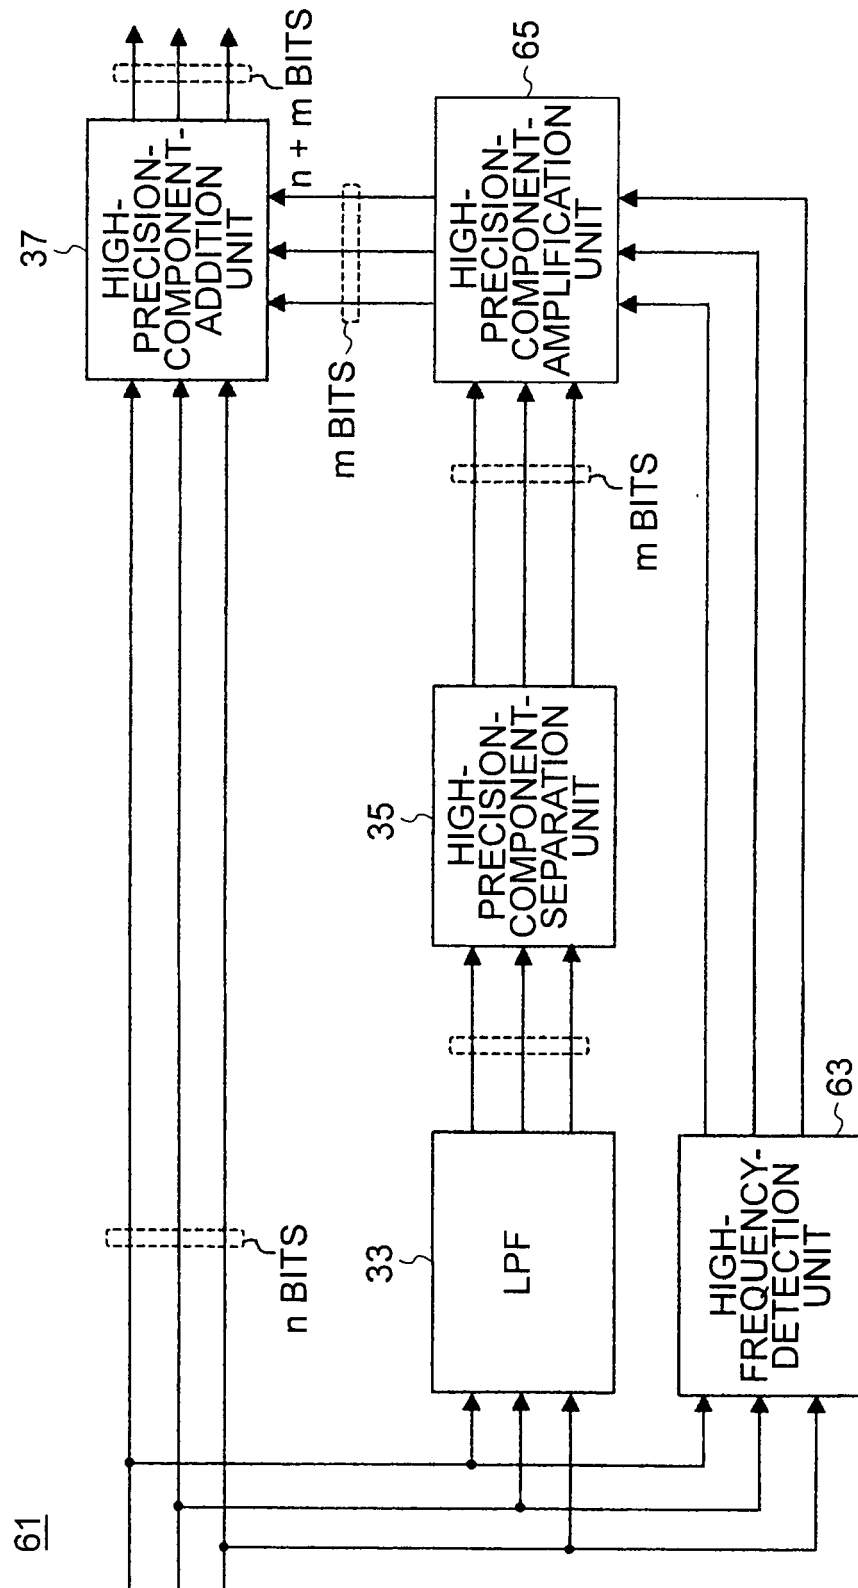


FIG. 11

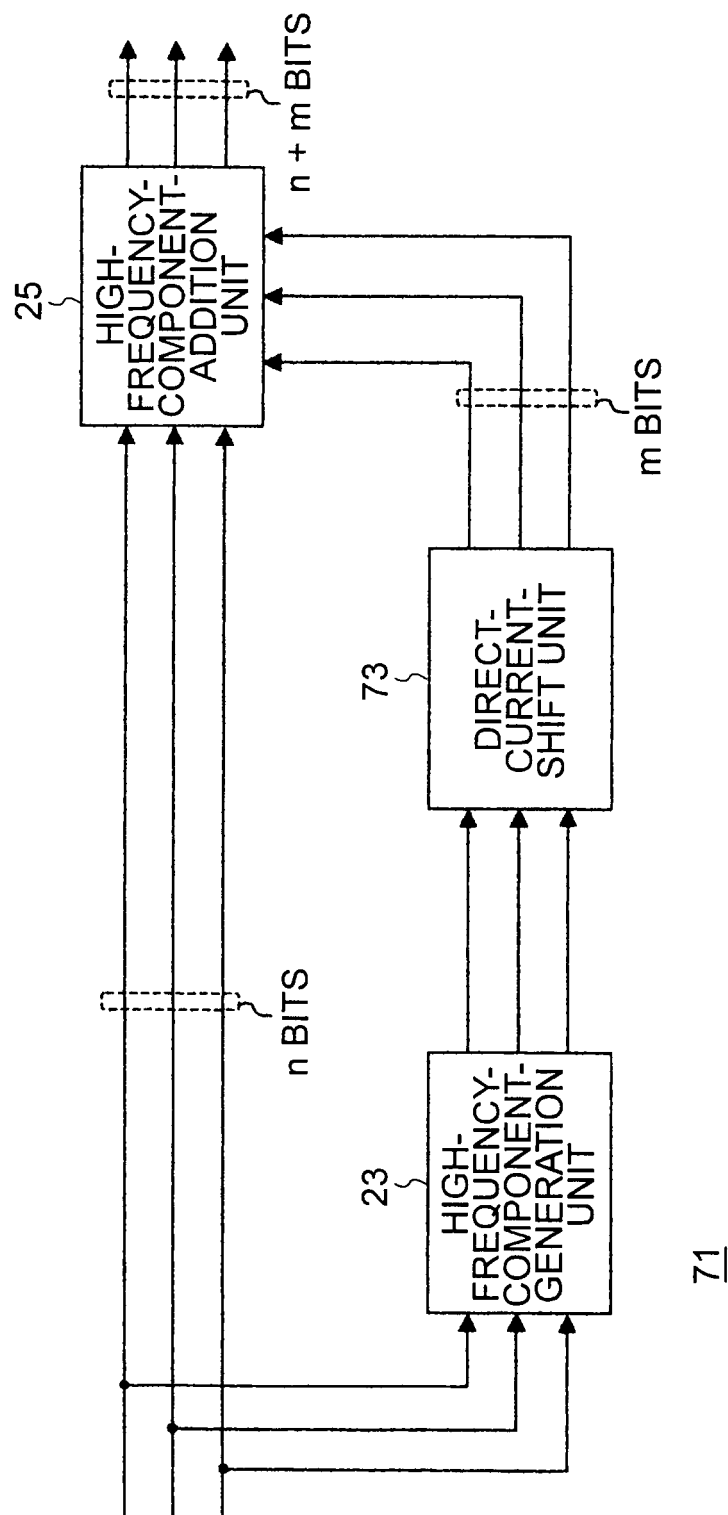


FIG. 12

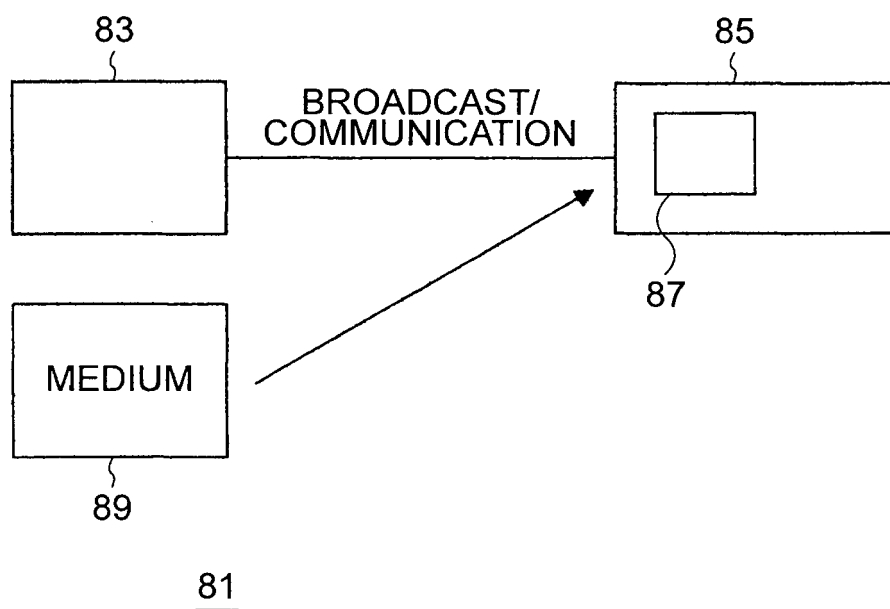


FIG. 13A


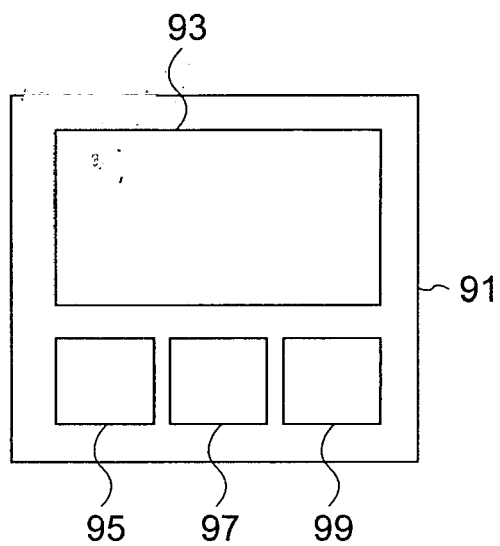


FIG. 13B



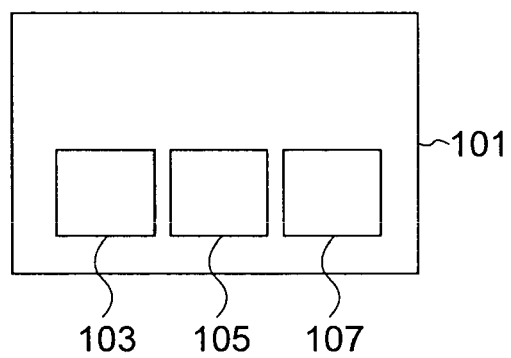

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 25 0647

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2004/130471 A1 (LEE YONG-HEE) 8 July 2004 (2004-07-08)	1,10-13	H03M7/30
Y	* paragraph [0012] - paragraph [0048]; figure 4 *	2-4	
A		5-9	
Y	----- US 6 167 157 A (SUGAHARA ET AL) 26 December 2000 (2000-12-26)	2-4	
A	* column 2, line 47 - column 4, line 24 *	5-13	
Y	----- PATENT ABSTRACTS OF JAPAN vol. 1996, no. 10, 31 October 1996 (1996-10-31) & JP 08 149470 A (VICTOR CO OF JAPAN LTD), 7 June 1996 (1996-06-07) * abstract *	2,3	
A	----- GB 2 298 069 A (* MOTOROLA INC) 21 August 1996 (1996-08-21) * the whole document *	1-13	TECHNICAL FIELDS SEARCHED (IPC)
			H03M
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 24 March 2006	Examiner Henderson, R
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 25 0647

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-03-2006

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004130471 A1	08-07-2004	JP 2004215270 A	29-07-2004
US 6167157 A	26-12-2000	NONE	
JP 08149470 A	07-06-1996	JP 2940422 B2	25-08-1999
GB 2298069 A	21-08-1996	AU 4610796 A	04-09-1996
		CA 2185026 A1	22-08-1996
		CN 1145707 A	19-03-1997
		DE 19581576 T0	28-05-1997
		FI 963491 A	06-09-1996
		FR 2730590 A1	14-08-1996
		IL 116661 A	04-01-1998
		IT RM960095 A1	11-08-1997
		JP 9512413 T	09-12-1997
		SE 9603698 A	27-11-1996
		WO 9625809 A1	22-08-1996