



(11) **EP 1 956 675 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
13.08.2008 Bulletin 2008/33

(51) Int Cl.:
H01P 1/18 (2006.01) H01Q 3/32 (2006.01)

(21) Application number: **08101406.0**

(22) Date of filing: **08.02.2008**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA MK RS

(72) Inventors:
• **Harel, Jean-Pierre**
22300 Lannion (FR)
• **Cojean, Nicolas**
22700 Louannec (FR)
• **Grone, René**
22300 Lannion (FR)

(30) Priority: **08.02.2007 FR 0753135**

(71) Applicant: **Alcatel Lucent**
75008 Paris (FR)


(74) Representative: **Sciaux, Edmond**
Compagnie Financière Alcatel
Intellectual Property & Standards
54 Rue La Boétie
75008 Paris (FR)

(54) **Phase-shifting system for radiating elements of an antenna**

(57) The subject of the present invention is a phase-shifting system including at least one body (21) which has at least one electrically conductive surface, an electrically conductive feed line (22) placed on the body (21) and including at least two segments (33a-33e, 34a-34e) which are parallel along a longitudinal axis B-B and at

least three access points (23, 24a-24e, 25a-25e), a movable dielectric device (26) placed above the feed line (22), characterized in that the device (26) includes two distinct sections (26a-26e) made up of dielectric material, which are capable of moving independently along the longitudinal axis B-B.

FIG_2

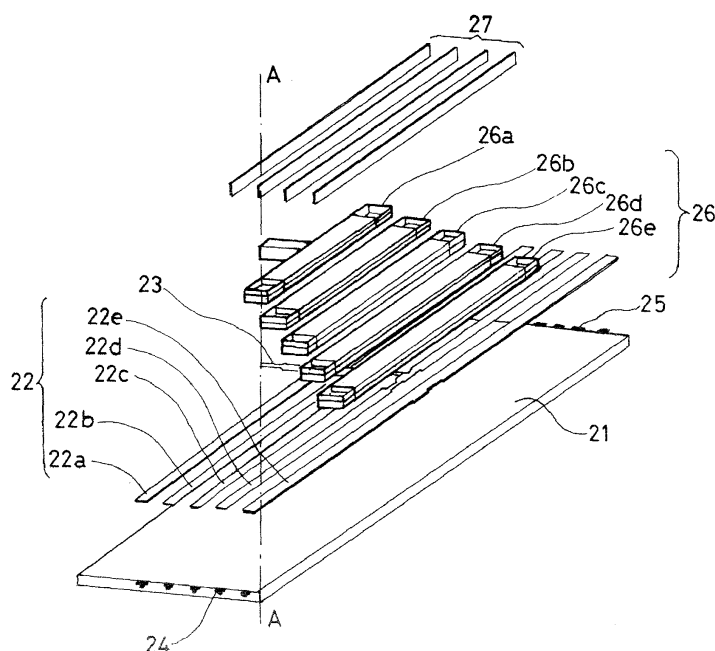

Description

[0001] The present invention relates to a device for longitudinally displaced phase-shifting, including a dielectric material, used for phase-shifting radiating elements, or groups of radiating elements. The invention is intended to particularly be used for radiating elements that belong to antennas for base stations of cellular communication networks (GSM, UMTS, etc.), but also for any other type of application that implements phase-shifters. The purpose of phase-shifting is to adjust the direction of an antenna's main lobe, thereby attaining dynamic-tilt antennas, otherwise known as "adjustable-tilt antennas."

[0002] Phase-shifters are passive systems, meaning that they do not include electronic components, enabling them to apply a relative shift in phases between different access points of a radio frequency feed network. There are several major families of phase-shifting systems, depending on their mechanical operation method.

[0003] Firstly, there are rotating systems (such as described in US 6,850,130 and JP 09,246,846), in which one or more metallic parts are used to link various conductive lines. These metallic parts perform ad hoc coupling between the conductive lines, most commonly in the form of a contact-free connection, i.e. one in which a capacitive effect between two metallic parts couples the lines using RF.

[0004] However, the disadvantage of coupling lines together is that these systems may have difficulty achieving good performance over a wide frequency band without requiring that unwanted compromises be made with regard to coupling losses, and therefore to the overall effectiveness of the phase-shifting system. Another disadvantage of these systems is that it is difficult to add more of the conductive lines that will be linked to the radiating elements. Finally, this sort of system is significantly bulky.

[0005] Secondly, there are transverse movement systems (such as described in EP1215752), in which a material with a high dielectric constant and low dielectric loss is used to create relative phase-shifting between two radiating elements. The feed lines for radiating elements are installed serially. The movement is transversal with respect to the feed lines of the various radiating elements. Each phase shift is added to the total, until the final radiating element is being fed.

[0006] The disadvantage of this system is that each of these phase-shifters should be set in motion, although they are fairly distant physically from one another. Furthermore, these phase-shifters are placed along the primary longitudinal axis of the antenna, and the splitters are interspersed between them, which leads to the system being very long, particularly when significant phase-shifting is sought for the antenna (especially to 20° and beyond). This length makes it difficult to comply with the required tolerance.

[0007] Finally, there are longitudinal movement systems (such as described in US5,949,303 or WO/2002/035651), in which a material with a high dielectric

constant and low dielectric loss is used to create relative phase-shifting between two radiating elements, or two groups of radiating elements, of an antenna. The material is inserted near the conductive line, which may be planar in structure, in the form of a stripline or microstrip. The propagation velocity of the signal that runs through this conductive line is reduced to a greater extent if the material's dielectric constant is higher, if the thickness of the dielectric material part is greater, and if the part is placed so as to cut off the lines of current running between the feed lines and the ground.

[0008] The major disadvantage of this system is that it requires a fairly high surface area to be activated, because the part made of dielectric material must move in a linear fashion from one end of the system to another, in a longitudinal direction. The limits to the part's movement thus limit the system's phase-shifting amplitude. Another disadvantage is that it is necessary to use multiple phase-shifters in order to achieve a complete feed-line structure for an antenna feed network.

[0009] The document WO/2002/035651 describes a monoblock phase-shifter, which moves as one piece and is made up of a single part made of dielectric material; it is given holes suitable for various conductive lines. This device does not allow the various conductive lines to be controlled independently.

[0010] The goal of the present invention is to eliminate the disadvantages found in the prior art, and particularly to disclose a low-loss longitudinal-movement phase-shifting system that is mechanically compact and stable, and that enables continuously varying phase-shifting.

[0011] The subject of the present invention is a phase-shifting system containing at least:

- a body which has at least one electrically conductive surface,
- an electrically conductive feed line placed on the body, including at least two segments which are parallel along a longitudinal axis and at least three access points,
- a movable dielectric device placed above the feed line.

[0012] In the invention, the device includes at least two distinct sections made of dielectric material, which are capable of moving independently along the longitudinal axis.

[0013] In a preferable embodiment, each section has areas located respectively at each end of the section, enabling impedance transformation.

[0014] In one variant, the impedance transformation areas possess recesses.

[0015] In another variant, the impedance transformation areas are separated by a central area made completely of dielectric material.

[0016] In yet another variant, the central areas of the sections have different lengths.

[0017] Preferably, the dielectric material selected is ei-

ther a plastic material or a ceramic material.

[0018] Advantageously, the movement of the sections is achieved using a gear or a pivoting rod.

[0019] The system of the invention may additionally comprise a means for guiding the longitudinal movement of the sections.

[0020] In one embodiment of the invention, the feed line further includes a first portion for impedance transformation, and a second portion for dividing the current, with these portions being connected to the segments.

[0021] Another subject of the invention is an antenna that includes a phase-shifting system based on one of the preceding claims.

[0022] The phase-shifting system of the invention is a system that is passive (meaning that it contains no active electrical components) and reciprocal, meaning that it is suitable for functioning as either a "splitter" or a "combiner" with respect to the various access points.

[0023] The main advantage of the present invention is the ability to independently control the phase shifts between two radiating elements of an antenna. The system of the invention is thereby applicable to an unlimited number of radiating elements. Furthermore, it allows for the ability to attain non-linear phase shifts between the elements, meaning ensuring independent control of the phase shifts that are applied in pairs to the radiating elements.

[0024] Another advantage of the invention is that it makes possible a broad range of values for the antenna's inclination. In the system of the invention, it is even possible to attain high antenna beam inclinations, which may reach and even exceed 20°.

[0025] Furthermore, this system has the advantage of being modifiable, so that it can be adapted to be used along different frequency bands.

[0026] Consequently, the possible range of inclinations for the antenna's beam are limited only by the dielectric material used (the higher the material's dielectric constant, the wider the range of inclinations) and by the length of the antenna, which is naturally significant for panel antennas.

[0027] Other subjects, characteristics, and advantages of the present invention will become apparent from the following description of one particular embodiment, which naturally is given for illustrative purposes and is non-limiting, and from the attached diagram, in which:

- Figure 1 is a simplified diagram of the phase-shifting system of the invention,
- Figure 2 represents an exploded schematic view of a first embodiment of one phase-shifting system of the invention,
- Figure 3 shows the system of Figure 2, once assembled, in a position corresponding to the minimum phase shift of the antenna,
- Figure 4 is an oblique-perspective view of the body of the system of Figure 2,
- Figure 5 is a top view of the electrical feed line of the

system in Figure 2,

- Figure 6 is an oblique-perspective view of the dielectric body of the system of Figure 2,
- Figure 7 is a schematic illustration of the movement of the dielectric sections using a gear,
- Figure 8 is a schematic illustration of the movement of the dielectric sections using a pivoting rod,
- Figure 9, analogous to Figure 3, shows the system of the invention in a centered position,

[0028] Figure 1 shows the phase-shifting system of the invention, including one electrical feed line **11** placed between two dielectric devices **12**, with the entire assembly being placed between two conductive bodies **13**.

[0029] In the embodiment of the invention depicted in Figures 2 and 3, the phase-shifting system includes the following components, overlaid along a direction A-A :

- a body **21** with a conductive surface;
- an electrical feed line **22** that comprises:
 - multiple conductive segments **22a-22e** which are parallel along direction B-B, intended to feed the radiating elements,
 - at least three access points, here for example as one central access point **23** and several access points **24a-24e** and **25a-25e** placed respectively on both ends of segments **22a-22e**,
 - a portion dedicated to the impedance transformation,
 - a portion dedicated to distributing power to the various access points;
 - a device **26** made of dielectric material that includes several independent sections **26a-26e** interspersed between the electrical line **22** and the conductive body **21**; through mechanical translation, the dielectric sections **26a-26e** may move along direction B-B so as to independently modify the respective coverage range of segments **22a-22e** of line **22**;
 - guiding means **27** and potentially additional mechanical parts to make it easier for the dielectric sections **26a-26e** to slide.

[0030] The body **21**, in the embodiment depicted in Figure 4, is made up of a conductive material, at least on its surface. For a "stripline" construction such as the one shown here, the body is equipped with two parallel conductive planes **21a** and **21b**; for a "microstrip" construction, a conductive line and a conductive plan acting as a "ground plane" are sufficient. The body **21** is constructed in the form of an aluminum block, which may have been bent, molded, or machined. The body may just as easily be created from other materials, such as brass, copper, or any other alloy with similar properties. The body may also be constructed in shapes other than the one depicted here.

[0031] The body **21** has an input **23** and outputs **24a-**

24e and **25a-25e** linked to a feed line **22**. The access points are shown here in the form of several connectors **24a-24e** and **25a-25e**, but they may also be constructed in the form of direct links to the radiating elements using coaxial cables, or by lengthening the segments of the "microstrip" or "stripline" feed line. The input **23** is depicted here in the central position, but it may also be placed on one of the sides of the body **21**. The minimum number of access points is therefore three, and only physical form-factor constraints may limit the number of them, except that this number is additionally limited to being an even or odd number.

[0032] The "stripline" electrical feed line **22**, depicted in Figure 5, is constructed as a single part, and is made up of several conductive segments **22a-22e**. The feed line **22** is obtained by perforating a brass plate 1 mm thick, but it may also be constructed with a different material with good electrical conductivity, as well as in the form of a printed circuit board.

[0033] In the form depicted here, the input **23** of the feed line **22** communicated with an access point area **50**. The portion **51** following the feed line **22** is used to enable proper impedance transformation between the input **23** and the number N of output connections available, with $N \geq 2$ (here $N = 10$), such as with a progressive Klopfenstein impedance taper.

[0034] The portion **51** is extended by portion **52**, which is used to enable the splitting or combining of current for the various access points **50**, **53a-53e** and **54a-54e**. Indeed, the conductive segments **22a-22e** do not necessarily have the same operating amplitude. In the present case, the outputs **53a-53**, **54-54e** all have different amplitudes.

[0035] The conductive segments **22a-22e** are arranged in a rectilinear fashion, and are parallel to one another. During construction, an effort will be made to spread apart the segments **22a-22e** if possible, so as to minimize coupling between them. The width of the conductive segments **22a-22e** is suitable for attaining the desired input and output impedance, which is generally 60 Ohms. Typically, the conductive segments **22a-22e** may be about 7.35 mm wide for a thickness of 1 mm, when the "stripline" feed line **22** is etched between two ground planes **21a** and **21b** spaced 7 mm apart.

[0036] Figure 6 depicts the device **26** made entirely of dielectric material, which includes a fixed portion **60**, placed above the portion **51** of the electrical feed line **22**, and several sections **26a-26e** which are movable and can move independently of one another. Each dielectric section **26a-26e** includes a central area **61** made entirely of dielectric material; the central areas are identical, except for their length. The sections **26a-26e** are constructed of plastic, such as polyphenylene sulfide (PPS RY-TON®), which has a dielectric constant of about 4 to 6. Although it is more expensive and requires greater precision, a ceramic material may also be used as a dielectric material whose dielectric constant ϵ_r is about 10.

[0037] Each dielectric section **26a-26e** includes two

areas **62a** and **62b**, respectively located at each end of the sections **26a-26e**, which serve to transform impedance along the "stripline" feed line **22**. Impedance transition must occur between the part of the feed line **22** which is exposed to air and the part where the feed line **22** is completely between the body **21** and the central area **61** of one section **26a-26e** of the dielectric device **26**. In the embodiment shown here as an example, the impedance transformation function is handled by the creation of recesses **63** in the dielectric material at the end areas **62a**, **62b** of each section **26a-26e** of the dielectric device **26**. These recesses **63** have been depicted here as rectangular holes, but they may naturally have any other form depending on the discounted result. For the purpose of achieving suitable impedance transformation between the part of the feed line **2** which is exposed to air, and the part where the feed line **2** is surrounded by dielectric material, the appropriate modification of the dielectric material of the sections **26a-26e** may be determined through calculation or simulation, based on an equivalence of the dielectric material made up of localized components, i.e. foreseen as the succession of discrete RLC components.

[0038] In another embodiment, the areas **62a**, **62b** that handle impedance transition may be achieved using quarter-wave sections with different thicknesses, thereby allowing impedance transition between the part of the feed line **2** located in an environment made up of air, and the part of that line **2** whose environment is filled with dielectric material.

[0039] A significant advantage of the invention is that the phase-shifting system's dielectric device is made up by means of several sections **26a-26e**. The movement of each of these sections may be controlled separately, and in this manner, phase-shifting between elements is achieved at least for pairs of antenna radiating elements.

[0040] The guiding means **27** are made of a dielectric material, particularly the same material as that used for the dielectric device **26**, so that the conductive sections **26a-26e** of the electrical feed line **22** that they cross do not suffer any change of medium whatsoever. These means **27** may be constructed in multiple ways. In the embodiment disclosed here, struts **27a-27e** are used in order to guide the sections **26a-26e** when they slide longitudinally. A gear or rod, for example, may help the sections move; in this case, the speeds at which the linked sections move are identical. Another solution is to move the sections completely independently, such as by using stepper motors or independent linear actuators.

[0041] The dielectric sections **26a-26e** above the conductive segments **22a-22e** move while obeying rules that depend on the usage of the phase-shifting system. In one specific situation, in which linear, progressive phase-shifting between the radiating elements of an antenna is necessary, such as 10° , then 20° , then 50° , etc., the sections **26a-26e** move independently, while maintaining a constantly moving distance between one another. For example, if section **26a** moves 20 mm, section **26b** must

move 40 mm, section 26c 60 mm, and so on.

[0042] The dielectric sections 26a-26e may be moved in various ways. The dielectric sections 26a-26e may, in particular, be moved in a synchronized fashion by means of a gear that includes an even number of toothed wheels, or by means of a pivoting rod.

[0043] Gear-based movement 70 is depicted in Figure 7. Shown here is a gear-based system 70, comprising two toothed wheels 70a and 70b for moving the dielectric sections 71, 72 with respect to one another. A main dielectric section 71 is moved in one direction 73, while a related section 72 moves in parallel with the section 71 and in the same direction 74 owing to the gears 70.

[0044] Pivoting-rod-based movement is depicted in Figure 8. A rod 80 pivots along a direction of rotation 81 around a mechanical axle 82, which is not fixed onto the dielectric device 26. Each dielectric section 83a-83d of the phase-shifting system is linked to the rod 80 by means of a pivot 84a-84d. The pivots 84a-84d must be capable of sliding to accompany the rotational movement of the rod 80. This solution is simple to implement mechanically, but it may require that oblong holes be present in the body 1 so that the pivots 84a-84d can slide.

[0045] The operation of the phase-shifting system of the invention has been studied in two different mechanical configurations:

- when the system 90 is in a centered position as depicted in Figure 9, and
- when the dielectric sections 26a-26e are aligned and are shifted 20 mm away from one another, which corresponds to the equivalent position of a minimal antenna inclination, as depicted in Figure 3.

[0046] Simulation results show that the phase-shifting system of the present invention may advantageously be incorporated into a full antenna concept, to attain the same level of performance under current conditions of use, and furthermore, with the ability to reach antenna inclination angles much greater than current solutions.

[0047] The present invention is not limited to the embodiments that have been explicitly described; rather, it includes any variations and generalizations within the reach of a person skilled in the art.

Claims

1. A phase-shifting system, including at least


- a body (21) which has at least one electrically conductive surface,
- an electrically conductive feed line (22) placed on the body (21) and including at least two segments (33a-33e, 34a-34e) which are parallel along a longitudinal axis B-B and at least three access points (23, 24a-24e, 25a-25e),
- a movable dielectric device (26) placed on the

upper side of the feed line (22),


characterized in that the device (26) includes at least two distinct sections (26a-26e) made of dielectric material, which can move independently along the longitudinal axis B-B.

2. A system according to one of the claims 1 and 2, in which each section (26a-26e) possesses areas (62a, 62b) located respectively at each end of the section (26a-26e), enabling impedance transformation.
3. A system according to claim 2, in which the impedance transformation areas (62a, 62b) possess recesses (63).
4. A system according to claim 3, in which the impedance transformation areas (62a, 62b) are separated by a central area (61) made entirely of dielectric material.
5. A system according to claim 4, in which the central areas (61) of the sections (26a-26e) are of different lengths.
6. A system according to one of the preceding claims, in which the sections (26a-26e) move by means of a gear (70) or a pivoting rod (80).
7. A system according to one of the preceding claims, in which the dielectric material is selected from among a plastic material and a ceramic material.
8. A system according to one of the preceding claims, further comprising guiding means (27) to guide the longitudinal movement of the sections (26a-26e).
9. A system according to one of the preceding claims, in which the feed line (22) further includes a first portion (51) for impedance transformation and a second portion (52) for dividing the current, with the portions being connected to the segments (22a-22e).
10. An antenna comprising a phase-shifting system according to one of the preceding claims.


FIG_1

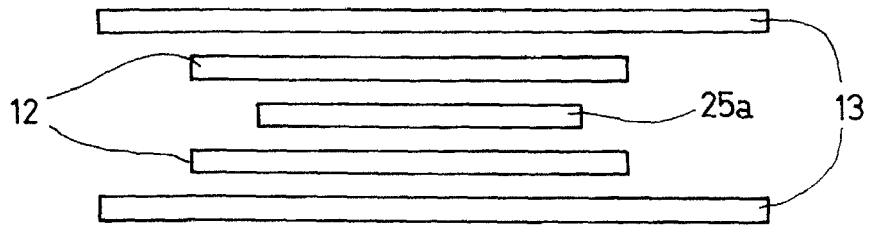


FIG_2

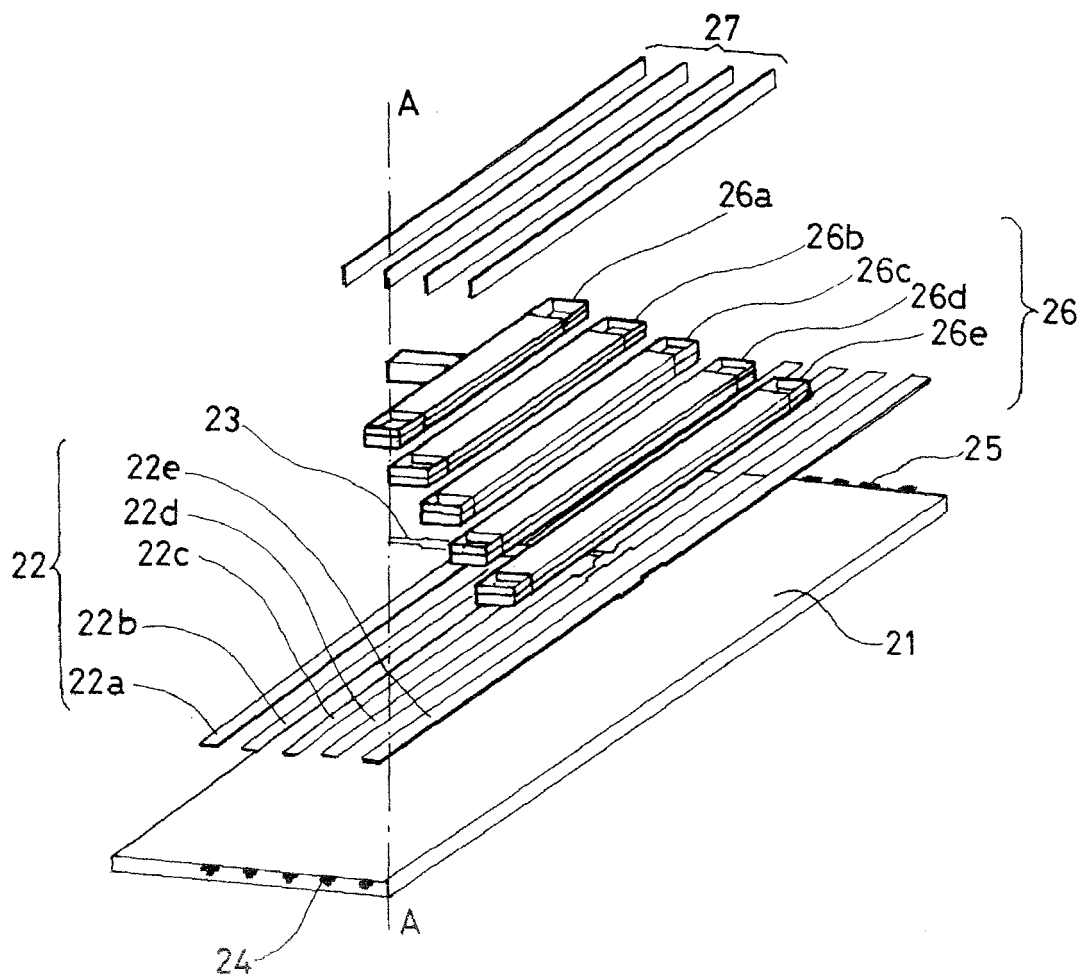


FIG_3

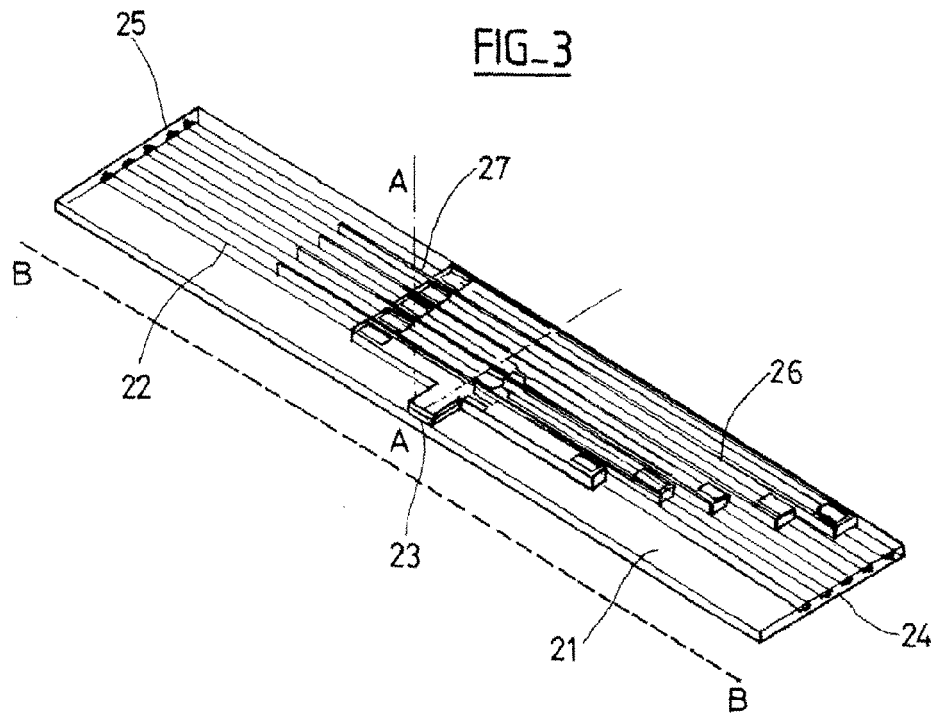


FIG_4

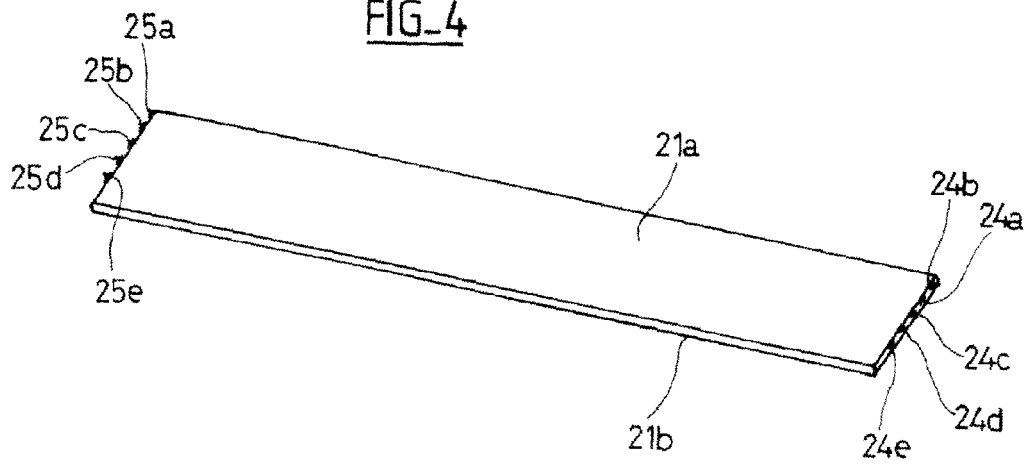


FIG_5

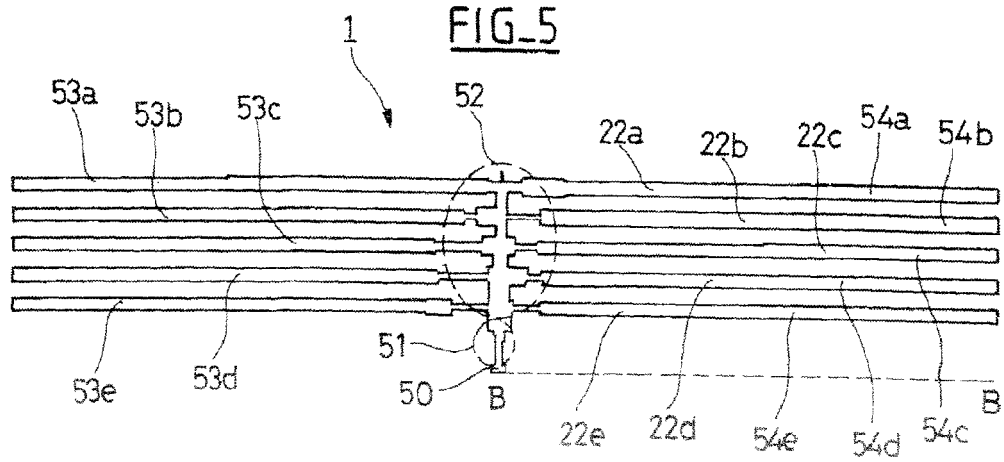


FIG_6

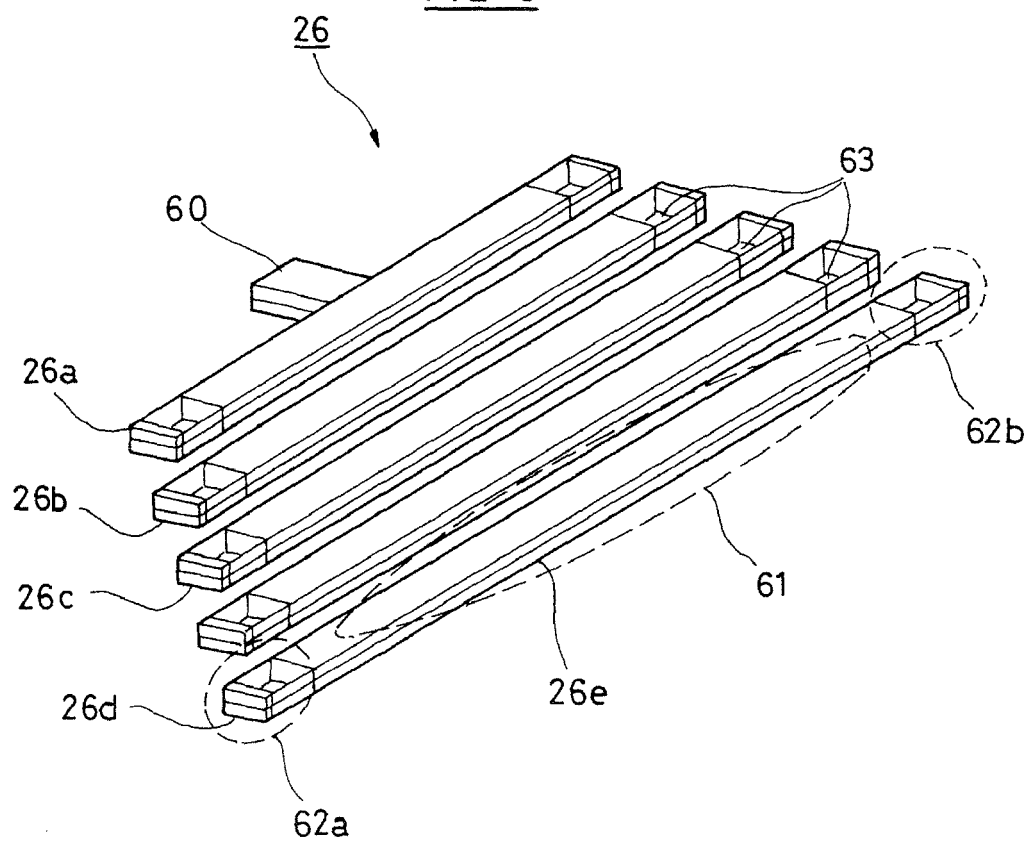


FIG_7

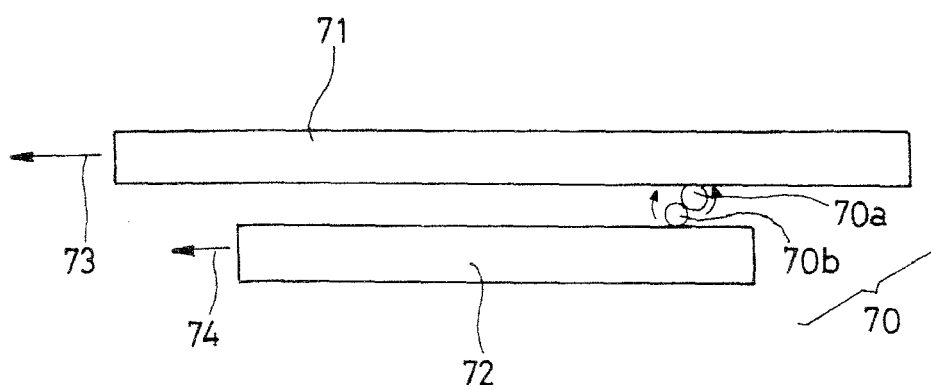

FIG_8

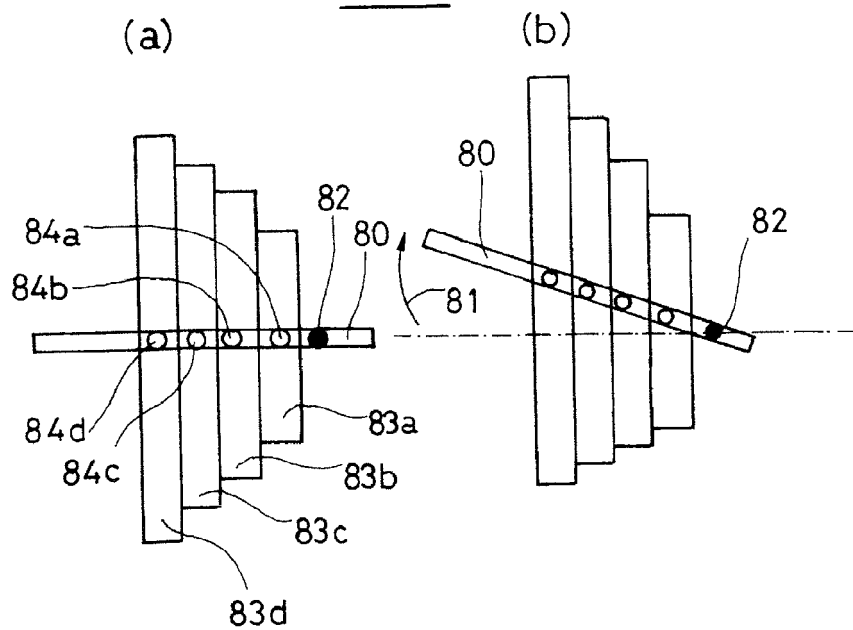

FIG_9

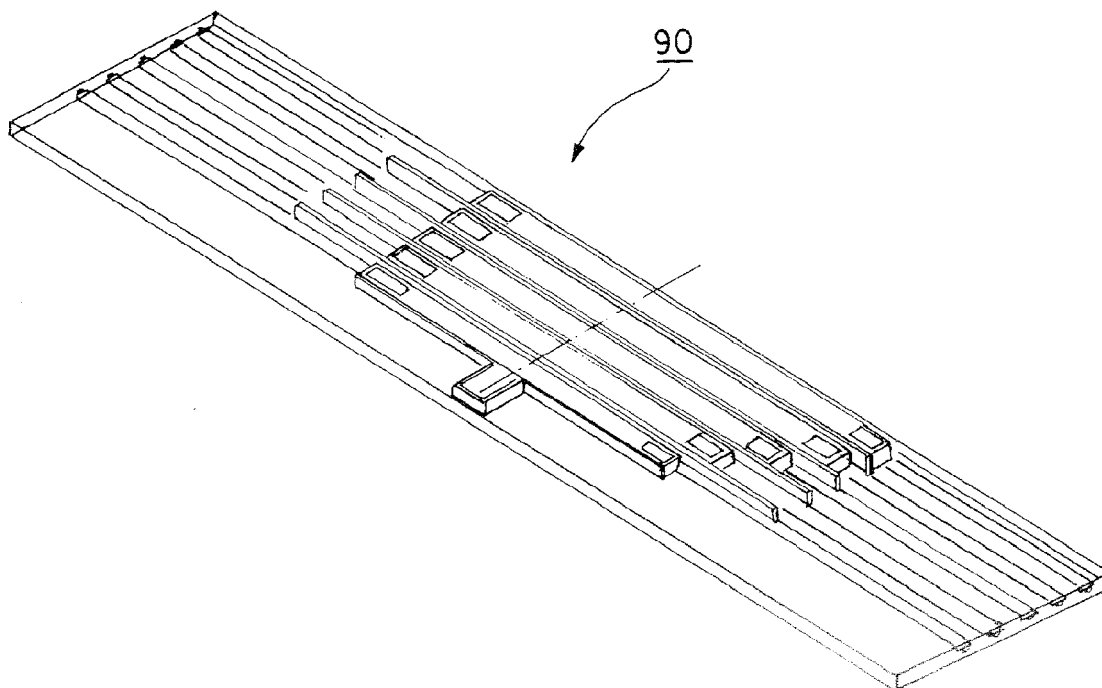



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 08 10 1406

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	GB 767 067 A (STANDARD TELEPHONES CABLES LTD) 30 January 1957 (1957-01-30) * page 3, line 60 - line 75; figure 16 *	1-10	INV. H01P1/18
A	DE 199 11 905 A1 (ALCATEL SA [FR]) 21 October 1999 (1999-10-21) * abstract; figure 1 *	1-10	ADD. H01Q3/32
A	WO 2004/008568 A (SIGMA WIRELESS TECHNOLOGIES LT [IE]; LAWLOR FERFAL JOSEPH [IE]; CARROL) 22 January 2004 (2004-01-22) * abstract; figures 2,5,6 *	1-10	
D,A	WO 02/35651 A (ALLGON AB [SE]; KARLSSON DAN [SE]; LINDMARK BJOERN [SE]; JONSSON STEFA) 2 May 2002 (2002-05-02) * the whole document *	1-10	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01P H01Q
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 20 May 2008	Examiner Marot-Lassauzaie, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 08 10 1406

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-05-2008

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 767067	A	30-01-1957	DE 1026382 B	20-03-1958
DE 19911905	A1	21-10-1999	AU 755676 B2	19-12-2002
			AU 1427899 A	08-06-2000
			CA 2261188 A1	18-09-1999
			SE 9900831 A	19-09-1999
			US 2002003458 A1	10-01-2002
WO 2004008568	A	22-01-2004	AU 2003244844 A1	02-02-2004
			EP 1522118 A1	13-04-2005
WO 0235651	A	02-05-2002	AU 8815601 A	06-05-2002
			CN 1471748 A	28-01-2004
			EP 1348244 A1	01-10-2003
			HK 1061309 A1	13-10-2006
			SE 519751 C2	08-04-2003
			SE 0003929 A	28-04-2002
			US 2004041740 A1	04-03-2004

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6850130 B [0003]
- JP 09246846 B [0003]
- EP 1215752 A [0005]
- US 5949303 A [0007]
- WO 2002035651 A [0007] [0009]