

(19)



(11)

EP 2 157 663 B9

(12)

CORRECTED EUROPEAN PATENT SPECIFICATION

(15) Correction information:

Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 1, 7

(51) Int Cl.:

H01Q 1/24 ^(2006.01) **H01Q 1/48** ^(2006.01)
H04B 1/38 ^(2006.01) **H04M 1/02** ^(2006.01)

(48) Corrigendum issued on:

26.02.2014 Bulletin 2014/09

(86) International application number:

PCT/JP2008/050016

(45) Date of publication and mention
of the grant of the patent:

07.08.2013 Bulletin 2013/32

(87) International publication number:

WO 2008/129882 (30.10.2008 Gazette 2008/44)

(21) Application number: **08702897.3**

(22) Date of filing: **07.01.2008**

(54) **RADIO COMMUNICATION DEVICE**

FUNKKOMMUNIKATIONSGERÄT

DISPOSITIF DE COMMUNICATION RADIO

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR

• **ONAKA, Kengo**

Nagaokakyo-shi
Kyoto 617-8555 (JP)

(30) Priority: **13.04.2007 JP 2007105972**

(74) Representative: **Laufhütte, Dieter**

Lorenz-Seidler-Gossel
Widenmayerstrasse 23
80538 München (DE)

(43) Date of publication of application:

24.02.2010 Bulletin 2010/08

(56) References cited:

WO-A1-2005/053089 JP-A- 2005 167 908
JP-A- 2006 041 899 JP-A- 2006 054 843

(73) Proprietor: **Murata Manufacturing Co. Ltd.**

Kyoto 617-8555 (JP)

(72) Inventors:

• **SATO, Jin**
Nagaokakyo-shi
Kyoto 617-8555 (JP)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 157 663 B9

Description

Technical Field

[0001] The present invention relates to a foldable radio communication apparatus which has a pair of housings in which a circuit board is housed.

Background Art

[0002] Radio communication apparatuses of this type have been employing a structure that enables conduction of an electric current, which is induced in a pair of circuit boards, to be improved and obtains an antenna gain as disclosed in, for example, Patent Document 1 and Patent Document 2.

[0003] Fig. 17 is a front view showing a radio communication apparatus according to a first related-art example. Fig. 18 is a perspective view showing a radio communication apparatus according to a second related-art example.

[0004] In a radio communication apparatus 100 disclosed in Patent Document 1, as shown in Fig. 17, ground units 111 and 121 of a pair of circuit boards 110 and 120 are connected via a resonant circuit 130. The resonant circuit 130 is a circuit in which a series-connected component and a resonance-use conductor 133 serving as an inductor are connected in parallel. In the series-connected component, a resonance-use conductor 131 serving as an inductor and a capacitor unit 132 are connected in series.

[0005] This causes a high-frequency electric current induced in the circuit board 110 by an antenna operation of an antenna 101 to flow to the circuit board 120 through the resonant circuit 130. An antenna gain is increased by making the conduction state of the high-frequency electric current be in a favorable state by using an impedance of the resonant circuit 130.

[0006] On the other hand, a radio communication apparatus disclosed in Patent Document 2, as shown in Fig. 18, has a structure in which a helical antenna 201 is provided at a front side of a conductor portion 210 of a circuit board and a flip element 230 is provided between the antenna 201 and the conductor portion 210. With such a structure, an electric current which flows into the flip element 230 from the conductor portion 210 is led using the flip element 230 in the direction opposite to the flow of the electric current in the conductor portion 210, and thus an antenna gain is increased.

Patent Document 1: Japanese Unexamined Patent Application Publication No. 2004-040524

Patent Document 2: Japanese Unexamined Patent Application Publication No. 2006-086715

Disclosure of Invention

[0007] However, existing radio communication apparatuses described above have the following problems.

[0008] First, in the radio communication apparatus shown in Fig. 17, the resonant circuit 130 includes the series-connected component in which the resonance-use conductor 131 serving as an inductor and the capacitor unit 132 are connected in series, and thus an electric current at the time of resonance always flows through both the resonance-use conductor 131 serving as an inductor and the capacitor unit 132. Thus, resonance is caused with an electric current having a desired frequency only if a condition regarding both the resonance-use conductor 131 serving as an inductor and the capacitor unit 132 is satisfied. Therefore, the impedance of the resonant circuit 130 can be controlled within only a specified and narrow range of frequency, and impedance control over a wide range of frequencies is difficult.

[0009] Next, the radio communication apparatus shown in Fig. 18 needs the helical antenna 201, which extends outside, and the flip element 230, whereby there is a problem that the physical volume of the radio communication apparatus becomes large.

[0010] In order to solve the above-described problems, it is an object of this invention to provide a radio communication apparatus that can control an impedance between circuit boards over a wide range of frequencies and has a small physical volume.

[0011] In order to solve a problem described above, the invention of Claim 1 provides a radio communication apparatus. The radio communication apparatus includes a first housing in which a first circuit board having an antenna unit is housed, a second housing in which a second circuit board is housed, a hinge unit for linking the first housing and the second housing in an openable/closeable manner, a group of circuit connecting lines for electrically connecting a circuit of the first circuit board and a circuit of the second circuit board and for electrically connecting a ground of the first circuit board and a ground of the second circuit board, and a high dielectric member provided near the hinge unit. The antenna unit is provided to be positioned near an end portion opposite the hinge unit of the first circuit board. The hinge unit links an end portion of one housing from among the first and second housings and a portion of the other housing, the portion being located more internally than an end portion of the other housing, and a region extending from the portion of the other housing to the end portion of the other housing overlaps a region near the end portion of the one housing in a projection domain when the first and second housings are in an unfolded state. The high dielectric member is arranged to be positioned between the regions overlapped when the first and the second housings are in an unfolded state in order to adjust a capacitance between the ground of the first circuit board and the ground of the second circuit board.

[0012] With such a structure, if an operation is performed in a state in which the first and second housings are unfolded, a radio wave is transmitted and received via the antenna unit of the first housing. Here, if electrical lengths of the first and the second circuits are appropriate

electrical lengths corresponding to an electrical length of the antenna unit, an antenna gain is increased and antenna characteristics are improved. The electrical lengths of such first and second circuit boards can be adjusted by controlling an impedance of a parallel circuit in which the group of circuit connecting lines, which is used to connect the first and the second circuit boards and functions as an inductor, and a capacitor between the grounds are connected in parallel.

[0013] According to this invention, the region extending from the portion of the other housing to the end portion of the other housing overlaps the region near the end portion of the one housing in a projection domain in a state in which the first and second housings are unfolded, and the high dielectric member is arranged to be positioned between the regions overlapped. Thus, a capacitance of the parallel circuit depends on the dielectric constant of the high dielectric member. Therefore, if the lengths of the first and the second circuit boards are constrained in terms of design and a desired electrical length cannot be obtained, the electrical lengths of the first and the second circuit boards can be set to desired values by changing the impedance of the parallel circuit, more specifically, by adjusting the dielectric constant of the high dielectric member and changing the capacitance.

[0014] Here, the inductor constituted by the group of circuit connecting lines between the first and the second circuit boards and the capacitor between the grounds are connected in parallel. Thus, a high frequency electric current at the time of resonance can be caused to mainly flow through the capacitor by increasing the dielectric constant and by increasing the capacitance. Thus, even if a condition regarding both the group of circuit connecting lines and the capacitor is not satisfied as in the existing radio communication apparatus described above, a desired impedance can be obtained by just changing a condition regarding the capacitor, the condition being related to the high dielectric member. Thus, in a wide range of frequencies, an impedance between the first and the second circuit boards can be controlled.

[0015] In addition, the physical volume of such a radio communication apparatus can be reduced since the first circuit board including the antenna unit is housed in the first housing and unnecessary elements such as a flip element are not used.

[0016] According to the invention of Claim 2, in the radio communication apparatus set forth in Claim 1, the high dielectric member is provided to at least one of the region extending from the portion of the other housing to the end portion of the other housing and the region near the end portion of the one housing.

[0017] According to the invention of Claim 3, in the radio communication apparatus set forth in Claim 1 or 2, the high dielectric member forms a part of or the entirety of at least one housing from among the first and second housings.

[0018] With such a structure, the radio communication apparatus can be designed in a state in which the high

dielectric is included, and thus the high dielectric does not affect the degree of freedom in designing of the radio communication apparatus.

[0019] According to the invention of Claim 4, in the radio communication apparatus set forth in any one of Claims 1 through 3, the high dielectric member is a mixture of a thermoplastic resin with a dielectric constant lower than that of a versatile plastic and filler with a high dielectric constant.

[0020] According to the invention of Claim 5, in the radio communication apparatus set forth in any one of Claims 1 through 4, a dielectric constant of the high dielectric member is set to a value within a range from 5 to 1000.

[0021] With such a structure, since the high dielectric with a high dielectric constant ranging from 5 through 1000 can be arranged without increasing a thickness of or a volume of the high dielectric member, a demand in terms of a design in which thinning is achieved or protrusions are reduced can be met.

[0022] According to the invention of Claim 6, in the radio communication apparatus set forth in any one of Claims 1 through 5, the high dielectric member is provided to each of the region extending from the portion of the other housing to the end portion of the other housing and the region near the end portion of the one housing, and metal plates are arranged inside the respective high dielectric members that are paired and the metal plates face each other.

[0023] With such a structure, by adjusting the size of the metal plates, a capacitance between the first and the second circuit boards can be controlled.

[0024] According to the invention of Claim 7, in the radio communication apparatus set forth in Claim 6, each of the metal plates is electrically connected, via a metal line, to the ground of the circuit board inside a housing in which a high dielectric member having the metal plate is provided.

[0025] With such a structure, stronger capacitive coupling can be generated between the first and the second circuit boards.

[0026] As described above, according to the radio communication apparatus according to Claims 1 through 7, since the impedance between the first and the second circuit boards can be controlled over a wide range of frequencies, even if the physical lengths of the first and the second circuit boards are constrained in terms of design, a favorable antenna gain can be obtained. Moreover, components projecting outside and unnecessary components are omitted as a result of, for example, the first circuit board including the antenna unit being housed in the first housing, thereby the physical volume of such a radio communication apparatus can be reduced.

[0027] In particular, according to the invention of Claims 3 and 5, radio communication apparatuses that meet a demand in terms of design can be manufactured.

[0028] Moreover, according to the invention of Claim 6, since the capacitance between the first and the second

circuit boards can be controlled by adjusting the size of the metal plates, control of a coupling amount between the first and the second circuit boards can be easily performed.

[0029] Furthermore, according to the invention of Claim 7, since stronger capacitive coupling can be generated between the first and the second circuit boards, even if an overlapped region of the metal plates that face each other is small, control of the capacitance between the first and the second circuit boards can assuredly be performed.

Brief Description of Drawings

[0030]

[Fig. 1] Fig. 1 is a perspective view showing a radio communication apparatus according to a first embodiment of the present invention.

[Fig. 2] Fig. 2 is a perspective view of the radio communication apparatus shown in Fig. 1 in a case in which a circuit board is seen through from the back side.

[Fig. 3] Fig. 3 is a sectional view of the radio communication apparatus which is in a folded state.

[Fig. 4] Fig. 4 is a sectional view of the radio communication apparatus which is in an unfolded state.

[Fig. 5] Fig. 5 is a partially enlarged sectional view used to describe a formation position of the hinge unit.

[Fig. 6] Fig. 6 is a partially enlarged sectional view used to describe an overlapped region of housings.

[Fig. 7] Fig. 7 is a plan view for indicating a position at which a high dielectric member is arranged.

[Fig. 8] Fig. 8 is a schematic diagram showing a parallel circuit formed between circuit boards.

[Fig. 9] Fig. 9 includes schematic diagrams used to describe a function of the parallel circuit.

[Fig. 10] Fig. 10 includes schematic diagrams used to describe a disadvantage of an existing parallel circuit.

[Fig. 11] Fig. 11 is a partially enlarged sectional view showing a main part of a radio communication apparatus according to a second embodiment of the present invention.

[Fig. 12] Fig. 12 is a partially enlarged sectional view showing a state in which housings are unfolded.

[Fig. 13] Fig. 13 is a partially enlarged sectional view showing a main part of a radio communication apparatus according to a third embodiment of the present invention.

[Fig. 14] Fig. 14 is a partially enlarged sectional view showing a state in which housings are unfolded.

[Fig. 15] Fig. 15 is a partially enlarged sectional view showing a main part of a radio communication apparatus according to a fourth embodiment of the present invention.

[Fig. 16] Fig. 16 is a partially enlarged sectional view

showing a state in which housings are unfolded.

[Fig. 17] Fig. 17 is a front view showing a radio communication apparatus according to a first related-art example.

[Fig. 18] Fig. 18 is a perspective view showing a radio communication apparatus according to a second related-art example.

Reference Numerals

[0031]

1, 2 housing
1a, 2a end portion
1b, 2b portion
3 hinge unit
4, 5 circuit board
6 group of circuit connecting lines
7, 7' high dielectric member
40 antenna unit
41, 51 ground area
42 non-ground area
43, 52 circuit
72 metal plate
73, 74 metal line
C capacitor
D1, D2 region
L1, L2 inductor

30 Best Modes for Carrying Out the Invention

[0032] Preferred embodiments according to the present invention will be described with reference to the drawings.

EMBODIMENT 1

[0033] Fig. 1 is a perspective view showing a radio communication apparatus according to a first embodiment of the present invention. Fig. 2 is a perspective view of the radio communication apparatus shown in Fig. 1 in a case in which a circuit board is seen through from the back side. Fig. 3 is a sectional view of the radio communication apparatus which is in a folded state. Fig. 4 is a sectional view of the radio communication apparatus which is in an unfolded state.

[0034] As shown in Fig. 1, the radio communication apparatus according to the first embodiment is a foldable cellular telephone. A housing 1 serving as a first housing and a housing 2 serving as a second housing are linked via a hinge unit 3 in an openable/closeable manner.

[0035] The housing 1 is a casing used as an operation unit of the radio communication apparatus, and is formed of a synthetic resin such as a plastic.

[0036] A keyboard 11, a microphone 12, and the like are mounted on the housing 1, and a circuit board 4 serving as a first circuit board is housed inside the housing 1 as shown by broken lines.

[0037] As shown in Fig. 2, the circuit board 4 has a ground area 41 on both surfaces thereof. A non-ground area 42 is provided at the back side of the circuit board 4, and an antenna unit 40 is surface-mounted on the non-ground area 42. Moreover, various circuits such as a transmitting-and-receiving unit and a control unit are provided on the ground area 41 of the circuit board 4; however, in order to facilitate understanding, these circuits are shown as a single circuit 43 on the drawings.

[0038] The antenna unit 40 is a monopole antenna whose electrical length is $(\lambda / 4) \times (m + 1)$ and is electrically connected to the circuit 43. Here, λ is a wavelength for a resonance frequency of the antenna unit 40 and m is an integer which is 0 or more.

[0039] On the other hand, the housing 2 is a casing used as a display unit of the radio communication apparatus, and is formed of a synthetic resin such as a plastic, similarly to the housing 1. However, the housing 2 is designed to be longer than the housing 1. Here, in the first embodiment, the housings 1 and 2 are formed of a synthetic resin such as a plastic; however, these may be formed of a metal such as a magnesium alloy.

[0040] As shown in Fig. 1, a liquid crystal panel 21, a speaker 22, and the like are mounted on the housing 2, and a circuit board 5 serving as a second circuit board is housed inside the housing 2 as shown by broken lines.

[0041] As shown in Fig. 2, the circuit board 5 has ground areas 51 and 51 on both surfaces thereof. Various circuits used to operate the liquid crystal panel 21, the speaker 22, and the like are provided on the ground area 51 at a front side of the circuit board 5; however, in order to facilitate understanding, these circuits are shown as a single circuit 52 as shown in Fig. 3.

[0042] As shown in Fig. 2, the circuit board 4 housed in the housing 1 and the circuit board 5 housed in the housing 2 are electrically connected via a group of circuit connecting lines 6.

[0043] A signal line and a control line that connect the circuit 43 to the circuit 52, a connecting line between the ground area 41 and the ground area 51, and the like exist in parallel between the circuit board 4 and the circuit board 5; however, in the first embodiment, the signal line and the like are collectively shown as the group of circuit connecting lines 6.

[0044] As shown in Fig. 3, the group of circuit connecting lines 6 electrically connects the circuit board 4 to the circuit board 5 through the hinge unit 3. Thus, an inductor L1 constituted by the group of circuit connecting lines 6 is disposed between the circuit boards 4 and 5.

[0045] The hinge unit 3 is a portion that links the housing 1 and the housing 2 in an openable/closeable manner, and, as a characteristic, links an end portion of the housing 2 serving as one housing to a portion located inside the housing 1 serving as the other housing.

[0046] Fig. 5 is a partially enlarged sectional view used to describe a formation position of the hinge unit 3. Fig. 6 is a partially enlarged sectional view used to describe an overlapped region of the housings 1 and 2.

[0047] As shown in Fig. 5, one side of the hinge unit 3 is linked to an end portion 2a of the housing 2. The other side of the hinge unit 3 is linked to a portion 1b located more internally (the right side of Fig. 5) than an end portion 1a of the housing 1.

[0048] This allows the housing 2 to rotate about the hinge unit 3 with respect to the housing 1, and as shown in Fig. 4, the housings 1 and 2 can be in an unfolded state.

[0049] Since the hinge unit 3 is linked to the portion 1b of the housing 1, when the housings 1 and 2 are in an unfolded state, as shown in Fig. 5, a region D1 extending from the portion 1b to the end portion 1a of the housing 1 and a region D2 near the end portion 2a of the housing 2 overlap with each other as seen in a projection domain.

[0050] A high dielectric member 7, which is characteristic according to the first embodiment, is arranged at this overlapped region.

[0051] Fig. 7 is a plan view for indicating a position at which the high dielectric member 7 is arranged.

[0052] As shown in Fig. 1, the high dielectric member 7 is a member for adjusting a capacitance between the ground areas 41 and 51 of the circuit board 4 and circuit board 5. In the first embodiment, a thermoplastic resin, the dielectric constant of which is lower than that of versatile plastic such as PC (Polycarbonate) or a mixture of PC and ABS (Acrylonitrile Butadiene Styrene), and filler with a high dielectric constant are mixed, and the dielectric constant of the mixture is set to be 5 through 1000.

[0053] The high dielectric member 7 is arranged so as to be positioned between the overlapped regions when the housings 1 and 2 are in an unfolded state as shown in Fig. 6. As shown in Fig. 5, the high dielectric member 7 is adhered onto the region D1 extending from the portion 1b of the housing 1 to the end portion 1a. As a matter of course, the high dielectric member 7 may be adhered onto the region D2 near the end portion 2a of the housing 2.

[0054] Moreover, the high dielectric member 7 is formed so as to form a strip-like shape, a cross section of which has a trapezoid shape. As shown in Fig. 7, the high dielectric member 7 is adhered to the housing 1 across the entire width.

[0055] According to this, as shown in Fig. 6, when the housing 1 and 2 are unfolded, the high dielectric member 7 is disposed between the end portions of the housings 1 and 2, that is, between the end portions of the ground areas 41 and 51 of the circuit boards 4 and 5. A capacitor C is constituted by the ground areas 41 and 51 and the high dielectric member 7, and the capacitor C causes the circuit boards 4 and 5 to be in a state in which the circuit boards 4 and 5 are electrically connected.

[0056] Next, an operation of and advantages indicated by the radio communication apparatus according to the first embodiment will be described.

[0057] Fig. 8 is a schematic diagram showing a parallel circuit formed between the circuit boards. Fig. 9 includes schematic diagrams used to describe a function of the parallel circuit.

[0058] As shown in Fig. 1, if the circuit 43 is operated in a state in which the housings 1 and 2 of the radio communication apparatus are unfolded, a radio wave is transmitted and received via the antenna unit 40 of the housing 1.

[0059] Here, the antenna unit 40, the electric length of which is one fourth of the wavelength for a resonance frequency, is a monopole antenna. Thus, if board lengths of the circuit boards 4 and 5 are appropriate lengths corresponding to the electric length of the antenna unit 40, an antenna gain is increased.

[0060] More particularly, when the electric lengths of the circuit boards 4 and 5 are equal to the electric length $(\lambda / 4) \times (m + 1)$ of the antenna unit 40 or longer than the electric length of the antenna unit 40 by about 0.1λ , an antenna gain is increased and antenna characteristics are improved.

[0061] Here, as described above, the circuit boards 4 and 5 are connected via the group of circuit connecting lines 6 serving as the inductor L1. Moreover, as shown in Fig. 6, since the circuit boards 4 and 5 are connected via the capacitor C constituted by the ground areas 41 and 51 and the high dielectric member 7 when the housings 1 and 2 are in an unfolded state, as shown in Fig. 8, the circuit boards 4 and 5 are in a state in which the circuit boards 4 and 5 are connected via the parallel circuit, which is constituted by the capacitor C and the inductor L1.

[0062] Thus, the board lengths of the circuit boards 4 and 5 can be adjusted to be appropriate values by controlling the impedance of this parallel circuit. That is, an electric length of the entirety of the circuit boards 4 and 5 can be adjusted by controlling the impedance of the parallel circuit.

[0063] In such a parallel circuit, as indicated by arrows shown in part (a) of Fig. 9, if the frequency of the electric current is high, the electric current flows through the capacitor C. If the frequency of the electric current is low, the electric current flows through the inductor L1. Thus, even if the same frequency is used, as shown in part (b) of Fig. 9, an influence caused by the inductor L1 can be disregarded by setting the capacitor C to have a high capacitance. Thus, in the first embodiment, as described above, the impedance can be controlled in a manner such that the dielectric constant of the high dielectric member 7 is set to a value within a range from 5 to 1000, the capacitor C constituted by the high dielectric member 7 and the ground areas 41 and 51 of the circuit boards 4 and 5 is set to have a high capacitance, and the capacitor C can be seen as dominant. Thus, by setting the dielectric constant of the high dielectric member 7 to an appropriate value and causing the impedance of the parallel circuit to be small, the electrical length of the entirety of the circuit boards 4 and 5 can be adjusted to be an appropriate electrical length. Moreover, the impedance of the parallel circuit can be controlled by simply adjusting the capacitance of the capacitor C, which is adjusted by adjusting the dielectric constant of the high dielectric mem-

ber 7. Thus, with respect to a wide range of frequencies, an appropriate electrical length, which is well-balanced, can be provided to the entirety of the circuit boards 4 and 5.

[0064] In contrast, similar to the radio communication apparatus shown in Fig. 17, if a parallel circuit which includes a series-connected component in which an inductor and a capacitor are connected in series is used, an appropriate electrical length cannot be provided to the entirety of the circuit boards 4 and 5 with respect to a wide range of frequencies.

[0065] Fig. 10 includes schematic diagrams used to describe a disadvantage of an existing parallel circuit.

[0066] As shown in part (a) of Fig. 10, the existing radio communication apparatus shown in Fig. 17 has a structure in which a parallel circuit is provided between the circuit boards 4 and 5. In the parallel circuit, a series-connected component, in which an inductor L2 and the capacitor C are connected in series, and the inductor L1 are connected in parallel.

[0067] Thus, as shown in part (b) of Fig. 10, even if the capacitance of the capacitor C is adjusted in order to be able to disregard the inductor L1, since the inductor L2 and the capacitor C are connected in series, a desired impedance can be obtained only in a case in which a condition regarding the inductor L2 and capacitor C is satisfied. Therefore, outside a specified narrow range of frequencies, the electrical length of the entirety of the circuit boards 4 and 5 cannot be set to an appropriate value.

[0068] In contrast, the radio communication apparatus according to the first embodiment differs from the existing radio communication apparatus. For a wide range of frequencies, in the radio communication apparatus according to the first embodiment, the entirety of the circuit boards 4 and 5 can be set to have an appropriate electrical length. In addition, the physical volume of such a radio communication apparatus can be reduced since the circuit board 4 including the antenna unit 40 is housed in the housing 1 and unnecessary elements such as a flip element are not used.

EMBODIMENT 2

[0069] Next, a second embodiment of the present invention will be described.

[0070] Fig. 11 is a partially enlarged sectional view showing a main part of a radio communication apparatus according to the second embodiment of the present invention. Fig. 12 is a partially enlarged sectional view showing a state in which the housings 1 and 2 are unfolded.

[0071] The second embodiment differs from the first embodiment described above in terms of a mounting structure for the high dielectric member 7.

[0072] That is, as shown in Fig. 11, the high dielectric member 7 is formed as a part of the housing 1, and the high dielectric member 7 is made to be in a state in which

the high dielectric member 7 is embedded in the housing 1. By unfolding the housings 1 and 2, as shown in Fig. 12, the high dielectric member 7 is made to be in a state in which the high dielectric member 7 is disposed between the ground areas 41 and 51 of the circuit boards 4 and 5.

[0073] With such a structure, a radio communication apparatus can be designed in a state in which the high dielectric member 7 is included, thus the high dielectric member 7 does not affect design of the radio communication apparatus. Here, if a protrusion caused by the high dielectric member 7 is a problem, the high dielectric member 7 may be designed so that the high dielectric member 7 is flush with surfaces of the housings 1 and 2.

[0074] Here, the high dielectric member 7 needs to be a part of or the entirety of at least one of the housings 1 and 2. Thus, instead of being adhered to the housing 2 as shown in the first embodiment, the high dielectric member 7 may be integrally formed with the housing 2 (the housing 1) when manufacturing the housing 2 (the housing 1). Moreover, the entirety of the housing 2 (the housing 1) may be formed as the high dielectric member 7.

[0075] Other structures, operations, and advantages are similar to those of the first embodiment. Thus, a description thereof is omitted.

EMBODIMENT 3

[0076] Next, a third embodiment of the present invention will be described.

[0077] Fig. 13 is a partially enlarged sectional view showing a main part of a radio communication apparatus according to the third embodiment of the present invention. Fig. 14 is a partially enlarged sectional view showing a state in which the housings 1 and 2 are unfolded.

[0078] The third embodiment differs from the first and second embodiments described above in terms of a point that a high dielectric member is provided to both of the housings 1 and 2.

[0079] That is, as shown in Fig. 13, a high dielectric member 7' having a rectangular cross-section shape is also arranged to a portion 2b near the end portion 2a of the housing 2 (within the region D2 shown in Fig. 6). By unfolding the housings 1 and 2, as shown in Fig. 14, the high dielectric member 7' overlaps the high dielectric member 7, and the overlapped high dielectric members 7 and 7' are caused to be in a state in which the overlapped high dielectric members 7 and 7' are disposed between the ground areas 41 and 51 of the circuit boards 4 and 5.

[0080] With such a structure, the capacitance of a capacitor C (see Fig. 8) between the circuit boards 4 and 5 can be increased, and capacitive coupling between the circuit boards 4 and 5 can be strengthened.

[0081] Other structures, operations, and advantages are similar to those of the first and second embodiments. Thus, a description thereof is omitted.

EMBODIMENT 4

[0082] Next, a fourth embodiment of the present invention will be described.

[0083] Fig. 15 is a partially enlarged sectional view showing a main part of a radio communication apparatus according to the fourth embodiment of the present invention. Fig. 16 is a partially enlarged sectional view showing a state in which the housings 1 and 2 are unfolded.

[0084] The fourth embodiment differs from the third embodiment described above in terms of a point that a metal plate inside the high dielectric member is connected to the ground area of the circuit board via a metal line.

[0085] That is, as shown in Fig. 15, a metal plate 72 is buried inside the high dielectric member 7 near the housing 1 and another metal plate 72 is buried inside the high dielectric member 7' near the housing 2. A metal line 73 is provided inside the high dielectric member 7, and the metal plate 72 and the ground area 51 of the circuit board 5 are electrically connected via the metal line 73. Also, a metal line 74 is provided inside the high dielectric member 7', and the metal plate 72 and the ground area 41 of the circuit board 4 are electrically connected via the metal line 74.

[0086] According to this, unfolding of the housings 1 and 2, as shown in Fig. 16, leads to a state in which the metal plates 72 and 72 are facing, the metal plates 72 and 72 being electrically connected to the ground areas 41 and 51 of the circuit boards 4 and 5, and a state in which the high dielectric members 7 and 7' that are in contact are disposed between the circuit boards 4 and 5.

[0087] As a result, the capacitance of a capacitor C (see Fig. 8) between the circuit boards 4 and 5 can be increased, and stronger capacitive coupling between the circuit boards 4 and 5 can be generated.

[0088] Other structures, operations, and advantages are similar to those of the third embodiment described above. Thus, a description thereof is omitted.

[0089] Here, the technical scope of the present invention is not limited to the above-described embodiments, and various modifications are permissible within the scope and spirit of the present invention.

[0090] For example, in the first embodiment described above, an example in which the high dielectric member 7 is mounted on the housing 1 by being adhered thereto is given; however, the method of mounting the high dielectric member 7 is not limited to adhering. As a matter of course, various mounting methods which are known may be applied.

[0091] In the fourth embodiment described above, an example in which the metal plates 72 are provided inside the high dielectric member 7 near the housing 1 and the high dielectric member 7' near the housing 2, and the metal plates 72 and 72 are electrically connected to the ground areas 41 and 51 of the circuit boards 4 and 5 via the metal lines 73 and 74 is given; however, if the housings 1 and 2 are formed of metal and the housings 1 and 2 are electrically connected to the ground areas 41 and

51 of the circuit boards 4 and 5, operations and advantages similar to those of the fourth embodiment can be obtained by simply disposing the high dielectric member 7 between the housings 1 and 2, as a matter of course.

[0092] Moreover, in the embodiments described above, a structure is given that meets a demand in terms of a design in which the dielectric constant of the high dielectric member 7 is set to a value within the range from 5 to 1000, a thickness of or a volume of the high dielectric member 7 is suppressed, and thinning is achieved or protrusions are reduced. However, as a matter of course, a radio communication apparatus in which the dielectric constant of the high dielectric member 7 is set outside the range from 5 to 1000 may be included in the scope of the present invention.

Claims

1. A radio communication apparatus comprising:

a first housing (1) in which a first circuit board (4) having an antenna unit (40) is housed;
a second housing (2) in which a second circuit board (5) is housed;
a hinge unit (3) for linking the first housing and the second housing in an openable/closeable manner; and the hinge unit links an end portion (2a) of one housing from among the first and second housings and a portion (1b) of the other housing, said portion (1b) of the other housing being located more internally than an end portion (1a) of the other housing, and a region (D1) extending from said portion (1b) of the other housing to said end portion (1a) of the other housing overlaps a region (D2) near said end portion (2a) of the one housing in a projection domain when the first and second housings are in an unfolded state,

characterised by:

a group of circuit connecting lines (6) for electrically connecting a circuit (43) of the first circuit board and a circuit (52) of the second circuit board and for electrically connecting a ground (41) of the first circuit board and a ground (51) of the second circuit board; and
a high dielectric member (7,7') provided near the hinge unit,
wherein the antenna unit is provided near an end portion of the first circuit board, said end portion being opposite the hinge unit
the high dielectric member (7,7') is arranged between the regions (D1, D2) being overlapped when the first and second housings are in an unfolded state in order to adjust a capacitance between the ground (41) of the first circuit board

and the ground (51) of the second circuit board.

2. The radio communication apparatus according to Claim 1,
wherein the high dielectric member (7,7') is provided to at least one of said region (D1) extending from said portion (1b) of the other housing to said end portion (1a) of the other housing and said region (D2) near said end portion (2a) of the one housing.
3. The radio communication apparatus according to Claim 1 or 2,
wherein the high dielectric member (7,7') forms a part of or the entirety of at least one housing from among the first and second housings.
4. The radio communication apparatus according to any one of Claims 1 to 3,
wherein the high dielectric member (7,7') is a mixture of a thermoplastic resin with a dielectric constant lower than that of a versatile plastic and filler with a high dielectric constant.
5. The radio communication apparatus according to any one of Claims 1 to 4,
wherein a dielectric constant of the high dielectric member (7,7') is set to a value within a range from 5 to 1000.
6. The radio communication apparatus according to any one of Claims 1 to 5,
wherein the high dielectric member (7,7') is provided to each of the region extending from the portion of the other housing to the end portion of the other housing and the region near the end portion of the one housing, and
metal plates (72) are arranged inside the respective high dielectric members that are paired and the metal plates face each other.
7. The radio communication apparatus according to Claim 6,
wherein each of the metal plates (72) is electrically connected, via a metal line (73, 74), to the ground (41, 51) of the circuit board inside said first or second housing (1,2) in which said high dielectric member (7,7') having the metal plate is provided.

Patentansprüche

1. Funkverbindungsgerät, welches umfasst:

ein erstes Gehäuse (1), in dem eine erste Leiterplatte (4) mit einer Antenneneinrichtung (40) aufgenommen ist;
ein zweites Gehäuse (2), in dem eine zweite Leiterplatte (5) aufgenommen ist;

eine Scharniereinrichtung (3) zum Verbinden des ersten Gehäuses und des zweiten Gehäuses in einer zu öffnenden/schließenden Weise; und die Scharniereinrichtung verbindet einen Endabschnitt (2a) eines Gehäuses von erstem und zweitem Gehäuse und einen Abschnitt (1 b) des anderen Gehäuses, wobei der Abschnitt (1 b) des anderen Gehäuses weiter innen als ein Endabschnitt (1a) des anderen Gehäuses positioniert ist, und ein Bereich (D1), der sich von dem Abschnitt (1 b) des anderen Gehäuses zu dem Endabschnitt (1a) des anderen Gehäuses erstreckt, überlagert einen Bereich (D2) nahe dem Endabschnitt (2a) des einen Gehäuses in einer Projektionsdomäne, wenn sich das erste und zweite Gehäuse in einem aufgeklappten Zustand befinden,

gekennzeichnet durch:

- eine Gruppe von Schaltkreisverbindungsleitungen (6) zum elektrischen Verbinden eines Schaltkreises (43) der ersten Leiterplatte und eines Schaltkreises (52) der zweiten Leiterplatte und zum elektrischen Verbinden einer Masse (41) der ersten Leiterplatte und einer Masse (51) der zweiten Leiterplatte; und ein hoch dielektrisches Element (7, 7'), das nahe der Scharniereinrichtung vorgesehen ist, wobei die Antenneneinrichtung nahe einem Endabschnitt der ersten Leiterplatte vorgesehen ist, wobei der Endabschnitt gegenüber der Scharniereinrichtung liegt; das hoch dielektrische Element (7, 7') ist zwischen den Bereichen (D1, D2) angeordnet, die überlagert sind, wenn sich das erste und zweite Gehäuse in einem aufgeklappten Zustand befinden, um zwischen der Masse (41) der ersten Leiterplatte und der Masse (51) der zweiten Leiterplatte eine Kapazität anzupassen.
2. Funkverbindungsgerät nach Anspruch 1, wobei das hoch dielektrische Element (7, 7') an mindestens einem von dem Bereich (D1), der sich von dem Abschnitt (1 b) des anderen Gehäuses zu dem Endabschnitt (1a) des anderen Gehäuses erstreckt, und dem Bereich (D2) nahe dem Endabschnitt (2a) des einen Gehäuses vorgesehen ist.
 3. Funkverbindungsgerät nach Anspruch 1 oder 2, wobei das hoch dielektrische Element (7, 7') einen Teil oder die Gesamtheit mindestens einen Gehäuses von erstem und zweitem Gehäuse bildet.
 4. Funkverbindungsgerät nach einem der Ansprüche 1 bis 3, wobei das hoch dielektrische Element (7, 7') eine Mischung aus einem thermoplastischen Harz mit einer Dielektrizitätskonstante, die niedriger als

die eines Universalkunststoffs ist, und einem Füllstoff mit einer hohen Dielektrizitätskonstante ist.

5. Funkverbindungsgerät nach einem der Ansprüche 1 bis 4, wobei eine Dielektrizitätskonstante des hoch dielektrischen Elements (7, 7') auf einen Wert in einem Bereich von 5 bis 1000 festgelegt ist.
6. Funkverbindungsgerät nach einem der Ansprüche 1 bis 5, wobei das hoch dielektrische Element (7, 7') sowohl an dem Bereich, der sich von dem Abschnitt des anderen Gehäuses zu dem Endabschnitt des anderen Gehäuses erstreckt, als auch an dem Bereich nahe dem Endabschnitt des einen Gehäuses vorgesehen ist und Metallplatten (72) in den jeweiligen hoch dielektrischen Elementen angeordnet sind, die gepaart sind, und die Metallplatten einander zugewandt sind.
7. Funkverbindungsgerät nach Anspruch 6, wobei jede der Metallplatten (72) mittels einer Metallleitung (73, 74) mit der Masse (41, 51) der Leiterplatte in dem ersten oder zweiten Gehäuse (1, 2), in dem das hoch dielektrische Element (7, 7') mit der Metallplatte vorgesehen ist, elektrisch verbunden ist.

Revendications

1. Appareil de communication radio, comprenant :
 - un premier boîtier (1) dans lequel une première carte de circuit imprimé (4) présentant une unité d'antenne (40) est logée ;
 - un second boîtier (2) dans lequel une seconde carte de circuit imprimé (5) est logée ;
 - une unité de charnière (3) pour raccorder le premier boîtier et le second boîtier de manière à pouvoir être ouvert/fermé ; et
 - l'unité de charnière raccordant une partie d'extrémité (2a) d'un boîtier parmi le premier et le second boîtiers et une partie (1 b) de l'autre boîtier, ladite partie (1 b) de l'autre boîtier étant située plus à l'intérieur qu'une partie d'extrémité (1 a) de l'autre boîtier, et une zone (D1) s'étendant de ladite partie (1 b) de l'autre boîtier à ladite partie d'extrémité (1 a) de l'autre boîtier chevauche une zone (D2) près de ladite partie d'extrémité (2a) dudit un boîtier dans une zone de projection quand le premier et le second boîtiers sont dans un état non plié,

caractérisé par :

un groupe de lignes de connexion de circuit (6) pour connecter électriquement un circuit (43) de la première carte de circuit imprimé (52) et un circuit (52) de la seconde carte de circuit imprimé

- mé et pour connecter électriquement une masse (41) de la première carte de circuit imprimé et une masse (51) de la seconde carte de circuit imprimé ; et
un élément à haute constante diélectrique (7, 7') prévu près de l'unité de charnière, dans lequel l'unité d'antenne est prévue près d'une partie d'extrémité de la première carte de circuit imprimé, ladite partie d'extrémité étant opposée à l'unité de charnière ;
l'élément à haute constante diélectrique (7, 7') est agencé entre les zones (D1, D2) qui se chevauchent quand le premier et le second boîtiers sont dans un état non plié afin d'ajuster une capacité entre la masse (41) de la première carte de circuit imprimé et la masse (51) de la seconde carte de circuit imprimé.
2. Appareil de communication radio selon la revendication 1, dans lequel l'élément à haute constante diélectrique (7, 7') est prévu sur au moins une de ladite zone (D1) s'étendant de ladite partie (1 b) de l'autre boîtier à ladite partie d'extrémité (1a) de l'autre boîtier et de ladite zone (D2) près de ladite partie d'extrémité (2a) dudit un boîtier.
3. Appareil de communication radio selon la revendication 1 ou 2, dans lequel l'élément à haute constante diélectrique (7, 7') forme une partie ou la totalité d'au moins un boîtier parmi le premier et le second boîtiers.
4. Appareil de communication radio selon l'une quelconque des revendications 1 à 3, dans lequel l'élément à haute constante diélectrique (7, 7') est un mélange d'une résine thermoplastique ayant une constante diélectrique inférieure à celle d'un plastique polyvalent et d'une matière de remplissage ayant une haute constante diélectrique.
5. Appareil de communication radio selon l'une quelconque des revendications 1 à 4, dans lequel une constante diélectrique de l'élément à haute constante diélectrique (7, 7') est réglée sur une valeur dans un intervalle de 5 à 1000.
6. Appareil de communication radio selon l'une quelconque des revendications 1 à 5, dans lequel l'élément à haute constante diélectrique (7, 7') est prévu sur chacune de la zone s'étendant de la partie de l'autre boîtier à la partie d'extrémité de l'autre boîtier et de la zone près de la partie d'extrémité dudit un boîtier, et
des plaques de métal (72) sont agencées à l'intérieur des éléments à haute constante diélectrique respectifs qui sont appariés et les plaques de métal font face l'une à l'autre.

7. Appareil de communication radio selon la revendication 6, dans lequel chacune des plaques de métal (72) est connectée électriquement, par l'intermédiaire d'une ligne en métal (73, 74), à la masse (41, 51) de la carte de circuit imprimé à l'intérieur desdits premier ou second boîtiers (1, 2) dans lequel ledit élément à haute constante diélectrique (7, 7') présentant la plaque métallique est prévu.

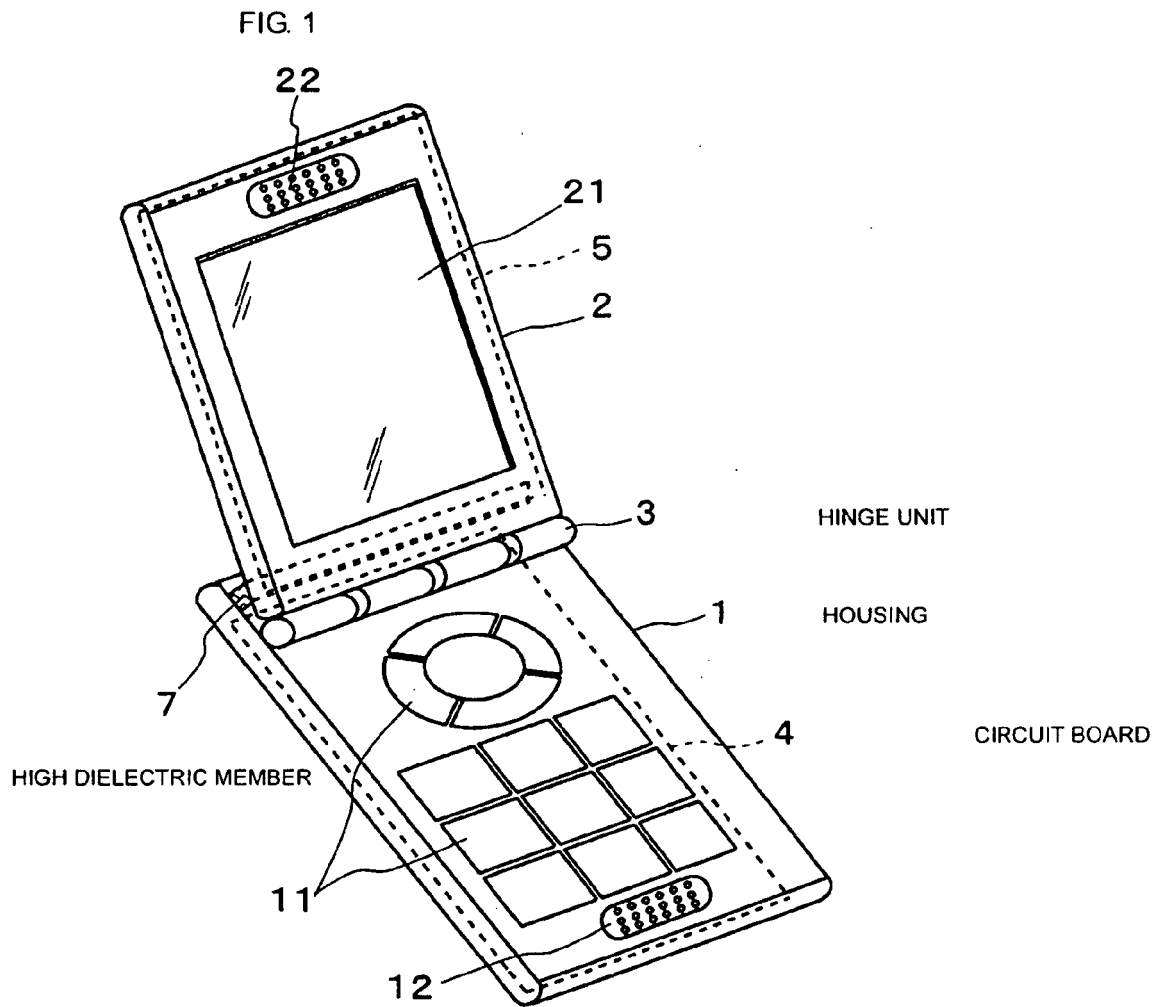


FIG. 2

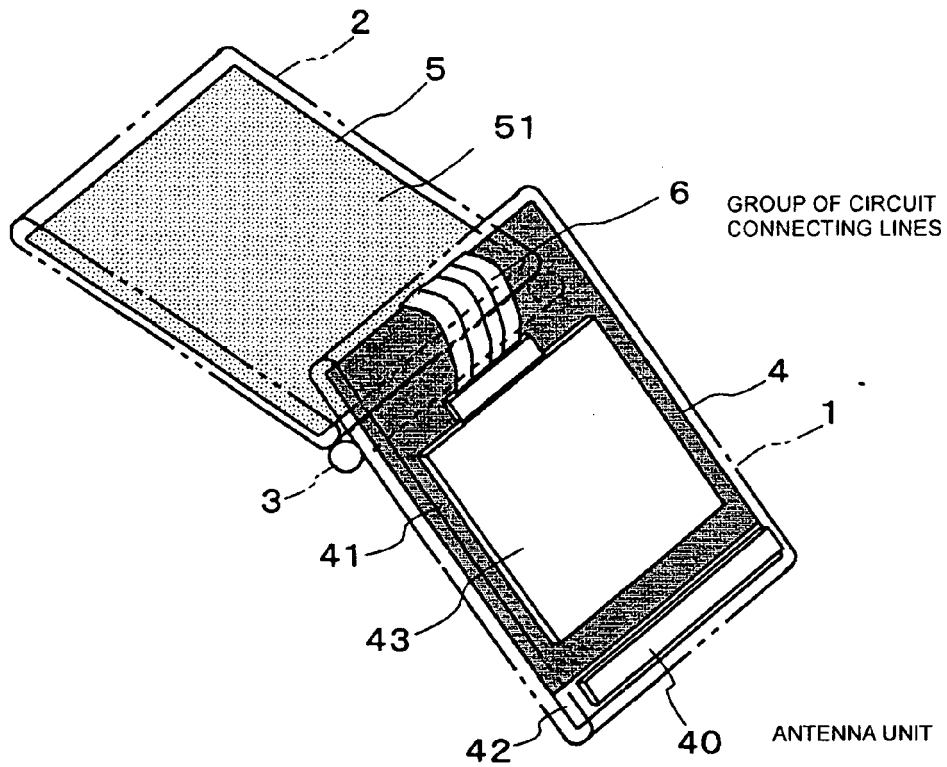


FIG. 3

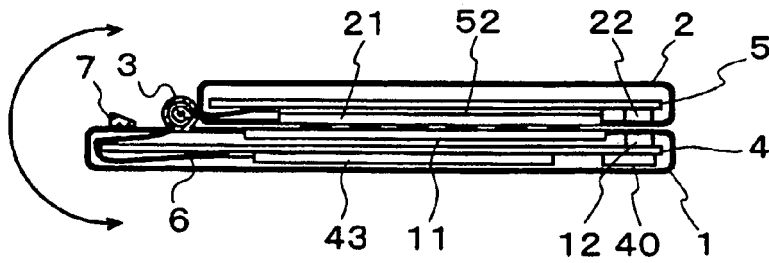


FIG. 4

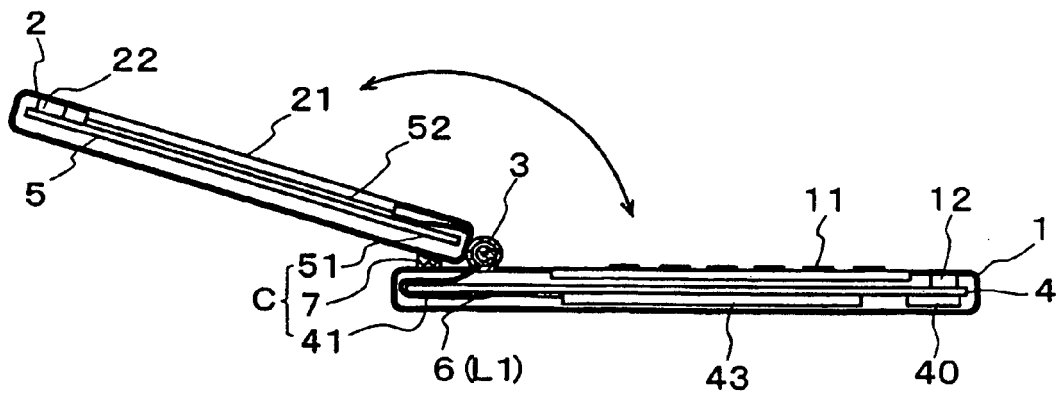


FIG. 5

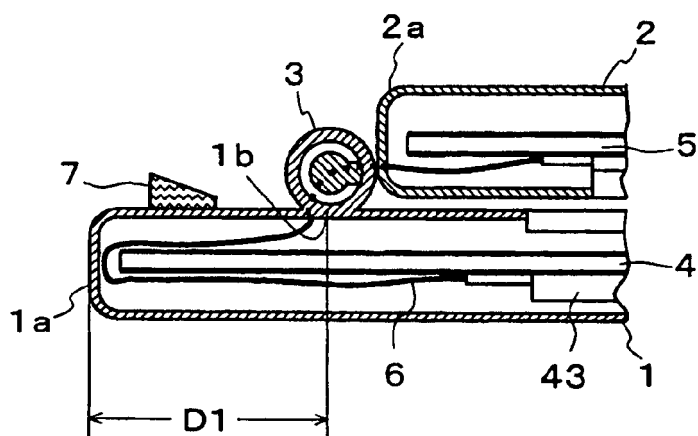


FIG. 6

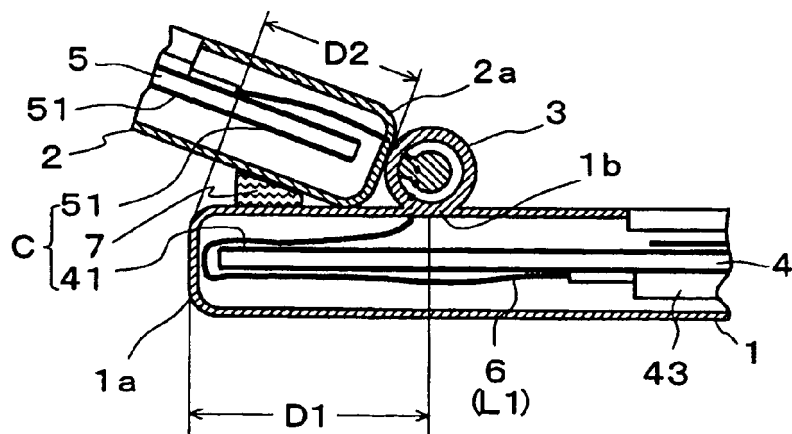


FIG. 7

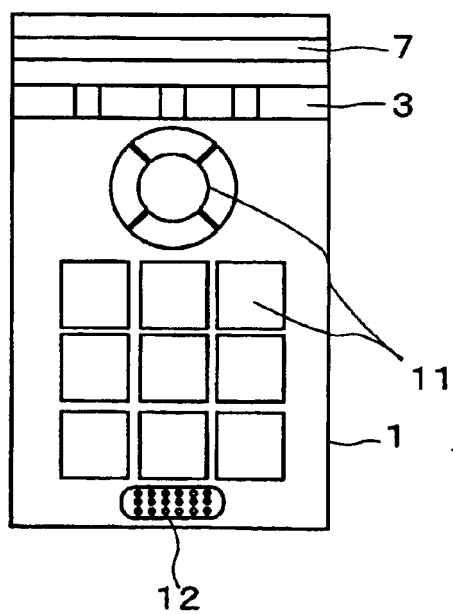


FIG. 8

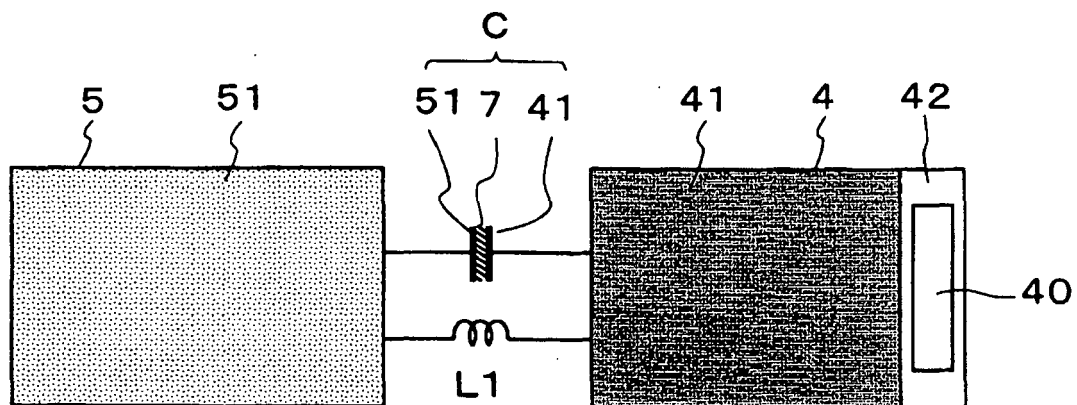


FIG. 9

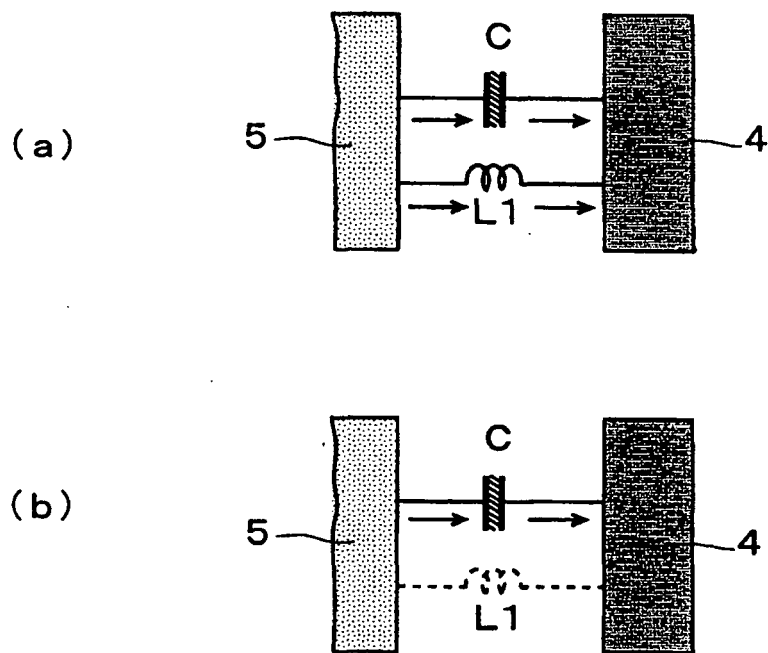


FIG. 10

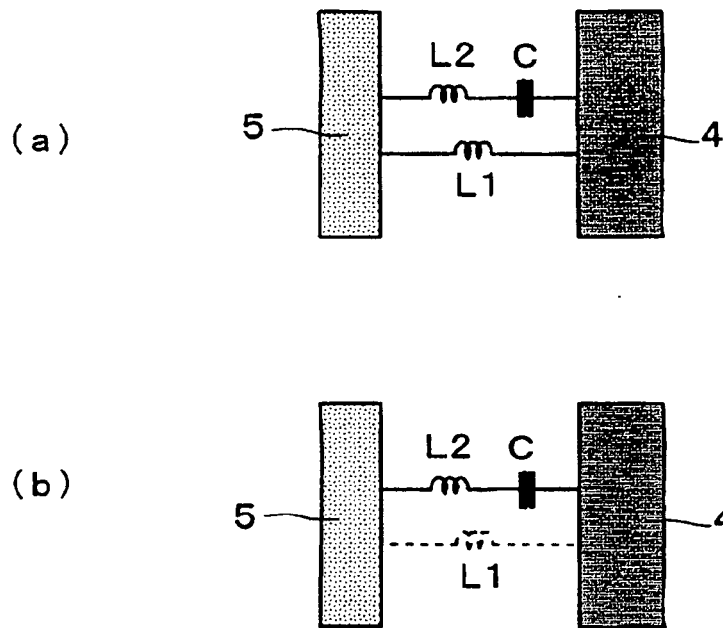


FIG. 11

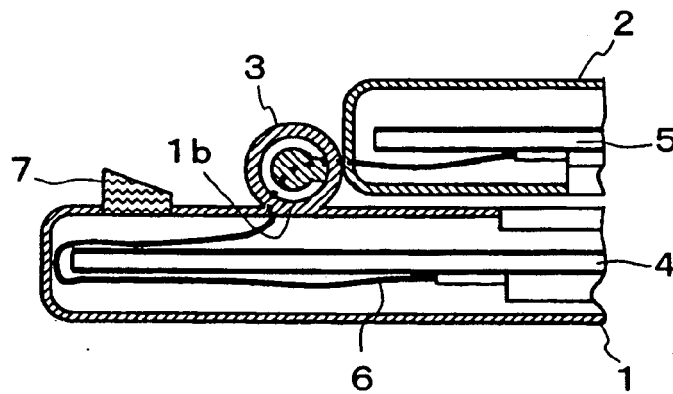


FIG. 12

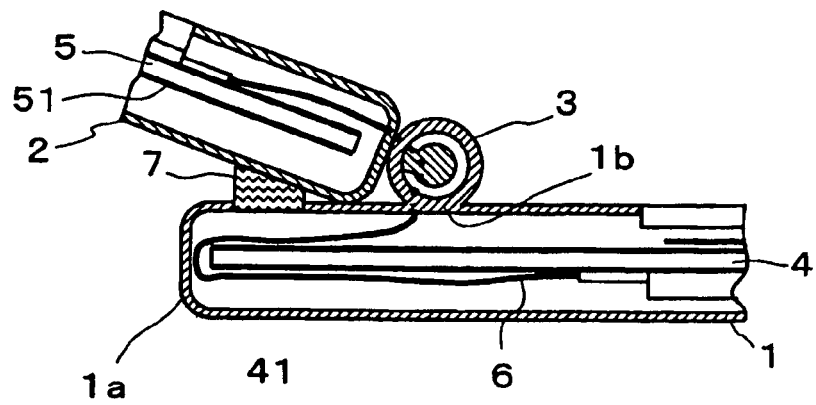


FIG. 13

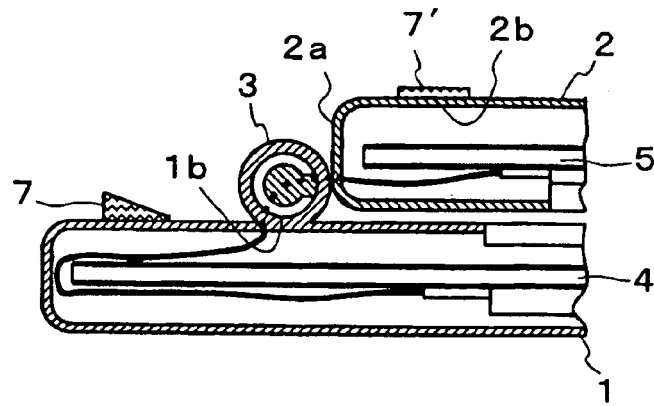


FIG. 14

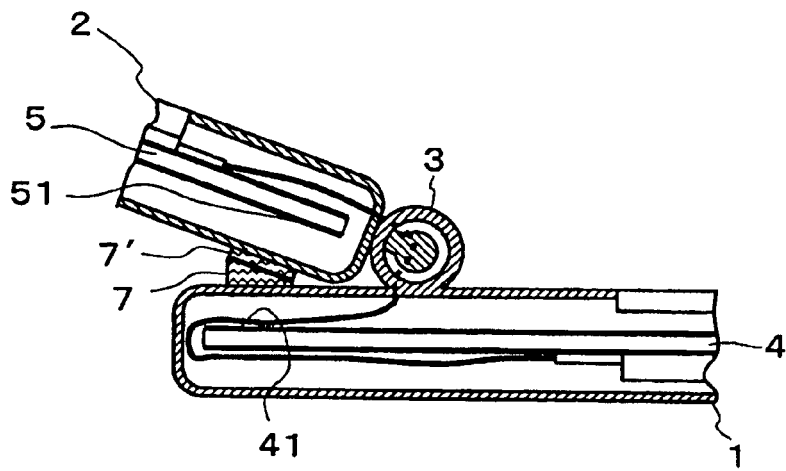


FIG. 15

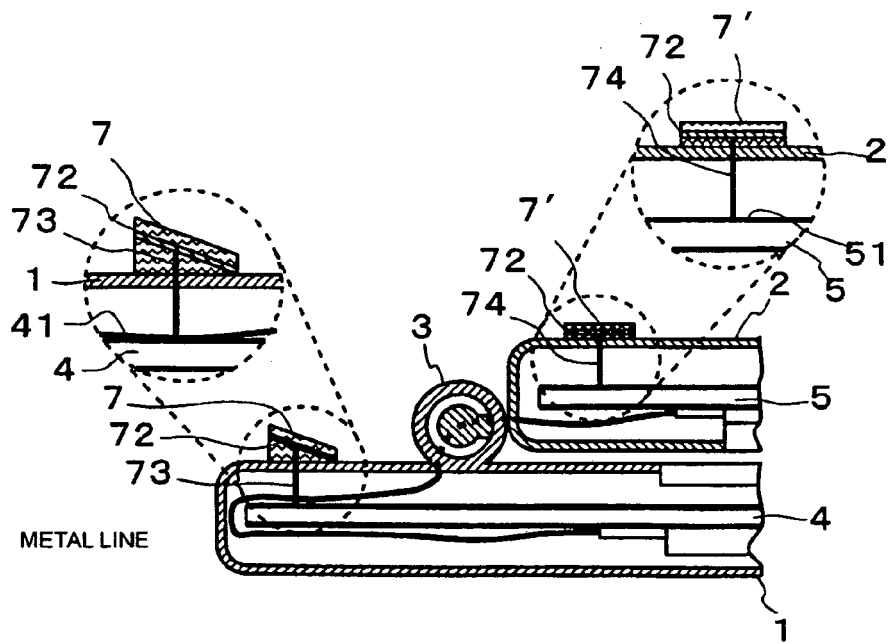


FIG. 16

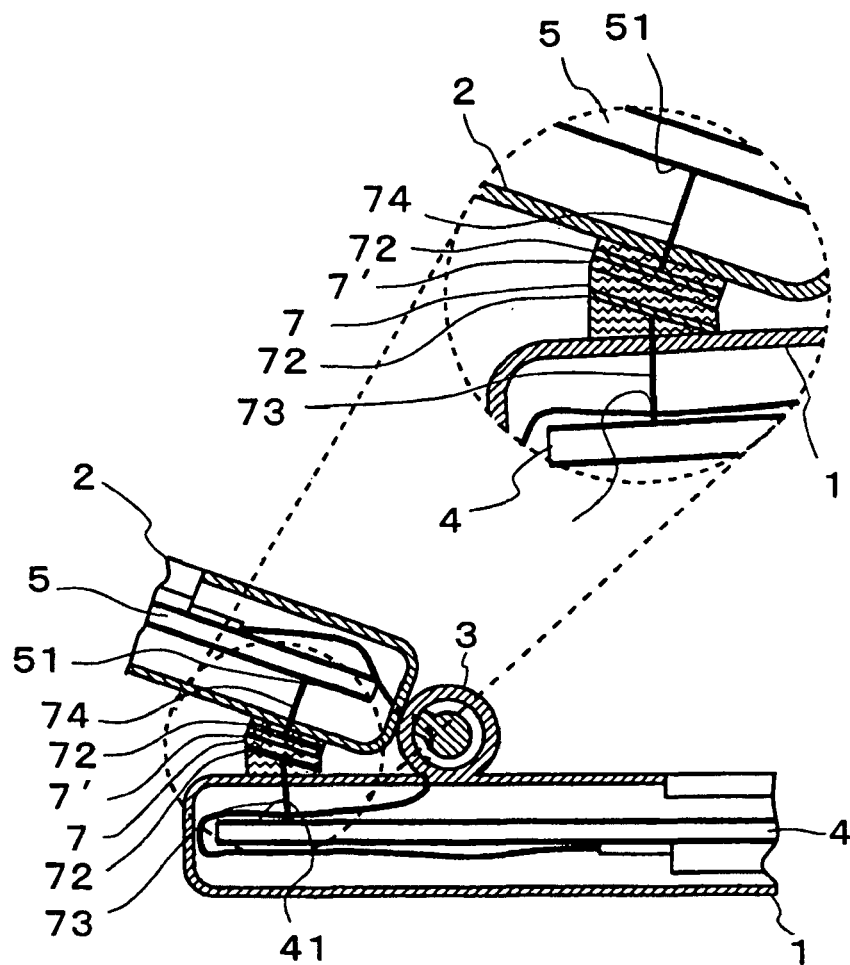


FIG. 17


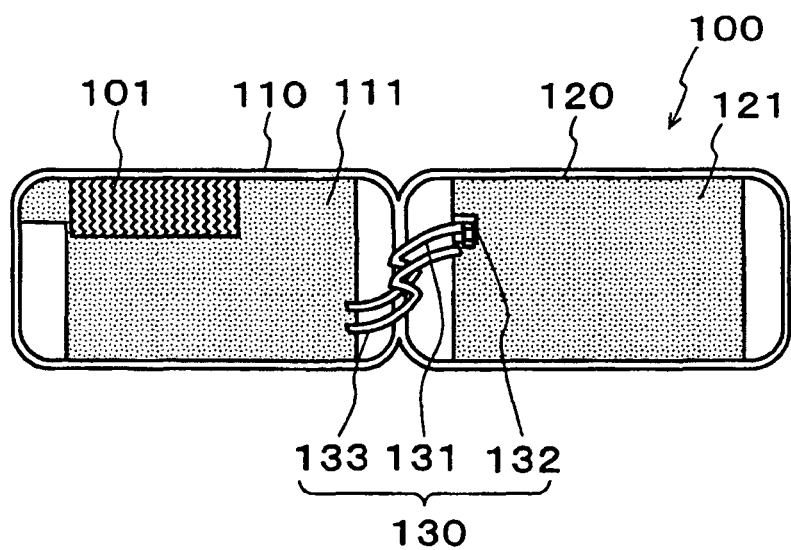


FIG. 18

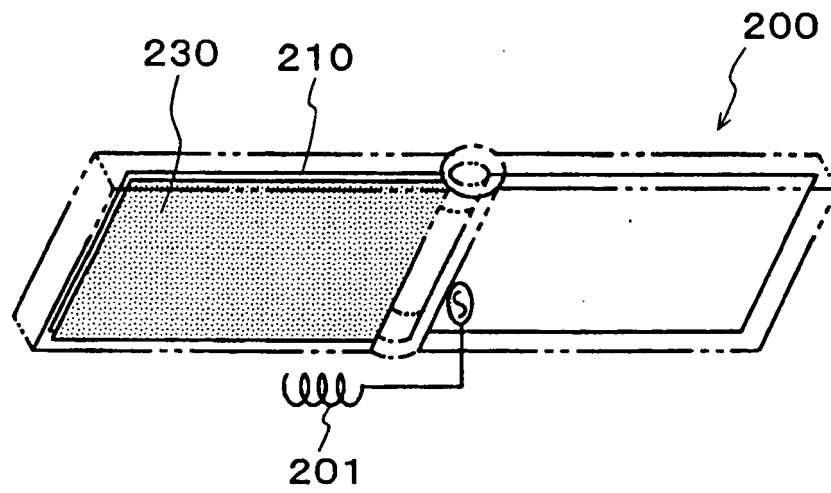

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004040524 A [0006]
- JP 2006086715 A [0006]