

(19)



(11)

EP 2 190 123 B9

(12)

CORRECTED EUROPEAN PATENT SPECIFICATION

(15) Correction information:

Corrected version no 1 (W1 B1)

Corrections, see

Description Paragraph(s) 44, 45, 48, 51, 52

Claims DE 1, 2

Claims EN 1, 2

Claims FR 1, 2

(51) Int Cl.:

H03M 13/00 (2006.01)

H03M 13/11 (2006.01)

H03M 13/25 (2006.01)

H04L 27/20 (2006.01)

H04L 27/36 (2006.01)

H04L 1/00 (2006.01)

H03M 13/15 (2006.01)

H03M 13/29 (2006.01)

H04L 27/34 (2006.01)

H04H 40/90 (2008.01)

(48) Corrigendum issued on:

27.08.2014 Bulletin 2014/35

(45) Date of publication and mention
of the grant of the patent:

07.03.2012 Bulletin 2012/10

(21) Application number: **10001217.8**

(22) Date of filing: **03.07.2003**

(54) Method and system for generating low density parity check (LDPC) codes

Verfahren und System für die Generierung von Low Density Parity Check (LDPC) Codes

Procédé et système pour la génération de codes LDPC (Low Density Parity Check)

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **03.07.2002 US 393457 P**

26.07.2002 US 398760 P

25.10.2002 US 421505 P

04.11.2002 US 423710 P

29.10.2002 US 421999 P

15.01.2003 US 440199 P

15.08.2002 US 403812 P

14.02.2003 US 447641 P

20.03.2003 US 456220 P

09.05.2003 US 469356 P

24.06.2003 US 482112 P

24.06.2003 US 482107 P

(43) Date of publication of application:

26.05.2010 Bulletin 2010/21

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:

03763495.3 / 1 413 059

(73) Proprietor: **DTV G LICENSING, INC**

El Segundo CA 90245 (US)

(72) Inventors:

• **Eroz, Mustafa**

Germantown

MD 20874 (US)

• **Sun, Feng-Wen**

Germantown

MD 20874 (US)

• **Lee, Lin-Nan**

Potomac

MD 20854 (US)

(74) Representative: **Jackson, Richard Eric et al**

Carpmaels & Ransford LLP

One Southampton Row

London WC1B 5HA (GB)

(56) References cited:

EP-A1- 1 093 231 WO-A2-02/099976

EP 2 190 123 B9

- BOND J W ET AL: "Constructing low-density parity-check codes" EUROCOMM 2000. INFORMATION SYSTEMS FOR ENHANCED PUBLIC SAFETY AND SECURITY. IEEE/AFCEA 17 MAY 2000, PISCATAWAY, NJ, USA, IEEE LNKD- DOI:10.1109/EURCOM.2000.874812, 1 January 2000 (2000-01-01), pages 260-262, XP010515080 ISBN: 978-0-7803-6323-6
- BOND J W ET AL: "Constructing low-density parity-check codes with circulant matrices" INFORMATION THEORY AND NETWORKING WORKSHOP, 1999 METSOVO, GREECE 27 JUNE-1 JULY 1999, PISCATAWAY, NJ, USA, IEEE, US LNKD- DOI:10.1109/ITNW.1999.814359, 27 June 1999 (1999-06-27), page 52, XP010365561 ISBN: 978-0-7803-5954-3
- YU YI ET AL: "Design of senii-algebraic low-density parity-check (SA-LDPC) codes for multilevel coded modulation" PROC., IEEE INTERNAT. CONFERENCE ON PARALLEL AND DISTRIBUTED COMPUTING, APPLICATIONS AND TECHNOLOGIES, PDCAT'2003, 27 August 2003 (2003-08-27), pages 931-934, XP010661473 ISBN: 978-0-7803-7840-7
- BANE VASIC ET AL: "Low-Density Parity Check Codes for Long-Haul Optical Communication Systems" IEEE PHOTONICS TECHNOLOGY LETTERS, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 14, no. 8, 1 August 2002 (2002-08-01) , XP011067271 ISSN: 1041-1135
- LI PING ET AL: "Low density parity check codes with semi-random parity check matrix" ELECTRONICS LETTERS, IEE STEVENAGE, GB LNKD- DOI:10.1049/EL:19990065, vol. 35, no. 1, 7 January 1999 (1999-01-07), pages 38-39, XP006011650 ISSN: 0013-5194
- ELEFThERIOU E ET AL: "Low-density parity-check codes for digital subscriber lines" PROC., IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, NEW YORK, NY, USA, vol. 1 OF 5, 28 April 2002 (2002-04-28), - 2 May 2002 (2002-05-02) pages 1752-1757, XP010589787 ISBN: 0-7803-7400-2
- ZHANG T. ET AL: "Joint code and decoder design for implementation-oriented (3, k)-regular LDPC codes" PROC., THE 35TH. ASILOMAR CONFERENCE ON SIGNALS, SYSTEMS, & COMPUTERS. PACIFIC GROOVE, CA, USA, vol. 1 OF 2. CONF. 35, 4 November 2001 (2001-11-04), - 7 November 2001 (2001-11-07) pages 1232-1236, XP010582236 ISBN: 0-7803-7147-X
- ECHARD R ET AL: "THE PI-ROTATION LOW-DENSITY PARITY CHECK CODES" GLOBECOM'01. 2001 IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE. SAN ANTONIO, TX, NOV. 25 - 29, 2001; [IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE], NEW YORK, NY : IEEE, US LNKD- DOI: 10.1109/GLOCOM.2001.965564, 25 November 2001 (2001-11-25), pages 980-984, XP001099251 ISBN: 978-0-7803-7206-1
- SARAH J JOHNSON ET AL: "A Family of Irregular LDPC Codes With Low Encoding Complexity" IEEE COMMUNICATIONS LETTERS, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 7, no. 2, 1 February 2003 (2003-02-01), XP011066488 ISSN: 1089-7798
- BANE VASIC ET AL: "Kirkman Systems and Their Application in Perpendicular Magnetic Recording" IEEE TRANSACTIONS ON MAGNETICS, IEEE SERVICE CENTER, NEW YORK, NY, US, vol. 38, no. 4, 1 July 2002 (2002-07-01), XP011075224 ISSN: 0018-9464

Description

FIELD OF THE INVENTION

5 **[0001]** The present invention relates to communication systems, and more particularly to coded systems.

BACKGROUND OF THE INVENTION

10 **[0002]** Communication systems employ coding to ensure reliable communication across noisy communication channels. These communication channels exhibit a fixed capacity that can be expressed in terms of bits per symbol at certain signal to noise ratio (SNR), defining a theoretical upper limit (known as the Shannon limit). As a result, coding design has aimed to achieve rates approaching this Shannon limit. Conventional coded communication systems have separately treated the processes of coding and modulation. Moreover, little attention has been paid to labeling of signal constellations.

15 **[0003]** A signal constellation provides a set of possible symbols that are to be transmitted, whereby the symbols correspond to codewords output from an encoder. One choice of constellation labeling involves Gray-code labeling. With Gray-code labeling, neighboring signal points differ in exactly one bit position. The prevailing conventional view of modulation dictates that any reasonable labeling scheme can be utilized, which in part is responsible for the paucity of research in this area.

20 **[0004]** With respect to coding, one class of codes that approach the Shannon limit is Low Density Parity Check (LDPC) codes. Traditionally, LDPC codes have not been widely deployed because of a number of drawbacks. One drawback is that the LDPC encoding technique is highly complex. Encoding an LDPC code using its generator matrix would require storing a very large, non-sparse matrix. Additionally, LDPC codes require large blocks to be effective; consequently, even though parity check matrices of LDPC codes are sparse, storing these matrices is problematic.

25 **[0005]** From an implementation perspective, a number of challenges are confronted. For example, storage is an important reason why LDPC codes have not become widespread in practice. Also, a key challenge in LDPC code implementation has been how to achieve the connection network between several processing engines (nodes) in the decoder. Further, the computational load in the decoding process, specifically the check node operations, poses a problem.

30 **[0006]** "Constructing Low-Density Parity-Check Codes", J.W. Bond et al. (Proc., IEEE/AFCEA Information Systems for Enhanced Public Safety and Security, EUROCOMM 2000, 17 May 2000) describes the construction of powerful LDPC codes with code rates 1/2 and 4/7.

[0007] There is a need for using LDPC codes efficiently to support high data rates, without introducing greater complexity. There is also a need to improve performance of LDPC encoders and decoders.

35 SUMMARY OF THE INVENTION

[0008] These and other needs are addressed by the present invention which is defined in the appendant claims. An encoder, such as a Low Density Parity Check (LDPC) encoder, generates encoded signals by transforming an input message into a codeword represented by a plurality of set of bits.

40 **[0009]** According to one aspect of an embodiment of the present invention, a method for generating encoded signals is disclosed. The method includes receiving one of a plurality of set of bits of a codeword from an encoder for transforming an input message into the codeword.

45 **[0010]** According to another aspect of an embodiment of the present invention, an encoder for generating encoded signals is disclosed. The encoder B configured to transform an input message into a codeword represented by a plurality of set of bits.

50 **[0011]** Still other aspects, features, and advantages of the present invention are readily apparent from the following detailed description, simply by illustrating a number of particular embodiments and implementations, including the best mode contemplated for carrying out the present invention. The present invention is also capable of other and different embodiments, and its several details can be modified in various obvious respects, all without departing from the scope of the present invention. Accordingly, the drawing and description are to be regarded as illustrative in nature, and not as restrictive.

BRIEF DESCRIPTION OF THE DRAWINGS

55 **[0012]** The present invention is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements and in which:

FIG. 1 is a diagram of a communications system configured to utilize Low Density Parity Check (LDPC) codes;

FIGs. 2A and 2B are diagrams of exemplary LDPC encoders deployed in the transmitter of FIG. 1;

FIG. 3 is a diagram of an exemplary receiver in the system of FIG. 1;

FIG. 4 is a diagram of a sparse parity check matrix;

FIG. 5 is a diagram of a bipartite graph of an LDPC code of the matrix of FIG. 4;

FIG. 6 is a diagram of a sub-matrix of a sparse parity check matrix, wherein the sub-matrix contains parity check values restricted to the lower triangular region;

FIG. 7 is a graph showing performance between codes utilizing unrestricted parity check matrix (H matrix) versus restricted H matrix having a sub-matrix as in FIG. 6;

FIGs. 8A and 8B are, respectively, a diagram of a non-Gray 8-PSK modulation scheme, and a Gray 8-PSK modulation, each of which can be used in the system of FIG. 1;

FIG. 8C is a diagram of a process for bit labeling for a higher order signal constellation;

FIG. 8D is a diagram of exemplary 16-APSK (Amplitude Phase Shift Keying) constellations;

FIG. 8E is a graph of Packet Error Rate (PER) versus signal-to-noise for the constellations of FIG. 8D;

FIG. 8F is a diagram of constellations for Quadrature Phase Shift Keying (QPSK), 8-PSK, 16-APSK and 32-APSK symbols;

FIG. 8G is a diagram of alternative constellations for 8-PSK, 16-APSK and 32-APSK symbols;

FIG. 8H is a graph of Packet Error Rate (PER) versus signal-to-noise for the constellations of FIG. 8F;

FIG. 9 is a graph showing performance between codes utilizing Gray labeling versus non-Gray labeling;

FIG. 10 is a flow chart of the operation of the LDPC decoder using non-Gray mapping ;

FIG. 11 is a flow chart of the operation of the LDPC decoder of FIG. 3 using Gray mapping;

FIGs. 12A-12C are diagrams of the interactions between the check nodes and the bit nodes in a decoding process;

FIGs. 13A and 13B are flowcharts of processes for computing outgoing messages between the check nodes and the bit nodes using, respectively, a forward-backward approach and a parallel approach;

FIGs. 14A-14C are graphs showing simulation results of LDPC codes generated;

FIGs. 15A and 15B are diagrams of the top edge and bottom edge, respectively, of memory organized to support structured access as to realize randomness in LDPC coding ; and

FIG. 16 is a diagram of a computer system that can perform the processes of encoding and decoding of LDPC codes.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0013] In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It is apparent, however, to one skilled in the art that the present invention may be practiced without these specific details or with an equivalent arrangement. In other instances, well-known structures and devices are shown in block diagram form in order to avoid unnecessarily obscuring the present invention.

[0014] FIG. 1 is a diagram of a communications system configured to utilize Low Density Parity Check (LDPC) codes, according to an embodiment of the present invention. A digital communications system 100 includes a transmitter 101 that generates signal waveforms across a communication channel 103 to a receiver 105. In this discrete communications

system 100, the transmitter 101 has a message source that produces a discrete set of possible messages; each of the possible messages has a corresponding signal waveform. These signal waveforms are attenuated, or otherwise altered, by communications channel 103. To combat the noise channel 103, LDPC codes are utilized.

[0015] The LDPC codes that are generated by the transmitter 101 enables high speed implementation without incurring any performance loss. These structured LDPC codes output from the transmitter 101 avoid assignment of a small number of check nodes to the bit nodes already vulnerable to channel errors by virtue of the modulation scheme (e.g., 8-PSK).

[0016] Such LDPC codes have a parallelizable decoding algorithm (unlike turbo codes), which advantageously involves simple operations such as addition, comparison and table look-up. Moreover, carefully designed LDPC codes do not exhibit any sign of error floor.

[0017] According to one embodiment of the present invention, the transmitter 101 generates, using a relatively simple encoding technique, LDPC codes based on parity check matrices (which facilitate efficient memory access during decoding) to communicate with the receiver 105. The transmitter 101 employs LDPC codes that can outperform concatenated turbo+RS (Reed-Solomon) codes, provided the block length is sufficiently large.

[0018] FIGs. 2A and 2B are diagrams of exemplary LDPC encoders deployed in the transmitter of FIG. 1. As seen in FIG. 2A, a transmitter 200 is equipped with an LDPC encoder 203 that accepts input from an information source 201 and outputs coded stream of higher redundancy suitable for error correction processing at the receiver 105. The information source 201 generates k signals from a discrete alphabet, X . LDPC codes are specified with parity check matrices. On the other hand, encoding LDPC codes require, in general, specifying the generator matrices. Even though it is possible to obtain generator matrices from parity check matrices using Gaussian elimination, the resulting matrix is no longer sparse and storing a large generator matrix can be complex.

[0019] Encoder 203 generates signals from alphabet Y to a signal mapper 206, which provides a mapping of the alphabet Y to the symbols of the signal constellation corresponding to the modulation scheme employed by a modulator 205. This mapping follows a non-sequential scheme, such as interleaving. Exemplary mappings are more fully described below with respect to FIGs. 8C. The encoder 203 uses a simple encoding technique that makes use of only the parity check matrix by imposing structure onto the parity check matrix. Specifically, a restriction is placed on the parity check matrix by constraining certain portion of the matrix to be triangular. The construction of such a parity check matrix is described more fully below in FIG. 6. Such a restriction results in negligible performance loss, and therefore, constitutes an attractive trade-off.

[0020] The modulator 205 modulates the symbols of the signal constellation from the mapper 206 to signal waveforms that are transmitted to a transmit antenna 207, which emits these waveforms over the communication channel 103. The transmissions from the transmit antenna 207 propagate to a receiver, as discussed below.

[0021] FIG. 2B shows an LDPC encoder utilized with a Bose Chaudhuri Hocquenghem (BCH) encoder and a cyclic redundancy check (CRC) encoder. Under this scenario, the codes generated by the LDPC encoder 203, along with the CRC encoder 209 and the BCH encoder 211, have a concatenated outer BCH code and inner low density parity check (LDPC) code. Furthermore, error detection is achieved using cyclic redundancy check (CRC) codes. The CRC encoder 209, in an exemplary embodiment, encodes using an 8-bit CRC code with generator polynomial $(x^5+x^4+x^3+x^2+1)(x^2+x+1)(x+1)$.

[0022] The LDPC encoder 203 systematically encodes an information block of size k_{ldpc} , $i = (i_0, i_1, \dots, i_{k_{ldpc}-1})$ onto a codeword of size n_{ldpc} , $c = (i_0, i_1, \dots, i_{k_{ldpc}-1}, p_0, p_1, \dots, p_{n_{ldpc}-k_{ldpc}-1})$. The transmission of the codeword starts in the given order from i_0 and ends with $p_{n_{ldpc}-k_{ldpc}-1}$. LDPC code parameters (n_{ldpc}, k_{ldpc}) are given in Table 1 below whereby the LDPC codes with rates 2/3, 4/5, 3/5, 8/9 and 9/10 are examples which are not part of the invention.

Table 1

LDPC Code Parameters (n_{ldpc}, k_{ldpc})		
Code Rate	LDPC Uncoded Block Length k_{ldpc}	LDPC Coded Block Length n_{ldpc}
1/2	32400	64800
2/3	43200	64800
3/4	48600	64800
4/5	51840	64800
5/6	54000	64800
3/5	38880	64800
8/9	57600	64800
9/10	58320	64800

[0023] The task of the LDPC encoder 203 is to determine $n_{ldpc} - k_{ldpc}$ parity bits ($p_0, p_1, \dots, p_{n_{ldpc}-k_{ldpc}-1}$) for every block of k_{ldpc} information bits, $(i_0, i_1, \dots, i_{k_{ldpc}-1})$. The procedure is as follows. First, the parity bits are initialized; $p_0 = p_1 = p_2 = \dots = p_{n_{ldpc}-k_{ldpc}-1} = 0$. The first information bit, i_0 , are accumulated at parity bit addresses specified in the first row of Tables 3 through 10. For example, for rate 2/3 (Table 3), the following results:

$$p_0 = p_0 \oplus i_0$$

$$p_{10491} = p_{10491} \oplus i_0$$

$$p_{16043} = p_{16043} \oplus i_0$$

$$p_{506} = p_{506} \oplus i_0$$

$$p_{12826} = p_{12826} \oplus i_0$$

$$p_{8065} = p_{8065} \oplus i_0$$

$$p_{8226} = p_{8226} \oplus i_0$$

$$p_{2167} = p_{2167} \oplus i_0$$

$$p_{240} = p_{240} \oplus i_0$$

$$p_{18673} = p_{18673} \oplus i_0$$

$$p_{9279} = p_{9279} \oplus i_0$$

$$p_{10579} = p_{10579} \oplus i_0$$

$$p_{20928} = p_{20928} \oplus i_0$$

(All additions are in GF(2)).

[0024] Then, for the next 359 information bits, i_m , $m = 1, 2, \dots, 359$, these bits are accumulated at parity bit addresses $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc} - k_{ldpc})$, where x denotes the address of the parity bit accumulator corresponding to the first bit i_0 , and q is a code rate dependent constant specified in Table 2. Continuing with the example, $q = 60$ for rate 2/3. By way of example, for information bit i_1 , the following operations are performed:

$$p_{60} = p_{60} \oplus i_1$$

$$p_{10551} = p_{10551} \oplus i_1$$

5

$$p_{16103} = p_{16103} \oplus i_1$$

$$p_{566} = p_{566} \oplus i_1$$

10

$$p_{12886} = p_{12886} \oplus i_1$$

$$p_{8125} = p_{8125} \oplus i_1$$

15

$$p_{8286} = p_{8286} \oplus i_1$$

20

$$p_{2827} = p_{2827} \oplus i_1$$

$$p_{300} = p_{300} \oplus i_1$$

25

$$p_{18733} = p_{18733} \oplus i_1$$

$$p_{9339} = p_{9339} \oplus i_1$$

30

$$p_{10639} = p_{10639} \oplus i_1$$

35

$$p_{20988} = p_{20988} \oplus i_1$$

[0025] For the 361st information bit i_{360} , the addresses of the parity bit accumulators are given in the second row of the Tables 3 through 10. In a similar manner the addresses of the parity bit accumulators for the following 359 information bits i_m , $m = 361, 362, \dots, 719$ are obtained using the formula $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc} - k_{ldpc})$, where x denotes the address of the parity bit accumulator corresponding to the information bit i_{360} , i.e., the entries in the second row of the Tables 3-10. In a similar manner, for every group of 360 new information bits, a new row from Tables 3 through 10 are used to find the addresses of the parity bit accumulators.

40

[0026] After all of the information bits are exhausted, the final parity bits are obtained as follows. First, the following operations are performed, starting with $i = 1$

45

$$p_i = p_i \oplus p_{i-1}, \quad i = 1, 2, \dots, n_{ldpc} - k_{ldpc} - 1.$$

50

Final content of p_i , $i = 0, 1, \dots, n_{ldpc} - k_{ldpc} - 1$ is equal to the parity bit p_i .

Table 2

Code Rate	q
2/3	60
5/6	30

55

EP 2 190 123 B9

(continued)

Code Rate	q
1/2	90
3/4	45
4/5	36
3/5	72
8/9	20
9/10	18

Table 3

Address of Parity Bit Accumulators (Rate 2/3)	
0	10491 16043 506 12826 8065 8226 2767 240 18673 9279 10579 20928
1	17819 8313 6433 6224 5120 5824 12812 17187 9940 13447 13825 18483
2	17957 6024 8681 18628 12794 5915 14576 10970 12064 20437 4455 7151
3	19777 6183 9972 14536 8182 17749 11341 5556 4379 17434 15477 18532
4	4651 19689 1608 659 16707 14335 6143 3058 14618 17894 20684 5306
5	9778 2552 12096 12369 15198 16890 4851 3109 1700 18725 1997 15882
6	486 6111 13743 11537 5591 7433 15227 14145 1483 3887 17431 12430
7	20647 14311 11734 4180 8110 5525 12141 15761 18661 18441 10569 8192
8	3791 14759 15264 19918 10132 9062 10010 12786 10675 9682 19246 5454
9	19525 9485 7777 19999 8378 9209 3163 20232 669016518 716 7353
10	4588 6709 2020210905 915 4317 11073 13576 16433 368 3508 21171
11	14072 4033 19959 12608 631 19494 14160 8249 10223 21504 12395 4322
12	13800 14161
13	2948 9647
14	14693 16027
15	20506 11082
16	1143 9020
17	1350 14014
18	1548 2190
19	12216 21556
20	2095 19897
21	4189 7958
22	15940 10048
23	515 12614
24	8501 8450
25	17595 16784
26	5913 8495
27	16394 10423
28	7409 6981
29	6678 15939
30	20344 12987
31	2510 14588
32	17918 6655
33	6703 19451
34	496 4217
35	7290 5766
36	10521 8925

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 2/3)	
5	37 20379 11905 38 4090 5838 39 19082 17040 40 20233 12352 41 19365 19546
10	42 6249 19030 43 11037 19193 44 19760 11772 45 19644 7428 46 16076 3521
15	47 11779 21062 48 13062 9682 49 8934 5217 50 11087 3319 51 18892 4356
20	52 7894 3898 53 5963 4360 54 7346 11726 55 5182 5609
25	56 2412 17295 57 9845 20494 58 6687 1864 59 20564 5216 0 18226 17207
30	1 9380 8266 2 7073 3065 3 18252 13437 4 9161 15642 5 10714 10153
35	6 11585 9078 7 5359 9418 8 9024 9515 9 1206 16354 10 14994 1102
40	11 9375 20796 12 15964 6027 13 14789 6452 14 8002 18591 15 14742 14089
45	16 253 3045 17 1274 19286 18 14777 2044 19 13920 9900 20 452 7374
50	21 18206 9921 22 6131 5414 23 10077 9726 24 12045 5479 25 4322 7990

EP 2 190 123 B9

(continued)

	Address of Parity Bit Accumulators (Rate 2/3)
5	26 15616 5550
	27 15561 10661
	28 20718 7387
	29 2518 18804
	30 8984 2600
10	31 6516 17909
	32 11148 98
	33 20559 3704
	34 7510 1569
	35 16000 11692
15	36 9147 10303
	37 16650 191
	38 15577 18685
	39 17167 20917
	40 4256 3391
20	41 20092 17219
	42 9218 5056
	43 18429 8472
	44 12093 20753
	45 16345 12748
25	46 16023 11095
	47 5048 17595
	48 18995 4817
	49 16483 3536
	50 1439 16148
30	51 3661 3039
	52 19010 18121
	53 8968 11793
	54 13427 18003
	55 5303 3083
35	56 531 16668
	57 4771 6722
	58 5695 7960
	59 3589 14630
	40

Table 4

45	Address of Parity Bit Accumulators (Rate 5/6)															
	0	4362	416	8909	4156	3216	3112	2560	2912	6405	8593	4969	6723			
	1	2479	1786	8978	3011	4339	9313	6397	2957	7288	5484	6031	10217			
	2	10175	9009	9889	3091	4985	7267	4092	8874	5671	2777	2189	8716			
50	3	9052	4795	3924	3370	10058	1128	9996	10165	9360	4297	434	5138			
	4	2379	7834	4835	2327	9843	804	329	8353	7167	3070	1528	7311			
	5	3435	7871	348	3693	1876	6585	10340	7144	5870	2084	4052	2780			
	6	3917	3111	3476	1304	10331	5939	5199	1611	1991	699	8316	9960			
55	7	6883	3237	1717	10752	7891	9764	4745	3888	10009	4176	4614	1567			
	8	10587	2195	1689	2968	5420	2580	2883	6496	111	6023	1024	4449			
	9	3786	8593	2074	3321	5057	1450	3840	5444	6572	3094	9892	1512			
	10	8548	1848	10372	4585	7313	6536	6379	1766	9462	2456	5606	9975			

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 5/6)	
5	11 8204 10593 7935 3636 3882 394 5968 8561 2395 7289 9267 9978 12 7795 74 1633 9542 6867 7352 6417 7568 10623 725 2531 9115 13 7151 2482 4260 5003 10105 7419 9203 6691 8798 2092 8263 3755 14 3600 570 4527 200 9718 6771 1995 8902 5446 768 1103 6520 15 6304 7621
10	16 6498 9209 17 7293 6786 18 5950 1708 19 8521 1793 20 6174 7854
15	21 9773 1190 22 9517 10268 23 2181 9349 24 1949 5560
20	25 1556 555 26 8600 3827 27 5072 1057 28 7928 3542 29 3226 3762
25	0 7045 2420 1 9645 2641 2 2774 2452 3 5331 2031 4 9400 7503
30	5 1850 2338 6 10456 9774 7 1692 9276 8 10037 4038
35	9 3964 338 10 2640 5087 11 858 3473 12 5582 5683 13 9523 916
40	14 4107 1559 15 4506 3491 16 8191 4182 17 10192 6157
45	18 5668 3305 19 3449 1540 20 4766 2697 21 4069 6675 22 1117 1016
50	23 5619 3085 24 8483 8400 25 8255 394 26 6338 5042
55	27 6174 5119 28 7203 1989 29 1781 5174

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 5/6)	
5	01464 3559 1 3376 4214 2 7238 67 3 10595 8831 4 1221 6513
10	5 5300 4652 6 1429 9749 7 7878 5131 8 4435 10284 9 6331 5507
15	10 66624941 11 9614 10238 12 8400 8025 13 9156 5630 14 7067 8878
20	15 9027 3415 16 1690 3866 17 2854 8469 18 6206 630 19 363 5453
25	20 4125 7008 21 1612 6702 22 9069 9226 23 5767 4060 24 3743 9237
30	25 7018 5572 26 8892 4536 27 853 6064 28 8069 5893 29 2051 2885
35	0 10691 3153 1 3602 4055 2 328 1717 3 2219 9299 41939 7898
40	5 617 206 6 8544 1374 7 10676 3240 8 6672 9489 9 3170 7457
45	10 7868 5731 11 6121 10732 12 4843 9132 13 580 9591 14 6267 9290
50	15 3009 2268 16 195 2419 17 8016 1557 18 1516 9195
55	

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 5/6)	
5	19 8062 9064
	20 2095 8968
	21 753 7326
	22 6291 3833
	23 2614 7844
10	24 2303 646
	25 2075 611
	26 4687 362
	27 8684 9940
	28 4830 2065
15	29 7038 1363
	0 1769 7837
	1 3801 1689
	2 10070 2359
20	3 3667 9918
	4 1914 6920
	5 4244 5669
	6 10245 7821
	7 7648 3944
25	8 3310 5488
	9 6346 9666
	10 7088 6122
	11 1291 7827
30	12 10592 8945
	13 3609 7120
	14 9168 9112
	15 6203 8052
	16 3330 2895
35	17 4264 10563
	18 10556 6496
	19 8807 7645
	20 1999 4530
40	21 9202 6818
	22 3403 1734
	23 2106 9023
	24 6881 3883
	25 3895 2171
45	26 4062 6424
	27 3755 9536
	28 4683 2131
	29 7347 8027
50	

Table 5

Address of Parity Bit Accumulators (Rate 1/2)	
55	54 9318 14392 27561 26909 10219 2534 8597
	55 7263 4635 2530 28130 3033 23830 3651
	56 24731 23583 26036 17299 5750 792 9169
	57 5811 26154 18653 11551 15447 13685 16264

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 1/2)	
58	12610 11347 28768 2792 3174 29371 12997
59	16789 16018 21449 6165 21202 15850 3186
60	31016 21449 17618 6213 12166 8334 18212
61	22836 14213 11327 5896 718 11727 9308
62	2091 24941 29966 23634 9013 15587 5444
63	22207 3983 16904 28534 21415 27524 25912
64	25687 4501 22193 14665 14798 16158 5491
65	4520 17094 23397 4264 22370 16941 21526
66	10490 6182 32370 9597 30841 25954 2762
67	22120 22865 29870 15147 13668 14955 19235
68	6689 18408 18346 9918 25746 5443 20645
69	29982 12529 13858 4746 30370 10023 24828
70	1262 28032 29888 13063 24033 21951 7863
71	6594 29642 31451 14831 9509 9335 31552
72	1358 6454 16633 20354 24598 624 5265
73	19529 295 18011 3080 13364 8032 15323
74	11981 1510 7960 21462 9129 11370 25741
75	9276 29656 4543 30699 20646 21921 28050
76	15975 25634 5520 31119 13715 21949 19605
77	18688 4608 31755 30165 13103 10706 29224
78	21514 23117 12245 26035 31656 25631 30699
79	9674 24966 31285 29908 17042 24588 31857
80	21856 27777 29919 27000 14897 11409 7122
81	29773 23310 263 4877 28622 20545 22092
82	15605 5651 21864 3967 14419 22757 15896
83	30145 1759 10139 29223 26086 10556 5098
84	18815 16575 2936 24457 26738 6030 505
85	30326 22298 27562 20131 26390 6247 24791
86	928 29246 21246 12400 15311 32309 18608
87	20314 6025 26689 16302 2296 3244 19613
88	6237 11943 22851 15642 23857 15112 20947
89	26403 25168 19038 18384 8882 12719 7093
0	14567 24965
1	3908 100
2	10279 240
3	24102 764
4	12383 4173
5	13861 15918
6	21327 1046
7	5288 14579
8	28158 8069
9	16583 11098
10	16681 28363
11	13980 24725
12	32169 17989
13	10907 2767
14	21557 3818
15	26676 12422
16	7676 8754

EP 2 190 123 B9

(continued)

5

10

15

20

25

30

35

40

45

Address of Parity Bit Accumulators (Rate 1/2)	
17 14905 20232	
18 15719 24646	
19 31942 8589	
20 19978 27197	
21 27060 15071	
22 6071 26649	
23 10393 11176	
24 9597 13370	
25 7081 17677	
26 1433 19513	
27 26925 9014	
28 19202 8900	
29 18152 30647	
30 20803 1737	
31 11804 25221	
32 31683 17783	
33 29694 9345	
34 12280 26611	
35 6526 26122	
36 26165 11241	
37 7666 26962	
38 16290 8480	
39 11774 10120	
40 30051 30426	
41 1335 15424	
42 6865 17742	
43 31779 12489	
44 32120 21001	
45 14508 6996	
46 979 25024	
47 4554 21896	
48 7989 21777	
49 4972 20661	
50 6612 2730	
51 12742 4418	
52 29194 595	
53 19267 20113	

Table 6

50

55

Address of Parity Bit Accumulators (Rate 3/4)	
0 6385 7901 14611 13389 11200 3252 5243 2504 2722 821 7374	
1 11359 2698 357 13824 12772 7244 6752 15310 852 2001 11417	
2 7862 7977 6321 13612 12197 14449 15137 13860 1708 6399 13444	
3 1560 11804 6975 13292 3646 3812 8772 7306 5795 14327 7866	
4 7626 11407 14599 9689 1628 2113 10809 9283 1230 15241 4870	
5 1610 5699 15876 9446 12515 1400 6303 5411 14181 13925 7358	
6 4059 8836 3405 7853 7992 15336 5970 10368 10278 9675 4651	
7 4441 3963 9153 2109 12683 7459 12030 12221 629 15212 406	

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 3/4)	
5	8 6007 8411 5771 3497 543 14202 875 9186 6235 13908 3563
	9 3232 6625 4795 546 9781 2071 7312 3399 7250 4932 12652
	10 8820 10088 11090 7069 6585 13134 10158 7183 488 7455 9238
10	11 1903 10818 119 215 7558 11046 10615 11545 14784 7961 15619
	12 3655 8736 4917 15874 5129 2134 15944 14768 7150 2692 1469
	13 8316 3820 505 8923 6757 806 7957 4216 15589 13244 2622
15	14 14463 4852 15733 3041 11193 12860 13673 8152 6551 15108 8758
	15 3149 11981
	16 13416 6906
20	17 13098 13352
	18 2009 14460
	19 7207 4314
25	20 3312 3945
	21 4418 6248
	22 2669 13975
30	23 7571 9023
	24 14172 2967
	25 7271 7138
35	26 6135 13670
	27 7490 14559
	28 8657 2466
40	29 8599 12834
	30 3470 3152
	31 13917 4365
45	32 6024 13730
	33 10973 14182
	34 2464 13167
50	35 5281 15049
	36 1103 1849
	37 2058 1069
55	38 9654 6095
	39 14311 7667
	40 15617 8146
	41 4588 11218
	42 13660 6243
	43 8578 7874
	44 11741 2686
	0 1022 1264
	1 12604 9965
	2 8217 2707
	3 3156 11793
	4 354 1514
	5 6978 14058
	6 7922 16079
	7 15087 12138
	8 5053 6470
	9 12687 14932
	10 15458 1763
	11 8121 1721

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 3/4)	
5	12 12431 549
	13 4129 7091
	14 1426 8415
	15 9783 7604
	16 6295 11329
10	17 1409 12061
	18 8065 9087
	19 2918 8438
	20 1293 14115
	21 3922 13851
15	22 3851 4000
	23 5865 1768
	24 2655 14957
	25 5565 6332
	26 4303 12631
20	27 11653 12236
	28 16025 7632
	29 4655 14128
	30 9584 13123
	31 13987 9597
25	32 15409 12110
	33 8754 15490
	34 7416 15325
	35 2909 15549
	36 2995 8257
30	37 9406 4791
	38 11111 4854
	39 2812 8521
	40 8476 14717
	41 7820 15360
35	42 1179 7939
	43 2357 8678
	44 7703 6216
	0 3477 7067
	1 3931 13845
40	2 7675 12899
	3 1754 8187
	4 7785 1400
	5 9213 5891
	6 2494 7703
45	7 2576 7902
	8 4821 15682
	9 10426 11935
	10 1810 904
	11 11332 9264
50	12 11312 3570
	13 14916 2650
	14 7679 7842
	15 6089 13084

EP 2 190 123 B9

(continued)

5

10

15

20

25

30

35

Address of Parity Bit Accumulators (Rate 3/4)	
16 3938 2751	
17 8509 4648	
18 12204 8917	
19 5749 12443	
20 12613 4431	
21 1344 4014	
22 8488 13850	
23 1730 14896	
24 14942 7126	
25 14983 8863	
26 6578 8564	
27 4947 396	
28 297 12805	
29 13878 6692	
30 11857 11186	
31 14395 11493	
32 16145 12251	
33 13462 7428	
34 14526 13119	
35 2535 11243	
36 6465 12690	
37 6872 9334	
38 15371 14023	
39 8101 10187	
40 11963 4848	
41 15125 6119	
42 8051 14465	
43 11139 5167	
44 2883 14521	

Table 7

40

45

50

55

Address of Parity Bit Accumulators (Rate 4/5)	
0 149 11212 5575 6360 12559 8108 8505 408 10026 12828	
1 5237 490 10677 4998 3869 3734 3092 3509 7703 10305	
2 8742 5553 2820 7085 12116 10485 564 7795 2972 2157	
3 2699 4304 8350 712 28413250 4731 10105 517 7516	
4 12067 1351 11992 12191 11267 5161 537 6166 4246 2363	
5 6828 7107 2127 3724 5743 11040 10756 4073 1011 3422	
6 11259 1216 9526 1466 10816 940 3744 2815 11506 11573	
7 4549 11507 1118 1274 11751 5207 7854 12803 4047 6484	
8 8430 4115 9440 413 4455 2262 7915 12402 8579 7052	
9 3885 9126 5665 4505 2343 253 4707 3742 4166 1556	
10 1704 8936 6775 8639 8179 7954 8234 7850 8883 8713	
11 11716 4344 9087 11264 2274 8832 9147 11930 6054 5455	
12 7323 3970 10329 2170 8262 3854 2087 12899 9497 11700	
13 4418 1467 2490 5841 817 11453 533 11217 11962 5251	
14 1541 4525 7976 3457 9536 7725 3788 2982 6307 5997	
15 11484 2739 4023 12107 6516 5512572 6628 8150 9852	

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 4/5)	
5	16 6070 1761 4627 6534 7913 3730 11866 1813 12306 8249
	17 12441 5489 8748 7837 7660 2102 11341 2936 6712 11977
	18 10155 4210
	19 1010 10483
	20 8900 10250
10	21 10243 12278
	22 7070 4397
	23 12271 3887
	24 11980 6836
	25 9514 4356
15	26 7137 10281
	27 11881 2526
	28 1969 11477
	29 3044 10921
	30 2236 8724
20	31 9104 6340
	32 7342 8582
	33 11675 10405
	34 6467 12775
	35 3186 12198
25	0 9621 11445
	1 7486 5611
	2 4319 4879
	3 2196 344
	4 75276650
30	5 10693 2440
	6 6755 2706
	7 5144 5998
	8 11043 8033
	9 4846 4435
35	10 4157 9228
	11 12270 6562
	12 11954 7592
	13 7420 2592
	14 8810 9636
40	15 689 5430
	16 920 1304
	17 1253 11934
	18 9559 6016
	19 312 7589
45	20 4439 4197
	21 4002 9555
	22 12232 7779
	23 1494 8782
	24 10749 3969
50	25 4368 3479
	26 6316 5342
	27 2455 3493
	28 12157 7405

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 4/5)	
5	29 6598 11495
	30 11805 4455
	31 9625 2090
	32 4731 2321
	33 3578 2608
10	34 8504 1849
	35 4027 1151
	0 5647 4935
	1 4219 1870
	2 10968 8054
15	3 6970 5447
	4 3217 5638
	5 8972 669
	6 5618 12472
	7 1457 1280
20	8 8868 3883
	9 8866 1224
	10 8371 5972
	11 266 4405
	12 3706 3244
25	13 6039 5844
	14 7200 3283
	15 1502 11282
	16 12318 2202
	17 4523 965
30	18 9587 7011
	19 2552 2051
	20 12045 10306
	21 11070 5104
	22 6627 6906
35	23 9889 2121
	24 829 9701
	25 2201 1819
	26 6689 12925
	27 2139 8757
40	28 12004 5948
	29 8704 3191
	30 8171 10933
	31 6297 7116
	32 616 7146
45	33 5142 9761
	34 10377 8138
	35 7616 5811
	0 7285 9863
	1 7764 10867
50	2 12343 9019
	3 4414 8331
	4 3464 642
	5 6960 2039
55	

EP 2 190 123 B9

(continued)

5
10
15
20
25
30
35

Address of Parity Bit Accumulators (Rate 4/5)	
6 786 3021	
7 710 2086	
8 7423 5601	
9 8120 4885	
10 12385 11990	
11 9739 10034	
12 424 10162	
13 1347 7597	
14 1450 112	
15 7965 8478	
16 8945 7397	
17 6590 8316	
18 6838 9011	
19 6174 9410	
20 255 113	
21 6197 5835	
22 12902 3844	
23 4377 3505	
24 5478 8672	
25 4453 2132	
26 9724 1380	
27 12131 11526	
28 12323 9511	
29 8231 1752	
30 497 9022	
31 9288 3080	
32 2481 7515	
33 2696 268	
34 4023 12341	
35 7108 5553	

40
45
50
55

Table 8

Address of Parity Bit Accumulators (Rate 3/5)	
22422 10282 11626 19997 11161 2922 3122 99 5625 17064 8270 179	
25087 16218 17015 828 20041 25656 4186 11629 22599 17305 22515 6463	
11049 22853 25706 14388 550019245 8732 2177 13555 11346 17265 3069	
16581 22225 12563 19717 23577 11555 25496 6853 25403 5218 15925 21766	
16529 14487 7643 10715 17442 11119 5679 14155 24213 21000 1116 15620	
5340 8636 16693 1434 5635 6516 9482 20189 1066 15013 25361 14243	
18506 22236 20912 8952 5421 15691 6126 21595 500 6904 13059 6802	
8433 4694 5524 14216 3685 19721 25420 9937 23813 9047 25651 16826	
21500 24814 6344 17382 7064 13929 4004 16552 12818 8720 5286 2206	
22517 2429 19065 2921 21611 1873 7507 5661 23006 23128 20543 19777	
1770 4636 20900 14931 9247 12340 11008 12966 4471 2731 16445 791	
6635 14556 18865 22421 22124 12697 9803 25485 7744 18254 11313 9004	
19982 23963 18912 7206 12500 4382 20067 6177 21007 1195 23547 24837	
756 11158 14646 20534 3647 17728 11676 11843 12937 4402 8261 22944	
9306 24009 10012 11081 3746 24325 8060 19826 842 8836 2898 5019	

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 3/5)	
5	7575 7455 25244 4736 14400 229815543 8006 24203 13053 1120 5128
	3482 9270 13059 15825 7453 23747 3656 24585 16542 17507 22462 14670
	15627 15290 4198 22748 5842 13395 23918 16985 14929 3726 25350 24157
	24896 16365 16423 13461 16615 8107 247413604 25904 8716 9604 20365
10	3729 17245 18448 9862 20831 25326 20517 24618 13282 5099 14183 8804
	16455 17646 15376 18194 25528 1777 6066 21855 14372 12517 4488 17490
	1400 8135 23375 20879 8476 4084 12936 25536 22309 16582 6402 24360
	25119 23586 128 4761 10443 22536 8607 9752 25446 15053 1856 4040
	377 21160 13474 5451 17170 5938 10256 11972 24210 17833 22047 16108
15	13075 9648 24546 13150 23867 7309 19798 2988 16858 4825 23950 15125
	20526 3553 11525 23366 2452 17626 19265 20172 18060 24593 13255 1552
	18839 21132 20119 15214 14705 7096 10174 5663 1865119700 12524 14033
	4127 2971 17499 16287 22368 21463 7943 18880 5567 8047 23363 6797
	10651 24471 14325 4081 7258 4949 7044 1078 797 22910 20474 4318
20	21374 13231 22985 5056 3821 23718 14178 9978 19030 23594 8895 25358
	6199 22056 7749 13310 3999 23697 16445 22636 5225 22437 24153 9442
	7978 12177 2893 20778 3175 8645 11863 24623 10311 25767 17057 3691
	20473 11294 9914 22815 2574 8439 3699 5431 24840 21908 16088 18244
	8208 5755 19059 8541 24924 6454 11234 10492 16406 10831 11436 9649
25	16264 11275 24953 2347 12667 19190 7257 7174 24819 2938 2522 11749
	3627 5969 13862 1538 23176 6353 2855 17720 2472 7428 573 15036
	0 18539 18661
	1 10502 3002
30	2 9368 10761
	3 12299 7828
	4 15048 13362
	5 18444 24640
	6 20775 19175
35	7 18970 10971
	8 5329 19982
	9 11296 18655
	10 15046 20659
40	11 7300 22140
	12 22029 14477
	13 11129 742
	14 13254 13813
	15 19234 13273
45	16 6079 21122
	17 22782 5828
	18 19775 4247
	19 1660 19413
50	20 4403 3649
	21 13371 25851
	22 22770 21784
	23 10757 14131
	24 16071 21617
55	25 6393 3725
	26 597 19968
	27 5743 8084

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 3/5)	
5	28 6770 9548
	29 4285 17542
	30 13568 22599
	31 1786 4617
	32 23238 11648
10	33 19627 2030
	34 13601 13458
	35 13740 17328
	36 25012 13944
	37 22513 6687
15	38 4934 12587
	39 21197 5133
	40 22705 6938
	41 7534 24633
20	42 24400 12797
	43 21911 25712
	44 12039 1140
	45 24306 1021
	46 14012 20747
25	47 11265 15219
	48 4670 15531
	49 9417 14359
	50 2415 6504
30	51 24964 24690
	52 14443 8816
	53 6926 1291
	54 6209 20806
	55 13915 4079
35	56 24410 13196
	57 13505 6117
	58 9869 8220
	59 1570 6044
40	60 25780 17387
	61 20671 24913
	62 24558 20591
	63 12402 3702
	64 8314 1357
45	65 20071 14616
	66 17014 3688
	67 19837 946
	68 15195 12136
50	69 7758 22808
	70 3564 2925
	71 3434 7769

55

Table 9

Address of Parity Bit Accumulators (Rate 8/9)
0 6235 2848 3222

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 8/9)	
5	1 5800 3492 5348
	2 2757 927 90
	3 6961 4516 4739
	4 1172 3237 6264
	5 1927 2425 3683
10	6 3714 6309 2495
	7 3070 6342 7154
	8 2428 613 3761
	9 2906 264 5927
	10 1716 1950 4273
15	11 4613 6179 3491
	12 4865 3286 6005
	13 1343 5923 3529
	14 4589 4035 2132
	15 1579 3920 6737
20	16 1644 1191 5998
	17 1482 23814620
	18 67916014 6596
	19 2738 5918 3786
	0 5156 6166
25	1 1504 4356
	2 130 1904
	3 6027 3187
	4 6718 759
	5 6240 2870
30	6 2343 1311
	7 1039 5465
	8 6617 2513
	9 1588 5222
	10 6561535
35	11 4765 2054
	12 5966 6892
	13 1969 3869
	14 3571 2420
	15 4632 981
40	16 3215 4163
	17 973 3117
	18 3802 6198
	19 3794 3948
	0 3196 6126
45	1 573 1909
	2 850 4034
	3 5622 1601
	4 6005 524
	5 5251 5783
50	6 172 2032
	7 1875 2475
	8 497 1291
	9 2566 3430

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 8/9)	
5	10 1249 740
	11 2944 1948
	12 6528 2899
	13 2243 3616
	14 867 3733
10	15 1374 4702
	16 4698 2285
	17 4760 3917
	18 1859 4058
	19 6141 3527
15	0 2148 5066
	1 1306 145
	2 2319 871
	3 3463 1061
	4 5554 6647
20	5 5837 339
	6 5821 4932
	7 6356 4756
	8 3930 418
	9 211 3094
25	10 1007 4928
	11 3584 1235
	12 6982 2869
	13 1612 1013
	14 953 4964
30	15 4555 4410
	16 4925 4842
	17 5778 600
	18 6509 2417
	19 1260 4903
35	0 3369 3031
	1 3557 3224
	2 3028 583
	3 3258 440
	4 6226 6655
40	5 4895 1094
	6 1481 6847
	7 4433 1932
	8 2107 1649
	9 2119 2065
45	10 4003 6388
	11 6720 3622
	12 3694 4521
	13 1164 7050
	14 1965 3613
50	15 4331 66
	16 2970 1796
	17 4652 3218
	18 1762 4777
55	

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 8/9)	
5	19 5736 1399
	0 970 2572
	1 2062 6599
	2 4597 4870
	3 1228 6913
10	4 4159 1037
	5 2916 2362
	6 395 1226
	7 6911 4548
	8 4618 2241
15	9 4120 4280
	10 5825 474
	11 2154 5558
	12 3793 5471
	13 5707 1595
20	14 1403 325
	15 6601 5183
	16 6369 4569
	17 4846 896
	18 7092 6184
25	19 6764 7127
	0 6358 1951
	1 3117 6960
	2 2710 7062
	3 1133 3604
30	4 3694 657
	5 1355 110
	6 3329 6736
	7 2505 3407
	8 2462 4806
35	9 4216 214
	10 5348 5619
	11 6627 6243
	12 2644 5073
	13 4212 5088
40	14 3463 3889
	15 5306 478
	16 4320 6121
	17 3961 1125
	18 5699 1195
45	19 6511 792
	0 3934 2778
	1 3238 6587
	2 1111 6596
	3 1457 6226
50	4 1446 3885
	5 3907 4043
	6 6839 2873
	7 1733 5615
55	

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 8/9)	
5	8 5202 4269
	9 3024 4722
	10 5445 6372
	11 370 1828
	12 4695 1600
10	13 680 2074
	14 1801 6690
	15 2669 1377
	16 2463 1681
15	17 5972 5171
	18 5728 4284
	19 1696 1459

Table 10

Address of Parity Bit Accumulators (Rate 9/10)	
20	0 5611 2563 2900
	1 5220 3143 4813
25	2 2481 834 81
	3 6265 4064 4265
	4 1055 2914 5638
	5 1734 2182 3315
	6 3342 5678 2246
30	7 2185 552 3385
	8 2615 236 5334
	9 1546 1755 3846
	10 4154 55613142
35	11 4382 2957 5400
	12 1209 5329 3179
	13 1421 3528 6063
	14 1480 1072 5398
	15 3843 1777 4369
40	16 1334 2145 4163
	17 2368 5055 260
	0 6118 5405
	1 2994 4370
45	2 3405 1669
	3 4640 5550
	4 1354 3921
	5 117 1713
	6 5425 2866
50	7 6047 683
	8 5616 2582
	9 2108 1179
	10 933 4921
55	11 5953 2261
	12 1430 4699
	13 5905 480
	14 4289 1846

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 9/10)	
5	15 5374 6208
	16 1775 3476
	17 3216 2178
	0 4165 884
	1 2896 3744
10	2 874 2801
	3 3423 5579
	4 3404 3552
	5 2876 5515
	6 516 1719
15	7 765 3631
	8 5059 1441
	9 5629 598
	10 5405 473
	11 4724 5210
20	12 155 1832
	13 1689 2229
	14 449 1164
	15 2308 3088
	16 1122 669
25	17 2268 5758
	0 5878 2609
	1 782 3359
	2 1231 4231
	3 4225 2052
30	4 4286 3517
	5 5531 3184
	6 1935 4560
	7 1174 131
	8 3115 956
35	9 3129 1088
	10 5238 4440
	11 5722 4280
	12 3540 375
	13 191 2782
40	14 906 4432
	15 3225 1111
	16 6296 2583
	17 1457 903
	0 855 4475
45	1 4097 3970
	2 4433 4361
	3 5198 541
	4 1146 4426
	5 3202 2902
50	6 2724 525
	7 1083 4124
	8 2326 6003
	9 5605 5990
55	

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 9/10)	
5	10 4376 1579
	11 4407 984
	12 1332 6163
	13 5359 3975
	14 1907 1854
10	15 3601 5748
	16 6056 3266
	17 3322 4085
	0 1768 3244
	1 2149 144
15	2 1589 4291
	3 5154 1252
	4 1855 5939
	5 4820 2706
	6 1475 3360
20	7 4266 693
	8 4156 2018
	9 2103 752
	10 3710 3853
	11 5123 931
25	12 6146 3323
	13 1939 5002
	14 5140 1437
	15 1263 293
	16 5949 4665
30	17 4548 6380
	0 3171 4690
	1 5204 2114
	2 6384 5565
	3 5722 1757
35	4 2805 6264
	5 1202 2616
	6 1018 3244
	7 4018 5289
	8 2257 3067
40	9 2483 3073
	10 1196 5329
	11 649 3918
	12 3791 4581
	13 5028 3803
45	14 3119 3506
	15 4779 431
	16 3888 5510
	17 4387 4084
	0 5836 1692
50	1 5126 1078
	2 5721 6165
	3 3540 2499
	4 2225 6348

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Rate 9/10)	
5	1044 1484
6	6323 4042
7	1313 5603
8	1303 3496
9	3516 3639
10	5161 2293
11	4682 3845
12	3045 643
13	2818 2616
14	3267 649
15	6236 593
16	646 2948
17	4213 1442
0	5779 1596
1	2403 1237
2	2217 1514
3	5609 716
4	5155 3858
5	1517 1312
6	2554 3158
7	5280 2643
8	4990 1353
9	5648 1170
10	1152 4366
11	3561 5368
12	3581 1411
13	5647 4661
14	1542 5401
15	5078 2687
16	316 1755
17	3392 1991

[0027] As regards the BCH encoder 211, the BCH code parameters are enumerated in Table 11.

Table 11

LDPC Code Rate	BCH Uncoded Block Length k_{bch}	BCH Coded Block Length n_{bch}	BCH Error Correction (bits)
1/2	32208	32400	12
2/3	43040	43200	10
3/4	48408	48600	12
4/5	51648	51840	12
5/6	53840	54000	10
3/5	38688	38880	12
8/9	57472	57600	8
9/10	58192	58320	8

[0028] It is noted that in the above table, $n_{bch} = k_{ldpc}$.

[0029] The generator polynomial of the t error correcting BCH encoder 211 is obtained by multiplying the first t polynomials in the following list of Table 12:

Table 12

$g_1(x)$	$1-x^2+x^3+x^5+x^{16}$
$g_2(x)$	$1+x+x^4+x^5+x^6+x^8+x^{16}$
$g_3(x)$	$1+x^2+x^3+x^4+x^5+x^7+x^8+x^9+x^{10}+x^{11}+x^{16}$
$g_4(x)$	$1+x^2+x^4+x^6+x^9+x^{11}+x^{12}+x^{14}+x^{16}$
$g_5(x)$	$1+x+x^2+x^3+x^5+x^8+x^9+x^{10}+x^{11}+x^{12}+x^{16}$
$g_6(x)$	$1+x^2+x^4+x^5+x^7+x^8+x^9+x^{10}+x^{12}+x^{13}+x^{14}+x^{15}+x^{16}$
$g_7(x)$	$1+x^2+x^5+x^6+x^8+x^9+x^{10}+x^{11}+x^{13}+x^{15}+x^{16}$
$g_8(x)$	$1+x+x^2+x^5+x^6+x^8+x^9+x^{12}+x^{13}+x^{14}+x^{16}$
$g_9(x)$	$1+x^5+x^7+x^9+x^{10}+x^{11}+x^{16}$
$g_{10}(x)$	$1+x+x^2+x^5+x^7+x^8+x^{10}+x^{12}+x^{13}+x^{14}+x^{16}$
$g_{11}(x)$	$1+x^2+x^3+x^5+x^9+x^{11}+x^{12}+x^{13}+x^{16}$
$g_{12}(x)$	$1+x+x^5+x^6+x^7+x^9+x^{11}+x^{12}+x^{16}$

[0030] BCH encoding of information bits $m = (m_{k_{bch}-1}, m_{k_{bch}-2}, \dots, m_1, m_0)$ onto a codeword $c = (m_{k_{bch}-1}, m_{k_{bch}-2}, \dots, m_1, m_0, d_{n_{bch}-k_{bch}-1}, d_{n_{bch}-k_{bch}}, \dots, d_1, d_0)$ is achieved as follows. The message polynomial $m(x) = m_{k_{bch}-1}x^{k_{bch}-1} + m_{k_{bch}-2}x^{k_{bch}-2} + \dots + m_1x + m_0$ is multiplied by $x^{n_{bch}-k_{bch}}$. Next, $x^{n_{bch}-k_{bch}}m(x)$ divided by $g(x)$. With $d(x) = d_{n_{bch}-k_{bch}-1}x^{n_{bch}-k_{bch}-1} + \dots + d_1x + d_0$ as the remainder, the codeword polynomial is set as follows: $c(x) = x^{n_{bch}-k_{bch}}m(x) + d(x)$.

[0031] The above LDPC codes, in an exemplary embodiment, can be used to variety of digital video applications, such as MPEG (Motion Pictures Expert Group) packet transmission.

[0032] FIG. 3 is a diagram of an exemplary receiver in the system of FIG. 1. At the receiving side, a receiver 300 includes a demodulator 301 that performs demodulation of received signals from transmitter 200. These signals are received at a receive antenna 303 for demodulation. After demodulation, the received signals are forwarded to a decoder 305, which attempts to reconstruct the original source messages by generating messages, X' ; in conjunction with a bit metric generator 307. With non-Gray mapping, the bit metric generator 307 exchanges probability information with the decoder 305 back and forth (iteratively) during the decoding process, which is detailed in FIG. 10. Alternatively, if Gray mapping is used, one pass of the bit metric generator is sufficient, in which further attempts of bit metric generation after each LDPC decoder iteration are likely to yield limited performance improvement; this approach is more fully described with respect to FIG. 11. To appreciate the advantages offered by the present invention, it is instructive to examine how LDPC codes are generated, as discussed in FIG. 4.

[0033] FIG. 4 is a diagram of a sparse parity check matrix. LDPC codes are long, linear block codes with sparse parity check matrix $H_{(n-k) \times n}$. Typically the block length, n , ranges from thousands to tens of thousands of bits. For example, a parity check matrix for an LDPC code of length $n=8$ and rate $\frac{1}{2}$ is shown in FIG. 4. The same code can be equivalently represented by the bipartite graph, per FIG. 5.

[0034] FIG. 5 is a diagram of a bipartite graph of an LDPC code of the matrix of FIG. 4. Parity check equations imply that for each check node, the sum (over GF (Galois Field)(2)) of all adjacent bit nodes is equal to zero. As seen in the figure, bit nodes occupy the left side of the graph and are associated with one or more check nodes, according to a predetermined relationship. For example, corresponding to check node m_1 , the following expression exists $n_1 + n_4 + n_5 + n_8 = 0$ with respect to the bit nodes.

[0035] Returning the receiver 303, the LDPC decoder 305 is considered a message passing decoder, whereby the decoder 305 aims to find the values of bit nodes. To accomplish this task, bit nodes and check nodes iteratively communicate with each other. The nature of this communication is described below.

[0036] From check nodes to bit nodes, each check node provides to an adjacent bit node an estimate ("opinion") regarding the value of that bit node based on the information coming from other adjacent bit nodes. For instance, in the above example if the sum of n_4 , n_3 and n_8 "looks like" 0 to m_1 , then m_1 would indicate to n_1 that the value of n_1 is believed to be 0 (since $n_1 + n_4 + n_5 + n_8 = 0$); otherwise m_1 indicate to n_1 that the value of n_1 is believed to be 1. Additionally, for soft decision decoding, a reliability measure is added.

[0037] From bit nodes to check nodes, each bit node relays to an adjacent check node an estimate about its own value based on the feedback coming from its other adjacent check nodes. In the above example n_1 has only two adjacent

check nodes m_1 and m_3 . If the feedback coming from m_3 to n_1 indicates that the value of n_1 is probably 0, then n_1 would notify m_1 that an estimate of n_1 's own value is 0. For the case in which the bit node has more than two adjacent check nodes, the bit node performs a majority vote (soft decision) on the feedback coming from its other adjacent check nodes before reporting that decision to the check node it communicates. The above process is repeated until all bit nodes are considered to be correct (i.e., all parity check equations are satisfied) or until a predetermined maximum number of iterations is reached, whereby a decoding failure is declared.

[0038] FIG. 6 is a diagram of a sub-matrix of a sparse parity check matrix, wherein the sub-matrix contains parity check values restricted to the lower triangular region, according to an embodiment of the present invention. As described previously, the encoder 203 (of FIG. 2) can employ a simple encoding technique by restricting the values of the lower triangular area of the parity check matrix. According to an embodiment of the present invention, the restriction imposed on the parity check matrix is of the form:

$$H_{(n-k) \times n} = [A_{(n-k) \times k} \ B_{(n-k) \times (n-k)}]$$

, where B is lower triangular.

[0039] Any information block $i = (i_0, i_1, \dots, i_{k-1})$ is encoded to a codeword $c = (i_0, i_1, \dots, i_{k-1}, p_0, p_1, \dots, p_{n-k-1})$ using $Hc^T = 0$, and recursively solving for parity bits; for example,

$$a_{00}i_0 + a_{01}i_1 + \dots + a_{0,k-1}i_{k-1} + p_0 = 0 \Rightarrow \text{Solve } p_0$$

$$a_{10}i_0 + a_{11}i_1 + \dots + a_{1,k-1}i_{k-1} + b_{10}p_0 + p_1 = 0 \Rightarrow \text{Solve } p_1$$

and similarly for $p_2, p_3, \dots, p_{n-k-1}$.

[0040] FIG. 7 is a graph showing performance between codes utilizing unrestricted parity check matrix (H matrix) versus restricted H matrix of FIG. 6. The graph shows the performance comparison between two LDPC codes: one with a general parity check matrix and the other with a parity check matrix restricted to be lower triangular to simplify encoding. The modulation scheme, for this simulation, is 8-PSK. The performance loss is within 0.1 dB. Therefore, the performance loss is negligible based on the restriction of the lower triangular H matrices, while the gain in simplicity of the encoding technique is significant. Accordingly, any parity check matrix that is equivalent to a lower triangular or upper triangular under row and/or column permutation can be utilized for the same purpose.

[0041] FIGs. 8A and 8B are, respectively, a diagram of a non-Gray 8-PSK modulation scheme, and a Gray 8-PSK modulation, each of which can be used in the system of FIG. 1. The non-Gray 8-PSK scheme of FIG. 8A can be utilized in the receiver of FIG. 3 to provide a system that requires very low Frame Erasure Rate (FER). This requirement can also be satisfied by using a Gray 8-PSK scheme, as shown in FIG. 8B, in conjunction with an outer code, such as Bose, Chaudhuri, and Hocquenghem (BCH), Hamming, or Reed-Solomon (RS) code.

[0042] Under this scheme, there is no need to iterate between the LDPC decoder 305 (FIG. 3) and the bit metric generator 307, which may employ 8-PSK modulation. In the absence of an outer code, the LDPC decoder 305 using Gray labeling exhibit an earlier error floor, as shown in FIG. 9 below.

[0043] FIG. 8C shows a diagram of a process for bit labeling for a higher order signal constellation. A codeword is output from the LDPC encoder 203 (FIGs. 2A and 2B), and is mapped to a constellation point in a higher order signal constellation (as shown in FIGs. 8D and 8F), per steps 801, 803. This mapping is not performed sequentially as in traditional systems, but instead executed on a non-sequential basis, such as interleaving. Such a mapping is further detailed below with respect to FIG. 8F. The modulator 205 then modulates, as in step 805, the signal based on the mapping. The modulated signal is thereafter transmitted (step 807).

[0044] FIG. 8D shows a diagram of exemplary 16-APSK (Amplitude Phase Shift Keying) constellations. Constellations A and B are 16-APSK constellations. The only difference between the two constellations A and B is that the inner circle symbols of Constellation A are rotated 15 degrees counterclockwise with respect to the inner circle symbols of Constellation B, such that inner circle symbols fall between the outer circle symbols to maximize inter-symbol distances. Therefore, intuitively Constellation A is more attractive if the Forward Error Correction (FEC) decoder 305 used a symbolwise decoding algorithm. On the other hand, given the multiplicity of code rates and different constellations, using an FEC code tailored towards bitwise decoding is more flexible. In such a case, it is not apparent which constellations would perform better, in that while Constellation A maximizes symbolwise distances, Constellation B is more "Gray-coding

friendly." AWGN (Additive White Gaussian Noise) simulations, with code rate 3/4, were performed (the results of which are shown in FIG. 8E) that with bitwise decoding, Constellation B performs slightly better.

[0045] FIG. 8F is a diagram of constellations for Quadrature Phase Shift Keying (QPSK), 8-PSK, 16-APSK and 32-APSK symbols;

[0046] FIGs. 8F show symmetric constellations for QPSK, 8-PSK, 16-APSK and 32-APSK symbols, respectively. With QSPK, two LDPC coded bits from the LDPC encoder 203 are mapped to a QPSK symbol. That is, bits $2i$ and $2i+1$ determines the i^{th} QPSK symbol, where $i=0,1,2,\dots, N/2-1$, and N is the coded LDPC block size. For 8-PSK, bits $N/3+i$, $2N/3+i$ and i determine the i^{th} 8-PSK symbol, where $i=0,1,2,\dots, N/3-1$. For 16-APSK, bits $N/2+2i$, $2i$, $N/2+2i+1$ and $2i+1$ specify the i^{th} 16-APSK symbol, where $i=0,1,2,\dots, N/4-1$. Further, for 32-APSK, bits $N/5+i$, $2N/5+i$, $4N/5+i$, $3N/5+i$ and i determine the i^{th} symbol, where $i=0,1,2,\dots, N/5-1$.

[0047] Alternatively, 8-PSK, 16-APSK and 32-APSK constellation labeling can be chosen as shown in FIG. 8G. With this labeling, N LDPC encoded bits are first passed through a bit interleaver. The bit interleaving table, in an exemplary embodiment, is a two-dimensional array with $N/3$ rows and 3 columns for 8-PSK, $N/4$ rows and 4 columns for 16-APSK and $N/5$ rows and 5 columns for 32-APSK. The LDPC encoded bits are written to the interleaver table column by column, and read out row by row. It is noted that for the case of 8-PSK and 32-APSK, this row/column bit interleaver strategy with labeling as shown in FIG. 8G, is exactly equivalent to the bit interleaving strategy described above with respect to the labeling shown in FIG. 8F. For the case of 16-APSK, these two strategies are functionally equivalent; that is, they exhibit the same performance on an AWGN channel.

[0048] FIG. 8H illustrates the simulation results (on AWGN Channel) of the above symbol constellations. Table 13 summarizes expected performance at $\text{PER}=10^{-6}$ and distance from constrained capacity.

Table 13

Code	Es/No (dB)	Distance to Capacity (dB)
2/3, 8-PSK	6.59	0.873
3/4, 8-PSK	7.88	0.690
5/6, 8-PSK	9.34	0.659
8/9, 8-PSK	10.65	0.750
9/10, 8-PSK	10.95	0.750
1/2, QPSK	0.99	0.846
3/5, QPSK	2.20	0.750
2/3, QPSK	3.07	0.760
3/4, QPSK	4.02	0.677
4/5, QPSK	4.66	0.627
5/6, QPSK	5.15	0.600
7/8, QPSK	5.93	0.698
8/9, QPSK	6.17	0.681
9/10, QPSK	6.39	0.687
3/4, 16-APSK	10.19	0.890
4/5, 16-APSK	11.0	0.850
5/6, 16-APSK	11.58	0.800
7/8, 16-APSK	12.54	0.890
4/5, 32-APSK	13.63	1.100
5/6, 32-APSK	14.25	1.050
8/9, 32-APSK	15.65	1.150

[0049] FIG. 9 is a graph showing performance between codes utilizing Gray labeling versus non-Gray labeling of FIGs. 8A and 8B. The error floor stems from the fact that assuming correct feedback from LDPC decoder 305, regeneration

of 8-PSK bit metrics is more accurate with non-Gray labeling since the two 8-PSK symbols with known two bits are further apart with non-Gray labeling. This can be equivalently seen as operating at higher Signal-to-Noise Ratio (SNR). Therefore, even though error asymptotes of the same LDPC code using Gray or non-Gray labeling have the same slope (i.e., parallel to each other), the one with non-Gray labeling passes through lower FER at any SNR.

[0050] On the other hand, for systems that do not require very low FER, Gray labeling without any iteration between LDPC decoder 305 and 8-PSK bit metric generator 307 may be more suitable because re-generating 8-PSK bit metrics before every LDPC decoder iteration causes additional complexity. Moreover, when Gray labeling is used, re-generating 8-PSK bit metrics before every LDPC decoder iteration yields only very slight performance improvement. As mentioned previously, Gray labeling without iteration may be used for systems that require very low FER, provided an outer code is implemented.

[0051] The choice between Gray labeling and non-Gray labeling depends also on the characteristics of the LDPC code. Typically, the higher bit or check node degrees, the better it is for Gray labeling, because for higher node degrees, the initial feedback from LDPC decoder 305 to 8-PSK (or similar higher order modulation) bit metric generator 307 deteriorates more with non-Gray labeling.

[0052] When 8-PSK (or similar higher order) modulation is utilized with a binary decoder, it is recognized that the three (or more) bits of a symbol are not received "equally noisy". For example with Gray 8-PSK labeling, the third bit of a symbol is considered more noisy to the decoder than the other two bits. Therefore, the LDPC code design does not assign a small number of edges to those bit nodes represented by "more noisy" third bits of 8-PSK symbol so that those bits are not penalized twice.

[0053] FIG. 10 is a flow chart of the operation of the LDPC decoder using non-Gray mapping. Under this approach, the LDPC decoder and bit metric generator iterate one after the other. In this example, 8-PSK modulation is utilized; however, the same principles apply to other higher modulation schemes as well. Under this scenario, it is assumed that the demodulator 301 outputs a distance vector, d , denoting the distances between received noisy symbol points and 8-PSK symbol points to the bit metric generator 307, whereby the vector components are as follows:

$$d_i = -\frac{E_s}{N_0} \{ (r_x - s_{i,x})^2 + (r_y - s_{i,y})^2 \} \quad i = 0, 1, \dots, 7.$$

[0054] The 8-PSK bit metric generator 307 communicates with the LDPC decoder 305 to exchange *a priori* probability information and *a posteriori* probability information, which respectively are represented as u , and a . That is, the vectors u and a respectively represent *a priori* and *a posteriori* probabilities of log likelihood ratios of coded bits.

[0055] The 8-PSK bit metric generator 307 generates the *a priori* likelihood ratios for each group of three bits as follows. First, extrinsic information on coded bits is obtained:

$$e_j = a_j - u_j \quad j = 0, 1, 2.$$

Next, 8-PSK symbol probabilities, p_i , $i = 0, 1, \dots, 7$, are determined.

*

$$y_j = -f(0, e_j) \quad j = 0, 1, 2$$

where $f(a, b) = \max(a, b) + LUT_f(a, b)$ with

$$LUT_f(a, b) = \ln(1 + e^{-|a-b|})$$

*

$$x_j = y_j + e_j \quad j = 0,1,2$$

*

$$p_0 = x_0 + x_1 + x_2 \quad p_4 = y_0 + x_1 + x_2$$

$$p_1 = x_0 + x_1 + y_2 \quad p_5 = y_0 + x_1 + y_2$$

$$p_2 = x_0 + y_1 + x_2 \quad p_6 = y_0 + y_1 + x_2$$

$$p_3 = x_0 + y_1 + y_2 \quad p_7 = y_0 + y_1 + y_2$$

[0056] Next, the bit metric generator 307 determines *a priori* log likelihood ratios of the coded bits as input to LDPC decoder 305, as follows:

$$u_0 = f(d_0 + p_0, d_1 + p_1, d_2 + p_2, d_3 + p_3) - f(d_4 + p_4, d_5 + p_5, d_6 + p_6, d_7 + p_7) - e_0$$

$$u_1 = f(d_0 + p_0, d_1 + p_1, d_4 + p_4, d_5 + p_5) - f(d_2 + p_2, d_3 + p_3, d_6 + p_6, d_7 + p_7) - e_1$$

$$u_2 = f(d_0 + p_0, d_2 + p_2, d_4 + p_4, d_6 + p_6) - f(d_1 + p_1, d_3 + p_3, d_5 + p_5, d_7 + p_7) - e_2$$

[0057] It is noted that the function $f(\cdot)$ with more than two variables can be evaluated recursively; e.g. $f(a,b,c) = f(f(a,b),c)$.

[0058] The operation of the LDPC decoder 305 utilizing non-Gray mapping is now described. In step 1001, the LDPC decoder 305 initializes log likelihood ratios of coded bits, v , before the first iteration according to the following (and as shown in FIG. 12A):

$$v_{n \rightarrow k_i} = u_n, \quad n = 0,1,\dots,N-1, \quad i = 1,2,\dots,\text{deg}(\text{bit node } n)$$

Here, $v_{n \rightarrow k_i}$ denotes the message that goes from bit node n to its adjacent check node k_i , u_n denotes the demodulator output for the bit n and N is the codeword size.

[0059] In step 1003, a check node, k , is updated, whereby the input v yields the output w . As seen in FIG. 12B, the incoming messages to the check node k from its d_c adjacent bit nodes are denoted by $v_{n1 \rightarrow k}, v_{n2 \rightarrow k}, \dots, v_{ndc \rightarrow k}$. The goal is to compute the outgoing messages from the check node k back to d_c adjacent bit nodes. These messages are denoted by $w_{k \rightarrow n1}, w_{k \rightarrow n2}, \dots, w_{k \rightarrow ndc}$, where

$$w_{k \rightarrow n_i} = g(v_{n_1 \rightarrow k}, v_{n_2 \rightarrow k}, \dots, v_{n_{i-1} \rightarrow k}, v_{n_{i+1} \rightarrow k}, \dots, v_{n_{d_c} \rightarrow k}).$$

The function $g(\cdot)$ is defined as follows:

$$g(a,b) = \text{sign}(a) \times \text{sign}(b) \times \{\min(|a|, |b|)\} + LUT_g(a,b),$$

where $LUT_g(a,b) = \ln(1+e^{-|a+b|}) - \ln(1+e^{-|a-b|})$. Similar to function f , function g with more than two variables can be evaluated recursively.

[0060] Next, the decoder 305, per step 1205, outputs *a posteriori* probability information (FIG. 12C), such that:

$$a_n = u_n + \sum_j w_{k_j \rightarrow n}.$$

[0061] Per step 1007, it is determined whether all the parity check equations are satisfied. If these parity check equations are not satisfied, then the decoder 305, as in step 1009, re-derives 8-PSK bit metrics and channel input u_n . Next, the bit node is updated, as in step 1011. As shown in FIG. 14C, the incoming messages to the bit node n from its d_v adjacent check nodes are denoted by $w_{k1 \rightarrow n}, w_{k2 \rightarrow n}, \dots, w_{kd_v \rightarrow n}$. The outgoing messages from the bit node n are computed back to d_v adjacent check nodes; such messages are denoted by $v_{n \rightarrow k1}, v_{n \rightarrow k2}, \dots, v_{n \rightarrow kd_v}$, and computed as follows:

$$v_{n \rightarrow k_i} = u_n + \sum_{j \neq i} w_{k_j \rightarrow n}$$

In step 1013, the decoder 305 outputs the hard decision (in the case that all parity check equations are satisfied):

$$\hat{c}_n = \begin{cases} 0, & a_n \geq 0 \\ 1, & a_n < 0 \end{cases} \quad \text{Stop if } H\hat{c}^T = 0$$

[0062] The above approach is appropriate when non-Gray labeling is utilized. However, when Gray labeling is implemented, the process of FIG. 11 is executed.

[0063] FIG. 11 is a flow chart of the operation of the LDPC decoder of FIG. 3 using Gray mapping. When Gray labeling is used, bit metrics are advantageously generated only once before the LDPC decoder, as re-generating bit metrics after every LDPC decoder iteration may yield nominal performance improvement. As with steps 1001 and 1003 of FIG. 10, initialization of the log likelihood ratios of coded bits, v , are performed, and the check node is updated, per steps 1101 and 1103. Next, the bit node n is updated, as in step 1105. Thereafter, the decoder outputs the *a posteriori* probability information (step 1107). In step 1109, a determination is made whether all of the parity check equations are satisfied; if so, the decoder outputs the hard decision (step 1111). Otherwise, steps 1103-1107 are repeated.

[0064] FIG. 13A is a flowchart of process for computing outgoing messages between the check nodes and the bit nodes using a forward-backward approach. For a check node with d_c adjacent edges, the computation of $d_c(d_c-1)$ and numerous $g(\dots)$ functions are performed. However, the forward-backward approach reduces the complexity of the computation to $3(d_c-2)$, in which d_c-1 variables are stored.

[0065] Referring to FIG. 12B, the incoming messages to the check node k from d_c adjacent bit nodes are denoted by $v_{n1 \rightarrow k}, v_{n2 \rightarrow k}, \dots, v_{ndc \rightarrow k}$. It is desired that the outgoing messages are computed from the check node k back to d_c adjacent bit nodes; these outgoing messages are denoted by $w_{k \rightarrow n1}, w_{k \rightarrow n2}, \dots, w_{k \rightarrow ndc}$.

[0066] Under the forward-backward approach to computing these outgoing messages, forward variables, $f_1, f_2, \dots, f_{dc}$, are defined as follows:

$$\begin{aligned} f_1 &= v_{1 \rightarrow k} \\ f_2 &= g(f_1, v_{2 \rightarrow k}) \\ f_3 &= g(f_2, v_{3 \rightarrow k}) \\ &\vdots \\ f_{dc} &= g(f_{dc-1}, v_{dc \rightarrow k}) \end{aligned}$$

In step 1301, these forward variables are computed, and stored, per step 1303.

[0067] Similarly, backward variables, $b_1, b_2, \dots, b_{dc}$, are defined by the following:

$$\begin{aligned}
b_{dc} &= v_{dc \rightarrow k} \\
b_{dc-1} &= g(b_{dc}, v_{dc-1 \rightarrow k}) \\
&\vdots \quad \vdots \quad \vdots \\
b_1 &= g(b_2, v_{1 \rightarrow k})
\end{aligned}$$

In step 1305, these backward variables are then computed. Thereafter, the outgoing messages are computed, as in step 1307, based on the stored forward variables and the computed backward variables. The outgoing messages are computed as follows:

$$\begin{aligned}
w_{k \rightarrow 1} &= b_2 \\
w_{k \rightarrow i} &= g(f_{i-1}, b_{i+1}) \quad i = 2, 3, \dots, d_c - 1 \\
w_{k \rightarrow dc} &= f_{dc-1}
\end{aligned}$$

[0068] Under this approach, only the forward variables, $f_2, f_3, \dots, f_{dc}$, are required to be stored. As the backward variables b_i are computed, the outgoing messages, $w_{k \rightarrow i}$, are simultaneously computed, thereby negating the need for storage of the backward variables.

[0069] The computation load can be further enhance by a parallel approach, as next discussed.

[0070] FIG. 13B is a flowchart of process for computing outgoing messages between the check nodes and the bit nodes using a parallel approach. For a check node k with inputs $v_{n1 \rightarrow k}, v_{n2 \rightarrow k}, \dots, v_{ndc \rightarrow k}$ from d_c adjacent bit nodes, the following parameter is computed, as in step 1311:

$$\gamma_k = g(v_{n1 \rightarrow k}, v_{n2 \rightarrow k}, \dots, v_{ndc \rightarrow k}).$$

[0071] It is noted that the $g(\dots)$ function can also be expressed as follows:

$$g(a, b) = \ln \frac{1 + e^{a+b}}{e^a + e^b}.$$

[0072] Exploiting the recursive nature of the $g(\dots)$ function, the following expression results:

$$\gamma_k = \ln \frac{1 + e^{g(v_{n1 \rightarrow k}, \dots, v_{ni-1 \rightarrow k}, v_{ni+1 \rightarrow k}, \dots, v_{ndc \rightarrow k}) + v_{ni \rightarrow k}}}{e^{g(v_{n1 \rightarrow k}, \dots, v_{ni-1 \rightarrow k}, v_{ni+1 \rightarrow k}, \dots, v_{ndc \rightarrow k})} + e^{v_{ni \rightarrow k}}} = \ln \frac{1 + e^{w_{k \rightarrow ni} + v_{ni \rightarrow k}}}{e^{w_{k \rightarrow ni}} + e^{v_{ni \rightarrow k}}}$$

[0073] Accordingly, $w_{k \rightarrow ni}$ can be solved in the following manner:

$$w_{k \rightarrow ni} = \ln \frac{e^{v_{ni \rightarrow k} + \gamma_k} - 1}{e^{v_{ni \rightarrow k} - \gamma_k} - 1} - \gamma_k$$

[0074] The $\ln(\dots)$ term of the above equation can be obtained using a look-up table LUT_x that represents the function $\ln |e^x - 1|$ (step 1313). Unlike the other look-up tables LUT_f or LUT_g , the table LUT_x would likely requires as many entries as the number of quantization levels. Once γ_k is obtained, the calculation of $w_{k \rightarrow ni}$ for all n_i can occur in parallel using the above equation, per step 1315.

[0075] The computational latency of γ_k is advantageously $\log_2(d_c)$.

[0076] FIGs. 14A-14C are graphs showing simulation results of LDPC codes generated in accordance with various embodiments of the present invention. In particular, FIGs. 14A-14C show the performance of LDPC codes with higher

order modulation and code rates of 3/4 (QPSK, 1.485 bits/symbol), 2/3 (8-PSK, 1.980 bits/symbol), and 5/6 (8-PSK, 2.474 bits/symbol).

[0077] Two general approaches exist to realize the interconnections between check nodes and bit nodes: (1) a fully parallel approach, and (2) a partially parallel approach. In fully parallel architecture, all of the nodes and their interconnections are physically implemented. The advantage of this architecture is speed.

[0078] The fully parallel architecture, however, may involve greater complexity in realizing all of the nodes and their connections. Therefore with fully parallel architecture, a smaller block size may be required to reduce the complexity. In that case, for the same clock frequency, a proportional reduction in throughput and some degradation in FER versus Es/No performance may result.

[0079] The second approach to implementing LDPC codes is to physically realize only a subset of the total number of the nodes and use only these limited number of "physical" nodes to process all of the "functional" nodes of the code. Even though the LDPC decoder operations can be made extremely simple and can be performed in parallel, the further challenge in the design is how the communication is established between "randomly" distributed bit nodes and check nodes. The decoder 305 (of FIG. 3) addresses this problem by accessing memory in a structured way, as to realize a seemingly random code. This approach is explained with respect to FIGs. 15A and 15B.

[0080] FIGs. 15A and 15B are diagrams of the top edge and bottom edge, respectively, of memory organized to support structured access as to realize randomness in LDPC coding, according to an embodiment of the present invention. Structured access can be achieved without compromising the performance of a truly random code by focusing on the generation of the parity check matrix. In general, a parity check matrix can be specified by the connections of the check nodes with the bit nodes. For example, the bit nodes can be divided into groups of a fixed size, which for illustrative purposes is 392. Additionally, assuming the check nodes connected to the first bit node of degree 3, for instance, are numbered as a , b and c , then the check nodes connected to the second bit node are numbered as $a+p$, $b+p$ and $c+p$, the check nodes connected to the third bit node are numbered as $a+2p$, $b+2p$ and $c+2p$ etc.; where $p=(\text{number of check nodes})/392$. For the next group of 392 bit nodes, the check nodes connected to the first bit node are different from a , b , c so that with a suitable choice of p , all the check nodes have the same degree. A random search is performed over the free constants such that the resulting LDPC code is cycle-4 and cycle-6 free. Because of the structural characteristics of the parity check matrix of the present invention, the edge information can be stored to permit concurrent access to a group of relevant edge values during decoding.

[0081] In other words the approach facilitates memory access during check node and bit node processing. The values of the edges in the bipartite graph can be stored in a storage medium, such as random access memory (RAM). It is noted that for a truly random LDPC code during check node and bit node processing, the values of the edges would need to be accessed one by one in a random fashion. However, such a conventional access scheme would be too slow for a high data rate application. The RAM of FIGs. 15A and 15B are organized in a manner, whereby a large group of relevant edges can be fetched in one clock cycle; accordingly, these values are placed "together" in memory, according to a predetermined scheme or arrangement. It is observed that, in actuality, even with a truly random code, for a group of check nodes (and respectively bit nodes), the relevant edges can be placed next to one another in RAM, but then the relevant edges adjacent to a group of bit nodes (respectively check nodes) will be randomly scattered in RAM. Therefore, the "togetherness" stems from the design of the parity check matrices themselves. That is, the check matrix design ensures that the relevant edges for a group of bit nodes and check nodes are simultaneously placed together in RAM.

[0082] As seen in FIGs. 15A and 15B, each box contains the value of an edge, which is multiple bits (e.g., 6). Edge RAM is divided into two parts: top edge RAM 1501 (FIG. 15A) and bottom edge RAM 1503 (FIG. 15B). Bottom edge RAM contains the edges between bit nodes of degree 2, for example, and check nodes. Top edge RAM 1501 contains the edges between bit nodes of degree greater than 2 and check nodes. Therefore, for every check node, 2 adjacent edges are stored in the bottom RAM 1503, and the rest of the edges are stored in the top edge RAM 1501. For example, the size of the top edge RAM 1501 and bottom edge RAM 1503 for various code rates are given in Table 14:

Table 14

	1/2	2/3	3/4	5/6
Top Edge RAM	400 x 392	440 x 392	504 x 392	520 x 392
Bottom Edge RAM	160 x 392	110 x 392	72 x 392	52 x 392

[0083] Based on Table 14, an edge RAM of size 576 x 392 is sufficient to store the edge metrics for all the code rates of 1/2, 2/3, 3/4, and 5/6.

[0084] As noted, under this exemplary scenario, a group of 392 bit nodes and 392 check nodes are selected for processing at a time. For 392 check node processing, $q = d_c - 2$ consecutive rows are accessed from the top edge RAM 1501, and 2 consecutive rows from the bottom edge RAM 1503. The value of d_c depends on the specific code, for

example $d_c=7$ for rate $1/2$, $d_c=10$ for rate $2/3$, $d_c=16$ for rate $3/4$ and $d_c=22$ for rate $5/6$ for the above codes. Of course other values of d_c for other codes are possible. In this instance, $q+2$ is the degree of each check node.

[0085] For bit node processing, if the group of 392 bit nodes has degree 2, their edges are located in 2 consecutive rows of the bottom edge RAM 1503. If the bit nodes have degree $d > 2$, their edges are located in some d rows of the top edge RAM 1501. The address of these d rows can be stored in non-volatile memory, such as Read-Only Memory (ROM). The edges in one of the rows correspond to the first edges of 392 bit nodes, the edges in another row correspond to the second edges of 392 bit nodes, etc. Moreover for each row, the column index of the edge that belongs to the first bit node in the group of 392 can also be stored in ROM. The edges that correspond to the second, third, etc. bit nodes follow the starting column index in a "wrapped around" fashion. For example, if the j^{th} edge in the row belongs to the first bit node, then the $(j+1)^{\text{st}}$ edge belongs to the second bit node, $(j+2)^{\text{nd}}$ edge belongs to the third bit node, ..., and $(j-1)^{\text{st}}$ edge belongs to the 392th bit node.

[0086] With the organization shown in FIGs. 15A and 15B, speed of memory access is greatly enhanced during LDPC coding.

[0087] FIG. 16 illustrates a computer system upon which an embodiment according to the present invention can be implemented. The computer system 1600 includes a bus 1601 or other communication mechanism for communicating information, and a processor 1603 coupled to the bus 1601 for processing information. The computer system 1600 also includes main memory 1605, such as a random access memory (RAM) or other dynamic storage device, coupled to the bus 1601 for storing information and instructions to be executed by the processor 1603. Main memory 1605 can also be used for storing temporary variables or other intermediate information during execution of instructions to be executed by the processor 1603. The computer system 1600 further includes a read only memory (ROM) 1607 or other static storage device coupled to the bus 1601 for storing static information and instructions for the processor 1603. A storage device 1609, such as a magnetic disk or optical disk, is additionally coupled to the bus 1601 for storing information and instructions.

[0088] The computer system 1600 may be coupled via the bus 1601 to a display 1611, such as a cathode ray tube (CRT), liquid crystal display, active matrix display, or plasma display, for displaying information to a computer user. An input device 1613, such as a keyboard including alphanumeric and other keys, is coupled to the bus 1601 for communicating information and command selections to the processor 1603. Another type of user input device is cursor control 1615, such as a mouse, a trackball, or cursor direction keys for communicating direction information and command selections to the processor 1603 and for controlling cursor movement on the display 1611.

[0089] According to one embodiment of the invention, generation of LDPC codes is provided by the computer system 1600 in response to the processor 1603 executing an arrangement of instructions contained in main memory 1605. Such instructions can be read into main memory 1605 from another computer-readable medium, such as the storage device 1609. Execution of the arrangement of instructions contained in main memory 1605 causes the processor 1603 to perform the process steps described herein. One or more processors in a multi-processing arrangement may also be employed to execute the instructions contained in main memory 1605. In alternative embodiments, hard-wired circuitry may be used in place of or in combination with software instructions to implement the embodiment of the present invention. Thus, embodiments of the present invention are not limited to any specific combination of hardware circuitry and software.

[0090] The computer system 1600 also includes a communication interface 1617 coupled to bus 1601. The communication interface 1617 provides a two-way data communication coupling to a network link 1619 connected to a local network 1621. For example, the communication interface 1617 may be a digital subscriber line (DSL) card or modem, an integrated services digital network (ISDN) card, a cable modem, or a telephone modem to provide a data communication connection to a corresponding type of telephone line. As another example, communication interface 1617 may be a local area network (LAN) card (e.g. for Ethernet™ or an Asynchronous Transfer Model (ATM) network) to provide a data communication connection to a compatible LAN. Wireless links can also be implemented. In any such implementation, communication interface 1617 sends and receives electrical, electromagnetic, or optical signals that carry digital data streams representing various types of information. Further, the communication interface 1617 can include peripheral interface devices, such as a Universal Serial Bus (USB) interface, a PCMCIA (Personal Computer Memory Card International Association) interface, etc.

[0091] The network link 1619 typically provides data communication through one or more networks to other data devices. For example, the network link 1619 may provide a connection through local network 1621 to a host computer 1623, which has connectivity to a network 1625 (e.g. a wide area network (WAN) or the global packet data communication network now commonly referred to as the "Internet") or to data equipment operated by service provider. The local network 1621 and network 1625 both use electrical, electromagnetic, or optical signals to convey information and instructions. The signals through the various networks and the signals on network link 1619 and through communication interface 1617, which communicate digital data with computer system 1600, are exemplary forms of carrier waves bearing the information and instructions.

[0092] The computer system 1600 can send messages and receive data, including program code, through the network(s), network link 1619, and communication interface 1617. In the Internet example, a server (not shown) might

transmit requested code belonging to an application program for implementing an embodiment of the present invention through the network 1625, local network 1621 and communication interface 1617. The processor 1603 may execute the transmitted code while being received and/or store the code in storage device 169, or other non-volatile storage for later execution. In this manner, computer system 1600 may obtain application code in the form of a carrier wave.

[0093] The term "computer-readable medium" as used herein refers to any medium that participates in providing instructions to the processor 1603 for execution. Such a medium may take many forms, including but not limited to non-volatile media, volatile media, and transmission media. Non-volatile media include, for example, optical or magnetic disks, such as storage device 1609. Volatile media include dynamic memory, such as main memory 1605. Transmission media include coaxial cables, copper wire and fiber optics, including the wires that comprise bus 1601. Transmission media can also take the form of acoustic, optical, or electromagnetic waves, such as those generated during radio frequency (RF) and infrared (IR) data communications. Common forms of computer-readable media include, for example, a floppy disk, a flexible disk, hard disk, magnetic tape, any other magnetic medium, a CD-ROM, CDRW, DVD, any other optical medium, punch cards, paper tape, optical mark sheets, any other physical medium with patterns of holes or other optically recognizable indicia, a RAM, a PROM, and EPROM, a FLASH-EPROM, any other memory chip or cartridge, a carrier wave, or any other medium from which a computer can read.

[0094] Various forms of computer-readable media may be involved in providing instructions to a processor for execution. For example, the instructions for carrying out at least part of the present invention may initially be borne on a magnetic disk of a remote computer. In such a scenario, the remote computer loads the instructions into main memory and sends the instructions over a telephone line using a modem. A modem of a local computer system receives the data on the telephone line and uses an infrared transmitter to convert the data to an infrared signal and transmit the infrared signal to a portable computing device, such as a personal digital assistance (PDA) and a laptop. An infrared detector on the portable computing device receives the information and instructions borne by the infrared signal and places the data on a bus. The bus conveys the data to main memory, from which a processor retrieves and executes the instructions. The instructions received by main memory may optionally be stored on storage device either before or after execution by processor.

[0095] Accordingly, the various embodiments of the present invention provide an encoder, which is a Low Density Parity Check (LDPC) encoder, which generates encoded signals by transforming an input message into a codeword represented by a plurality of set of bits.

[0096] While the present invention has been described in connection with a number of embodiments and implementations, the present invention is not so limited but covers various obvious modifications and equivalent arrangements, which fall within the purview of the appended claims.

Claims

1. A method for encoding signals, the method comprising:

encoding an input message into a codeword with a Low Density Parity Check (LDPC) encoder (203), wherein the step of encoding comprises:

receiving information bits, $i_0, i_1, \dots, i_m, \dots, i_{k_{ldpc} - 1}$;

initializing parity bits, $p_0, p_1, \dots, p_j, \dots, p_{n_{ldpc} - k_{ldpc} - 1}$, of a Low Density Parity Check (LDPC) code having a code rate of 1/2, 5/6, or 3/4 according to $p_0 = p_1 = \dots = p_{n_{ldpc} - k_{ldpc} - 1} = 0$;

generating, based on the information bits, the parity bits by accumulating the information bits by performing operations for each information bit, $i_m, p_j = p_j \oplus i_m$ for each corresponding value of j , and subsequently performing the operation, starting with $j = 1, p_j = p_j \oplus p_{j-1}$, for $j = 1, 2, \dots, n_{ldpc} - k_{ldpc} - 1$; and

generating the codeword, c , of size n_{ldpc} as $c = (i_0, i_1, \dots, i_{k_{ldpc} - 1}, p_0, p_1, \dots, p_{n_{ldpc} - k_{ldpc} - 1})$ where p_j , for $j = 1, 2, \dots, n_{ldpc} - k_{ldpc} - 1$, is final content of p_j ,

wherein j is a parity bit address equal to $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc} - k_{ldpc})$, n_{ldpc} is a codeword size equating to 64800, k_{ldpc} is an information block size equating to the code rate multiplied by n_{ldpc} , m is an integer corresponding to a particular information bit, and x denotes a parity bit address, wherein each row of the following tables specifies addresses x for a particular one of the code rates of 1/2, 5/6, and 3/4 corresponding to a particular one of the tables, wherein q is specified in the following table for each one of the code rates of 1/2, 5/6, and 3/4, whereby each successive row of the corresponding table for the particular code rate provides all parity bit addresses j for the first information bit in each successive group of 360 information bits, and each successive row of the table provides all addresses x used in calculating parity bit addresses, j , for the next information bits according to $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc} - k_{ldpc})$ in each successive group of 360 information bits:-

EP 2 190 123 B9

Address of Parity Bit Accumulators (Code Rate 5/6, q=30)	
5	0 4362 416 8909 4156 3216 3112 2560 2912 6405 8593 4969 6723
	1 2479 1786 8978 3011 4339 9313 6397 2957 7288 5484 6031 10217
	2 10175 9009 9889 3091 4985 7267 4092 8874 5671 2777 2189 8716
	3 9052 4795 3924 3370 10058 1128 9996 10165 9360 4297 434 5138
	4 2379 7834 4835 2327 9843 804 329 8353 7167 3070 1528 7311
10	5 3435 7871 348 3693 1876 6585 10340 7144 5870 2084 4052 2780
	6 3917 3111 3476 1304 10331 5939 5199 1611 1991 699 8316 9960
	7 6883 3237 1717 10752 7891 9764 4745 3888 10009 4176 4614 1567
	8 10587 2195 1689 2968 5420 2580 2883 6496 111 6023 1024 4449
	9 3786 8593 2074 3321 5057 1450 3840 5444 6572 3094 9892 1512
15	10 8548 1848 10372 4585 7313 6536 6379 1766 9462 2456 5606 9975
	11 8204 10593 7935 3636 3882 394 5968 8561 2395 7289 9267 9978
	12 7795 74 1633 9542 6867 7352 6417 7568 10623 725 2531 9115
	13 7151 2482 4260 5003 10105 7419 9203 6691 8798 2092 8263 3755
	14 3600 570 4527 200 9718 6771 1995 8902 5446 768 1103 6520
20	15 6304 7621
	16 6498 9209
	17 7293 6786
	18 5950 1708
	19 8521 1793
25	20 6174 7854
	21 9773 1190
	22 9517 10268
	23 2181 9349
	24 1949 5560
30	25 1556 555
	26 8600 3827
	27 5072 1057
	28 7928 3542
	29 3226 3762
35	0 7045 2420
	1 9645 2641
	2 2774 2452
	3 5331 2031
	4 9400 7503
40	5 1850 2338
	6 10456 9774
	7 1692 9276
	8 10037 4038
	9 3964 338
45	10 2640 5087
	11 858 3473
	12 5582 5683
	13 9523 916
	14 4107 1559
50	15 4506 3491
	16 8191 4182
	17 10192 6157
	18 5668 3305
	19 3449 1540

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 5/6, q=30)	
5	20 4766 2697
	21 4069 6675
	22 1117 1016
	23 5619 3085
	24 8483 8400
10	25 8255 394
	26 6338 5042
	27 6174 5119
	28 7203 1989
	29 1781 5174
15	0 1464 3559
	1 3376 4214
	2 7238 67
	3 10595 8831
	4 1221 6513
20	5 5300 4652
	6 1429 9749
	7 7878 5131
	8 4435 10284
	9 6331 5507
25	10 6662 4941
	11 9614 10238
	12 8400 8025
	13 9156 5630
	14 7067 8878
30	15 9027 3415
	16 1690 3866
	17 2854 8469
	18 6206 630
	19 363 5453
35	20 4125 7008
	21 1612 6702
	22 9069 9226
	23 5767 4060
	24 3743 9237
40	25 7018 5572
	26 8892 4536
	27 853 6064
	28 8069 5893
	29 2051 2885
45	0 10691 3153
	1 3602 4055
	2 328 1717
	3 2219 9299
	4 1939 7898
50	5 617 206
	6 8544 1374
	7 10676 3240
	8 6672 9489

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 5/6, q=30)	
5	9 3170 7457
	10 7868 5731
	11 6121 10732
	12 4843 9132
	13 580 9591
10	14 6267 9290
	15 3009 2268
	16 195 2419
	17 8016 1557
	18 15169195
15	19 8062 9064
	20 2095 8968
	21 753 7326
	22 6291 3833
	23 2614 7844
20	24 2303 646
	25 2075 611
	26 4687 362
	27 8684 9940
	28 4830 2065
25	29 7038 1363
	0 1769 7837
	1 3801 1689
	2 10070 2359
	3 3667 9918
30	4 1914 6920
	5 4244 5669
	6 10245 7821
	7 7648 3944
	8 3310 5488
35	9 6346 9666
	10 7088 6122
	11 1291 7827
	12 10592 8945
	13 3609 7120
40	14 9168 9112
	15 6203 8052
	16 3330 2895
	17 4264 10563
	18 10556 6496
45	19 8807 7645
	20 1999 4530
	21 9202 6818
	22 3403 1734
	23 2106 9023
50	24 6881 3883
	25 3895 2171
	26 4062 6424
	27 3755 9536

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 5/6, q=30)	
5	28 4683 2131 29 7347 8027

Address of Parity Bit Accumulators (Code Rate 1/2, q=90)	
10	54 9318 14392 27561 26909 10219 2534 8597 55 7263 4635 2530 28130 3033 23830 3651 56 24731 23583 26036 17299 5750 792 9169 57 5811 26154 18653 11551 15447 13685 16264
15	58 12610 11347 28768 2792 3174 29371 12997 59 16789 16018 21449 6165 21202 15850 3186 60 31016 21449 17618 6213 12166 8334 18212 61 22836 14213 11327 5896 718 11727 9308 62 2091 24941 29966 23634 9013 15587 5444
20	63 22207 3983 16904 28534 21415 27524 25912 64 25687 4501 22193 14665 14798 16158 5491 65 4520 17094 23397 4264 22370 16941 21526 66 10490 6182 32370 9597 30841 25954 2762 67 22120 22865 29870 15147 13668 14955 19235
25	68 6689 18408 18346 9918 25746 5443 20645 69 29982 12529 13858 4746 30370 10023 24828 70 1262 28032 29888 13063 24033 21951 7863 71 6594 29642 31451 14831 9509 9335 31552
30	72 1358 6454 16633 20354 24598 624 5265 73 19529 295 18011 3080 13364 8032 15323 74 11981 1510 7960 21462 9129 11370 25741 75 9276 29656 4543 30699 20646 21921 28050
35	76 15975 25634 5520 31119 13715 21949 19605 77 18688 4608 31755 30165 13103 10706 29224 78 21514 23117 12245 26035 31656 25631 30699 79 9674 24966 31285 29908 17042 24588 31857 80 21856 27777 29919 27000 14897 11409 7122
40	81 29773 23310 263 4877 28622 20545 22092 82 15605 5651 21864 3967 14419 22757 15896 83 30145 1759 10139 29223 26086 10556 5098 84 18815 16575 2936 24457 26738 6030 505
45	85 30326 22298 27562 20131 26390 6247 24791 86 928 29246 21246 12400 15311 32309 18608 87 20314 6025 26689 16302 2296 3244 19613 88 6237 11943 22851 15642 23857 15112 20947 89 26403 25168 19038 18384 8882 12719 7093
50	0 14567 24965 1 3908 100 2 10279 240 3 24102 764
55	4 12383 4173 5 13861 15918 6 21327 1046 7 5288 14579

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 1/2, q=90)	
5	8 28158 8069
	9 16583 11098
	10 16681 28363
	11 13980 24725
	12 32169 17989
10	13 10907 2767
	14 21557 3818
	15 26676 12422
	16 7676 8754
	17 14905 20232
15	18 15719 24646
	19 31942 8589
	20 19978 27197
	21 27060 15071
20	22 6071 26649
	23 10393 11176
	24 9597 13370
	25 7081 17677
	26 1433 19513
25	27 26925 9014
	28 19202 8900
	29 18152 30647
	30 20803 1737
30	31 11804 25221
	32 31683 17783
	33 29694 9345
	34 12280 26611
	35 6526 26122
35	36 26165 11241
	37 7666 26962
	38 16290 8480
	39 11774 10120
40	40 30051 30426
	41 1335 15424
	42 6865 17742
	43 31779 12489
	44 32120 21001
45	45 14508 6996
	46 979 25024
	47 4554 21896
	48 7989 21777
	49 4972 20661
50	50 6612 2730
	51 12742 4418
	52 29194 595
55	53 19267 20113

EP 2 190 123 B9

Address of Parity Bit Accumulators (Code Rate 3/4, q=45)	
5	0 6385 7901 14611 13389 11200 3252 5243 2504 2722 821 7374 1 11359 2698 357 13824 12772 7244 6752 15310 852 2001 11417 2 7862 7977 6321 13612 12197 14449 15137 13860 1708 6399 13444 3 1560 11804 6975 13292 3646 3812 8772 7306 5795 14327 7866 4 7626 11407 14599 9689 1628 2113 10809 9283 1230 15241 4870
10	5 1610 5699 15876 9446 12515 1400 6303 5411 14181 13925 7358 6 4059 8836 3405 7853 7992 15336 5970 10368 10278 9675 4651 7 4441 3963 9153 2109 12683 7459 12030 12221 629 15212 406 8 6007 8411 5771 3497 543 14202 875 9186 6235 13908 3563 9 3232 6625 4795 546 9781 2071 7312 3399 7250 4932 12652
15	10 8820 10088 11090 7069 6585 13134 10158 7183 488 7455 9238 11 1903 10818 119 215 7558 11046 10615 11545 14784 7961 15619 12 3655 8736 4917 15874 5129 2134 15944 14768 7150 2692 1469 13 8316 3820 505 8923 6757 806 7957 4216 15589 13244 2622
20	14 14463 4852 15733 3041 11193 12860 13673 8152 6551 15108 8758 15 3149 11981 16 13416 6906 17 13098 13352 18 2009 14460
25	19 7207 4314 20 3312 3945 21 4418 6248 22 2669 13975
30	23 7571 9023 24 14172 2967 25 7271 7138 26 6135 13670 27 7490 14559
35	28 8657 2466 29 8599 12834 30 3470 3152 31 13917 4365
40	32 6024 13730 33 10973 14182 34 2464 13167 35 5281 15049
45	36 1103 1849 37 2058 1069 38 9654 6095 39 14311 7667 40 15617 8146
50	41 4588 11218 42 13660 6243 43 8578 7874 44 11741 2686
55	0 1022 1264 1 12604 9965 2 8217 2707 3 3156 11793

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 3/4, q=45)	
5	4 354 1514
	5 6978 14058
	6 7922 16079
	7 15087 12138
	8 5053 6470
10	9 12687 14932
	10 15458 1763
	11 8121 1721
	12 12431 549
	13 4129 7091
15	14 1426 8415
	15 9783 7604
	16 6295 11329
	17 1409 12061
	18 8065 9087
20	19 2918 8438
	20 1293 14115
	21 3922 13851
	22 3851 4000
	23 5865 1768
25	24 2655 14957
	25 5565 6332
	26 4303 12631
	27 11653 12236
	28 16025 7632
30	29 4655 14128
	30 9584 13123
	31 13987 9597
	32 15409 12110
	33 8754 15490
35	34 7416 15325
	35 2909 15549
	36 2995 8257
	37 9406 4791
	38 11111 4854
40	39 2812 8521
	40 8476 14717
	41 7820 15360
	42 1179 7939
	43 2357 8678
45	44 7703 6216
	0 3477 7067
	1 3931 13845
	2 7675 12899
	3 1754 8187
50	4 7785 1400
	5 9213 5891
	6 2494 7703
	7 2576 7902

(continued)

Address of Parity Bit Accumulators (Code Rate 3/4, q=45)	
5	8 4821 15682
	9 10426 11935
	10 1810 904
	11 11332 9264
	12 11312 3570
10	13 14916 2650
	14 7679 7842
	15 6089 13084
	16 3938 2751
15	17 8509 4648
	18 12204 8917
	19 5749 12443
	20 12613 4431
	21 1344 4014
20	22 8488 13850
	23 1730 14896
	24 14942 7126
	25 14983 8863
	26 6578 8564
25	27 4947 396
	28 297 12805
	29 13878 6692
	30 11857 11186
30	31 14395 11493
	32 16145 12251
	33 13462 7428
	34 14526 13119
	35 2535 11243
35	36 6465 12690
	37 6872 9334
	38 15371 14023
	39 8101 10187
40	40 11963 4848
	41 15125 6119
	42 8051 14465
	43 11139 5167
45	44 2883 14521

2. A Low Density Parity Check (LDPC) encoder (203) for generating encoded signals, comprising:

means configured to receive information bits, $i_0, i_1, \dots, i_m, \dots, i_{k_{ldpc}-1}$;

means configured to initialize parity bits, $p_0, p_1, \dots, p_j, \dots, p_{n_{ldpc}-k_{ldpc}-1}$, of a Low Density Parity Check (LDPC) code having a code rate of 1/2, 5/6, or 3/4 according to $p_0 = p_1 = \dots = p_{n_{ldpc}-k_{ldpc}-1} = 0$;

means configured to generate, based on the information bits, the parity bits by accumulating the information bits by performing operations for each information bit, i_m , $p_j = p_j \oplus i_m$ for each corresponding value of j , and subsequently performing the operation, starting with $j = 1$, $p_j = p_j \oplus p_{j-1}$, for $j = 1, 2, \dots, n_{ldpc} - k_{ldpc} - 1$; and

means configured to generate the codeword, c , of size n_{ldpc} as $c = (i_0, i_1, \dots, i_{k_{ldpc}-1}, p_0, p_1, \dots, p_{n_{ldpc}-k_{ldpc}-1})$ where p_j for $j = 1, 2, \dots, n_{ldpc} - k_{ldpc} - 1$, is final content of p_j .

wherein j is a parity bit address equal to $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc} - k_{ldpc})$, n_{ldpc} is a codeword size equating

EP 2 190 123 B9

to 64800, k_{ldpc} is an information block size equating to the code rate multiplied by n_{ldpc} , m is an integer corresponding to a particular information bit, and x denotes a parity bit address, wherein each row of the following tables specifies addresses x for a particular one of the code rates of 1/2, 5/6, and 3/4 corresponding to a particular one of the tables, wherein q is specified in the following table for each one of the code rates of 1/2, 5/6, and 3/4, whereby each successive row of the corresponding table for the particular code rate provides all parity bit addresses j for the first information bit in each successive group of 360 information bits, and each successive row of the table provides all addresses x used in calculating parity bit addresses, j , for the next information bits according to $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc} - k_{ldpc})$ in each successive group of 360 information bits:-

Address of Parity Bit Accumulators (Code Rate 5/6, q=30)										
0	4362	416	8909	4156	3216	3112	2560	2912	6405	8593
1	2479	1786	8978	3011	4339	9313	6397	2957	7288	5484
2	10175	9009	9889	3091	4985	7267	4092	8874	5671	2777
3	9052	4795	3924	3370	10058	1128	9996	10165	9360	4297
4	2379	7834	4835	2327	9843	804	329	8353	7167	3070
5	3435	7871	348	3693	1876	6585	10340	7144	5870	2084
6	3917	3111	3476	1304	10331	5939	5199	1611	1991	699
7	6883	3237	1717	10752	7891	9764	4745	3888	10009	4176
8	10587	2195	1689	2968	5420	2580	2883	6496	111	6023
9	3786	8593	2074	3321	5057	1450	3840	5444	6572	3094
10	8548	1848	10372	4585	7313	6536	6379	1766	9462	2456
11	8204	10593	7935	3636	3882	394	5968	8561	2395	7289
12	7795	74	1633	9542	6867	7352	6417	7568	10623	725
13	7151	2482	4260	5003	10105	7419	9203	6691	8798	2092
14	3600	570	4527	200	9718	6771	1995	8902	5446	768
15	6304	7621								
16	6498	9209								
17	7293	6786								
18	5950	1708								
19	8521	1793								
20	6174	7854								
21	9773	1190								
22	9517	10268								
23	2181	9349								
24	1949	5560								
25	1556	555								
26	8600	3827								
27	5072	1057								
28	7928	3542								
29	3226	3762								
0	7045	2420								
1	9645	2641								
2	2774	2452								
3	5331	2031								
4	9400	7503								
5	1850	2338								
6	10456	9774								
7	1692	9276								
8	10037	4038								
9	3964	338								
10	2640	5087								
11	858	3473								

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 5/6, q=30)	
5	12 5582 5683
	13 9523 916
	14 4107 1559
	15 4506 3491
	16 8191 4182
10	17 10192 6157
	18 5668 3305
	19 3449 1540
	20 4766 2697
	21 4069 6675
15	22 1117 1016
	23 5619 3085
	24 8483 8400
	25 8255 394
	26 6338 5042
20	27 6174 5119
	28 7203 1989
	29 1781 5174
	0 1464 3559
	1 3376 4214
25	2 7238 67
	3 10595 8831
	4 1221 6513
	5 5300 4652
	6 1429 9749
30	7 7878 5131
	8 4435 10284
	9 6331 5507
	10 6662 4941
	11 9614 10238
35	12 8400 8025
	13 9156 5630
	14 7067 8878
	15 9027 3415
	16 1690 3866
40	17 2854 8469
	18 6206 630
	19 363 5453
	20 4125 7008
	21 1612 6702
45	22 9069 9226
	23 5767 4060
	24 3743 9237
	25 7018 5572
	26 8892 4536
50	27 853 6064
	28 8069 5893
	29 2051 2885
	0 10691 3153
55	

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 5/6, q=30)	
5	1 3602 4055
	2 328 1717
	3 2219 9299
	4 1939 7898
	5 617 206
10	6 8544 1374
	7 10676 3240
	8 6672 9489
	9 3170 7457
	10 7868 5731
15	11 6121 10732
	12 4843 9132
	13 580 9591
	14 6267 9290
	15 3009 2268
20	16 195 2419
	17 8016 1557
	18 1516 9195
	19 8062 9064
	20 2095 8968
25	21 753 7326
	22 6291 3833
	23 2614 7844
	24 2303 646
	25 2075 611
30	26 4687 362
	27 8684 9940
	28 4830 2065
	29 7038 1363
	0 1769 7837
35	1 3801 1689
	2 10070 2359
	3 3667 9918
	4 1914 6920
	5 4244 5669
40	6 10245 7821
	7 7648 3944
	8 3310 5488
	9 6346 9666
	10 7088 6122
45	11 1291 7827
	12 10592 8945
	13 3609 7120
	14 9168 9112
	15 6203 8052
50	16 3330 2895
	17 4264 10563
	18 10556 6496
	19 8807 7645

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 5/6, q=30)	
20	1999 4530
21	9202 6818
22	3403 1734
23	2106 9023
24	6881 3883
25	3895 2171
26	4062 6424
27	3755 9536
28	4683 2131
29	7347 8027

Address of Parity Bit Accumulators (Code Rate 1/2, q=90)	
54	9318 14392 27561 26909 10219 2534 8597
55	7263 4635 2530 28130 3033 23830 3651
56	24731 23583 26036 17299 5750 792 9169
57	5811 26154 18653 11551 15447 13685 16264
58	12610 11347 28768 2792 3174 29371 12997
59	16789 16018 21449 6165 21202 15850 3186
60	31016 21449 17618 6213 12166 8334 18212
61	22836 14213 11327 5896 718 11727 9308
62	2091 24941 29966 23634 9013 15587 5444
63	22207 3983 16904 28534 21415 27524 25912
64	25687 4501 22193 14665 14798 16158 5491
65	4520 17094 23397 4264 22370 16941 21526
66	10490 6182 32370 9597 30841 25954 2762
67	22120 22865 29870 15147 13668 14955 19235
68	6689 18408 18346 9918 25746 5443 20645
69	29982 12529 13858 4746 30370 10023 24828
70	1262 28032 29888 13063 24033 21951 7863
71	6594 29642 31451 14831 9509 9335 31552
72	1358 6454 16633 20354 24598 624 5265
73	19529 295 18011 3080 13364 8032 15323
74	11981 1510 7960 21462 9129 11370 25741
75	9276 29656 4543 30699 20646 21921 28050
76	15975 25634 5520 31119 13715 21949 19605
77	18688 4608 31755 30165 13103 10706 29224
78	21514 23117 12245 26035 31656 25631 30699
79	9674 24966 31285 29908 17042 24588 31857
80	21856 27777 29919 27000 14897 11409 7122
81	29773 23310 263 4877 28622 20545 22092
82	15605 5651 21864 3967 14419 22757 15896
83	30145 1759 10139 29223 26086 10556 5098
84	18815 16575 2936 24457 26738 6030 505
85	30326 22298 27562 20131 26390 6247 24791
86	928 29246 21246 12400 15311 32309 18608
87	20314 6025 26689 16302 2296 3244 19613
88	6237 11943 22851 15642 23857 15112 20947
89	26403 25168 19038 18384 8882 12719 7093

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 1/2, q=90)	
5	0 14567 24965
	1 3908 100
	2 10279 240
	3 24102 764
	4 12383 4173
10	5 13861 15918
	6 21327 1046
	7 5288 14579
	8 28158 8069
	9 16583 11098
15	10 16681 28363
	11 13980 24725
	12 32169 17989
	13 10907 2767
	14 21557 3818
20	15 26676 12422
	16 7676 8754
	17 14905 20232
	18 15719 24646
	19 31942 8589
25	20 19978 27197
	21 27060 15071
	22 6071 26649
	23 10393 11176
	24 9597 13370
30	25 7081 17677
	26 1433 19513
	27 26925 9014
	28 19202 8900
	29 18152 30647
35	30 20803 1737
	31 11804 25221
	32 31683 17783
	33 29694 9345
	34 12280 26611
40	35 6526 26122
	36 26165 11241
	37 7666 26962
	38 16290 8480
	39 11774 10120
45	40 30051 30426
	41 1335 15424
	42 6865 17742
	43 31779 12489
	44 32120 21001
50	45 14508 6996
	46 979 25024
	47 4554 21896
	48 7989 21777

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 1/2, q=90)

49 4972 20661
50 6612 2730
51 12742 4418
52 29194 595
53 19267 20113

Address of Parity Bit Accumulators (Code Rate 3/4, q=45)

0 6385 7901 14611 13389 11200 3252 5243 2504 2722 821 7374
1 11359 2698 357 13824 12772 7244 6752 15310 852 2001 11417
2 7862 7977 6321 13612 12197 14449 15137 13860 1708 6399 13444
3 1560 11804 6975 13292 3646 3812 8772 7306 5795 14327 7866
4 7626 11407 14599 9689 1628 2113 10809 9283 1230 15241 4870
5 1610 5699 15876 9446 12515 1400 6303 5411 14181 13925 7358
6 4059 8836 3405 7853 7992 15336 5970 10368 10278 9675 4651
7 4441 3963 9153 2109 12683 7459 12030 12221 629 15212 406
8 6007 8411 5771 3497 543 14202 875 9186 6235 13908 3563
9 3232 6625 4795 546 9781 2071 7312 3399 7250 4932 12652
10 8820 10088 11090 7069 6585 13134 10158 7183 488 7455 9238
11 1903 10818 119 215 7558 11046 10615 11545 14784 7961 15619
12 3655 8736 4917 15874 5129 2134 15944 14768 7150 2692 1469
13 8316 3820 505 8923 6757 806 7957 4216 15589 13244 2622
14 14463 4852 15733 3041 11193 12860 13673 8152 6551 15108 8758
15 3149 11981
16 13416 6906
17 13098 13352
18 2009 14460
19 7207 4314
20 3312 3945
21 4418 6248
22 2669 13975
23 7571 9023
24 14172 2967
25 7271 7138
26 6135 13670
27 7490 14559
28 8657 2466
29 8599 12834
30 3470 3152
31 13917 4365
32 6024 13730
33 10973 14182
34 2464 13167
35 5281 15049
36 1103 1849
37 2058 1069
38 9654 6095
39 14311 7667

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 3/4, q=45)	
5	40 15617 8146
	41 4588 11218
	42 13660 6243
	43 8578 7874
	44 11741 2686
10	0 1022 1264
	1 12604 9965
	2 8217 2707
	3 3156 11793
	4 354 1514
15	5 6978 14058
	6 7922 16079
	7 15087 12138
	8 5053 6470
	9 12687 14932
20	10 15458 1763
	11 8121 1721
	12 12431 549
	13 4129 7091
	14 1426 8415
25	15 9783 7604
	16 6295 11329
	17 1409 12061
	18 8065 9087
	19 2918 8438
30	20 1293 14115
	21 3922 13851
	22 3851 4000
	23 5865 1768
	24 2655 14957
35	25 5565 6332
	26 4303 12631
	27 11653 12236
	28 16025 7632
	29 4655 14128
40	30 9584 13123
	31 13987 9597
	32 15409 12110
	33 8754 15490
	34 7416 15325
45	35 2909 15549
	36 2995 8257
	37 9406 4791
	38 11111 4854
	39 2812 8521
50	40 8476 14717
	41 7820 15360
	42 1179 7939
	43 2357 8678

EP 2 190 123 B9

(continued)

Address of Parity Bit Accumulators (Code Rate 3/4, q=45)	
5	44 7703 6216
	0 3477 7067
	1 3931 13845
	2 7675 12899
	3 1754 8187
10	4 7785 1400
	5 9213 5891
	6 2494 7703
	7 2576 7902
	8 4821 15682
15	9 10426 11935
	10 1810 904
	11 11332 9264
	12 11312 3570
20	13 14916 2650
	14 7679 7842
	15 6089 13084
	16 3938 2751
	17 8509 4648
25	18 12204 8917
	19 5749 12443
	20 12613 4431
	21 1344 4014
30	22 8488 13850
	23 1730 14896
	24 14942 7126
	25 14983 8863
	26 6578 8564
35	27 4947 396
	28 297 12805
	29 13878 6692
	30 11857 11186
40	31 14395 11493
	32 16145 12251
	33 13462 7428
	34 14526 13119
	35 2535 11243
45	36 6465 12690
	37 6872 9334
	38 15371 14023
	39 8101 10187
50	40 11963 4848
	41 15125 6119
	42 8051 14465
	43 11139 5167
55	44 2883 14521

Patentansprüche

1. Verfahren zum Codieren von Signalen, wobei das Verfahren Folgendes umfasst:

Codieren einer Eingabenachricht in ein Codewort mit einem Low Density Parity Check- (LDPC-) Codierer (203), wobei der Schritt des Codierens Folgendes umfasst:

Empfangen von Informationsbits, $i_0, i_1, \dots, i_m, \dots, i_{k_{ldpc}-1}$;

Initialisieren von Paritätsbits, $p_0, p_1, \dots, p_j, \dots, p_{n_{ldpc}-k_{ldpc}-1}$, eines Low Density Parity Check- (LDPC-) Codes mit einer Coderate von 1/2, 5/6 oder 3/4 gemäß $p_0=p_1=\dots=p_{n_{ldpc}-k_{ldpc}-1}=0$;

Generieren, auf der Basis der Informationsbits, der Paritätsbits durch Akkumulieren der Informationsbits durch Durchführen von Operationen für jedes Informationsbit i_m , $p_j=p_j \oplus i_m$ für jeden entsprechenden Wert von j und danach Durchführen der Operation, beginnend mit $j=1$, $p_j=p_j \oplus p_{j-1}$, für $j=1, 2, \dots, n_{ldpc}-k_{ldpc}-1$; und

Generieren des Codeworts c der Größe n_{ldpc} als $c=(i_0, i_1, \dots, i_{k_{ldpc}-1}, p_0, p_1, \dots, p_{n_{ldpc}-k_{ldpc}-1})$, wobei p_j für $j=1, 2, \dots, n_{ldpc}-k_{ldpc}-1$, der finale Gehalt von p_j ist,

wobei j eine Paritätsbitadresse gleich $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc}-k_{ldpc})$ ist, n_{ldpc} eine Codewortgröße gleich 64800 ist, k_{ldpc} eine Informationsblockgröße gleich der Coderate multipliziert mit n_{ldpc} ist, m eine ganze Zahl entsprechend einem bestimmten Informationsbit ist und x eine Paritätsbitadresse bezeichnet, wobei jede Reihe der folgenden Tabellen Adressen x für eine bestimmte der Coderaten von 1/2, 5/6 und 3/4 entsprechend einer bestimmten der Tabellen spezifiziert, wobei q in der folgenden Tabelle für jede einzelne der Coderaten von 1/2, 5/6 und 3/4 spezifiziert ist, wodurch jede aufeinanderfolgende Reihe der entsprechenden Tabelle für die bestimmte Coderate alle Paritätsbitadressen j für das erste Informationsbit in jeder aufeinanderfolgenden Gruppe von 360 Informationsbits liefert und jede aufeinanderfolgende Reihe der Tabelle alle Adressen x liefert, die beim Berechnen von Paritätsbitadressen j für die nächsten Informationsbits gemäß $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc}-k_{ldpc})$ in jeder aufeinanderfolgenden Gruppe von 360 Informationsbits verwendet werden:

Adresse von Paritätsbitakkumulatoren (Coderate 5/6, q=30)

0	4362 416 8909 4156 3216 3112 2560 2912 6405 8593 4969 6723
1	2479 1786 8978 3011 4339 9313 6397 2957 7288 5484 6031 10217
2	10175 9009 9889 3091 4985 7267 4092 8874 5671 2777 2189 8716
3	9052 4795 3924 3370 10058 1128 9996 10165 9360 4297 434 3138
4	2379 7834 4835 2327 9843 804 329 8353 7167 3070 1528 7311
5	3435 7871 348 3693 1876 6585 10340 7144 5870 2084 4052 2780
6	3917 31113476 1304 103315939 5199 1611 1991699 9316 9960
7	6983 3237 1717 10752 78919764 4745 3888 10009 4176 4614 1567
8	10587 2195 1689 2968 5420 2580 2883 6496 1116023 1024 4449
9	3786 8593 2074 3321 5057 1450 3840 5444 6572 3094 9892 1512
10	8548 1848 10372 4585 7313 6536 6379 1766 9462 2456 5606 9975
11	8204 10593 7935 3636 3882 394 5968 85612395 7289 9267 9978
12	7795 74 1633 9542 6867 7352 6417 7568 10623 725 2531 9115
13	71512482 4260 5003 10105 7419 9203 6691 87982092 8263 3755
14	3600 570 4527 200 9718 6771 1995 8902 5446 768 1103 6520
15	6304 7621
16	6498 9209
17	7293 6786
18	5950 1708
19	8521 1793
20	61747 854
21	9773 1190
22	9517 10268
23	2181 9349
24	1949 5560
25	1556 555
26	8600 3827

EP 2 190 123 B9

(fortgesetzt)

Adresse von Paritätsbitakkumulatoren (Coderate 5/6, q=30)	
5	27 5072 1057
	28 7928 3542
	29 3226 3762
	0 7045 2420
	1 9645 2641
10	2 2774 2452
	3 5331 2031
	4 9400 7503
	5 1850 2338
	6 10456 9774
15	7 1692 9276
	8 10037 4038
	9 3964 338
	10 2640 5087
	11 858 3473
20	12 5582 5683
	13 9523 916
	14 4107 1559
	15 4506 3491
	16 8191 4182
25	17 10192 6157
	18 5668 3305
	19 3449 1540
	20 4766 2697
	21 4069 6675
30	22 1117 1016
	23 5619 3085
	24 8483 8400
	25 8255 394
	26 6338 5042
35	27 6174 5119
	28 7203 1989
	29 1781 5174
	0 1464 3559
	1 3376 4214
40	2 7238 67
	3 10595 8831
	4 1221 6513
	5 5300 4652
	6 1429 9749
45	7 7878 5131
	8 4435 10284
	9 6331 5507
	10 6662 4941
	11 9614 10238
50	12 8400 8025
	13 9156 5630
	14 7067 8878
	15 9027 3415
55	

EP 2 190 123 B9

(fortgesetzt)

	Adresse von Paritätsbitakkumulatoren (Coderate 5/6, q=30)
5	16 1690 3866 17 2854 8469 18 6206 630 19 363 5453 20 4125 7008
10	21 1612 6702 22 9069 9226 23 57674060 24 3743 9237 25 7018 5572
15	26 8892 4536 27 853 6064 28 8069 5893 29 2051 2885 0 10691 3153
20	1 3602 4055 2 328 1717 3 2219 9299 4 1939 7893 5 617 206
25	6 8544 1374 7 10676 3240 8 6672 9489 9 3170 7457 10 7868 5731
30	11 6121 10732 12 4843 9132 13 580 9591 14 6267 9290 15 3009 2268
35	16 195 2419 17 8016 1557 18 1516 9195 19 8062 9064 20 2095 8968
40	21 753 7326 22 6291 3833 23 2614 7844 24 2303 646 25 2075 611
45	26 4687 362 27 8684 9940 28 4830 2065 29 7038 1363 0 1769 7837
50	1 3801 1689 2 10070 2359 3 3667 9918 4 1914 6920
55	

EP 2 190 123 B9

(fortgesetzt)

Adresse von Paritätsbitakkumulatoren (Coderate 5/6, q=30)	
5	5 4244 5669
	6 10245 7821
	7 7648 3944
	8 3310 5488
	9 6346 9666
10	10 7088 6122
	11 1291 7827
	12 10592 8945
	13 3609 7120
	14 9168 9112
15	15 6203 8052
	16 3330 2895
	17 4264 10563
	18 10556 6496
20	19 8807 7645
	20 1999 4530
	21 9202 6818
	22 3403 1734
	23 2106 9023
25	24 6881 3883
	25 3895 2171
	26 4062 6424
	27 3755 9536
30	28 4683 2131
	29 7347 8027

Adresse von Paritätsbitakkumulatoren (Coderate 1/2, q=90)	
35	54 9318 14392 27561 26909 10219 2534 8597
	55 7263 4635 2530 28130 3033 23830 3651
	56 24731 23583 26036 17299 5750 792 9169
	57 5811 26154 18653 11551 15447 13685 16264
40	58 12610 11347 28768 2792 3174 29371 12997
	59 16789 16018 21449 6165 21202 15850 3186
	60 31016 21449 17618 6213 12166 8334 18212
	61 22836 14213 11327 5896 718 11727 9308
	62 2091 24941 29966 23634 9013 15587 5444
45	63 22207 3983 16904 28534 21415 27524 25912
	64 25687 4501 22193 14665 14798 16158 5491
	65 4520 17094 23397 4264 22370 16941 21526
	66 10490 6182 32370 9597 30841 25954 2762
50	67 22120 22865 29870 15147 13668 14955 19235
	68 6689 18408 18346 9918 25746 5443 20645
	69 29982 12529 13858 4746 30370 10023 24828
	70 1262 28032 29888 13063 24033 21951 7863
55	71 6594 29642 31451 14831 9509 9335 31352
	72 1358 6454 16633 20354 24598 624 5265
	73 19529 295 18011 3080 13364 8032 15323
	74 11981 1510 7960 21462 9129 11370 25741

EP 2 190 123 B9

(fortgesetzt)

	Adresse von Paritätsbitakkumulatoren (Coderate 1/2, q=90)
5	75 9276 29656 4543 30699 20646 21921 28050
	76 15975 25634 5520 31119 13715 21949 19605
	77 18688 4608 31755 30165 13103 10706 29224
	78 21514 23117 12245 26035 31656 25631 30699
	79 9674 24966 31285 29908 17042 24588 31857
10	80 21856 27777 29919 27000 14897 11409 7122
	81 29773 23310 263 4877 28622 20545 22092
	82 15605 5651 21864 3967 14419 22757 15896
	83 30145 1759 10139 29223 26086 10556 5098
15	84 18815 16575 2936 24457 26738 6030 505
	85 30326 22298 27562 20131 26390 6247 24791
	86 928 29246 21246 12400 15311 32309 18608
	87 20314 6025 26689 16302 2296 3244 19613
	88 6237 11943 22851 15642 23857 15112 20947
20	89 26403 25168 19038 18384 8882 12719 7093
	0 14567 24965
	1 3908 100
	2 10279 240
	3 24102 764
25	4 12383 4173
	5 13861 15918
	6 21327 1046
	7 5288 14579
30	8 28158 8069
	9 16583 11098
	10 16681 28363
	11 13980 24725
	12 32169 17989
35	13 10907 2767
	14 21557 3818
	15 26676 12422
	16 7676 8754
40	17 14905 20232
	18 15719 24646
	19 31942 8589
	20 19978 27197
	21 27060 13071
45	22 6071 26649
	23 10393 11176
	24 9597 13370
	25 7081 17677
50	26 1433 19513
	27 26925 9014
	28 19202 8900
	29 18152 30647
	30 20803 1737
55	31 11804 25221
	32 31683 17783
	33 29694 9345

EP 2 190 123 B9

(fortgesetzt)

5

10

15

20

25

Adresse von Paritätsbitakkumulatoren (Coderate 1/2, q=90)

34 12280 26611
 35 6526 26122
 36 26165 11241
 37 7666 26962
 38 16290 8480
 39 11774 10120
 40 30051 30426
 41 1335 15424
 42 6865 17742
 43 31779 12489
 44 32120 21001
 45 14508 6996
 46 979 25024
 47 4554 21896
 48 7989 21777
 49 4972 20661
 50 6612 2730
 51 12742 4418
 52 29194 595
 53 19267 20113

30

35

40

45

50

55

Adresse von Paritätsbitakkumulatoren (Coderate 3/4, q=45)

0 6385 7901 14611 13389 11200 3252 5243 2504 2722 821 7374
 1 11359 2698 357 13824 12772 7244 6752 15310 852 2001 11417
 2 7862 7977 6321 13612 12197 14449 15137 13860 1708 6399 13444
 3 1560 11804 6975 13292 3646 3812 8772 7306 5795 14327 7866
 4 7626 11407 14599 9689 1628 2113 10809 9283 1230 15241 4870
 5 1610 5699 15876 9446 12515 1400 6303 5411 14181 13925 7358
 6 4059 8836 3405 7853 7992 15336 5970 10368 10278 9675 4651
 7 4441 3963 9153 2109 12683 7459 12030 12221 629 15212 406
 8 6007 8411 5771 3497 543 14202 875 9186 6235 13908 3563
 9 3232 6625 4795 546 9781 2071 7312 3399 7250 4932 12652
 10 8820 10088 11090 7069 6585 13134 10158 7183 488 7455 9238
 11 1903 10818 119 215 7558 11046 10615 11545 14184 7961 15619
 12 3655 8736 4917 15874 5129 2134 15944 14769 7150 2692 1469
 13 8316 3820 505 8923 6757 806 7957 4216 15589 13244 2622
 14 14463 4852 15733 3041 11193 12860 13673 8152 6551 15108 8758
 15 3149 11981
 16 13416 6906
 17 13098 13352
 18 2009 14460
 19 7207 4314
 20 3312 3945
 21 4418 6248
 22 2669 13975
 23 7571 9023
 24 14172 2967

EP 2 190 123 B9

(fortgesetzt)

Adresse von Paritätsbitakkumulatoren (Coderate 3/4, q=45)	
5	25 7271 7138
	26 6135 13670
	27 7490 14559
	28 8657 2466
	29 8599 12134
10	30 3470 3152
	31 13917 4365
	32 6024 13730
	33 10973 14182
	34 2464 13167
15	35 5281 15049
	36 1103 1849
	37 2058 1069
	38 9654 6095
	39 14311 7667
20	40 156117 8146
	41 4588 11218
	42 13660 6243
	43 8578 7874
	44 11741 2686
25	0 1022 1264
	1 12604 9965
	2 8217 2707
	3 3156 11793
	4 354 1514
30	5 6978 14058
	6 7922 16079
	7 15087 12138
	8 5053 6470
	9 12687 14932
35	10 15458 1763
	11 8121 1721
	12 12431 549
	13 4129 7091
	14 1426 8415
40	15 9783 7604
	16 6295 11329
	17 1409 12061
	18 8065 9087
	19 2918 8438
45	20 1293 14115
	21 3922 13851
	22 3851 4000
	23 5865 1768
	24 2655 14957
50	25 5565 6332
	26 4303 12631
	27 11653 12236
	28 16025 7632

EP 2 190 123 B9

(fortgesetzt)

	Adresse von Paritätsbitakkumulatoren (Coderate 3/4, q=45)
5	29 4655 14128
	30 9584 13123
	31 13987 9597
	32 15409 12110
	33 8754 15490
10	34 7416 15325
	35 2909 15549
	36 2995 8257
	37 9406 4791
	38 11111 4854
15	39 2812 8521
	40 8476 14717
	41 7820 15360
	42 1179 7939
20	43 2357 8678
	44 7703 6216
	0 3477 7067
	1 3931 13845
	2 7675 12899
25	3 1754 8187
	4 7785 1400
	5 9213 5891
	6 2494 7703
	7 2576 7902
30	8 4821 15682
	9 10426 11935
	10 1810 904
	11 11332 9264
35	12 11312 3570
	13 14916 2650
	14 7679 7842
	15 6089 13084
40	16 3938 2751
	17 8509 4648
	18 12204 8917
	19 5749 12443
	20 12613 4431
45	21 1344 4014
	22 8488 13850
	23 1730 14896
	24 14942 7126
50	25 14983 8863
	26 6578 8564
	27 4947 396
	28 297 12805
	29 13878 6692
55	30 11857 11186
	31 14395 11493
	32 16145 12251

(fortgesetzt)

Adresse von Paritätsbitakkumulatoren (Coderate 3/4, q=45)	
33 13462 7428	
34 14526 13119	
35 2535 11243	
36 6465 12690	
37 6872 9334	
38 15371 14023	
39 8101 10187	
40 11963 4848	
41 15125 6119	
42 8051 14465	
43 11139 5167	
44 2883 14521	

2. Low Density Parity Check- (LDPC-) Codierer (203) zum Generieren von codierten Signalen, umfassend:

Mittel konfiguriert zum Empfangen von Informationsbits, $i_0, i_1, \dots, i_m, \dots, i_{k_{ldpc}-1}$;
 Mittel konfiguriert zum Initialisieren von Paritätsbits, $p_0, p_1, \dots, p_j, \dots, p_{n_{ldpc}-k_{ldpc}-1}$, eines Low Density Parity Check- (LDPC-) Codes mit einer Coderate von 1/2, 5/6 oder 3/4 gemäß $p_0=p_1=\dots=p_{n_{ldpc}-k_{ldpc}-1}=0$;
 Mittel konfiguriert zum Generieren, auf der Basis der Informationsbits, der Paritätsbits durch Akkumulieren der Informationsbits durch Durchführen von Operationen für jedes Informationsbit i_m , $p_j=p_j \oplus i_m$ für jeden entsprechenden Wert von j und danach Durchführen der Operation, beginnend mit $j=1$, $p_j=p_j \oplus p_{j-1}$, für $j=1, 2, \dots, n_{ldpc}-k_{ldpc}-1$; und
 Mittel konfiguriert zum Generieren des Codeworts c der Größe n_{ldpc} als $c=(i_0, i_1, \dots, i_{k_{ldpc}-1}, p_0, p_1, \dots, p_{n_{ldpc}-k_{ldpc}-1})$, wobei p_j für $j=1, 2, \dots, n_{ldpc}-k_{ldpc}-1$, der finale Gehalt von p_j ist,

wobei j eine Paritätsbitadresse gleich $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc}-k_{ldpc})$ ist, n_{ldpc} , eine Codewortgröße gleich 64800 ist, k_{ldpc} eine Informationsblockgröße gleich der Coderate multipliziert mit n_{ldpc} ist, m eine ganze Zahl entsprechend einem bestimmten Informationsbit ist und x eine Paritätsbitadresse bezeichnet, wobei jede Reihe der folgenden Tabellen Adressen x für eine bestimmte der Coderaten von 1/2, 5/6 und 3/4 entsprechend einer bestimmten der Tabellen spezifiziert, wobei q in der folgenden Tabelle für jede einzelne der Coderaten von 1/2, 5/6 und 3/4 spezifiziert ist, wodurch jede aufeinanderfolgende Reihe der entsprechenden Tabelle für die bestimmte Coderate alle Paritätsbitadressen j für das erste Informationsbit in jeder aufeinanderfolgenden Gruppe von 360 Informationsbits liefert und jede aufeinanderfolgende Reihe der Tabelle alle Adressen x liefert, die beim Berechnen von Paritätsbitadressen j für die nächsten Informationsbits gemäß $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc}-k_{ldpc})$ in jeder aufeinanderfolgenden Gruppe von 360 Informationsbits verwendet werden:

Adresse von Paritätsbitakkumulatoren (Coderate 5/6, q=30)	
0 4362 416 8909 4156 3216 3112 2560 2912 6405 8593 4969 6723	
1 2479 1786 8978 3011 4339 9313 6397 2957 7288 5484 6031 10217	
2 10175 9009 9889 3091 4985 7267 4092 8874 5671 2777 2189 8716	
3 9052 4795 3924 3370 10058 1128 9996 10165 9360 4297 434 5138	
4 2379 7834 4835 2327 9843 804 329 8353 7167 3070 1528 7311	
5 3435 7871 348 3693 1876 6585 10340 7144 5870 2084 4052 2780	
6 3917 3111 3476 1304 10331 5939 5199 1611 1991 699 8316 9960	
7 6883 3237 1717 10752 7891 9764 4745 3888 10009 4176 4614 1567	
8 10587 2195 1689 2968 5420 2580 2883 6496 111 6023 1024 4449	
9 3786 8593 2074 3321 5057 1450 3840 5444 6572 3094 9892 1512	
10 8548 1848 10372 4585 7313 6536 6379 1766 9462 2456 5606 9975	
11 8204 10593 7935 3636 3882 394 5968 8561 2395 7289 9267 9978	
12 7795 74 1633 9542 6867 7352 6417 7568 10623 725 2531 9115	
13 7151 2482 4260 5003 10105 7419 9203 6691 8798 2092 8263 3755	

EP 2 190 123 B9

(fortgesetzt)

	Adresse von Paritätsbitakkumulatoren (Coderate 5/6, q=30)
5	14 3600 570 4527 200 9718 6771 1995 8902 5446 768 1103 6520
	15 6304 7621
	16 6498 9209
	17 7293 6786
	18 5950 1708
10	19 8521 1793
	20 6174 7854
	21 9773 1190
	22 9517 10268
	23 2181 9349
15	24 1949 5560
	25 1556 555
	26 8600 3827
	27 5072 1057
20	28 7928 3342
	29 3226 3762
	0 7045 2420
	1 9645 2641
	2 2774 2452
25	3 5331 2031
	4 9400 7503
	5 1850 2338
	6 10456 9774
30	7 1692 9276
	8 10037 4038
	9 3964 338
	10 2640 5087
	11 858 3473
35	12 5582 5683
	13 9523 916
	14 4107 1559
	15 4506 3491
40	16 8191 4182
	17 10192 6157
	18 5668 3305
	19 3449 1540
	20 4766 2697
45	21 4069 6675
	22 1117 1016
	23 5619 3085
	24 8483 8400
	25 8255 394
50	26 6338 5042
	27 6174 5119
	28 7203 1989
	29 1781 5174
55	0 1464 3559
	1 3376 4214
	2 7238 67

EP 2 190 123 B9

(fortgesetzt)

Adresse von Paritätsbitakkumulatoren (Coderate 5/6, q=30)	
5	3 10595 8831
	4 1221 6513
	5 5300 4632
	6 1429 9749
	7 7878 5131
10	8 4435 10284
	9 6331 5507
	10 6662 4941
	11 9614 10238
	12 8400 8025
15	13 9156 5630
	14 7067 8878
	15 9027 3415
	16 1690 3866
	17 2854 8469
20	18 6206 630
	19 363 5453
	20 4125 7008
	21 1612 6702
	22 9069 9226
25	23 5767 4060
	24 3743 9237
	25 7018 5572
	26 8892 4536
	27 853 6064
30	28 8069 5893
	29 2051 2885
	0 10691 3153
	1 3602 4055
	2 328 1717
35	3 2219 9299
	4 1939 7898
	5 617 206
	6 8544 1374
	7 10676 3240
40	8 6672 9489
	9 3170 7457
	10 7868 5731
	11 6121 10732
	12 4843 9132
45	13 580 9591
	14 6267 9290
	15 3009 2268
	16 195 2419
	17 8016 1557
50	18 1516 9195
	19 8062 9064
	20 2095 8968
	21 753 7326

EP 2 190 123 B9

(fortgesetzt)

Adresse von Paritätsbitakkumulatoren (Coderate 5/6, q=30)	
5	22 6291 3833 23 2614 7844 24 2303 646 25 2075 611 26 4687 362
10	27 8684 9940 28 4830 2065 29 7038 1363 0 1769 7837 1 3801 1689
15	2 10070 2359 3 3667 9918 4 1914 6920 5 4244 5669 6 10245 7821
20	7 7649 3944 8 3310 5488 9 6346 9666 10 7088 6122 11 1291 7827
25	12 10592 8945 13 3609 7120 14 49168 9112 15 6203 8052 16 3330 2895
30	17 4264 10563 18 10556 6496 19 8807 7645 20 1999 4530 21 9202 6818
35	22 3403 1734 23 2106 9023 24 6881 3883 25 3895 2171 26 4062 6424
40	27 3755 9536 28 4683 2131 29 7347 8027
45	

Adresse von Paritätsbitakkumulatoren (Code rate 1/2, q=90)	
50	54 9318 14392 27561 26909 10219 2534 8597 55 7263 4635 2530 28130 3033 23830 3651 56 24731 23583 26036 17299 5750 792 9169 57 5811 26154 18653 11551 15447 13685 16264
55	58 12610 11347 28768 2792 3174 29371 12997 59 16789 16018 21449 6165 21202 15850 3186 60 31016 21449 17618 6213 12166 8334 18212 61 22836 14213 11327 5896 718 11727 9308

EP 2 190 123 B9

(fortgesetzt)

Adresse von Paritätsbitakkumulatoren (Code rate 1/2, q=90)	
5	62 2091 24941 29966 23634 9013 15597 5444
	63 22207 3983 16904 28534 21415 27524 25912
	64 25687 4501 22193 14665 14799 16158 5491
	65 4520 17094 23397 4264 22370 16941 21526
	66 10490 6182 32370 9597 30841 25954 2762
10	67 22120 22865 29870 15147 13668 14955 19235
	68 6689 18408 18346 9918 25746 5443 20645
	69 29982 12529 13858 4746 30370 10023 24828
	70 1262 28032 29888 13063 24033 21951 7863
	71 6594 29642 31451 14831 9509 9335 31552
15	72 1358 6454 16633 20354 24598 624 5265
	73 19529 293 18011 3080 13364 8032 15323
	74 11981 1510 7960 21462 9129 11370 25741
	75 9276 29656 4543 30699 20646 21921 28050
	76 15975 25634 5520 31119 13715 21949 19605
20	77 19688 4608 31755 30165 13103 10706 29224
	78 21514 23117 12245 26035 31656 25631 30699
	79 9674 24966 31285 29908 17042 24588 31857
	80 21856 27777 29919 27000 14897 11409 7122
	81 29773 23310 263 4877 28622 20545 22092
25	82 15605 5651 21864 3967 14419 22757 15896
	83 30145 1759 10139 29223 26086 10556 5098
	84 18815 16575 2936 24457 26738 6030 505
	85 30326 22298 27562 20131 26390 6247 24791
	86 928 29246 21246 12400 15311 32309 18608
30	87 20314 6025 26689 16302 2296 3244 19613
	88 6237 11943 22851 15642 23857 15112 20947
	89 26403 25168 19038 18394 8882 12719 7093
	0 14567 24965
	1 3908 100
35	2 10279 240
	3 24102 764
	4 12383 4173
	5 13861 15918
	6 21327 1046
40	7 5288 14579
	8 28158 8069
	9 16583 11098
	10 16681 28363
	11 13980 24725
45	12 32169 17989
	13 10907 2767
	14 21557 3818
	15 26676 12422
	16 7676 8754
50	17 14905 20232
	18 15719 24646
	19 31942 8589
	20 19978 27197

EP 2 190 123 B9

(fortgesetzt)

5

10

15

20

25

30

35

40

Adresse von Paritätsbitakkumulatoren (Code rate 1/2, q=90)

21 27060 15071
 22 6071 26649
 23 10393 11176
 24 9597 13370
 25 7091 17677
 26 1433 19513
 27 26925 9014
 28 19202 8900
 29 18152 30647
 30 20803 1737
 31 11804 25221
 32 31683 17783
 33 29694 9345
 34 12280 26611
 35 6526 26122
 36 26165 11241
 37 7666 26962
 38 16290 8480
 39 11774 10120
 40 30051 30426
 41 1335 15424
 42 6865 17742
 43 31779 12489
 44 32120 21001
 45 14508 6996
 46 979 25024
 47 4554 21896
 48 7989 21777
 49 4972 20661
 50 6612 2730
 51 12742 4418
 52 29194 595
 53 19267 20113

45

50

55

Adresse von Paritätsbitakkumulatoren (Coderate 3/4, q=45)

0 6385 7901 14611 13389 11200 3252 5243 2504 2722 821 7374
 1 11359 2698 357 13824 12772 7244 6752 15310 852 2001 11417
 2 7862 7977 6321 13612 12197 14449 15137 13860 1708 6399 13444
 3 1560 11804 6975 13292 3646 3812 8772 7306 5795 14327 7866
 4 7626 11407 14599 9689 1628 2113 10809 9283 1230 15241 4870
 5 1610 5699 15876 9446 12515 1400 6303 5411 14181 13925 7358
 6 4059 8836 3405 7853 7992 15336 5970 10368 10278 9675 4651
 7 4441 3963 9153 2109 12683 7459 12030 12221 629 15212 406
 8 6007 8411 5771 3497 543 14202 875 9186 6235 13908 3563
 9 3232 6625 4795 546 9181 2071 7312 3399 7250 4932 12652
 10 8820 10088 11090 7069 6585 13134 10158 7183 488 7455 9238
 11 1903 10818 119 215 7558 11046 10615 11545 14784 7961 15619

EP 2 190 123 B9

(fortgesetzt)

	Adresse von Paritätsbitakkumulatoren (Coderate 3/4, q=45)
5	12 3655 8736 4917 15874 5129 2134 15944 14768 7150 2692 1469
	13 8316 3820 505 8923 6757 806 7957 4216 15589 13244 2622
	14 14463 4852 15733 3041 11193 12860 13673 8152 6551 15108 8758
	15 3149 11981
	16 13416 6906
10	17 13098 13352
	18 2009 14460
	19 7207 4314
	20 3312 3945
	21 4418 6248
15	22 2669 13975
	23 7571 9023
	24 14172 2967
	25 7271 7138
20	26 6135 13670
	27 7490 14559
	28 8657 2466
	29 8599 12834
	30 3470 3152
25	31 13917 4365
	32 6024 13730
	33 10973 14182
	34 2464 13167
30	35 5281 15049
	36 1103 1849
	37 2058 1069
	38 9654 6095
	39 14311 7667
35	40 15617 8146
	41 4588 11218
	42 13660 6243
	43 8578 7874
40	44 11741 2686
	0 1022 1264
	1 12604 9965
	2 8217 2707
	3 3156 11793
45	4 354 1514
	5 6978 14058
	6 7922 16079
	7 15087 12138
50	8 5053 6470
	9 12687 14932
	10 15458 1763
	11 8121 1721
	12 12431 549
55	13 4129 7091
	14 1426 8415
	15 9783 7604

EP 2 190 123 B9

(fortgesetzt)

	Adresse von Paritätsbitakkumulatoren (Coderate 3/4, q=45)
5	16 6295 11329
	17 1409 12061
	18 8065 9087
	19 2918 8438
	20 1293 14115
10	21 3922 13851
	22 3851 4000
	23 5865 1768
	24 2655 14957
	25 5565 6332
15	26 4303 12631
	27 11653 12236
	28 16025 7632
	29 4655 14128
20	30 9584 13123
	31 13987 9597
	32 15409 12110
	33 8754 15490
	34 7416 15325
25	35 2909 15549
	36 2995 8257
	37 9406 4791
	38 11111 4854
30	39 2812 8521
	40 8476 14717
	41 7820 15360
	42 1179 7939
	43 2357 8678
35	44 7703 6216
	0 3477 7067
	1 3931 13845
	2 7675 12899
40	3 1754 8187
	4 7785 1400
	5 9213 5891
	6 2494 7703
	7 2576 7902
45	8 4821 15682
	9 10426 11935
	10 1810 904
	11 11332 9264
50	12 11312 3570
	13 14916 2650
	14 7679 7842
	15 6089 13084
	16 3938 2751
55	17 8509 4648
	18 12204 8917
	19 5749 12443

(fortgesetzt)

Adresse von Paritätsbitakkumulatoren (Coderate 3/4, q=45)	
20 12613 4431	
21 1344 4014	
22 8488 13850	
23 1730 14896	
24 14942 7126	
25 14983 8863	
26 6578 8564	
27 4947 396	
28 297 12805	
29 13878 6692	
30 11857 11186	
31 14395 11493	
32 16145 12251	
33 13462 7428	
34 14526 13119	
35 2535 11243	
36 6465 12690	
37 6872 9334	
38 15371 14023	
39 8101 10187	
40 11963 4848	
41 15125 6119	
42 8051 14465	
43 11139 5167	
44 2883 14521	

Revendications

1. Procédé de codage de signaux, le procédé comprenant :

le codage d'un message d'entrée en un mot de code avec un codeur à Vérification de Parité de Faible Densité (LDPC) (203), l'étape de codage comprenant :

la réception de bits d'information, $i_0, i_1, \dots, i_m, \dots, i_{k_{ldpc} - 1}$;

l'initialisation de bits de parité, $p_0, p_1, \dots, p_j, \dots, p_{n_{ldpc} - k_{ldpc} - 1}$; d'un code de Vérification de Parité de Faible Densité (LDPC) ayant un taux de codage de 1/2, 5/6 ou 3/4 en fonction de $p_0 = p_1 = \dots = p_{n_{ldpc} - k_{ldpc} - 1} = 0$;

la génération, en fonction des bits d'information, des bits de parité en accumulant les bits d'information en exécutant des opérations pour chaque bit d'information, $i_m, p_j = p_j \oplus i_m$, pour chaque valeur correspondante de j, et l'exécution ensuite de l'opération, en commençant par $j = 1, p_j = p_j \oplus p_{j-1}$, pour $j = 1, 2, \dots, n_{ldpc} - k_{ldpc} - 1$: et la génération du mot de code, c, de taille n_{ldpc} sous la forme $c = (i_0, i_1, \dots, i_{k_{ldpc}}, p_0, p_1, \dots, p_{n_{ldpc} - 1})$ où p_j , pour $j = 1, 2, \dots, n_{ldpc} - k_{ldpc} - 1$, est le contenu final de p_j .

dans lequel j est une adresse de bit de parité égale à $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc} - k_{ldpc})$, n_{ldpc} est une taille de mot de code égale à 64800, k_{ldpc} est une taille de bloc d'information égale au taux de codage multiplié par n_{ldpc} , m est un nombre entier correspondant à un bit d'information particulier, et x désigne une adresse de bit de parité, dans lequel chaque rangée des tableaux suivants spécifie des adresses x pour un taux de codage particulier des taux de codage de 1/2, 5/6 et 3/4 correspondant à un tableau particulier des tableaux, dans lequel q est spécifié dans le tableau suivant pour chacun des taux de codage de 1/2, 5/6 et 3/4, si bien que chaque rangée successive du tableau correspondant pour le taux de codage particulier fournit toutes les adresses de bits de parité j pour le premier bit d'information dans chaque groupe successif de 360 bits d'information, et chaque rangée successive du tableau fournit toutes les adresses x utilisées dans le calcul des adresses de bit de parité, j, pour les bits d'information suivants en fonction de $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc} - k_{ldpc})$, dans chaque groupe successif de 360 bits d'information :

EP 2 190 123 B9

	Adresse d'accumulateurs de bits de parité (Taux de Codage 5/6, q = 30)
5	0 4362 416 8909 4156 3216 3112 2560 2912 6405 8593 4969 6723 1 2479 1786 8978 3011 4339 9313 6397 2957 7288 5484 6031 10217 2 10175 9009 9889 3091 4985 7267 4092 8874 5671 2777 2189 8716 3 9052 4795 3924 3370 10058 1128 9996 10165 9360 4297 434 5138 4 2379 7834 4835 2327 9843 804 329 8353 7167 3070 1528 7311
10	5 3435 7871 348 3693 1876 6585 10340 7144 5870 2084 4052 2780 6 3917 3111 3476 1304 10331 5939 5199 1611 1991 699 8316 9960 7 6883 3237 1717 10752 7891 9764 4745 3888 10009 4176 4614 1567 8 10587 2195 1689 2968 5420 2580 2883 6496 111 6023 1024 4449 9 3786 8593 2074 3321 5057 1450 3840 5444 6572 3094 9892 1512
15	10 8548 1848 10372 4585 7313 6536 6379 1766 9462 2456 5606 9975 11 8204 10593 7935 3636 3882 394 5968 8561 2395 7289 9267 9978 12 7795 74 1633 9542 6867 7352 6417 7568 10623 725 2531 9115 13 7151 2482 4260 5003 10105 7419 9203 6691 8798 2092 8263 3755 14 3600 570 4527 200 9718 6771 1995 8902 5446 768 1103 6520
20	15 6304 7621 16 6498 9209 17 7293 6786 18 5950 1708
25	19 8521 1793 20 6174 7854 21 9773 1190 22 9517 10268 23 2181 9349
30	24 1949 5560 25 1556 555 26 8600 3827 27 5072 1057
35	28 7928 3542 29 3226 3762 0 7045 2420 1 9645 2641 2 2774 2452
40	3 5331 2031 4 9400 7503 5 1850 2338 6 10456 9774
45	7 1692 9276 8 10037 4038 9 3964 338 10 2640 5087 11 858 3473
50	12 5582 5683 13 9523 916 14 4107 1559 15 4506 3491 16 8191 4182
55	17 10192 6157 18 5668 3305 19 3449 1540

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 5/6, q = 30)	
5	20 4766 2697
	21 4069 6675
	22 1117 1016
	23 5619 3085
	24 8483 8400
10	25 8255 394
	26 6338 5042
	27 6174 5119
	28 7203 1989
	29 1781 5174
15	0 1464 3559
	1 3376 4214
	2 7238 67
	3 10595 8831
	4 1221 6513
20	5 5300 4652
	6 1429 9749
	7 7878 5131
	8 4435 10284
	9 6331 5507
25	10 6662 4941
	11 9614 10238
	12 8400 8025
	13 9156 5630
	14 7067 8878
30	15 9027 3415
	16 1690 3866
	17 2854 8469
	18 6206 630
	19 363 5453
35	20 4125 7008
	21 1612 6702
	22 9069 9226
	23 5767 4060
	24 3743 9237
40	25 7018 5572
	26 8892 4536
	27 853 6064
	28 8069 5893
	29 2051 2885
45	0 10691 3153
	1 3602 4055
	2 328 1717
	3 2219 9299
	4 1939 7898
50	5 617 206
	6 8544 1374
	7 10676 3240
	8 6672 9489

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 5/6, q = 30)	
5	9 3170 7457
	10 7868 5731
	11 6121 10732
	12 4843 9132
	13 580 9591
10	14 6267 9290
	15 3009 2268
	16 195 2419
	17 8016 1557
15	18 1516 9195
	19 8062 9064
	20 2095 8968
	21 753 7326
	22 6291 3833
20	23 2614 7844
	24 2303 646
	25 2075 611
	26 4687 362
	27 8684 9940
25	28 4830 2065
	29 7038 1363
	0 1769 7837
	1 3801 1689
30	2 10070 2359
	3 3667 9918
	4 1914 6920
	5 4244 5669
	6 10245 7821
35	7 7648 3944
	8 3310 5488
	9 6346 9666
	10 7088 6122
40	11 1291 7827
	12 10592 8945
	13 3609 7120
	14 9168 9112
	15 6203 8052
45	16 3330 2895
	17 4264 10563
	18 10556 6496
	19 8807 7645
50	20 1999 4530
	21 9202 6818
	22 3403 1734
	23 2106 9023
	24 6881 3883
55	25 3895 2171
	26 4062 6424
	27 3755 9536

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 5/6, q = 30)

28 4683 2131

29 7347 8027

Adresse d'accumulateurs de bits de parité (Taux de Codage 1/2, q = 90)

54 9318 14392 27561 26909 10219 2534 8597

55 7263 4635 2530 28130 3033 23830 3651

56 24731 23583 26036 17299 5750 792 9169

57 5811 26154 18653 11551 15447 13685 16264

58 12610 11347 28768 2792 3174 29371 12997

59 16789 16018 21449 6165 21202 15850 3186

60 31016 21449 17618 6213 12166 8334 18212

61 22836 14213 11327 5896 718 11727 9308

62 2091 24941 29966 23634 9013 15587 5444

63 22207 3983 16904 28534 21415 27524 25912

64 25687 4501 22193 14665 14798 16158 5491

65 4520 17094 23397 4264 22370 16941 21526

66 10490 6182 32370 9597 30841 25954 2762

67 22120 22865 29870 15147 13668 14955 19235

68 6689 18408 18346 9918 25746 5443 20645

69 29982 12529 13858 4746 30370 10023 24828

70 1262 28032 29888 13063 24033 21951 7863

71 6594 29642 31451 14831 9509 9335 31552

72 1358 6454 16633 20354 24598 624 5265

73 19529 295 18011 3080 13364 8032 15323

74 11981 1510 7960 21462 9129 11370 25741

75 9276 29656 4543 30699 20646 21921 28050

76 15975 25634 5520 31119 13715 21949 19605

77 18688 4608 31755 30165 13103 10706 29224

78 21514 23117 12245 26035 31656 25631 30699

79 9674 24966 31285 29908 17042 24588 31857

80 21856 27777 29919 27000 14897 11409 7122

81 29773 23310 263 4877 28622 20545 22092

82 15605 5651 21864 3967 14419 22757 15896

83 30145 1759 10139 29223 26086 10556 5098

84 18815 16575 2936 24457 26738 6030 505

85 30326 22298 27562 20131 26390 6247 24791

86 928 29246 21246 12400 15311 32309 18608

87 20314 6025 26689 16302 2296 3244 19613

88 6237 11943 22851 15642 23857 15112 20947

89 26403 25168 19038 18384 8882 12719 7093

0 14567 24965

1 3908 100

2 10279 240

3 24102 764

4 12383 4173

5 13861 15918

6 21327 1046

7 5288 14579

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 1/2, q = 90)	
5	8 28158 8069 9 16583 11098 10 16681 28363 11 13980 24725 12 32169 17989
10	13 10907 2767 14 21557 3818 15 26676 12422 16 7676 8754 17 14905 20232
15	18 15719 24646 19 31942 8589 20 19978 27197 21 27060 15071 22 6071 26649
20	23 10393 11176 24 9597 13370 25 7081 17677 26 1433 19513 27 26925 9014
25	28 19202 8900 29 18152 30647 30 20803 1737 31 11804 25221 32 31683 17783
30	33 29694 9345 34 12280 26611 35 6526 26122 36 26165 11241 37 7666 26962
35	38 16290 8480 39 11774 10120 40 30051 30426 41 1335 15424 42 6865 17742
40	43 31779 12489 44 32120 21001 45 14508 6996 46 979 25024 47 4554 21896
45	48 7989 21777 49 4972 20661 50 6612 2730 51 12742 4418 52 29194 595
50	53 19267 20113
55	

EP 2 190 123 B9

Adresse d'accumulateurs de bits de parité (Taux de Codage 3/4, q = 45)	
5	0 6385 7901 14611 13389 11200 3252 5243 2504 2722 821 7374 1 11359 2698 357 13824 12772 7244 6752 15310 852 2001 11417 2 7862 7977 6321 13612 12197 14449 15137 13860 1708 6399 13444 3 1560 11804 6975 13292 3646 3812 8772 7306 5795 14327 7866 4 7626 11407 14599 9689 1628 2113 10809 9283 1230 15241 4870
10	5 1610 5699 15876 9446 12515 1400 6303 5411 14181 13925 7358 6 4059 8836 3405 7853 7992 15336 5970 10368 10278 9675 4651 7 4441 3963 9153 2109 12683 7459 12030 12221 629 15212 406 8 6007 8411 5771 3497 543 14202 875 9186 6235 13908 3563
15	9 3232 6625 4795 546 9781 2071 7312 3399 7250 4932 12652 10 8820 10088 11090 7069 6585 13134 10158 7183 488 7455 9238 11 1903 10818 119 215 7558 11046 10615 11545 14784 7961 15619 12 3655 8736 4917 15874 5129 2134 15944 14768 7150 2692 1469 13 8316 3820 505 8923 6757 806 7957 4216 15589 13244 2622
20	14 14463 4852 15733 3041 11193 12860 13673 8152 6551 15108 8758 15 3149 11981 16 13416 6906 17 13098 13352
25	18 2009 14460 19 7207 4314 20 3312 3945 21 4418 6248 22 2669 13975
30	23 7571 9023 24 14172 2967 25 7271 7138 26 6135 13670 27 7490 14559
35	28 8657 2466 29 8599 12834 30 3470 3152 31 13917 4365
40	32 6024 13730 33 10973 14182 34 2464 13167 35 5281 15049
45	36 1103 1849 37 2058 1069 38 9654 6095 39 14311 7667 40 15617 8146
50	41 4588 11218 42 13660 6243 43 8578 7874 44 11741 2686
55	0 1022 1264 1 12604 9965 2 8217 2707 3 3156 11793

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 3/4, q = 45)	
5	4 354 1514 5 6978 14058 6 7922 16079 7 15087 12138 8 5053 6470
10	9 12687 14932 10 15458 1763 11 8121 1721 12 12431 549 13 4129 7091
15	14 1426 8415 15 9783 7604 16 6295 11329 17 1409 12061 18 8065 9087
20	19 2918 8438 20 1293 14115 21 3922 13851 22 3851 4000 23 5865 1768
25	24 2655 14957 25 5565 6332 26 4303 12631 27 11653 12236 28 16025 7632
30	29 4655 14128 30 9584 13123 31 13987 9597 32 15409 12110 33 8754 15490
35	34 7416 15325 35 2909 15549 36 2995 8257 37 9406 4791 38 11111 4854
40	39 2812 8521 40 8476 14717 41 7820 15360 42 1179 7939 43 2357 8678
45	44 7703 6216 0 3477 7067 1 3931 13845 2 7675 12899
50	3 1754 8187 4 7785 1400 5 9213 5891 6 2494 7703
55	7 2576 7902

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 3/4, q = 45)	
8	4821 15682
9	10426 11935
10	1810 904
11	11332 9264
12	11312 3570
13	14916 2650
14	7679 7842
15	6089 13084
16	3938 2751
17	8509 4648
18	12204 8917
19	5749 12443
20	12613 4431
21	1344 4014
22	8488 13850
23	1730 14896
24	14942 7126
25	14983 8863
26	6578 8564
27	4947 396
28	297 12805
29	13878 6692
30	11857 11186
31	14395 11493
32	16145 12251
33	13462 7428
34	14526 13119
35	2535 11243
36	6465 12690
37	6872 9334
38	15371 14023
39	8101 10187
40	11963 4848
41	15125 6119
42	8051 14465
43	11139 5167
44	2883 14521

2. Codeur à Vérification de Parité de Faible Densité (LDPC) (203) pour générer des signaux codés, comprenant :

un moyen configuré pour recevoir des bits d'information, $i_0, i_1, \dots, i_m, \dots, i_{k_{ldpc}-1}$;

un moyen configuré pour initialiser des bits de parité, $p_0, p_1, \dots, p_j, \dots, p_{n_{ldpc}-k_{ldpc}-1}$; d'un code de Vérification de Parité de Faible Densité (LDPC) ayant un taux de codage de 1/2, 5/6 ou 3/4 en fonction de $p_0 = p_1 = \dots = p_{n_{ldpc}-k_{ldpc}-1} = 0$;

un moyen configuré pour générer, en fonction des bits d'information, des bits de parité en accumulant les bits d'information en exécutant des opérations pour chaque bit d'information, $i_m, p_j = p_j \oplus i_m$, pour chaque valeur correspondante de j , et exécuter ensuite l'opération, en commençant par $j = 1, p_j = p_j \oplus p_{j-1}$, pour $j = 1, 2, \dots, n_{ldpc} - k_{ldpc} - 1$: et

un moyen configuré pour générer le mot de code, c , de taille n_{ldpc} sous la forme $c = (i_0, i_1, \dots, i_{k_{ldpc}-1}, p_0, p_1, \dots, p_{n_{ldpc}-k_{ldpc}-1})$ où p_j , pour $j = 1, 2, \dots, n_{ldpc} - k_{ldpc} - 1$, est le contenu final de p_j ,

EP 2 190 123 B9

dans lequel j est une adresse de bit de parité égale à $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc} - k_{ldpc})$, n_{ldpc} est une taille de mot de code égale à 64800, k_{ldpc} est une taille de bloc d'information égale au taux de codage multiplié par n_{ldpc} , m est un nombre entier correspondant à un bit d'information particulier, et x désigne une adresse de bit de parité, dans lequel chaque rangée des tableaux suivants spécifie des adresses x pour un taux de codage particulier des taux de codages de 1/2, 5/6 et 3/4 correspondant à un tableau particulier des tableaux, dans lequel q est spécifié dans le tableau suivant pour chacun des taux de codage de 1/2, 5/6 et 3/4, si bien que chaque rangée successive du tableau correspondant pour le taux de codage particulier fournit toutes les adresses de bits de parité j pour le premier bit d'information dans chaque groupe successif de 360 bits d'information, et chaque rangée successive du tableau fournit toutes les adresses x utilisées dans le calcul des adresses de bit de parité, j , pour les bits d'information suivants en fonction de $\{x + m \bmod 360 \times q\} \bmod (n_{ldpc} - k_{ldpc})$, dans chaque groupe successif de 360 bits d'information :

Adresse d'accumulateurs de bits de parité (Taux de Codage 5/6, q = 30)	
0	4362 416 8909 4156 3216 3112 2560 2912 6405 8593 4969 6723
1	2479 1786 8978 3011 4339 9313 6397 2957 7288 5484 6031 10217
2	10175 9009 9889 3091 4985 7267 4092 8874 5671 2777 2189 8716
3	9052 4795 3924 3370 10058 1128 9996 10165 9360 4297 434 5138
4	2379 7834 4835 2327 9843 804 329 8353 7167 3070 1528 7311
5	3435 7871 348 3693 1876 6585 10340 7144 5870 2084 4052 2780
6	3917 3111 3476 1304 10331 5939 5199 1611 1991 699 8316 9960
7	6883 3237 1717 10752 78919764 4745 3888 10009 4176 4614 1567
8	10587 2195 1689 2968 5420 2580 2883 6496 111 6023 1024 4449
9	3786 8593 2074 3321 5057 1450 3840 5444 6572 3094 9892 1512
10	8548 1848 10372 4585 7313 6536 6379 1766 9462 2456 5606 9975
11	8204 10593 7935 3636 3882 394 5968 8561 2395 7289 9267 9978
12	7795 74 1633 9542 6867 7352 6417 7568 10623 725 2531 9115
13	7151 2482 4260 5003 10105 7419 9203 6691 8798 2092 8263 3755
14	3600 570 4527 200 9718 6771 1995 8902 5446 768 1103 6520
15	6304 7621
16	6498 9209
17	7293 6786
18	5950 1708
19	8521 1793
20	6174 7854
21	9773 1190
22	9517 10268
23	2181 9349
24	1949 5560
25	1556 555
26	8600 3827
27	5072 1057
28	7928 3542
29	3226 3762
0	7045 2420
1	9645 2641
2	2774 2452
3	5331 2031
4	9400 7503
5	1850 2338
6	1045 69774
7	1692 9276
8	10037 4038
9	3964 338
10	2640 5087

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 5/6, q = 30)	
5	11 858 3473
	12 5582 5683
	13 9523 916
	14 4107 1559
	15 45063 491
10	16 8191 4182
	17 10192 6157
	18 5668 3305
	19 3449 1540
	20 4766 2697
15	21 4069 6675
	22 1117 1016
	23 5619 3085
	24 8483 8400
	25 8255 394
20	26 6338 5042
	27 6174 5119
	28 7203 1989
	29 1781 5174
	0 1464 3559
25	1 3376 4214
	2 7238 67
	3 10595 8831
	4 1221 6513
	5 5300 4652
30	6 1429 9749
	7 7878 5131
	8 4435 10284
	9 6331 5507
	10 6662 4941
35	11 9614 10238
	12 8400 8025
	13 9156 5630
	14 7067 8878
	15 9027 3415
40	16 1690 3866
	17 2854 8469
	18 6206 630
	19 363 5453
	20 4125 7008
45	21 1612 6702
	22 9069 9226
	23 5767 4060
	24 3743 9237
	25 7018 5572
50	26 8892 4536
	27 853 6064
	28 8069 5893
	29 2051 2885

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 5/6, q = 30)	
5	0 10691 3153
	1 3602 4055
	2 328 1717
	3 2219 9299
	4 1939 7898
10	5 617 206
	6 8544 1374
	7 10676 3240
	8 6672 9489
	9 3170 7457
15	10 7868 5731
	11 6121 10732
	12 4843 9132
	13 580 9591
	14 6267 9290
20	15 3009 2268
	16 195 2419
	17 8016 1557
	18 1516 9195
	19 8062 9064
25	20 2095 8968
	21 753 7326
	22 6291 3833
	23 2614 7844
	24 2303 646
30	25 2075 611
	26 4687 362
	27 8684 9940
	28 4830 2065
	29 7038 1363
35	0 1769 7837
	1 3801 1689
	2 10070 2359
	3 3667 9918
	4 1914 6920
40	5 4244 5669
	6 10245 7821
	7 7648 3944
	8 3310 5488
	9 6346 9666
45	10 7088 6122
	11 1291 7827
	12 10592 8945
	13 3609 7120
	14 9168 9112
50	15 6203 8052
	16 3330 2895
	17 4264 10563
	18 10556 6496

EP 2 190 123 B9

(suite)

5

10

15

Adresse d'accumulateurs de bits de parité (Taux de Codage 5/6, q = 30)

19 8807 7645
20 1999 4530
21 9202 6818
22 3403 1734
23 2106 9023
24 6881 3883
25 3895 2171
26 4062 6424
27 3755 9536
28 4683 2131
29 7347 8027

20

25

30

35

40

45

50

55

Adresse d'accumulateurs de bits de parité (Taux de Codage 112, q = 80)

54 9318 14392 27561 26909 10219 2534 8597
55 7263 4635 2530 28130 3033 23830 3651
56 24731 23583 26036 17299 5750 792 9169
57 5811 26154 18653 11551 15447 13685 16264
58 12610 11347 28768 2792 3174 29371 12997
59 16789 16018 21449 6165 21202 15850 3186
60 31016 21449 17618 6213 12166 8334 18212
61 22836 14213 11327 5896 718 11727 9308
62 2091 24941 29966 23634 9013 15587 5444
63 22207 3983 16904 28534 21415 27524 25912
64 25687 4501 22193 14665 14798 16158 5491
65 4520 17094 23397 4264 22370 16941 21526
66 10490 6182 32370 9597 30841 25954 2762
67 22120 22865 29870 15147 13668 14955 19235
68 6689 18408 18346 9918 25746 5443 20645
69 29982 12529 13858 4746 30370 10023 24828
70 1262 28032 29888 13063 24033 21951 7863
71 6594 29642 31451 14831 9509 9335 31552
72 1358 6454 16633 20354 24598 624 5265
73 19529 295 18011 3080 13364 8032 15323
74 11981 1510 7960 21462 9129 11370 25741
75 9276 29656 4543 30699 20646 21921 28050
76 15975 25634 5520 31119 13715 21949 19605
77 18688 4608 31755 30165 13103 10706 29224
78 21514 23117 12245 26035 31656 25631 30699
79 9674 24966 31285 29908 17042 24588 31857
80 21856 27777 29919 27000 14897 11409 7122
81 29773 23310 263 4877 28622 20545 22092
82 15605 5651 21864 3967 14419 22757 15896
83 30145 1759 10139 29223 26086 10556 5098
84 18815 16575 2936 24457 26738 6030 505
85 30326 22298 27562 20131 26390 6247 24791
86 928 29246 21246 12400 15311 32309 18608
87 20314 6025 26689 16302 2296 3244 19613
88 6237 11943 22851 15642 23857 15112 20947

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 112, q = 80)	
5	89 26403 25168 19038 18384 8882 12719 7093
	0 14567 24965
	1 3908 100
	2 10279 240
	3 24102 764
10	4 12383 4173
	5 13861 15918
	6 21327 1046
	7 5288 14579
	8 28158 8069
15	9 16583 11098
	10 16681 28363
	11 13980 24725
	12 32169 17989
20	13 10907 2767
	14 21557 3818
	15 26676 12422
	16 7676 8754
	17 14905 20232
25	18 15719 24646
	19 31942 8589
	20 19978 27197
	21 27060 15071
30	22 6071 26649
	23 10393 11176
	24 9597 13370
	25 7081 17677
	26 1433 19513
35	27 26925 9014
	28 19202 8900
	29 18152 30647
	30 20803 1737
40	31 11804 25221
	32 31683 17783
	33 29694 9345
	34 12280 26611
	35 6526 26122
45	36 26165 11241
	37 7666 26962
	38 16290 8480
	39 11774 10120
50	40 30051 30426
	41 1335 15424
	42 6865 17742
	43 31779 12489
	44 32120 21001
55	45 14508 6996
	46 979 25024
	47 4554 21896

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 112, q = 80)

48 7989 21777
49 4972 20661
50 6612 2730
51 12742 4418
52 29194 595
53 19267 20113

Adresse d'accumulateurs de bits de parité (Taux de Codage 3/4, q = 45)

0 6385 7901 14611 13389 11200 3252 5243 2504 2722 821 7374
1 11359 2698 357 13824 12772 7244 6752 15310 852 2001 11417
2 7862 7977 6321 13612 12197 14449 15137 13860 1708 6399 13444
3 1560 11804 6975 13292 3646 3812 8772 7306 5795 14327 7866
4 7626 11407 14599 9689 1628 2113 10809 9283 1230 15241 4870
5 1610 5699 15876 9446 12515 1400 6303 5411 14181 13925 7358
6 4059 8836 3405 7853 7992 15336 5970 10368 10278 9675 4651
7 4441 3963 9153 2109 12683 7459 12030 12221 629 15212 406
8 6007 8411 5771 3497 543 14202 875 9186 6235 13908 3563
9 3232 6625 4795 546 9781 2071 7312 3399 7250 4932 12652
10 8820 10088 11090 7069 6585 13134 10158 7183 488 7455 9238
11 1903 10818 119 215 7558 11046 10615 11545 14784 7961 15619
12 3655 8736 4917 15874 5129 2134 15944 14768 7150 2692 1469
13 8316 3820 505 8923 6757 806 7957 4216 15589 13244 2622
14 14463 4852 15733 3041 11193 12860 13673 8152 6551 15108 8758
15 3149 11981
16 13416 6906
17 13098 13352
18 2009 14460
19 7207 4314
20 3312 3945
21 4418 6248
22 2669 13975
23 7571 9023
24 14172 2967
25 7271 7138
26 6135 13670
27 7490 14559
28 8657 2466
29 8599 12834
30 3470 3152
31 13917 4365
32 6024 13730
33 10973 14182
34 2464 13167
35 5281 15049
36 1103 1849
37 2058 1069
38 9654 6095

EP 2 190 123 B9

(suite)

Adresse d'accumulateurs de bits de parité (Taux de Codage 3/4, q = 45)	
5	39 14311 7667
	40 15617 8146
	41 4588 11218
	42 13660 6243
	43 8578 7874
10	44 11741 2686
	0 1022 1264
	1 12604 9965
	2 8217 2707
	3 3156 11793
15	4 354 1514
	5 6978 14058
	6 7922 16079
	7 15087 12138
	8 5053 6470
20	9 12687 14932
	10 15458 1763
	11 8121 1721
	12 12431 549
	13 4129 7091
25	14 1426 8415
	15 9783 7604
	16 6295 11329
	17 1409 12061
	18 8065 9087
30	19 2918 8438
	20 1293 14115
	21 3922 13851
	22 3851 4000
	23 5865 1768
35	24 2655 14957
	25 5565 6332
	26 4303 12631
	27 11653 12236
	28 16025 7632
40	29 4655 14128
	30 9584 13123
	31 13987 9597
	32 15409 12110
	33 8754 15490
45	34 7416 15325
	35 2909 15549
	36 2995 8257
	37 9406 4791
	38 11111 4854
50	39 2812 8521
	40 8476 14717
	41 7820 15360
	42 1179 7939
55	

EP 2 190 123 B9

(suite)

	Adresse d'accumulateurs de bits de parité (Taux de Codage 3/4, q = 45)
5	43 2357 8678 44 7703 6216 0 3477 7067 1 3931 13845 2 7675 12899
10	3 1754 8187 4 7785 1400 5 9213 5891 6 2494 7703 7 2576 7902
15	8 4821 15682 9 10426 11935 10 1810 904 11 11332 9264 12 11312 3570
20	13 14916 2650 14 7679 7842 15 6089 13084 16 3938 2751 17 8509 4648
25	18 12204 8917 19 5749 12443 20 12613 4431 21 1344 4014 22 8488 13850
30	23 1730 14896 24 14942 7126 25 14983 8863 26 6578 8564 27 4947 396
35	28 297 12805 29 13878 6692 30 11857 11186 31 14395 11493 32 16145 12251
40	33 13462 7428 34 14526 13119 35 2535 11243 36 6465 12690 37 6872 9334
45	38 15371 14023 39 8101 10187 40 11963 4848 41 15125 6119 42 8051 14465
50	43 11139 5167 44 2883 14521
55	

FIG. 1

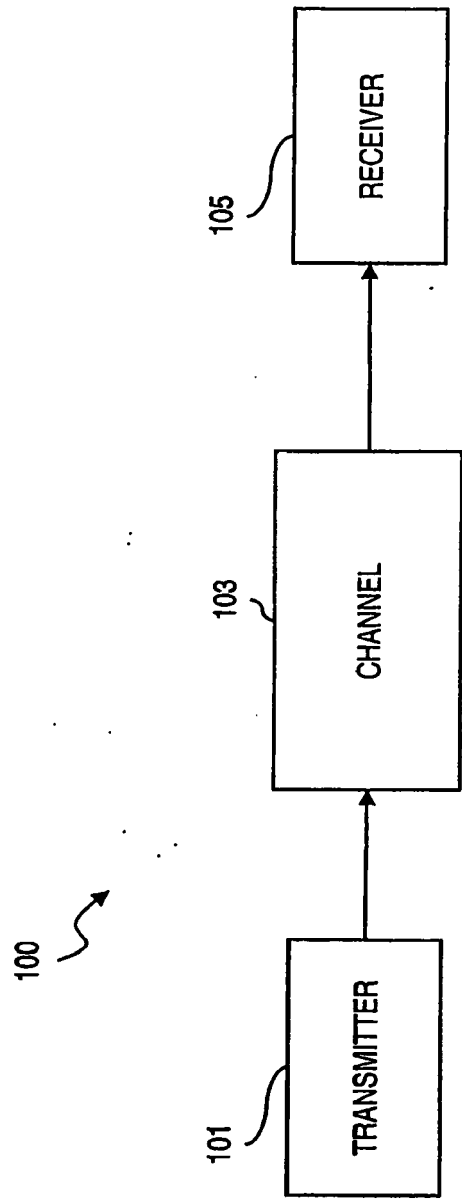


FIG. 2A

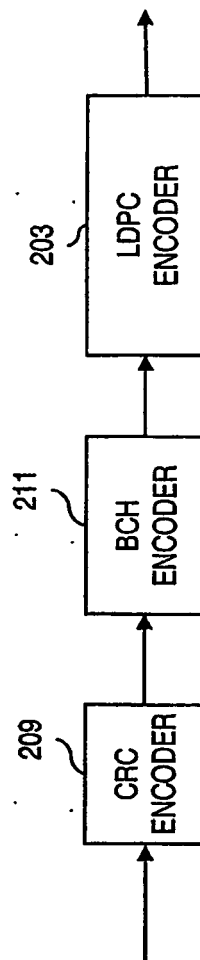
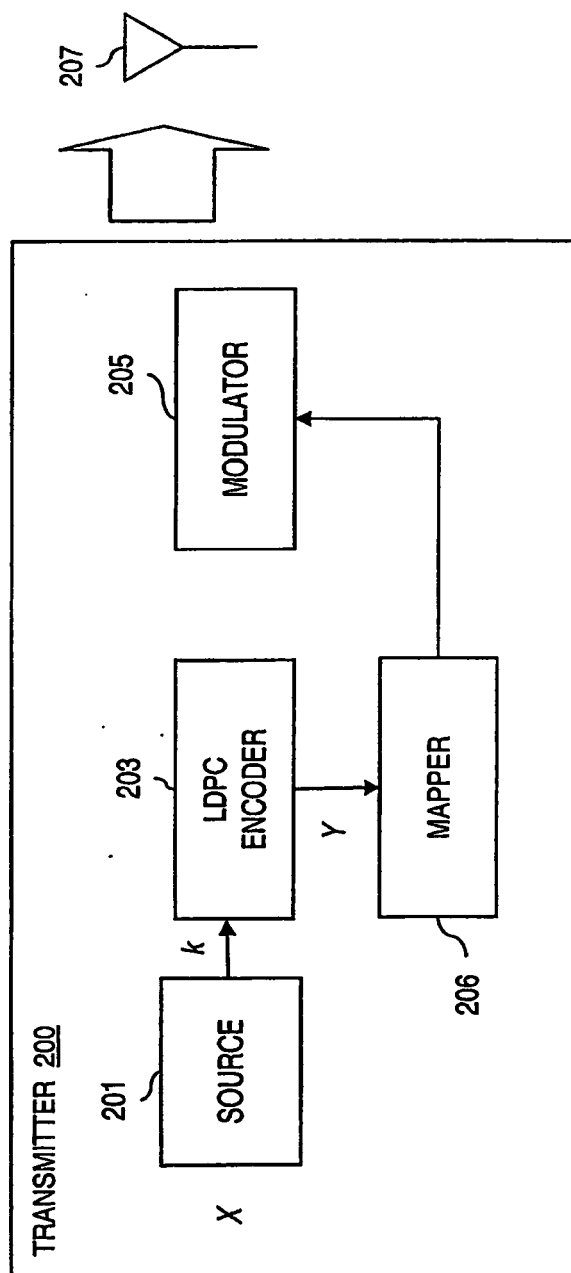


FIG. 2B

FIG. 3

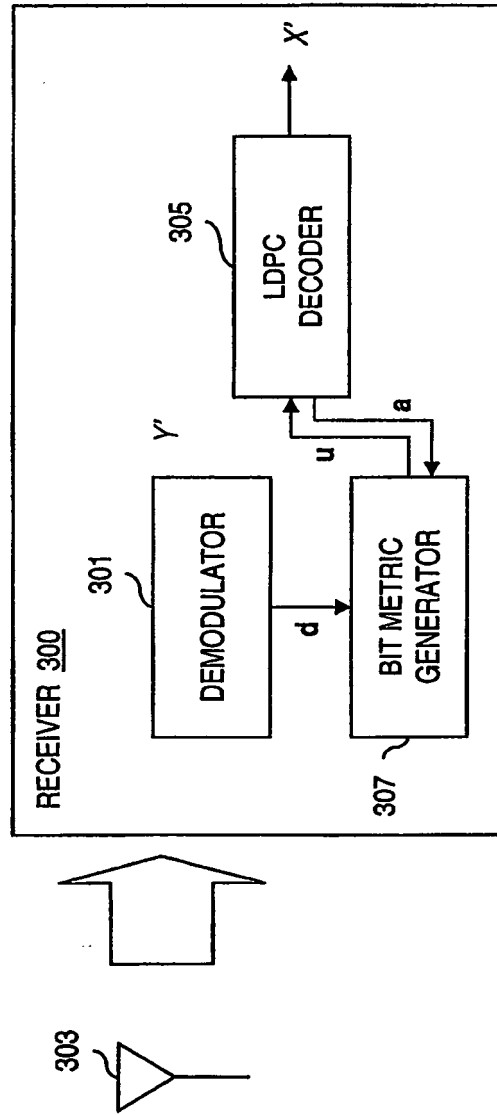


FIG. 4

$$H = \begin{matrix} & n_1 & n_2 & n_3 & n_4 & n_5 & n_6 & n_7 & n_8 \\ \begin{matrix} m_1 \\ m_2 \\ m_3 \\ m_4 \end{matrix} & \begin{bmatrix} 1 & 0 & 0 & 1 & 1 & 0 & 0 & 1 \\ 0 & 1 & 1 & 0 & 1 & 0 & 1 & 0 \\ 1 & 0 & 1 & 0 & 0 & 1 & 0 & 1 \\ 0 & 1 & 0 & 1 & 0 & 1 & 1 & 0 \end{bmatrix} \end{matrix}$$

FIG. 5

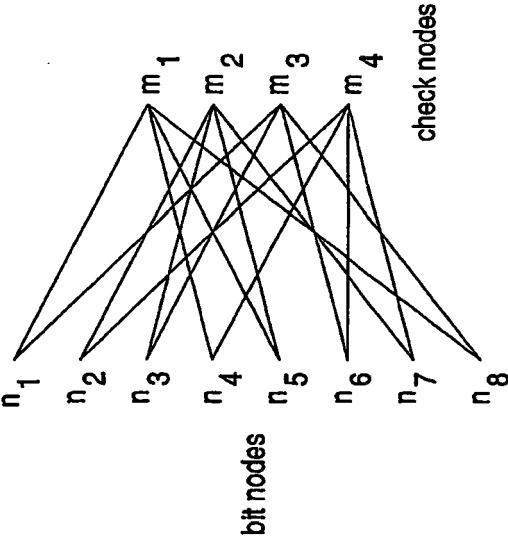
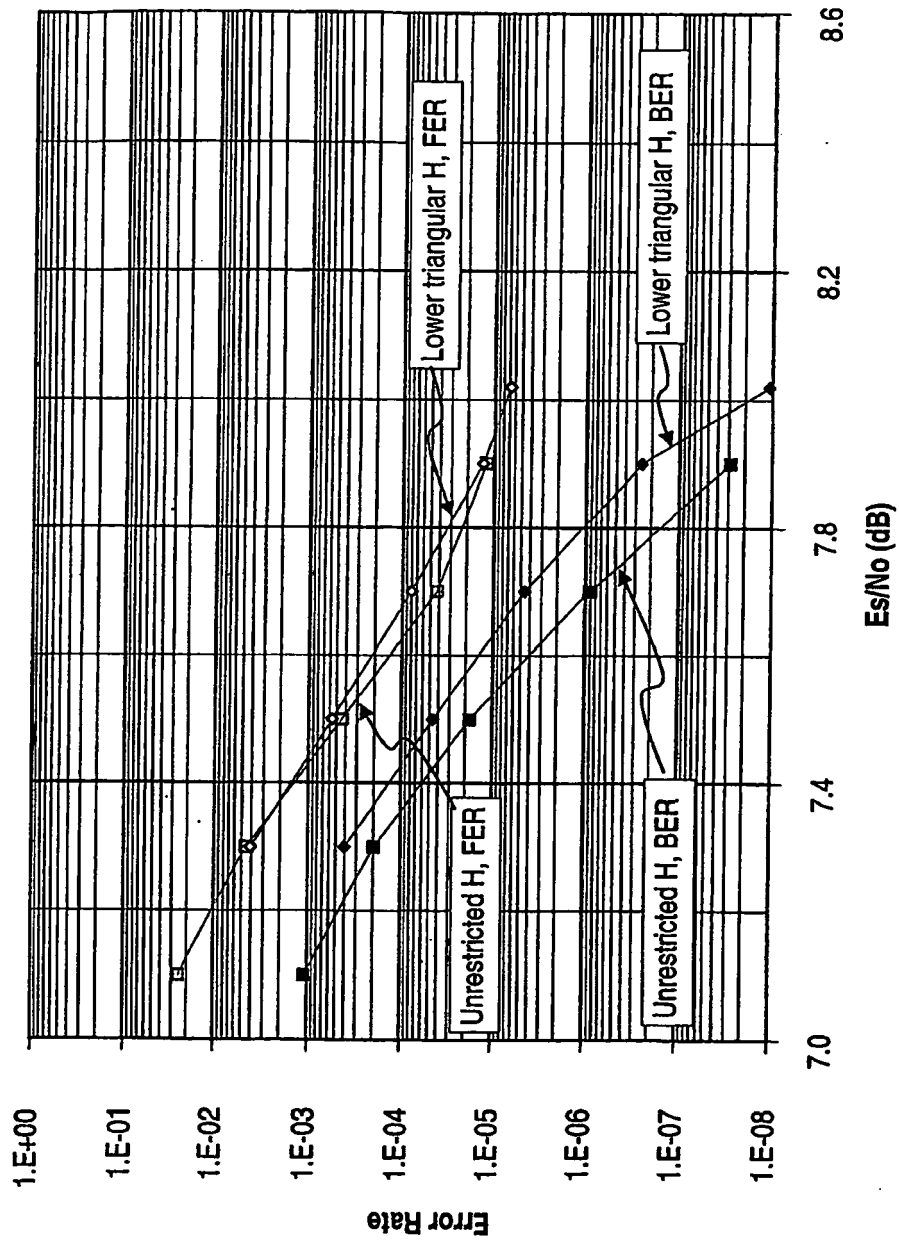


FIG. 6

$$B = \begin{bmatrix} 1 & & & & & & & \\ & 1 & & & & & & \\ & & x & x & 1 & & & \\ & & & x & x & x & 1 & \\ & & & & x & x & x & 1 \\ & & & & & x & x & x \\ & & & & & & x & x \\ & & & & & & & 1 \end{bmatrix}$$

FIG. 7



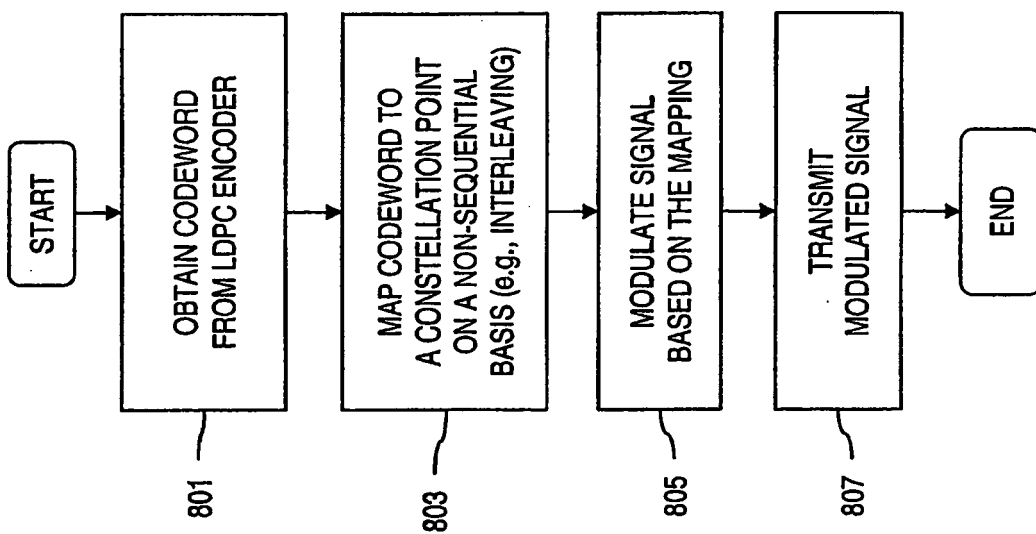


FIG. 8D

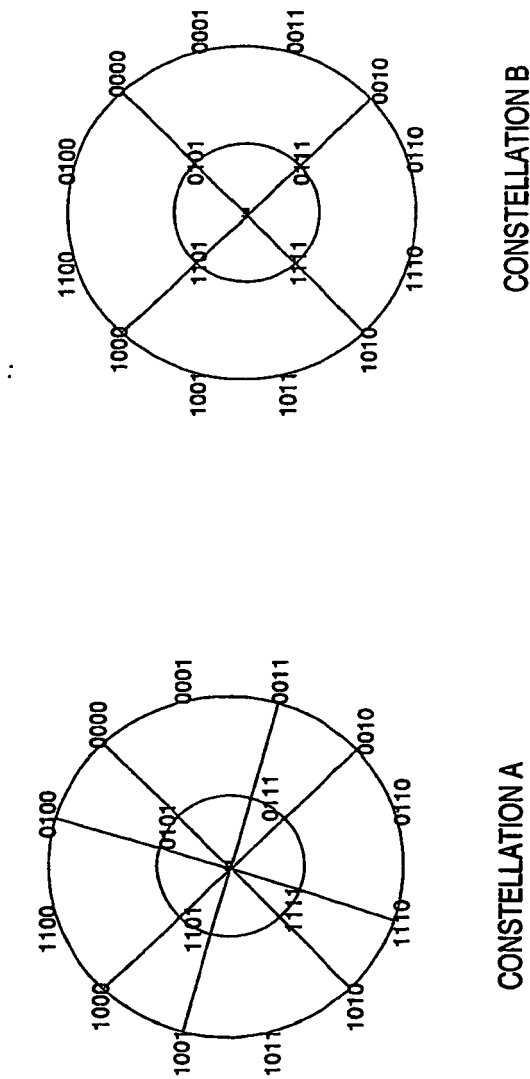


FIG. 8E

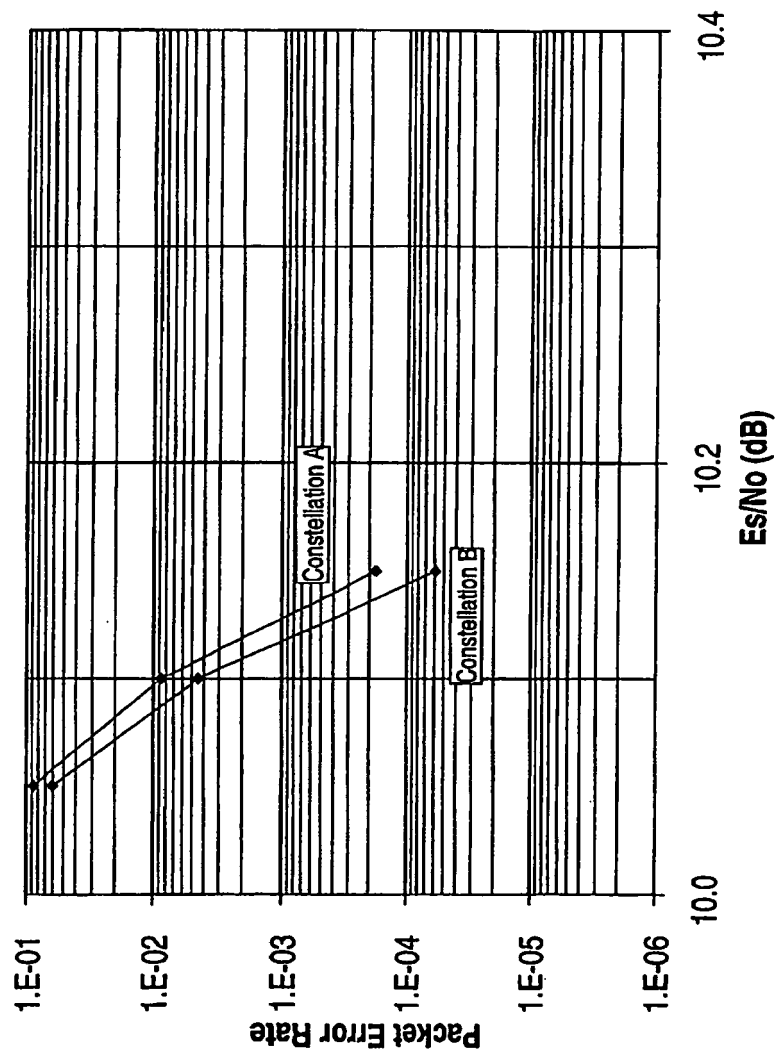


FIG. 8F

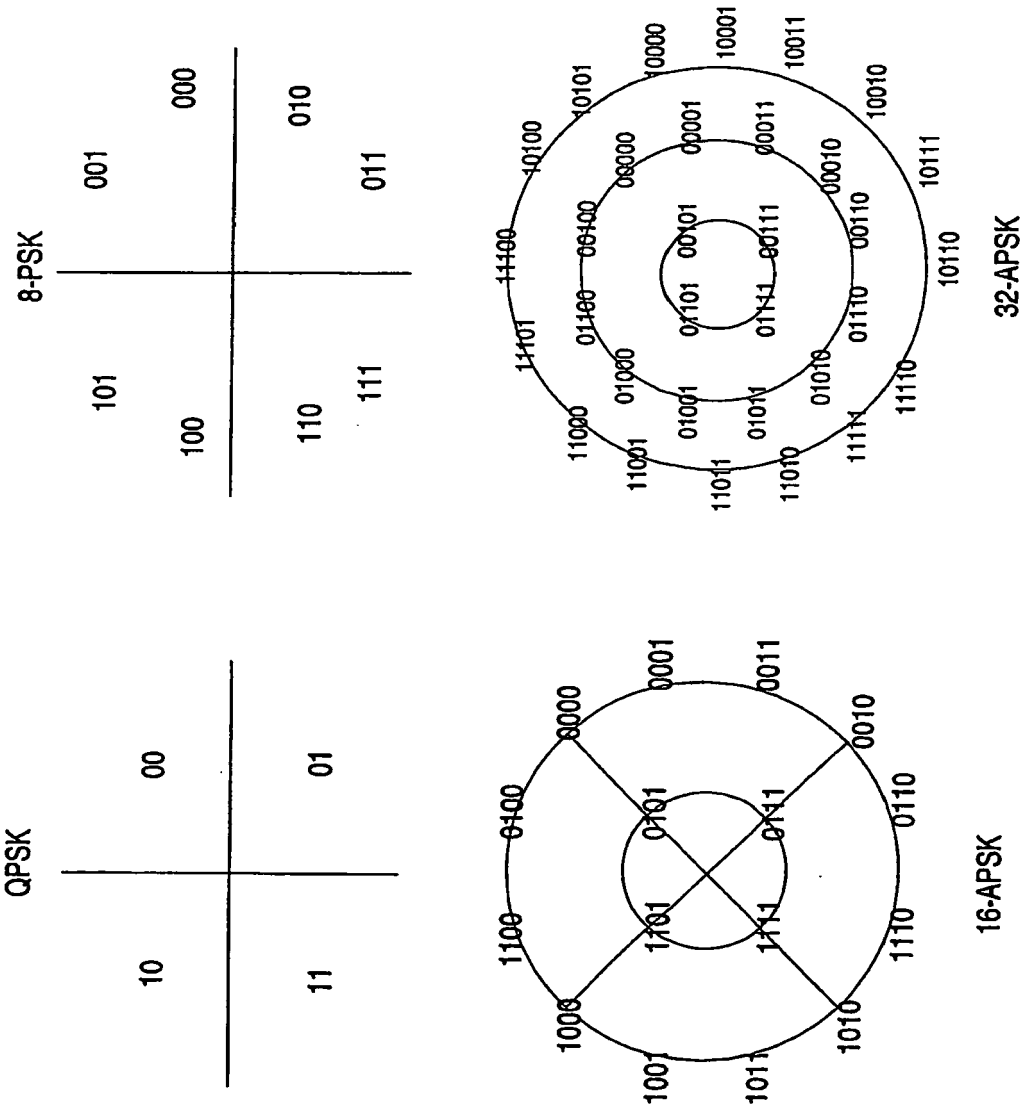


FIG. 8G

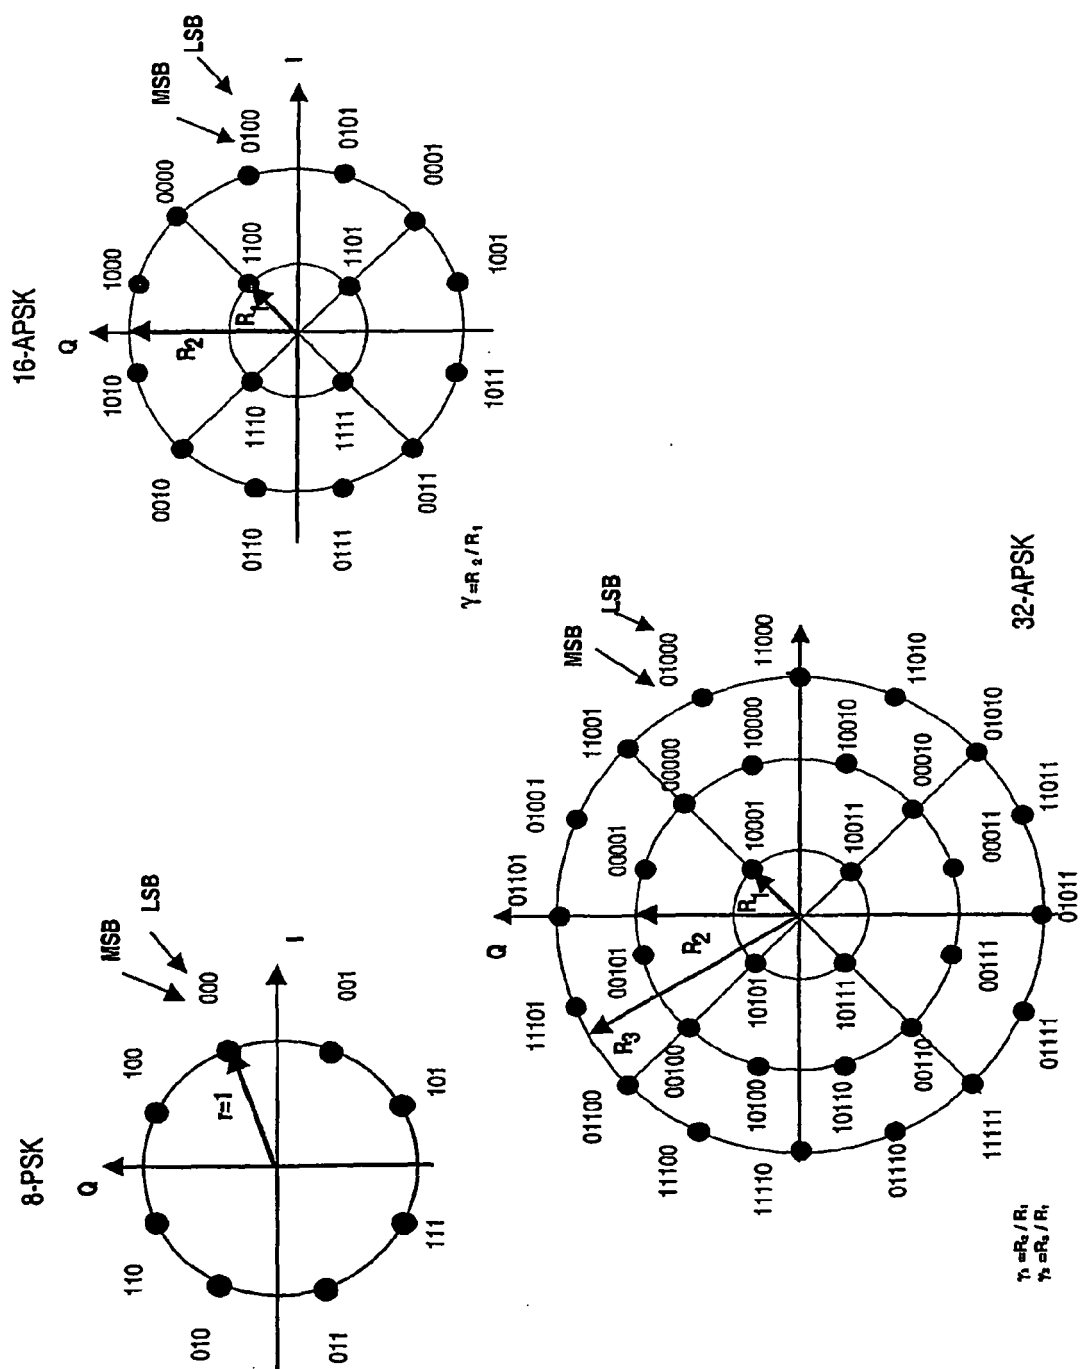


FIG. 8H

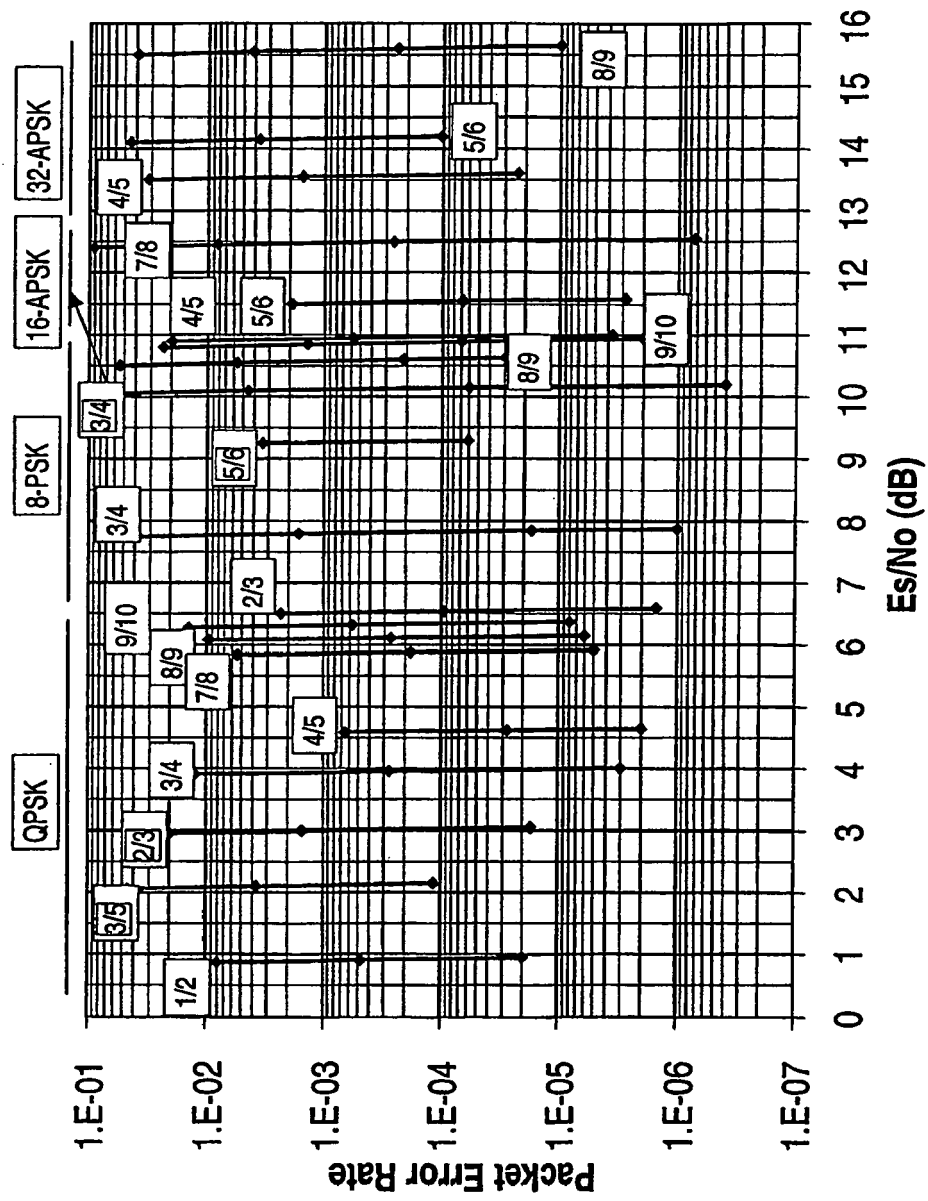
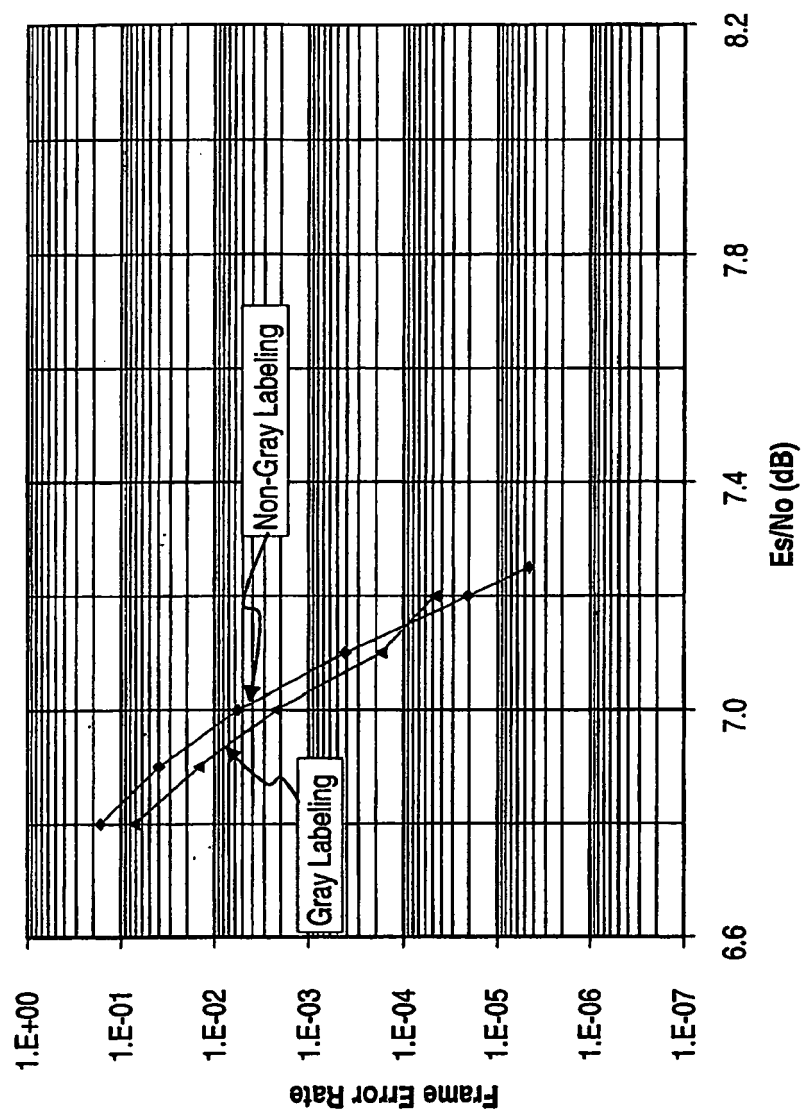
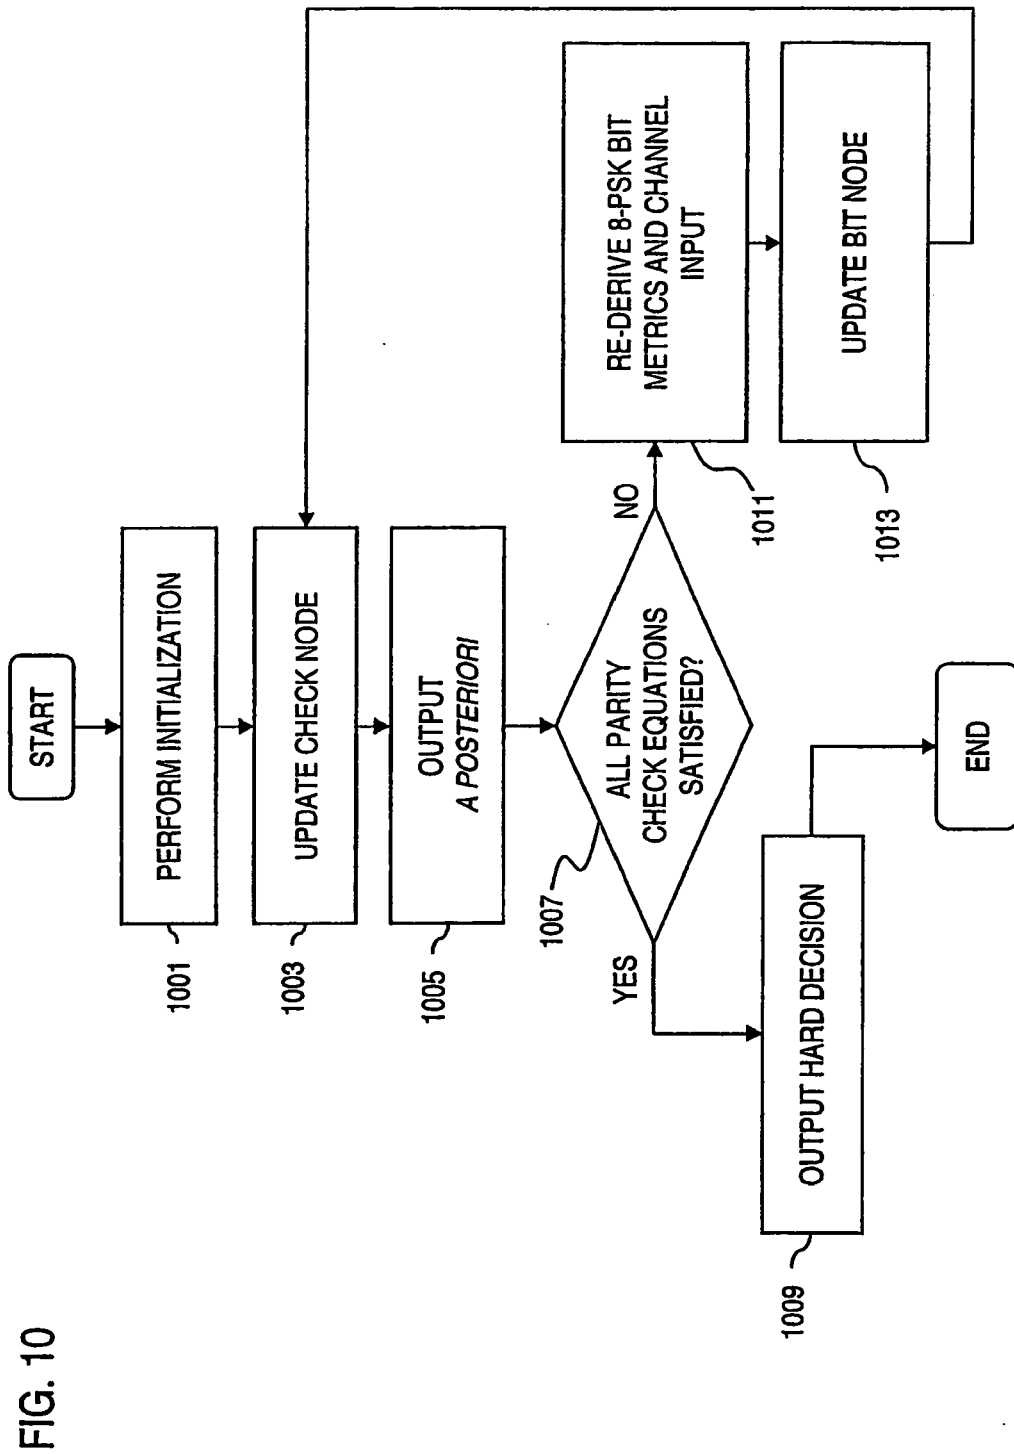


FIG. 9





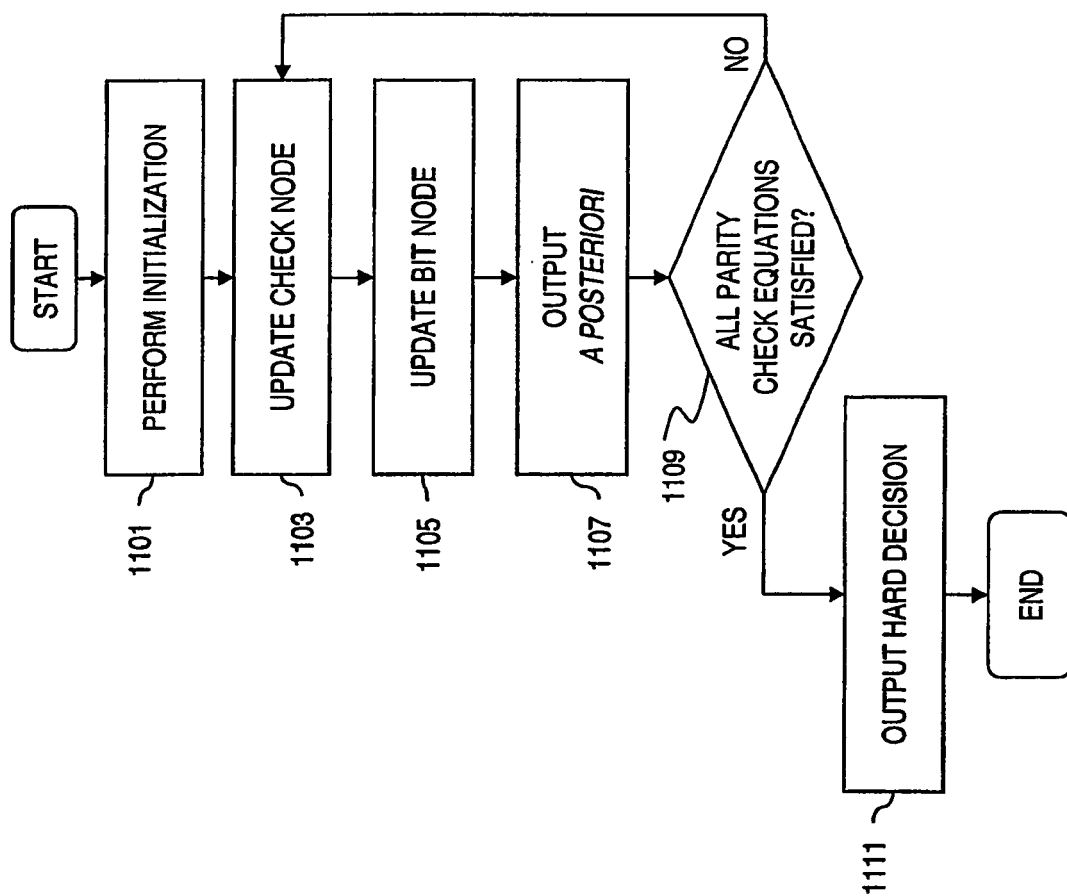


FIG. 12A

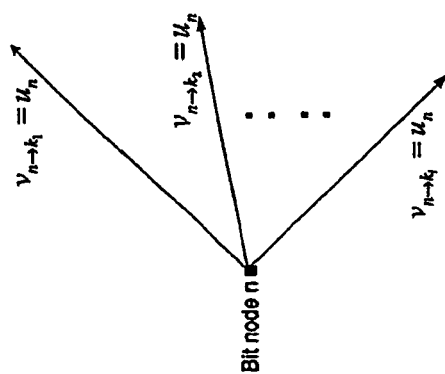


FIG. 12C

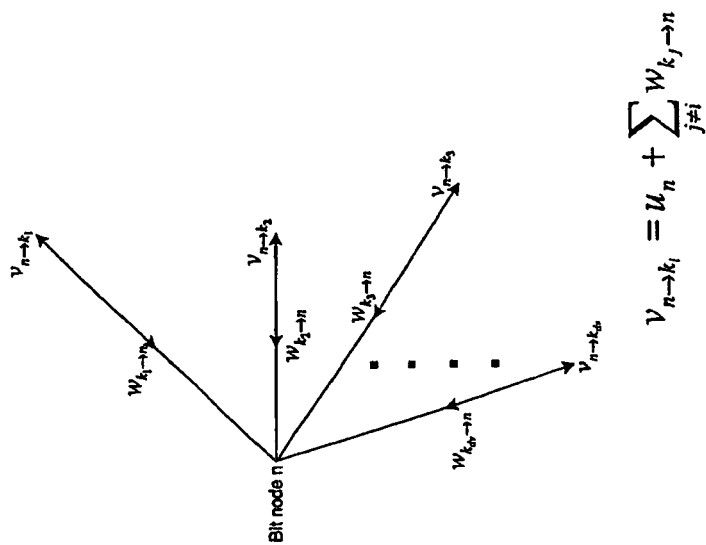


FIG. 12B

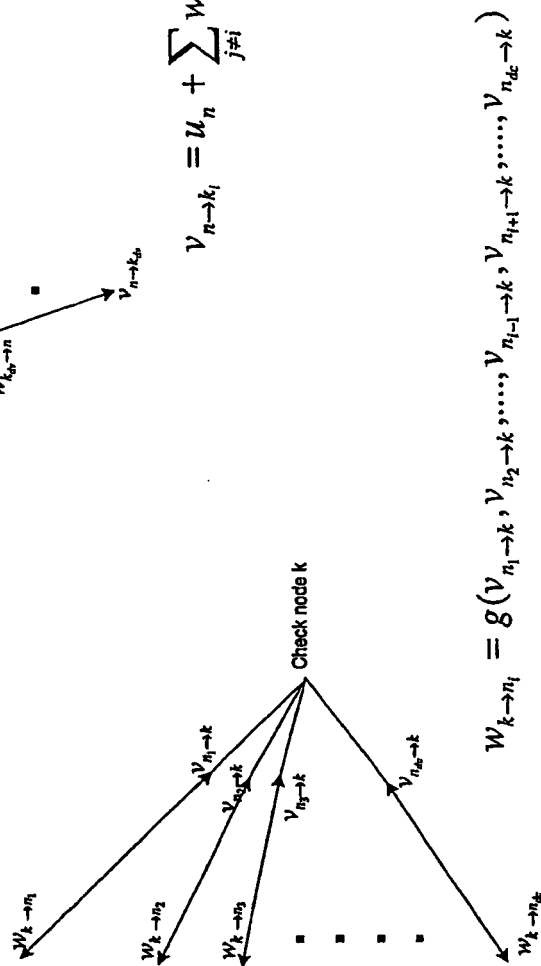


FIG. 13A

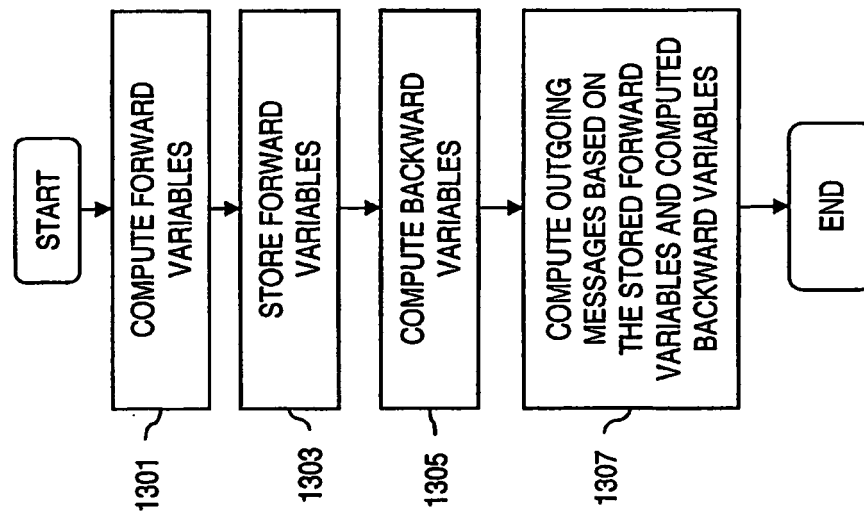


FIG. 13B

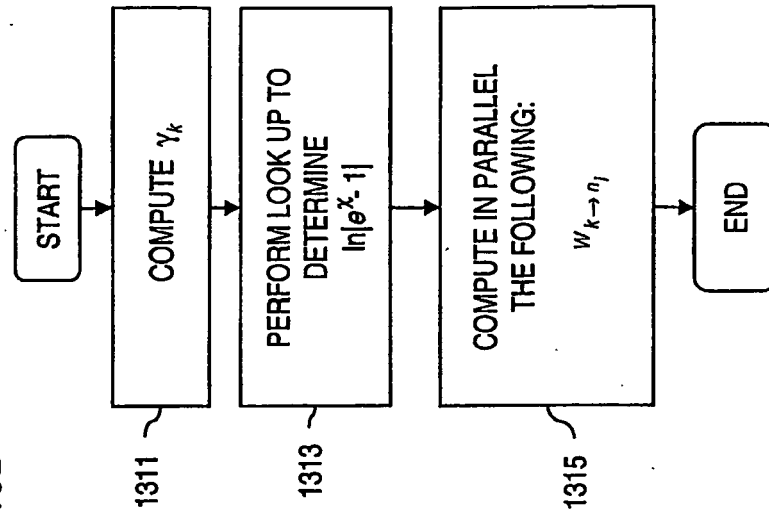


FIG. 14A

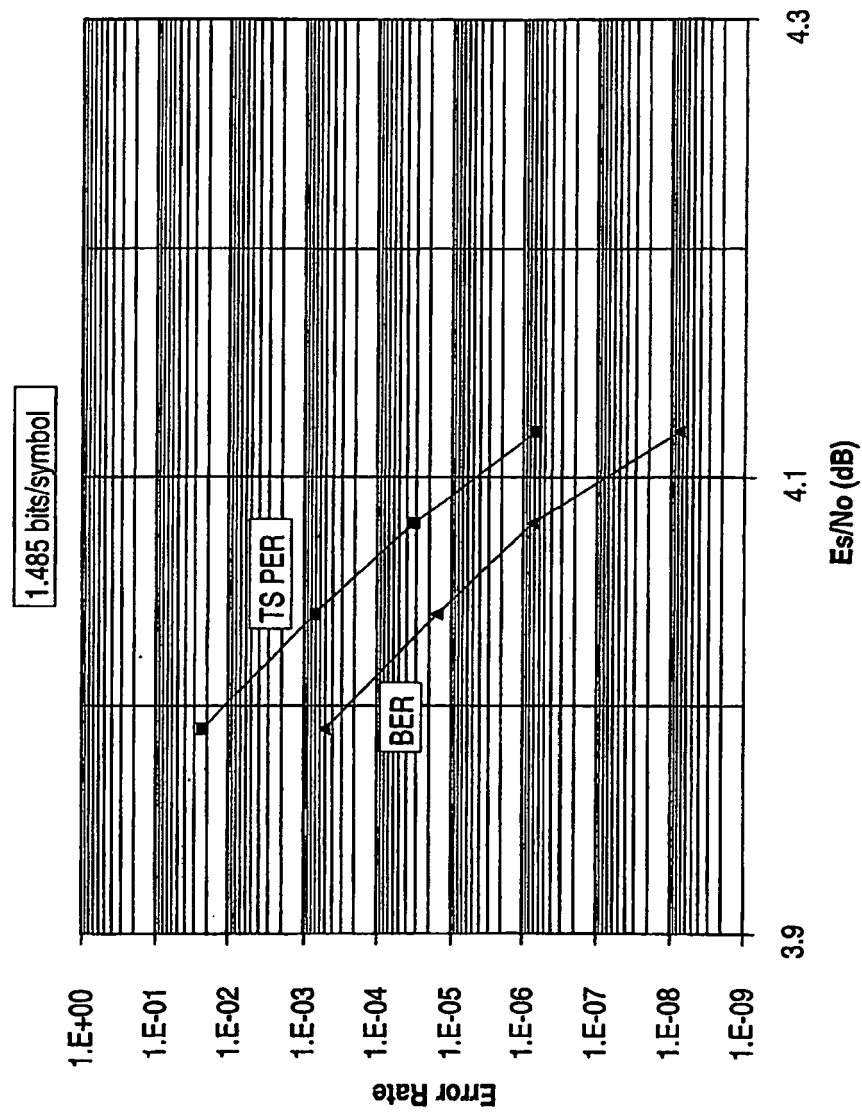


FIG. 14B

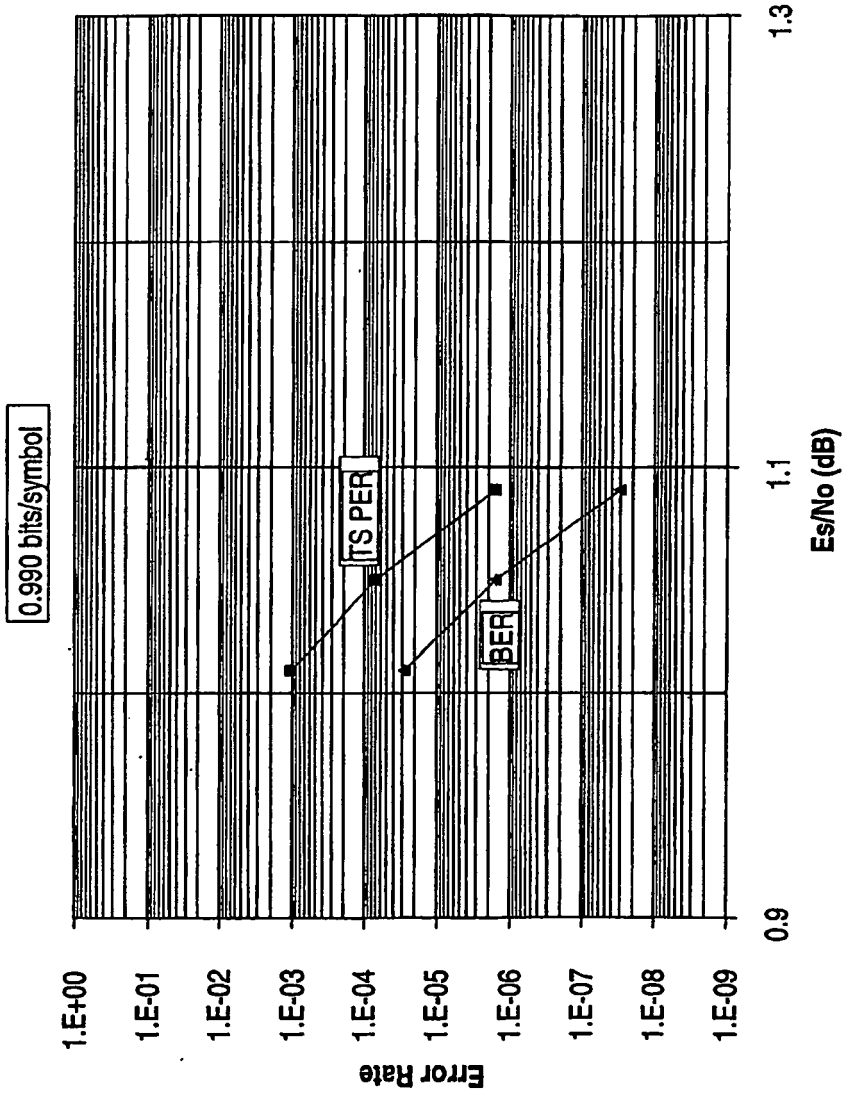


FIG. 14C



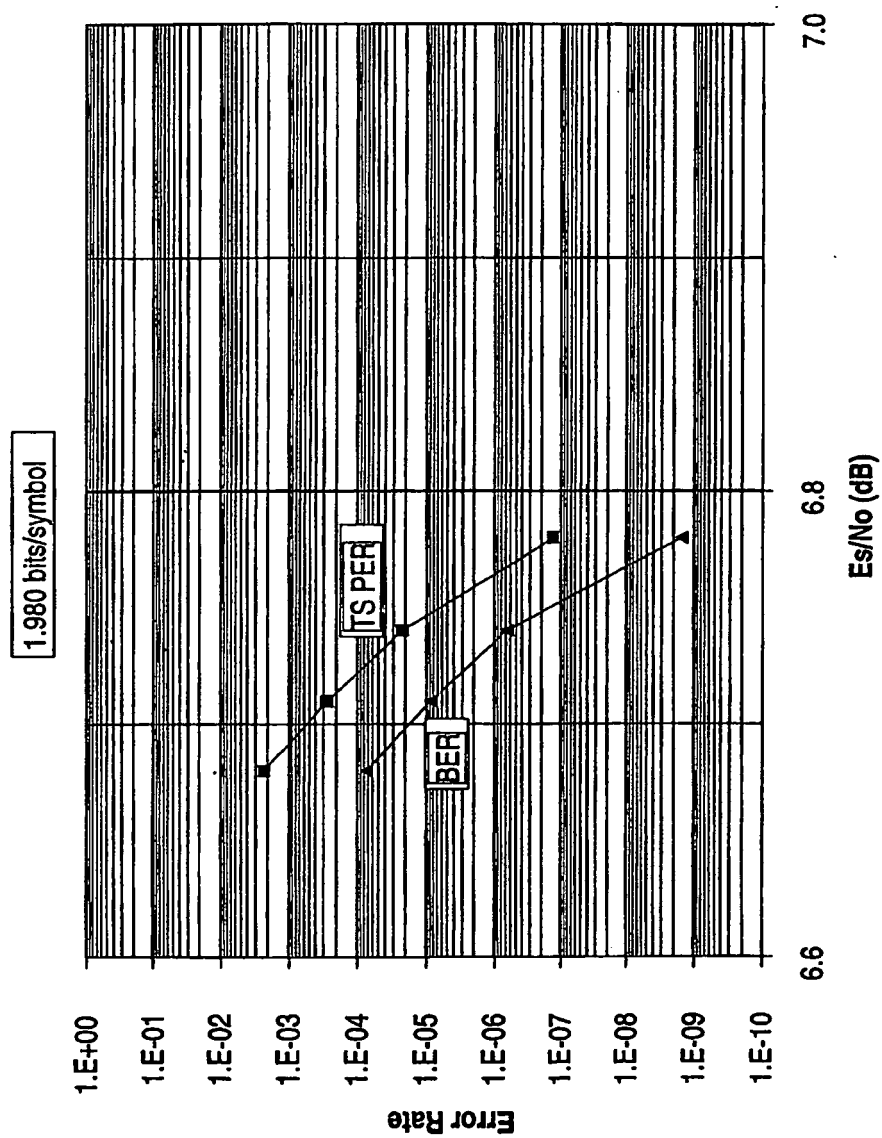



FIG. 15A

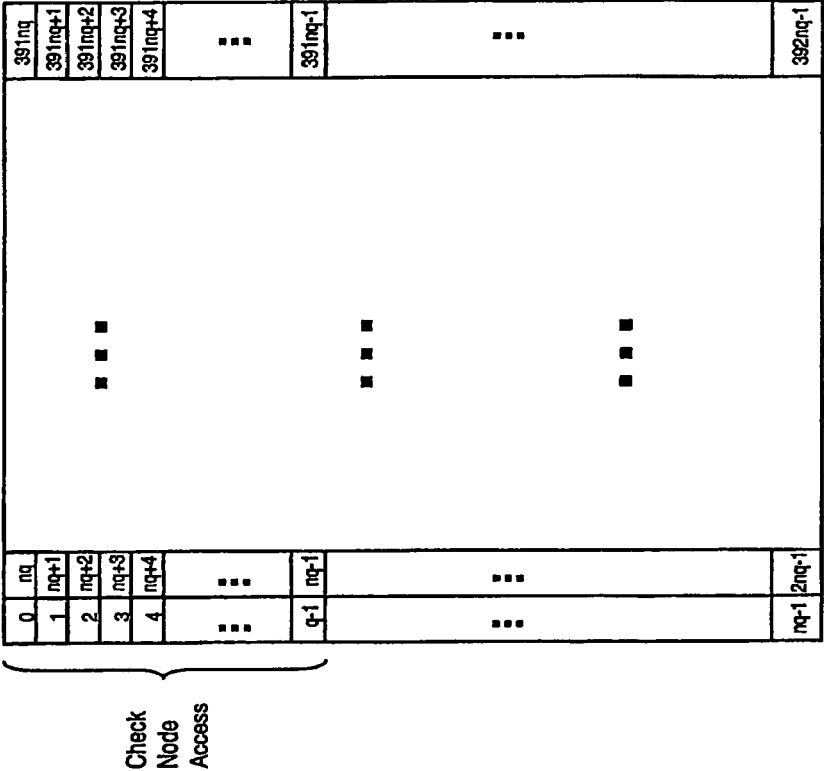

1501

FIG. 15B

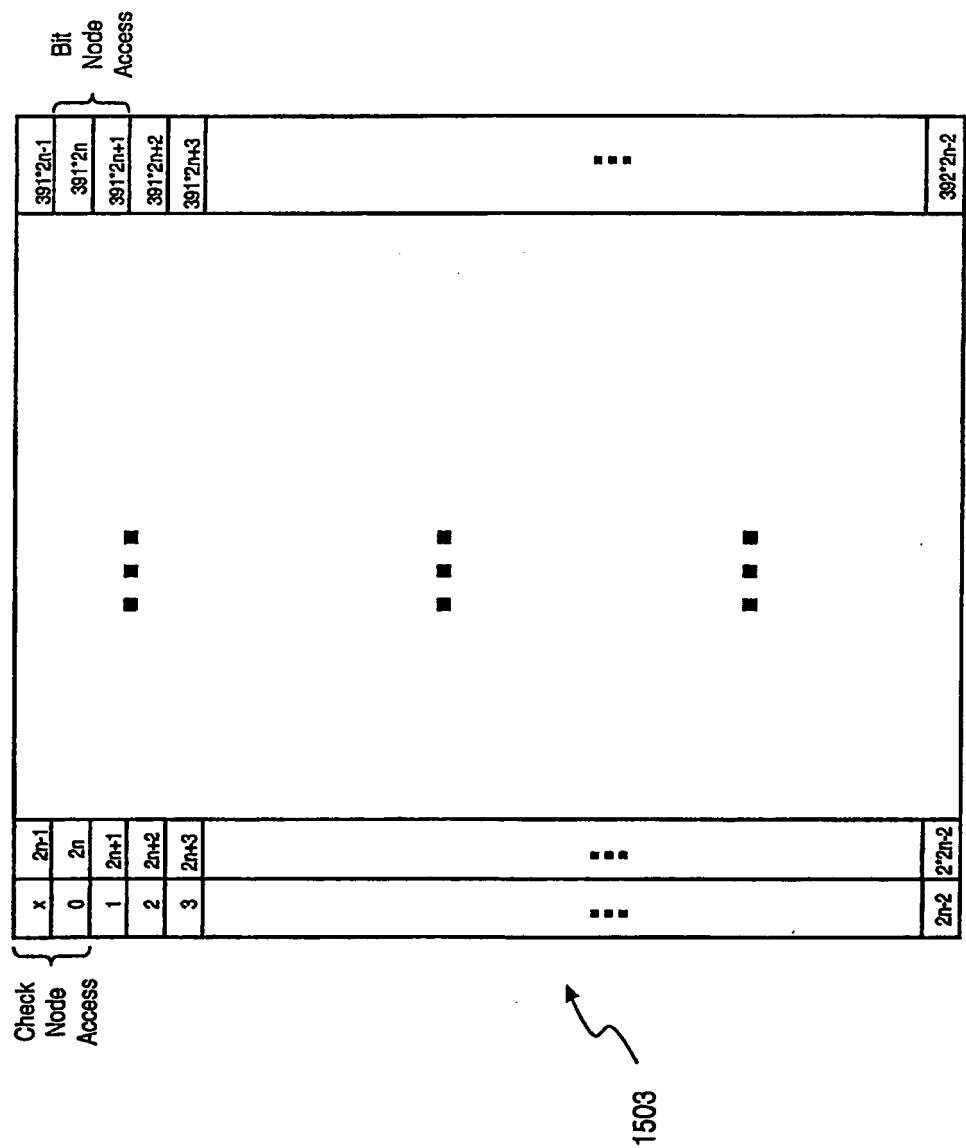

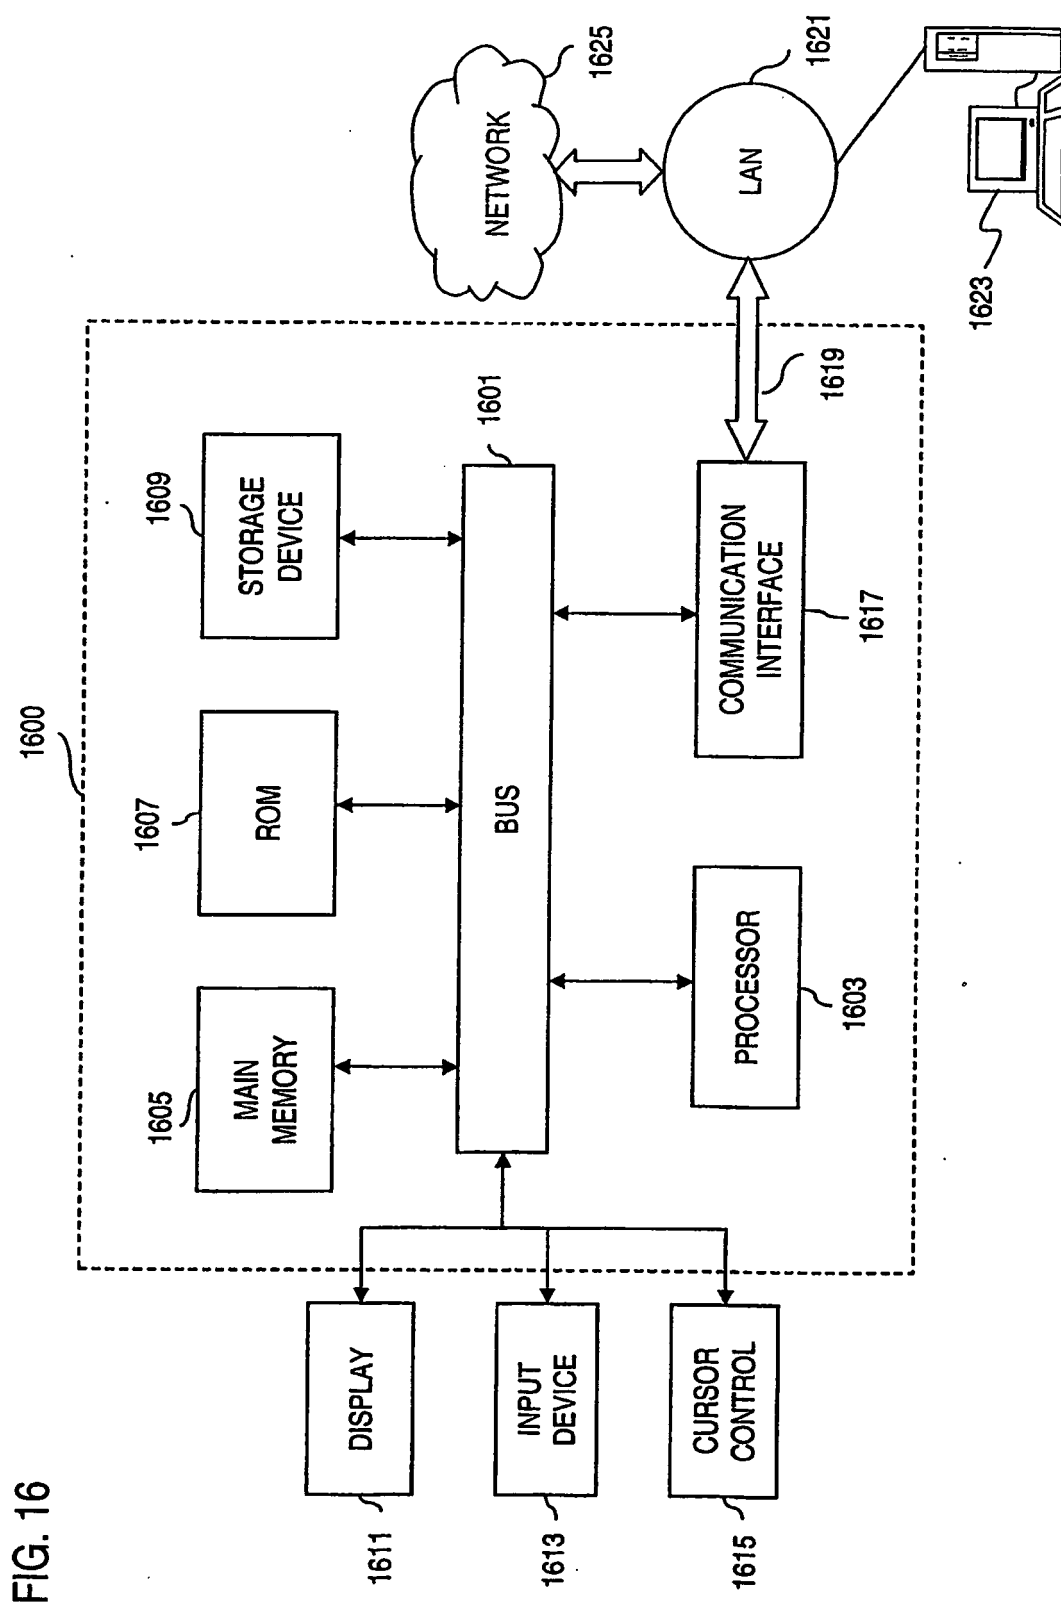

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Non-patent literature cited in the description

- **J.W. BOND et al.** Constructing Low-Density Parity-Check Codes. *Proc., IEEE/AFCEA Information Systems for Enhanced Public Safety and Security, EUROCOMM 2000*, 17 May 2000 [**0006**]