



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
15.08.2012 Bulletin 2012/33

(51) Int Cl.:
H01P 1/387 (2006.01)

(21) Application number: **12154357.3**

(22) Date of filing: **07.02.2012**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(30) Priority: **10.02.2011 US 201113024986**

(71) Applicant: **EMS Technologies, Inc.**
Norcross, GA 30092 (US)

(72) Inventors:
• **Popelka, David J.**
Alpharetta, GA 30004 (US)
• **Vaughn, Todd**
Lawrenceville, GA 30043 (US)
• **Voss, John D.**
Cumming, GA 30041 (US)

(74) Representative: **Buckley, Guy Julian et al**
Patent Outsourcing Limited
1 King Street
Bakewell
Derbyshire DE45 1DZ (GB)

(54) **Integrated circulators sharing a continuous circuit**

(57) The present invention is directed to a circuit assembly that includes an integrated circulator assembly. The circuit assembly has a first substrate, which contains a continuous circuit trace that includes a circulator component from the circulator assembly and at least one electrical component from the circuit assembly. A second substrate is disposed beneath the first substrate and includes a cladding on one surface. The second substrate contains an aperture that accepts a ferrite element, which is axially aligned with the circulator component of the circuit trace. A conductive material is placed across the ferrite element so that it forms a continuous ground plane with the cladding, which is common to the entire circuit trace. The circulator assembly also contains a magnet bonded to the ferrite element. The circulator assembly may also include a yoke disposed below the magnet to shield the circulator from external magnetic fields.

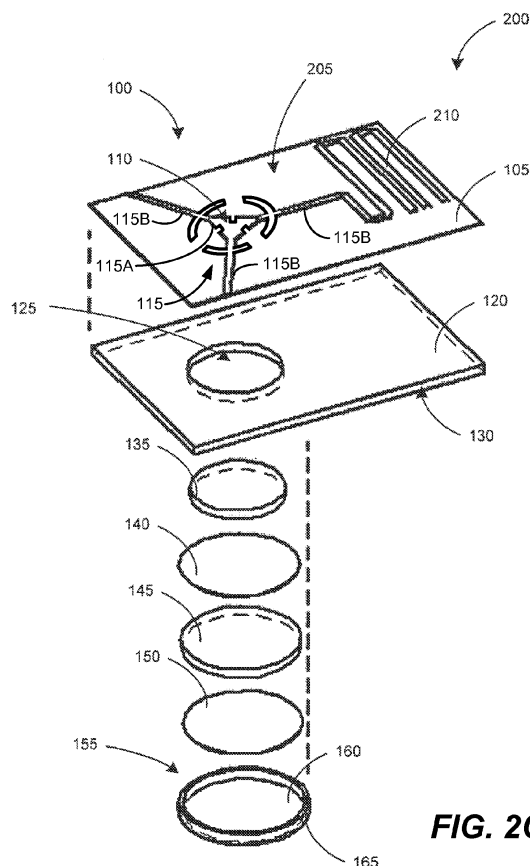


FIG. 2C

Description

REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation-in-part of U.S. Patent Application No. 11/314,160 of the same title filed 19 December 2005, which claims priority to U.S. Provisional Patent Application Serial No. 60/636,945, filed on December 17, 2004. Both Applications are incorporated herein by reference as if fully set forth below.

BACKGROUND

1. Field of the Invention

[0002] Embodiments of the present invention relate to a device, system, and method for providing continuous circuit traces, and specifically to a device, system, and method for providing continuous circuit traces comprising circulators and other electronic components in a continuous circuit trace, obviating the need for manual interconnects and impedance matching.

2. Description of the Related Art

[0003] The use of circulators to isolate and transmit electronic signals is well known. Circulators are multi-port devices, which receive a radio frequency (RF) signals on one port and route them to an adjacent port while isolating or decoupling the RF signal from the remaining ports. Currently, circulators are used for applications that operate at very high frequencies. For example, circulators are commonly used in microwave circuits and microwave transmit and receive (T/R) modules for both RADAR and communications systems. Conventional circulator designs may include a y-shaped RF conductor with three port connectors that are positioned between a pair of ferrite substrates. Magnets are placed above and below the ferrite substrates to produce a DC-biasing magnetic field in the ferrite elements to provide non-reciprocal operation of the transmission paths between the three port connectors. A thin metal plate, or cladding, is placed on the outer surface of each ferrite substrate below each magnet to provide ground planes for the circulator and provide shielding from spurious RF radiation. The components are then placed within a steel case or housing to hold provided a return path for the magnetic fields generated by the magnets, while at the same time shielding the components from extraneous magnetic fields.

[0004] Although circulators are extremely efficient devices, conventional circulators have several drawbacks. First, installation of conventional circulators on a circuit board requires that an aperture, which is slightly larger than the circulator package is cut into the circuit board where the circulator is to be installed. The circulator is then placed within the aperture and the port connectors are attached to the external circuit trace on the circuit board using manual interconnection, such as solder, ribbon

cables, and the like.

[0005] As shown in FIG. 1A, from U.S. Patent No. 4,761,621 to Kane ("Kane"), printed circuit circulators are known in the art. Conventionally, however, even those circulators manufactured as printed circuit components have nonetheless been connected to other external electronic components (e.g., resistors, filters, additional circulators) using traditional methods. In other words, the external components are surface mounted or through hole mounted and then soldered to the printed circuit board ("PCB"). As a result, since the port leads **313**, **401**, **403** of the circulator are normally made from different materials and have different impedance values from the external components **407**, **409**, **413**, and because these components **407**, **409**, **413** are soldered to the board, there is an impedance mismatch at the interconnects, which results in a degradation of the electrical performance of the circulator.

[0006] The impedance mismatch must be corrected using ribbon connectors, or other known methods to match the impedance the port connectors with the circuit trace. As shown in Fig. 1B, from U.S. Patent No. 3,334,317 to Andre ("Andre"), attempts to correct this impedance mismatch include using multiple stepped impedance matching sections **10b**, **10c** to perform a conventional impedance transformation. This adds complexity to the manufacturing process and requires tuning based on the operational frequency range of the circulator. In other words, two resonators operating at two different frequencies require impedance matching sections **10b**, **10c** that are different sizes (i.e., widths) based on their frequency.

[0007] Additionally, discontinuities between the circulator and the circuit trace exist at the connection ports. The manual interconnects also lead to insertion losses at the port connectors, an increase in the interference from unwanted RF signals, and high performance variability of the circulator. Furthermore, the manual interconnects tend to have poor thermal capabilities, which can lead to a decrease in the amount of signal power that can be passed through the circuit.

[0008] Another drawback with conventional circulators is that the circulators do not lie within the same plane as the components of the external circuit. This makes it difficult to effectively provide a common ground the circulator and the circuit. Typically a metal plate must be molded to conform to the contours created by the circulator and adhered to the backside of both the circulator and the external circuit. This non-planar ground plane can lead to reduction in the electrical performance of the circulator.

[0009] Yet another drawback to conventional circulators is that they are expensive to manufacture and cannot be made using an automated manufacturing process. For example, the ferrite substrates used in conventional circulators tend to be brittle and can be damaged in an automated manufacturing process. In addition, the components, particularly the resonator, the ferrite elements,

and the magnets must be precisely aligned to insure proper operation of the circulator. Consequently, all or at least part of conventional circulators must be assembled manually and the component aligned using a jig or and aligning frame. Once the components are properly aligned, they are sealed, usually by hand, in a steel housing. A spring or other compression mechanism is usually placed in the housing to insure that the ferrite material remains in constant contact with the resonator. Unfortunately, this assembly process is expensive in both time and money.

[0010] Several attempts have been made to solve these problems associated with conventional circulators. For example, one method attempted to reduce impedance mismatch between two or more circulator by cascading the circulators in a common package. The circulator includes two or more RF conductors cascaded together, which are disposed between two oblong ferrite substrates. A single impedance matching element is coupled between the coupled connection ports of the cascaded circulator resonators to improve the performance of the circulators. Unfortunately this method still must use manual interconnects to connect the cascaded circulators to an exterior circuit. Furthermore, the circulator elements are disposed between two ferrite substrates, which are easily damaged.

[0011] Another solution was to design a cost effective method of manufacturing a large number of circulators. The method includes depositing a circulator trace on a central dielectric substrate. A series of dielectric shims, which are pre-drilled with an opening are disposed around a ferrite element, which rests on top each side of the central substrate. A steel plate is then placed on each side of the substrate layer. An outer shim then is placed on top of the steel disc. The outer shim contains a number of vias etched down to the steel plate to provide an electrical contact to ground. A number of vias are then drilled into the outer shim and filled with a conductive material to provide contacts for surface mounting the circulator to a circuit board. Although the method uses inexpensive materials, this circulator has several drawbacks. First, the steel disc covers only a portion of the circulator trace, which provides an inadequate ground for the circulator trace and consequently does not adequately shield the circulator trace from spurious RF signals. Furthermore, since the circulator is designed for surface mounting, the circulator does not lie in-line with the external circuit and therefore, the ground plane of the circuit is non-planar and discontinuous. The ground plane between the external circuit and the circulator must be bridged with ribbon cables, or other suitable connectors, which results in electrical inefficiencies. Moreover, since the circulator is surface mounted, it uses manual interconnects to connect the circulator to the external circuit, which result in an impedance mismatch between the circulator and the external circuit.

[0012] Therefore, there is a need in the art for a low cost circulator that uses standard dielectric materials that

can be assembled using conventional PCB techniques. There is a further need in the art for a circulator that can be integrated into a circuit, in which the circuit trace of the circulator and the trace of the electrical circuit are part of the same continuous circuit trace without the use of manual interconnects. There is still a further need for a circulator that has a continuous ground plane and can be inserted into a circuit board so that the circulator trace is in-line with the trace of the components from the external circuit.

SUMMARY

[0013] Embodiments of the present invention relate to a device, system, and method for creating a continuous circuit trace comprising one or more circulators and one or more external electronic components. The ability to manufacture these components in a continuous circuit trace eliminated impedance mismatches created between the components. This, in turn, eliminates the need for physical impedance matching using, for example, variable width impedance matching sections between the components and the adjacent circuitry and traces. This technology enables low cost printed circuit board ("PCB") manufacturing of circulators and overcomes the performance loss normally associated with printed circulators in the PCB environment.

[0014] Embodiments of the present invention can include device comprising a first substrate and a continuous circuit trace printed on the first substrate, the continuous circuit trace comprising a first circulator pattern and a first external component. The circulator pattern can comprise a central conductor element and three or more connection ports. In some embodiments, the circulator pattern can further comprise a discontinuous ring disposed around the central conductor element to improve circulator loading. In other embodiments, the central conductor element can comprise one or more slots to improve circulator loading.

[0015] The first external component can comprise a variety of RF electronic components. The RF electronic component can comprise, for example and not limitation, a second circulator pattern, a filter, an antenna, a power divider, or a power combiner. In some embodiments, the circuit can further comprise a second external component in a continuous circuit trace with the first circulator pattern and the first external component. To improve circulator performance, the first substrate can be relatively thin. In some embodiments, the thickness of the first substrate is between approximately .001 and .010 inches.

[0016] In some embodiments, the device can further comprise a second substrate disposed beneath the first substrate. The second substrate can comprise, for example, a cladding on a first side, an aperture, and a ferrite element inserted into the aperture and proximately aligned with the central conductor element. In some embodiments, a conductive material can be disposed over the ferrite element in electrical contact with the cladding

to form a continuous ground plane. A first magnet can also be disposed below the ferrite element.

[0017] Embodiments of the present invention can also comprise a first substrate, a first continuous circuit trace printed on the first side of the first substrate, the first continuous circuit trace comprising a first circulator pattern and a first external component, and a second continuous circuit trace printed on the second side of the first substrate, the second continuous circuit trace comprising at least a second circulator pattern. As above, the first and second circulators each can comprise a central conductor element and three or more connection ports. In some embodiments, the first circulator and the second circulator can be connected with conductive vias in the first substrate.

[0018] Embodiments of the present invention can further comprise a second substrate disposed beneath the first substrate. The second substrate can comprise a cladding on a first side, a first aperture, and a first ferrite element inserted into the first aperture and proximately aligned with the central conductor elements. A conductive material can be disposed over the first ferrite element and in electrical contact with the cladding on the first side of the second substrate and can form a continuous ground plane. In some embodiments, a first magnet can be disposed below the first ferrite element.

[0019] The thickness of the first substrate can be between approximately .001 and .010 inches. The thickness of the second substrate can be between approximately .01 and .07 inches. In a preferred embodiment, the conductive material comprises a conductive thin film adhesive. In some embodiments, the second continuous circuit trace printed on the second side of the first substrate can comprise the second circulator pattern and a second external component.

[0020] In some embodiments, a third substrate can be disposed above the first substrate. The third substrate can comprise a cladding on a first side, a second aperture, and a second ferrite element. The second ferrite element can be inserted into the second aperture and can be proximately aligned with the central conductor elements. In a preferred embodiment, a conductive material can be disposed over the second ferrite element such that it is in electrical contact with the cladding on the first side of the third substrate to form a continuous ground plane. The device can further comprise a second magnet, which can be disposed above the second ferrite element.

[0021] Still other embodiments of the present invention can comprise a method for creating an integrated circuit comprising providing a first substrate and printing a continuous circuit on the first side of the first substrate comprising a first circulator pattern and a first external component.

[0022] The method can further comprise providing a second substrate comprising a metalized layer on at least one side and creating a first aperture in the second substrate sized and shaped to accept a first ferrite disk. The

first ferrite disk can be inserted into the aperture and a conductive material can be placed over the first ferrite disk such that the conductive material is in electrical contact with the first ferrite disk and the metalized layer on the second substrate to form a continuous ground plane. A first magnet can be placed below the first ferrite disk and the second substrate can be bonded to the bottom of the first substrate.

[0023] Embodiments of the present invention can further comprise providing a third substrate comprising a metalized layer on at least one side. A second aperture can be created in the third substrate sized and shaped to accept a second ferrite disk. The second ferrite disk can be inserted into the aperture and a conductive material can be placed over the ferrite disk such that the conductive material is in electrical contact with the first ferrite disk and the metalized layer on the third substrate to form a continuous ground plane. In some embodiments, a second magnet can be placed above the second ferrite disk. The third substrate can be bonded to the top of the first substrate. In some embodiments, a second continuous circuit trace can be printed on a second side of the first substrate comprising at least a second circulator.

[0024] The various aspects of the present invention may be more clearly understood and appreciated from a review of the following detailed description of the disclosed embodiments and by reference to the appended drawings and claims.

BRIEF DESCRIPTION OF THE FIGURES

[0025] FIG. 1A is an illustration of a printed circulator on a printed circuit board ("PCB") with conventional through-hole mounted resistors.

[0026] FIG. 1B is an illustration of a conventional circulator comprising impedance matching elements.

[0027] FIG. 1C is an illustration of a conventional circulator, which includes tuning tabs.

[0028] FIG. 1D is an illustration of a conventional circulator with mismatched port connections due to a discontinuous circuit trace.

[0029] FIG. 2A is an illustration of an exploded view of a circulator assembly for use with a microstrip circuit in accordance with some embodiments of the present invention.

[0030] FIG. 2B is an illustration of an exploded view of a circuit trace for a circulator assembly in accordance with some embodiments of the present invention.

[0031] FIG. 2C is an illustration of an exploded view of a circulator assembly integrated with a microstrip circuit assembly in accordance with some embodiments of the present invention.

[0032] FIG. 3 is an illustration of an overhead view of a circulator assembly integrated with the microstrip circuit assembly in FIG. 2A in accordance with some embodiments of the present invention.

[0033] FIG. 4 is an illustration of a cross-sectional view

of the circulator assembly taken along the 4 - 4 line of FIG. 3 in accordance with some embodiments of the present invention.

[0034] FIG. 5 is an illustration of an exploded view of an exemplary embodiment of a circulator assembly for use with a stripline circuit in accordance with some embodiments of the present invention.

[0035] FIG. 6 is an illustration of an exploded view of a circulator assembly integrated within a stripline circuit assembly in accordance with some embodiments of the present invention.

[0036] FIG. 7 is an illustration of an overhead view of a circulator assembly integrated within a stripline circuit assembly in accordance with some embodiments of the present invention.

[0037] FIG. 8A and FIG. 8B, collectively known as FIG. 8, are illustrations of a cross-sectional view of the circulator assembly taken along the 8 - 8 line of FIG. 7 in accordance with some embodiments of the present invention.

[0038] FIG. 9 is an illustration of an isometric view of the circulator assembly taken along the 9 - 9 line of FIG. 7 in accordance with some embodiments of the present invention.

[0039] FIG. 10 is an illustration of an exploded view of another embodiment of a circulator assembly integrated with in a stripline circuit assembly in accordance with some embodiments of the present invention.

[0040] FIG. 11 is an illustration of an overhead view of a stripline circuit assembly containing two integrated circulator assemblies in accordance with some embodiments of the present invention.

[0041] FIG. 12 is a logic flow diagram illustrating a method for manufacturing a circulator assembly in accordance with some embodiments of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0042] To facilitate an understanding of the principles and features of the various embodiments of the invention, various illustrative embodiments are explained below. Although preferred embodiments of the invention are explained in detail, it is to be understood that other embodiments are contemplated. Accordingly, it is not intended that the invention is limited in its scope to the details of construction and arrangement of components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments and of being practiced or carried out in various ways. Also, in describing the preferred embodiments, specific terminology will be resorted to for the sake of clarity.

[0043] It must also be noted that, as used in the specification and the appended claims, the singular forms "a," "an" and "the" include plural references unless the context clearly dictates otherwise. For example, reference to a component is intended also to include composition of a plurality of components. References to a system con-

taining "a" component is intended to include other components in addition to the one named.

[0044] Also, in describing the preferred embodiments, terminology will be resorted to for the sake of clarity. It is intended that each term contemplates its broadest meaning as understood by those skilled in the art and includes all technical equivalents, which operate in a similar manner to accomplish a similar purpose.

[0045] Ranges may be expressed herein as from "about" or "approximately" one particular value and/or to "about" or "approximately" another particular value. When such a range is expressed, other exemplary embodiments include from the one particular value and/or to the other particular value.

[0046] The words "comprising," "containing," or "including" conveys that at least the named compound, element, particle, or method step is present in the composition or article or method, but does not exclude the presence of other compounds, materials, particles, method steps, even if the other such compounds, material, particles, method steps have the same function as what is named.

[0047] It is also to be understood that the mention of one or more method steps does not preclude the presence of additional method steps or intervening method steps between those steps expressly identified. Similarly, it is also to be understood that the mention of one or more components in a composition does not preclude the presence of additional components than those expressly identified.

[0048] Various tabs, slots, and other features can be used to change, for example and not limitation, the frequency response, the bandwidth, or the loading characteristics of a resonator. As shown in FIGS. 1A and 1D from *Kane*, for example, a circulator can comprise a central triangular conducting portion surrounded by a discontinuous ring. The slots in the ring act as a loading mechanism and enable the overall size of the resonator to be reduced. As mentioned above, FIG. 1B from *Andre* depicts a circulator comprising a central circular conducting portion **28** with ports **10** comprising impedance matching sections **10b**, **10c**. FIG. 1C, from U.S. Patent No. 3,854,106 to Tresselt ("*Tresselt*") depicts a central circular conducting portion with tabs **34** mounted on the ports. These tabs enable the bandwidth of the circulator to be broadened or narrowed, as applicable.

[0049] For the sake of clarity, the term "circulator" as used herein refers to circulators in general, including various designs and including components (e.g., tabs, slots, and impedance matching sections) used to "tune" circulators. Components that affect the operation of the circulator itself, as opposed to the overall circuit, are considered part of the circulator as opposed to "external" components. In other words, as used herein, FIGS. 1B-1D depict only circulators without any external components. In addition, the actual design of the circulator is immaterial to embodiments of the present invention.

[0050] External components or external electronic

components, as used herein, can include, for example and not limitation, additional circulators, a filter, an antenna, a power divider, or a power combiner. These components are located in the same circuit with, but outside, the circulator and are used primarily to modify the signal going through the circuit (as opposed to tuning the circulator itself). FIG. 2C, for example, depicts a circulator **110** in a continuous circuit trace with a filter **210**. In this configuration, the filter **210** would be considered the "external" electronic component.

[0051] The term "continuous circuit trace," as used herein, can include circuits that are printed, vapor deposited ("sputtered"), laminated, etched, or otherwise deposited or manufactured on a printed circuit board ("PCB"). These circuits are made by printing the various components on the PCB and the components and are connected using printed conductors, or traces, as opposed to manual interconnects, soldering, or other mechanical connection means. PCB manufacturing reduces costs and reduces or eliminates impedance mismatches in connections. As a result, impedance matching measures, such as those described above, are unnecessary.

[0052] Embodiments of the present invention, therefore, relate to an apparatus, system, and method for providing a continuous circuit trace comprising one or more circulators and one or more external electronic components (e.g., a circulator, a resistor, or a filter). The one or more circulators and the one or more external components can be manufactured in a continuous circuit trace such that no manual interconnects are necessary. This, among other things, decreases manufacturing costs, increases reliability and performance, and reduces product size.

[0053] FIG. 2A is an exploded view of a circulator assembly **100** in accordance with some embodiments of the present invention. The circulator assembly **100** contains a single ground plane in what is commonly known as a "microstrip" configuration. The circulator assembly **100** includes a first substrate **105** that is made from a non-ferrous dielectric material and is used to support a circuit trace **110**. Typically, the first substrate **105** is made from dielectric materials that are used in constructing conventional PCBs. For example, the first substrate **105** may be made from polymers, such as but not limited to polytetrafluoroethylene (PTFE), combinations of PTFE and woven glass fibers, PTFE and random micro fiber glass, PTFE and ceramic, polyamides and polyamide compositions including polyamide and glass, polyamide film, epoxy resins, such as cyanate ester, bisamaleimide tiazine, and the like. However, the first substrate **105** may also be made from semiconductor material such as but not limited to silicon (Si), gallium arsenide (GaAs), indium antimonide (InSb), cadmium sulfide (CdS), and cadmium selenide (CdSe) for specialized applications.

[0054] The circuit trace **110** is applied to one side of the substrate **105** using standard PCB manufacturing techniques, such as physical vapor deposition (PVD), also known as "sputtering," chemical vapor deposition

(CVD), and the like. The circuit trace **110** is a conductive material, such as gold (Au), silver (Ag), copper (Cu), aluminum (Al), titanium (Ti) and the like is first applied to the substrate **105**. A mask that contains the pattern of the circuit element, in this case the pattern forms a circulator pattern **115**, or circulator component **115** on the conductive material. The circulator pattern **115** can comprise a central conductor portion **115A** and three or more connection ports **115B**. In some embodiments, as shown, the circulator pattern **115** can comprise one or more notches, a discontinuous outer ring, or other components to alter or tune the behavior of the circulator **115**.

[0055] The exposed conductive material is removed from the substrate. The mask is then removed leaving desired circuit trace **110**. The circuit trace **110** of the circulator **100** created in this manner, forms a continuous trace with no discontinuities or irregularities. Alternatively, the circulator circuit trace **110** may be located on one side of the substrate **105** and connected through conductive vias **175** passing through the substrate **105** to a second circulator circuit trace **170** as shown in FIG. 2B. The use of the second circulator circuit trace **170** can increase performance by increasing bandwidth, lowering insertion loss, and improving isolation.

[0056] The circulator circuit trace **110** may have the form of any conventional circulator. In FIG. 2A, the circulator circuit trace **110** contains a RF resonator and three conductive transfer strips that extend from the points of the triangular resonator and terminate at electrodes or contact pads (not shown) for connecting to an external circuit. Although the circuit trace **110** is depicted as having a triangular-shaped RF resonator, those skilled in the art will appreciate that the circuit trace **110** may take on any shape that contains a central resonator and three equally spaced conductive transfer strips extending from the central RF resonator without departing from the scope of the invention. As mentioned above, the circulator **110** can also comprise various tuning elements to modify the behavior of the circulator **110**.

[0057] The circulator assembly **100** also has a second substrate **120** disposed below the first substrate **105**. The second substrate **120** is also made from a dielectric material and is preferably made from a dielectric material used for constructing PCBs, as described above. The second substrate **120** may be made from the same dielectric material as the first substrate **105** or may be made from a different dielectric material based on the design criteria. The second substrate **120** includes an aperture **125** that is proximately aligned with the circulator circuit trace **110**. The aperture **125** is typically circular in shape; however, the aperture can also be any polygonal shape, such as a square, a triangle, a pentagon, a hexagon, and so forth. The bottom side of the second substrate **120** includes a cladding **130** that forms a continuous ground plane. The cladding **130** is a thin layer of a conductive material such as copper, gold, silver, aluminum, titanium, and the like.

[0058] The circulator assembly **100** also contains a fer-

rite element **135** disposed within the aperture **125** of the second substrate **120**. The ferrite element **135** is circular in shape and has diameter that matches the diameter of the aperture **125** so that it may rigidly affixed into the aperture **125**. Although the ferrite element **135** is typically described as being circular, the ferrite element **135** will have the same shape as the aperture **125** to insure that the ferrite element **135** self aligns itself with the circulator circuit trace **110** and minimize any discontinuities between the second substrate **120** and the ferrite element **135**.

[0059] Disposed beneath the ferrite element **135** is a conductive material **140**. The conductive material **140** is slightly larger than the aperture **125** to ensure that it makes electrical contact with the cladding **130**, thereby providing a continuous ground plane across the circulator circuit trace **110**. The conductive material **140** is typically very thin, approximately in the range from 0.001 inches to 0.003 inches. As a result, the conductive material **140** approximately coplanar with the cladding **130**, which provide improved shielding and improved electrical performance over conventional circulators. In one exemplary embodiment, the conductive material **140** is a conductive thin film adhesive that can be cut into any desired shape. The conductive thin film adhesive **140** is simply adhered to the cladding **130** of the second substrate **120** making sure that it fully covers the aperture **125**, thereby ensuring a continuous ground plane. In addition to completing the ground plane, the conductive tape also provides additional support to the ferrite element **135**, thereby further securing it within the aperture **125** and eliminating the outer support casing required for conventional circulators. In another exemplary embodiment, the conductive material **140** may be a conductive adhesive, such as conductive two-part epoxy. The conductive two-part epoxy is applied across the aperture in a thin layer while in the molten state, typically having a thickness approximately between 0.001 inches and 0.003 inches and allowed to cure. In yet another exemplary embodiment, the conductive material **140** may simply be a thin metal film. The metal film can be secured to the cladding using a thin bead of adhesive.

[0060] The circulator assembly **100** also contains a magnet **145** located below the conductive material **140** and proximately aligned with both the ferrite material **135** and the circulator circuit trace **110**. In an exemplary embodiment, the magnet **145** is a permanent magnet and is polarized to produce a direct current (DC) biased magnetic field that passes through the ferrite material **135** and the circulator circuit trace **110**. The magnet **145** is held in place by the conductive material **140**.

[0061] The circulator assembly **100** may also contain a yoke **155** that is disposed beneath the magnet **145**. The yoke **155** is typically slightly larger than the magnet **145** and has a plate **160** and a tang **165** that extends around the periphery of the plate **160**. The tang **165** has a height sufficient to cover the magnet **145** to provide both a DC magnetic field return path and adequate shield-

ing from external magnetic fields.

[0062] The circulator assembly **100** also contains three connection pads (not shown) at the ends of each of the three conductive strips of the circulator circuit trace **110** that electrically connect the circuit assembly **100** to an external circuit. The connection pads may be mouse holes, which are known in the art. Alternatively, the connection pads may be formed on the underside of the second substrate **120** for use as a surface mounted component.

[0063] FIG. 2C is an illustration of an exploded view of a microstrip circuit **200** containing the circulator assembly **100**. As shown by the figure, the circulator assembly **100** comprises circular loading mechanisms and is fully integrated into the microstrip circuit **200** as opposed to being connected through manual interconnections as required by conventional circulators. The microstrip circuit **200** contains a continuous circuit trace **205** deposited or etched on a first substrate **105**. The continuous circuit trace **205** contains at least one circulator circuit trace **110** electrically connected to at least one other external RF component **210** (as opposed to components associated with the circulator, as mentioned above). The RF component **210** may be a filter component, a coupler component, or any other type of RF component. The RF component **210** may even be another circulator. Because the circulator circuit trace **110** is integrated within the continuous circuit trace **205** that contains the RF component **210**, there are no discontinuities or manual interconnects between the circulator circuit trace **110** and the RF component **210**. Integration of the circulator assembly **100** provides several advantages over conventional circulator designs. First, because conventional circulator designs require interconnects between the circulator and an external circuit element, there will always be an impedance mismatch at the interconnect, which results in unwanted signal degradation through the system. However, since the circulator circuit trace **110** is integrated within the circuit trace **205**, there is no impedance mismatch between the circulator circuit trace **110** and the electronic component **210**. Therefore, there is little to no signal degradation at the interfaces between the circulator assembly **100** and other connecting RF components **210**. Second, because interconnects bridge a discontinuity in a circuit trace, conventional circulators tend to have high insertion losses at the interconnects. Since the present invention eliminates any interconnects, insertion losses associated with those interconnects are eliminated. Additionally, by eliminating the interconnects, there are no discontinuities when connecting the circulator assembly **100** into the microstrip circuit **200** to allow RF interference to enter the microstrip circuit **200**. As a result, interference due to unwanted RF signals in the circulator assembly **100** is greatly reduced.

[0064] A second substrate **120**, which contains a cladding **130** on the outside surface, is disposed below the first substrate **105**. The second substrate **120** contains an aperture **125** that is aligned with the circulator circuit

trace **110** of the continuous circuit trace **205**. Typically, the first substrate **105** is much thinner than the second substrate. The first substrate **105** has a thickness in the range of approximately 0.001 inches to 0.010 inches, while the second substrate **120** has a thickness in the range of approximately 0.010 inches to 0.070 inches. In one exemplary embodiment the first substrate **105** has a thickness in the range of approximately 0.003 inches to 0.007 inches, and more preferably 0.005 inches, while the second substrate **120** has a thickness in the range of approximately 0.01 inches to 0.07 inches, and more preferably 0.03 inches. Those skilled in the art will appreciate that the thicknesses of the first substrate **105** and the second substrate **120** are necessarily not limited to the values herein provided and may be adjusted to any thickness as required by a particular design.

[0065] A ferrite element **135** is located within the aperture **125**. Beneath the ferrite element **135** is a conductive material **140**. In an exemplary embodiment, the conductive material **140** is made from a conductive thin film adhesive, which is laid across the ferrite element **135**. The conductive material **140** is slightly larger than the aperture **125**. This allows the conductive material **140** to make electrical contact with the cladding **130** and form a continuous ground plane over the entire continuous circuit trace **205**. Maintaining the ground plane that is continuous over the entire continuous circuit trace **205** provides improved shielding of the microstrip circuit **200** from unwanted external RF signals. Furthermore, since the conductive material **140** is made from a thin film, typically on the order of approximately 0.001 inches, the conductive material **140** is substantially planar with the cladding **130**, which improves electrical performance of the microstrip circuit **200**, since path length along the ground plane is substantially the same as the path length along the continuous circuit trace **205**.

[0066] A magnet **145** is disposed below the conductive material **140** and is proximally aligned with the ferrite element **135**. The magnet **145** is used to induce a biased magnetic field through the ferrite element **135**. A yoke **155** may then be bonded to the magnet **145** using an adhesive material **150** to provide a return path for the biased magnetic field and also shield the circulator assembly **100** from unwanted external magnetic fields.

[0067] FIG. 3 is a top-down view of the microstrip circuit **200** containing the integrated circulator assembly **100** of FIG. 2, in accordance with some embodiments of the present invention. The continuous circuit trace **205** containing the circulator circuit trace **110** and another RF component **210** is shown by the figure. Disposed beneath the first substrate **105** is the second substrate **120** (not shown), which contains the ferrite material **135** located within the aperture **125**. As seen from the figure, the ferrite material **135** is proximally aligned with the central RF resonator of the circulator circuit trace **110**. The conductive material **140** extends beyond the aperture **125** to provide an electrical contact with the cladding **130** (not shown) on the backside of the second substrate **120** (not

shown). The conductive material **140** is also proximally aligned with the aperture **125**.

[0068] FIG. 4 is a cross-sectional view of a portion of the microstrip circuit **200** taken along the 4 - 4 line of FIG. 3. The continuous circuit trace **205**, which contains the circulator circuit trace **110**, is located on the top surface of the first substrate **105**. The first substrate **105** is composed of a thin layer of a nonferrous dielectric material, such as PTFE, or other materials used for the manufacture of PCBs. The first substrate **105** is relative thin and has a thickness, T_1 that in the range of approximately 0.001 inches to 0.010 inches, while the second substrate **120** has a thickness T_2 , in the range of approximately 0.010 inches to 0.070 inches. In one exemplary embodiment the first substrate **105** has a thickness T_1 , in the range of approximately 0.003 inches to 0.007 inches, and more preferably 0.005 inches, while the second substrate **120** has a thickness T_2 , in the range of approximately 0.01 inches to 0.07 inches, and more preferably 0.03 inches. Those skilled in the art will appreciate that the thicknesses T_1 and T_2 of the first substrate **105** and the second substrate **120** respectively, are necessarily not limited to the values herein provided and may be adjusted to any thickness as required by a particular design. The continuous circuit trace **205** is typically deposited on top of the first substrate **105** in a very thin layer, having a thickness, T_3 , in the range of approximately 0.0008 inches to 0.0015 inches.

[0069] The second substrate **120** is bonded to the bottom of the first substrate **105** using standard circuit board adhesives known in the art. The second substrate **120** is also made from non-ferrous dielectric materials, which are used for the construction of PCBs, such as PTFE and the like. In one exemplary embodiment, the second substrate **120** and the first substrate **105** are made from the same dielectric material. However, those skilled in the art will appreciate that the first substrate **105** and the second substrate **120** may be made from different non-ferrous dielectric materials with different dielectric constants, as required by a particular application. The bottom of the second substrate **120** also contains a thin cladding **130** that provides the ground plane for the microstrip circuit **200**.

[0070] Integrated within the second substrate **120** is the ferrite material **135**. The ferrite material **135** is disposed in the aperture **125**, which has been milled into the second substrate **120**. Alternatively, the ferrite material **135** may be affixed in the aperture **125** using a conventional heat resistant, non-conductive adhesive material, such as a two-part epoxy, which is known in the art. The ferrite material **135** has substantially the same thickness, T_2 , as the second substrate **120** so the top of the ferrite material **135** and the top of the second substrate **120**, and the bottom of the ferrite material **135** and the bottom of the second substrate **120**, form substantially coplanar surfaces. This allows the first substrate **105** to lay flat upon the second substrate **120** without any significant variation in height at the interface between the

second substrate **120** and the ferrite material **135**, as any variation may stress the first substrate **105**. Stresses in the first substrate **105** may lead to cracking or even rupture of the first substrate **105** above the interface between the second substrate **120** and the ferrite material **135**, which can lead to degradation in the performance or even complete failure of the stripline circuit **200**. The desirability to have the bottom of the ferrite material **135** and the bottom of the second substrate **120** being substantially coplanar is to provide planar ground plane, which has previously been discusses.

[0071] The conductive material **140** is disposed on the underside of the second substrate **120**. The conductive material **140** extends beyond the boundary of the aperture **125** so that it provides sufficient electrical contact with the cladding **130** on the underside of the second substrate **120**, thereby providing a continuous ground plane for the microstrip circuit **200**. In addition to providing a continuous ground plane across the ferrite element **135**, the conductive material **140** also bonds the ferrite element **135** in the aperture **125** of the second substrate **120**. In addition, the conductive material **140** has sufficient flexibility to accommodate small variances in the thickness between the second substrate **120** and the ferrite element **135** due manufacturing tolerances. The magnet **145** is larger than the aperture **125** and is also aligned with the ferrite element **135** to ensure that the ferrite element **135** is completely covered. Finally, the yoke **155** is bonded to the magnet **145** using an adhesive material **150**. The tang **165** (FIG. 2) of the yoke **155** extends in an upward direction from the plate **160** (FIG. 2) and fully surrounds the magnet **145** thereby shielding the magnet **145** from external magnetic fields that may interfere with the operation of the circulator assembly **100**.

[0072] FIG. 5 is an exploded view of an exemplary embodiment of a circulator assembly **500** arranged in a stripline configuration in accordance with some embodiments of the present invention. The circulator assembly **500** includes a first substrate **503** that supports a circulator circuit trace **506**. The first substrate **503** is composed of a thin layer of nonferrous dielectric material, such as PTFE, and other materials used for the manufacture of PCBs. The circulator circuit trace **506** contains a triangular-shaped central resonator and three conductive transfer strips spaced equally around the perimeter of the triangular-shaped central resonator. Those skilled in the art will appreciate that other shapes may be used for the central resonator, without departing from the scope of the invention.

[0073] The circulator assembly **500** also contains a second substrate **512** that is positioned below the first substrate **503** and a third substrate **533** that is positioned above the first substrate **503**, thereby forming a laminar structure. The second substrate **512** and the third substrate **533** are also made from a non-ferrous dielectric material. In an exemplary embodiment, the second substrate **512** and the third substrate **533** are made from the same dielectric material used for the first substrate **503**.

In another exemplary embodiment, the second substrate **512** and the third substrate **533** are made from a dielectric material that is different from the dielectric material used for the first substrate **503**.

[0074] The second substrate **512** contains a first cladding **515** disposed on the bottom exterior surface (not shown). Similarly, the third substrate **533** contains a second cladding **536** deposited on the top exterior surface. The first and second claddings **515** and **536** are formed by depositing a thin layer of metal using standard deposition techniques, such as PVD, CVD, and the like. The second substrate **512** and the third substrate **533** each contain an aperture **518** and **539**, respectively. The apertures **518** and **539** are aligned with the circulator circuit trace **506** on the first substrate **503**. A first ferrite element **521** is inserted into the first aperture **518** and a second ferrite element **542** is inserted into the second aperture **539**. The ferrite elements **521** and **542** are typically placed into the apertures **518** and **539**, respectively. However, the ferrite elements **521** and **542** may be affixed in the apertures **518** and **539** using an adhesive, such as a two-part epoxy and the like.

[0075] A first conductive material **524** is disposed across the underside of the first ferrite element **521**. Similarly, a second conductive material **545** is placed across the top of the second ferrite element **542**. In an exemplary embodiment, the conductive materials **524** and **545** are formed from conductive thin film adhesive, which are slightly larger than the apertures **518** and **539**. The conductive thin film adhesives make electrical contact with the claddings **515** and **536** to provide two continuous ground planes, which shield the circulator circuit trace **506** from unwanted RF radiation. Alternatively, rather than using a conductive thin film adhesive, the conductive materials **524** and **545** may be made from a conductive adhesive, such as a conductive two-part epoxy. Typically, the conductive materials **524** and **545** are relatively thin. As a result, the conductive materials **524** and **545** are approximately coplanar with the claddings **515** and **536**.

[0076] The circulator assembly **500** also contains a first magnet **527** disposed below the first ferrite element **521**. Similarly, a second magnet **548** is located above the second ferrite element **542**. Both the first magnet **527** and the second magnet **548** are proximately aligned with the circulator circuit trace **506** to produce a DC biased magnetic field that passes through the ferrite elements **521** and **542** and the circulator circuit trace **506**.

[0077] The circulator assembly **500** may also have a yoke **554** that has a top plate **557** and a bottom plate **560**. The top plate **557** of the yoke **554** is placed on top of the second magnet **548**. A first adhesive material **551** may be inserted between the top plate **557** and the second magnet **548** to affix the top plate **557** to the second magnet **548**. Similarly, the bottom plate **560** is disposed on the bottom of the first magnet **527** and may be bonded to the first magnet **527** by a second adhesive material **530**. In an exemplary embodiment, the first adhesive ma-

terial 551 and the second adhesive material 530 are made from the same conductive material that is used to complete the ground planes across the second substrate 509 and the third substrate 533.

[0078] The yoke 554 may also contain at least one tang 563 that extends between the top plate 557 and the bottom plate 560 and provides a return path for the magnetic field induced by the magnets 527 and 548. In an exemplary embodiment, the yoke 554 includes two tangs 563, which pass through a first pair of cutouts in the first substrate 503, a second pair of cutouts in the second substrate 512, and a third pair of cutouts in the third substrate 533 and connects to the bottom plate 560. The top plate 557 and the bottom plate 560 of the yoke 554 are approximately the same size or slightly larger than the magnets 527 and 548 to provide sufficient shielding to the circulator circuit trace 506. Although the yoke 554 has been described as having two tangs 563, those skilled in the art will appreciate that the yoke 554 may have either a single tang 563 or three tangs 563 located intermediate of the three conductive strips of the circulator circuit trace 506. Each of the first pair of cutout, the second pair of cutouts, and the third pair of cutout are edge plated to provide additional shielding and isolation for the circulator assembly 500.

[0079] The circulator assembly 500 also contains three connection pads (not shown) at the ends of each of the three conductive strips of the circulator circuit trace 506 that electrically connect the circulator assembly 500 to an external circuit. The connection pads may be mouse holes, which are known in the art. Alternatively, the connection pads may be formed on the underside of the second substrate 512 for use as a surface mounted device. The connection pads may be formed on the underside of the second substrate 512 by etching vias through the second substrate 512 up to each of the three conductive strips. The vias are then filled with a conductive material such as copper, gold, silver, aluminum, and the like.

[0080] A stripline circuit 600 in accordance with some embodiments of the present invention is shown in FIGs. 6-9. The stripline circuit 600 includes at least one circulator assembly 500 (FIG. 5) that is integrated into the stripline circuit 600. The circulator assembly 500 is integrated with at least one external RF component 609 in a continuous circuit trace 606 etched on a first substrate 603 in accordance with some embodiments of the present invention. The RF component 609 may be a filter component, a coupler component, or any other type of electronic component. Because the circulator circuit trace 605 is integrated with the continuous circuit trace 606, there are no discontinuities or interconnects between the circulator circuit trace 506 and the RF component 609. As with the microstrip circuit 200, this configuration provides several advantages over conventional circulator designs, including improved impedance matching between the circulator assembly 500 and the other electronic components 609, low insertion losses, improved shielding to unwanted RF signals, and greater

reliability. Although the stripline circuit 600 is shown with a single circulator assembly 500 integrated with a single RF component 609, those skilled in the art will appreciate that the stripline circuit 600 may be expanded to include any number of circulator assemblies 500 integrated with any number of RF components 609 without departing from the scope of the invention.

[0081] A second substrate 612 and the third substrate 633 are disposed below and above the first substrate 603, respectively and have claddings 615 and 636 deposited on their respective outside surfaces. The second substrate 612 and third substrate 633 contain apertures 618 and 639, respectively, which are proximately aligned with the circulator circuit trace 605. Ferrite elements 621 and 642 are disposed within the apertures 618 and 639. Conductive material 624 and 645 overlap the apertures 618 and 639. In an exemplary embodiment, the conductive materials 624 and 645 are made from a conductive thin film adhesive, which is laid across the ferrite elements 621 and 642. Because the conductive thin film adhesive 624 and 645 are larger than the apertures 618 and 639, the thin film adhesive makes electrical contact with the claddings 615 and 636 and forms continuous ground planes over the entire continuous circuit trace 606. Maintaining ground planes that are continuous over the entire continuous circuit trace 606 provides improved shielding of the stripline circuit 600 from unwanted external RF signals. Furthermore, since the conductive materials 624 and 645 are made from a conductive thin film adhesive, which has a thickness typically on the order of approximately 0.001 inches, the conductive film is substantially planar with the claddings 615 and 636, which further improves the electrical capabilities since the path length along the ground planes are substantially the same length as the path length of the continuous circuit trace 606. Magnets 627 and 648 are disposed below and above the conductive material 624 and 645 and are proximately aligned with the ferrite elements 621 and 642. The yoke 654 may then be bonded to the magnets 627 and 648 using an adhesive material 630 and 651 to provide a return path for the DC biased magnetic field and also to provide shielding to the circulator assembly 500 (FIG. 5) from unwanted external magnetic fields.

[0082] FIG. 7 is an overhead view of the stripline circuit 600 in accordance with some embodiments of the present invention. The first substrate 603 (not shown), which carries the continuous circuit trace 606 that shown in broken lines, is disposed between a second substrate 612 (not shown) and a third substrate 633. The continuous circuit trace 606 includes the circulator circuit trace 605 electrically connected to the RF component 609. Since the circulator circuit trace 605 and the RF component 609 are integrated into the same continuous circuit trace 606, there are no interconnects between the circulator circuit trace 605 and the RF component 609. This allows the stripline circuit 600 to have better electrical properties, such as improved impedance matching between the circuit components, improved signal transmis-

sion, and improved heat distribution through the continuous circuit trace **606**.

[0083] In addition, the cladding **636** cover the entire exterior, or top surface, of the third substrate **633**. The conductive material **645** extends beyond the aperture **639** to provide an electrical contact with the cladding **636** to form a continuous ground plane over the entire continuous circuit trace **606**. This allows the circulator circuit trace **605** to share a common ground with the RF component **609**. Having a common ground between the circulator circuit trace **605** and the RF component **609** provides several advantages over conventional circulators. The common ground plane provides increased shielding of the continuous circuit trace **606** from external RF radiation. The common ground plane also increases line isolation and reduces radiative emissions from the stripline circuit **600** to improve the electrical performance of the stripline circuit **600**.

[0084] Referring to FIGs. 8A, 8B and FIG. 9, a cross-sectional view of a portion of the stripline circuit **600** is shown. In particular, FIGs. 8A is an illustration of a cross-section of the circuit assembly **600** taken along the 8 - 8 line of FIG. 7, while FIG. 8B is a magnified view of the cross-section shown in FIG. 8A. FIG. 9 is an illustration of an isometric view of the stripline circuit **600** taken along the 9 - 9 line of FIG. 7. The cross sectional views illustrate the relative thickness of the first substrate **603** to the second and third substrates **612** and **633**. The first substrate **603** has a thickness, T_1 that is in the range of approximately 0.001 inches to 0.010 inches. The second and third substrates **612** and **633** typically have the same thickness, T_2 that is greater than the thickness of the first substrate **603** and in the range of approximately 0.01 inches to 0.07 inches. In a preferred embodiment, the first substrate **603** has a thickness T_1 , in the range of approximately 0.003 inches to 0.007 inches and more preferably about 0.005 inches, while the second substrate has a thickness T_2 , in the range of approximately 0.01 inches to 0.07 inches, and more preferably about 0.03 inches. The detail of a portion of the continuous circuit trace **606** is shown in FIG. 8B to show its relative thickness. Typically, the continuous circuit trace **606** is very thin and has a thickness T_3 , usually in the range of approximately 0.25 ounces/meter² (oz/m²) to 1.0 (oz/m²). Any gaps **805** (FIG. 8B) between the first substrate **603** and the third substrate **633** are filled with a standard thermally stable adhesive, which is well known in the manufacturing of PCBs. The continuous circuit trace **606** is substantially uniform along its entire path due to the elimination of interconnects between the circulator assembly **500** and the RF component **609**. The uniformity of the circuit trace **606** leads to the improved heat distribution along the continuous circuit trace **606**, which allows the stripline circuit **600** to handle higher power signals.

[0085] FIG. 10 is an illustration of another exemplary embodiment of a stripline circuit assembly **1000** containing a circulator assembly integrated with at least on other

RF component in accordance with some embodiments of the present invention. The stripline circuit **1000** is identical to the stripline circuit **600** shown in FIG. 6, except the yoke **654** has been eliminated from the circulator assembly **500**.

[0086] Although the stripline circuit has been shown to have a single circulator element integrated into the circuit trace **606**, those skilled in the art will appreciate that the stripline circuit assembly **600** can contain any number of circulator assemblies integrated within the circuit trace. FIG. 11 in an illustration of another exemplary stripline circuit **1100** that contains two circulator assemblies **1110** and **1115** that have a circulator circuit trace **1120** and **1125**, respectively connected in series, which are integrated within a continuous circuit trace **1115** containing at least one other electronic element **1030** in accordance with the present invention. As seen by the figure, the circulator circuit traces **1120** and **1125** are connected through a common circuit trace **1115** to the RF component **1130** without using interconnects. Furthermore, the circulator assemblies **1105** and **1110** share a common ground plane with the RF component **1130**, where the common ground plane **1130** extending over the entire continuous circuit trace **1115**.

[0087] FIG. 12 is a flow diagram illustrating a process **1200** for manufacturing the circulator assembly **100** in accordance with some embodiment of the present invention. The process **1200** allows the large scale manufacturing of highly reliable and inexpensive circulator assemblies **100** by using readily available low cost materials and eliminating the need for manually assembling the microstrip circulator assemblies **100**. Although the process **1200** is described for manufacturing a microstrip circulator assembly **100**, those skilled in the art will appreciate that the process **1200** is also applicable for manufacturing a stripline circulator **500** (FIG. 5) in accordance the present invention. Furthermore, those skilled in the art will appreciate that the method **1200** is equally applicable for manufacturing the microstrip circuits **200** (FIG. 2) and stripline circuits **600** (FIG. 6) that include integrated circulator assemblies.

[0088] Process **1200** begins at **1205**, in which a circuit trace **110** is created on a first substrate **105**, wherein the continuous circuit trace contains least one circulator circuit trace **110**. The first substrate **105** is made from a non-ferrous dielectric material, such as dielectric materials used for manufacturing PCBs. For instance, the first substrate **105** maybe made from PTFE, or a PTFE combined with glass, glass fibers, resin, ceramics, and the like. Typically, the first substrate **105** that carries the continuous circuit trace **110** is relatively thin. For instance, in an exemplary embodiment, the first substrate **105** has a thickness, T_1 , in the range of approximately 0.003 inches and 0.007 inches and more preferably of approximately 0.005 inches.

[0089] The continuous circuit trace **110** may be deposited on the first substrate **105** using any conventional method known in the art. For example, the continuous

circuit trace **110** may be deposited on the first substrate **105** by physical vapor deposition, also known as sputtering, chemical vapor deposition, electro deposition, lamination, and the like. Alternatively, one side of the first substrate **105** can contain cladding one side and the continuous circuit trace **110** can be etched using standard techniques. Designing the continuous circuit trace **110** provides several advantages over the circulator components used in conventional circulators. For instance, since the continuous circuit trace **110** resides on non-ferrous dielectric substrate, the continuous trace **110** of the circulator assembly **100** can be manufactured using conventional PCB techniques. Second, the non-ferrous dielectric is more durable than the ferrous substrates used in conventional circulators. Conventional ferrous substrates are typically made from ferrite or pressed from metallic powder, which tends to be brittle, easily broken, limited in size, expensive, and usually is not compatible with other RF components. Therefore, the use of materials commonly used for PCBs for the first substrate makes the circulator assembly **100** more robust than conventional circulators and therefore, is conducive to automated manufacturing.

[0090] At **1210**, an aperture **125** is cut into the second substrate **120** at a position that will allow it to be proximately aligned with the circuit trace **110** when the second substrate **120** is bonded to the first substrate **105**. The aperture **125** is bored completely through the second substrate **120** and the cladding **130**. This "through-boring" process has several advantages over existing circulators. The aperture **125** avoids the problems associated with milling a recess in the substrate to small and precise tolerances, which are difficult to achieve, problematic, and expensive to manufacture.

[0091] At **1215**, a stack is created by placing a second substrate **120** comprising a cladding layer **130** on at least one side below the first substrate **105**. An adhesive material, such as bond film that is suitable for RF circuits is placed between the first substrate **105** and the second substrate **120**. The second substrate **120** is also constructed from a non-ferrous dielectric material used for making PCBs. Typically, the second substrate **120** is made from the same material and has the same dielectric constant as the first substrate **105**. However, those skilled in the art will appreciate that the second substrate **120** may be made from a different material and have a different dielectric constant than the first substrate **105**. Furthermore, the second substrate **120** is made to have thickness, T_2 that is greater than the thickness of the first substrate **105**. In one exemplary embodiment, the thickness T_2 of the second substrate **120** is between approximately 0.01 inches and 0.07 inches, and more preferably about 0.03 inches. At this time the stack, which consists of the first substrate **105** and the second substrate **120** may be bonded tighter to form a circuit board laminate. Alternatively, the bonding process may be performed after all of the elements have been aligned and assembled.

[0092] The second substrate **120** contains an aperture

125 that is proximately aligned with the circuit trace **110** on the first substrate **105**. The aperture **125** is typically circular in shape and has a diameter that encompasses the entire central resonator portion of the circulator circuit trace **110**. A circular-shaped aperture **125** is preferred over other shapes, as a circular-shaped aperture **125** is easier and less expensive to manufacture than other shaped aperture. Although a circular-shaped aperture **125** is described as being more desirable, the aperture **125** may have any polygonal shape, such as a triangle, a square, a pentagon, a hexagon, a heptagon, an octagon, and the like.

[0093] At **1220**, a ferrite element **135** is placed within the aperture **125** in the second substrate **120**. The ferrite element **135** is typically formed in the shape of a disc, and has a thickness that is substantially equal to the thickness, T_2 , of the second substrate **120**. This allows the top of the ferrite element **135** to be coplanar with the top of the second substrate **120** and the bottom of the ferrite element **135** to be coplanar with the cladding **130** on the bottom of the second substrate **120**. This prevents any discontinuities from forming within the circuit trace **110** due to unwanted flexing. The use of pre-drilled apertures **125** in the second substrate **120**, which are proximately aligned with the circulator component **115**, allows the ferrite element **135** to be "self aligning." Thus, the ferrite element **135** can be placed in the correct relationship relative to the circulator element **115** without the use of special alignment jigs or structures. Furthermore, since the alignment jigs are not longer required, the process of inserting the ferrite elements **135** can be automated using standard PCB manufacturing techniques.

[0094] At **1225**, a conductive material **140** is placed across the aperture **125** and over the ferrite element **135** so that it is in electrical contact with the cladding layer **130**. The conductive material **140**, by being in electrical contact with the cladding **130** completes the ground plane for the circulator **100**. Normally, the conductive layer **140** has a thickness in the range of approximately 0.003 inches and 0.007 inches. The thin conductive material provides a substantially planar ground plane, which is continuous across the aperture **125**. The conductive layer **140** is typically made from a conductive tape, which not only completes the ground plane, but also supports the ferrite element **135** in the aperture **125** and is thermally stable over the operating temperatures of the circulator **100**. Alternatively, the conductive material **140** may be made of a conductive adhesive, such as a two-part epoxy, and the like.

[0095] Next, at **1230**, a magnet **145** is placed beneath the conductive layer **140** and in proximal alignment with the ferrite element **135**. The magnet **145** is typically a permanent magnet and is bonded to the ferrite element with a conductive material **140**. Typically, the conductive material is the same conductive tape used for the conductive material **140** disposed between the magnet **145** and the ferrite disc **135**. The conductive material **140** may also be made from a conductive adhesive, and the like.

[0096] At 1235 a yoke 155 is placed below the magnet 145. A conductive material 140 is also disposed between the magnet 145 and the yoke 155 to allow the yoke 155 to be bonded to the magnet 145.

[0097] Finally, at 1240, the stack is laminated in a one-step process, also known as co-bonding. This co-bonding process of manufacturing can be applied to manufacturing at least one circulator with at least one RF component that share a common, continuous circuit trace, in which the various assembly components are laminated or joined together, in a single step, commonly referred to "co-bonded" or "co-bonding."

[0098] The method 1200 for manufacturing the circulator assembly 100 provides several advantages over existing methods. First, since the circulator assembly 100 uses standard dielectric materials commonly used in PCBs for the substrates, rather than ferrite substrates, the cost of manufacturing the circulator assembly is greatly reduced. Second, since the ferrite elements 135 are self aligning, the circulator assembly 100 can be assembled without the use of alignment jigs. Therefore, the circulator assembly 100 can be assembled using standard automated PCB manufacturing techniques. Furthermore, the method 1200 supports panel production practices, which allows large scale production of the circulator assemblies, which greatly reduces the overall cost of manufacturing the circulator assembly 100.

[0099] Other alternative embodiments will become apparent to those skilled in the art to which an exemplary embodiment pertains without departing from its spirit and scope. Accordingly, the scope of the present invention is defined by the appended claims rather than the foregoing description.

Claims

1. A device comprising:

a first substrate (105); and
a continuous circuit trace (110) printed on the first substrate (105), the continuous circuit trace (110) comprising a first circulator pattern (115) and a first external component;
wherein the circulator pattern (115) comprises a central conductor element (115A) and three or more connection ports (115B).

2. The device of Claim 1, wherein the circulator pattern (115) further comprises a discontinuous ring disposed around the central conductor element (115A) to improve circulator loading.

3. The device of Claim 1, wherein the central conductor element (115A) comprises one or more slots, one or more tabs, or both to improve circulator loading.

4. The device of Claim 1, wherein the first external com-

ponent comprises an RF electronic component.

5. The device of Claim 4, wherein the RF electronic component comprises one of a second circulator pattern, a filter, an antenna, a power divider, and a power combiner.

6. The device of Claim 1, further comprising a second external component in a continuous circuit trace (110) with the first circulator pattern (115) and the first external component.

7. The device of Claim 1, further comprising:

a second substrate (120) disposed beneath the first substrate (105), comprising:

a cladding (130) on a first side;
an aperture (125); and
a ferrite element (135) inserted into the aperture (125) and proximately aligned with the central conductor element (115A);

a conductive material (140) disposed over the ferrite element (135) and in electrical contact with the cladding (130) to form a continuous ground plane; and
a first magnet (145) disposed below the ferrite element (135).

8. A method for creating an integrated circuit comprising:

providing a first substrate (105);
printing a continuous circuit on the first side of the first substrate (105) comprising a first circulator pattern (115) and a first external component.

9. The method of Claim 8, further comprising:

providing a second substrate (120) comprising a metalized layer on at least one side;
creating a first aperture (125) in the second substrate (120) sized and shaped to accept a first ferrite disk (135);
inserting the first ferrite disk (135) into the aperture (125);
placing a conductive material (140) over the first ferrite disk (135) such that the conductive material (140) is in electrical contact with the first ferrite disk (135) and the metalized layer on the second substrate (120) to form a continuous ground plane;
placing a first magnet (145) below the first ferrite disk (135); and
bonding the second substrate (120) to the bottom of the first substrate (105).

10. The method of Claim 9, further comprising:

providing a third substrate (633) comprising a metalized layer on at least one side;
creating a second aperture (639) in the third substrate (633) sized and shaped to accept a second ferrite disk (642);
inserting the second ferrite disk (642) into the aperture (639);
placing a conductive material (645) over the ferrite disk (642) such that the conductive material (645) is in electrical contact with the first ferrite disk (621) and the metalized layer on the third substrate (633) to form a continuous ground plane;
placing a second magnet (648) above the second ferrite disk (642); and
bonding the third substrate (633) to the top of the first substrate (105).

20

25

30

35

40

45

50

55

FIG. 1A
Prior Art

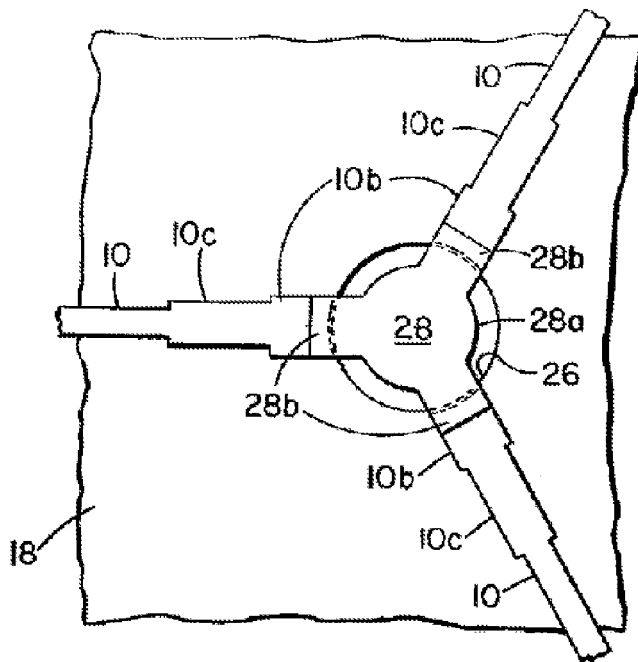
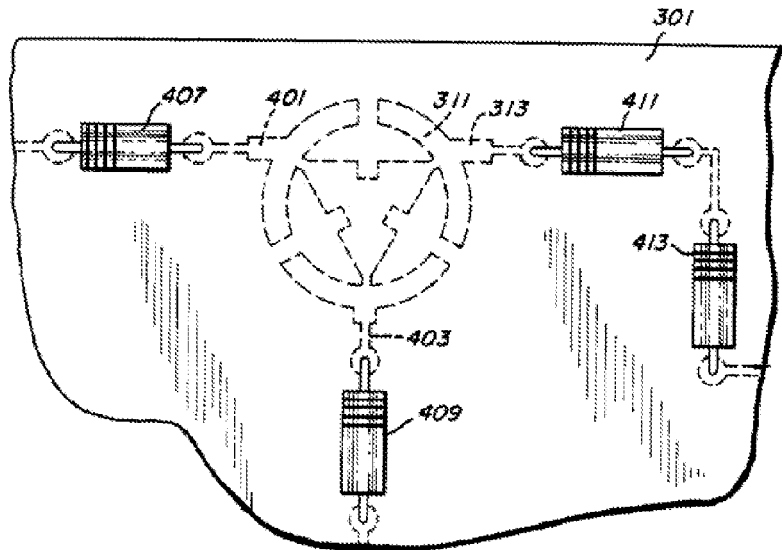


FIG. 1B
Prior Art

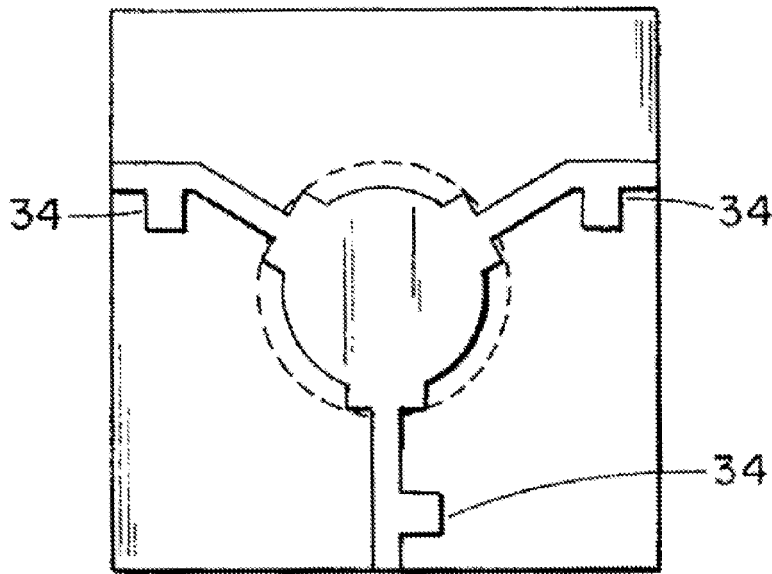


FIG. 1C
Prior Art

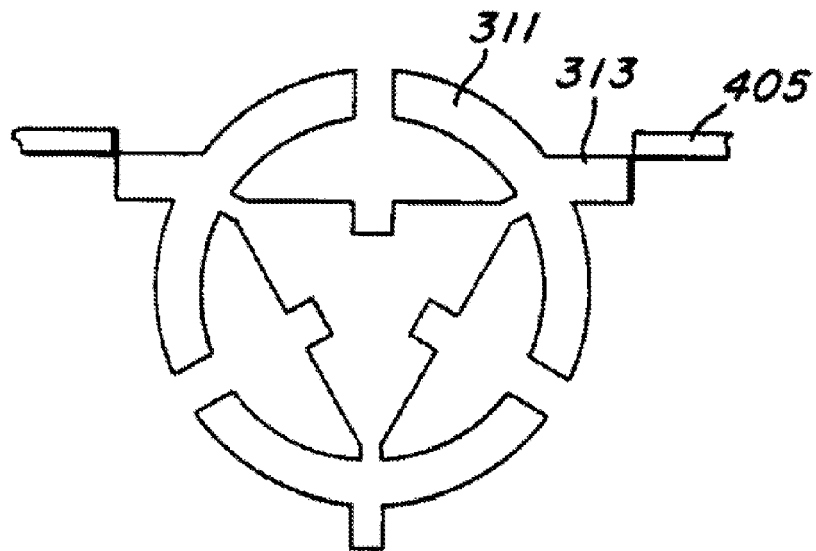


FIG. 1D
Prior Art

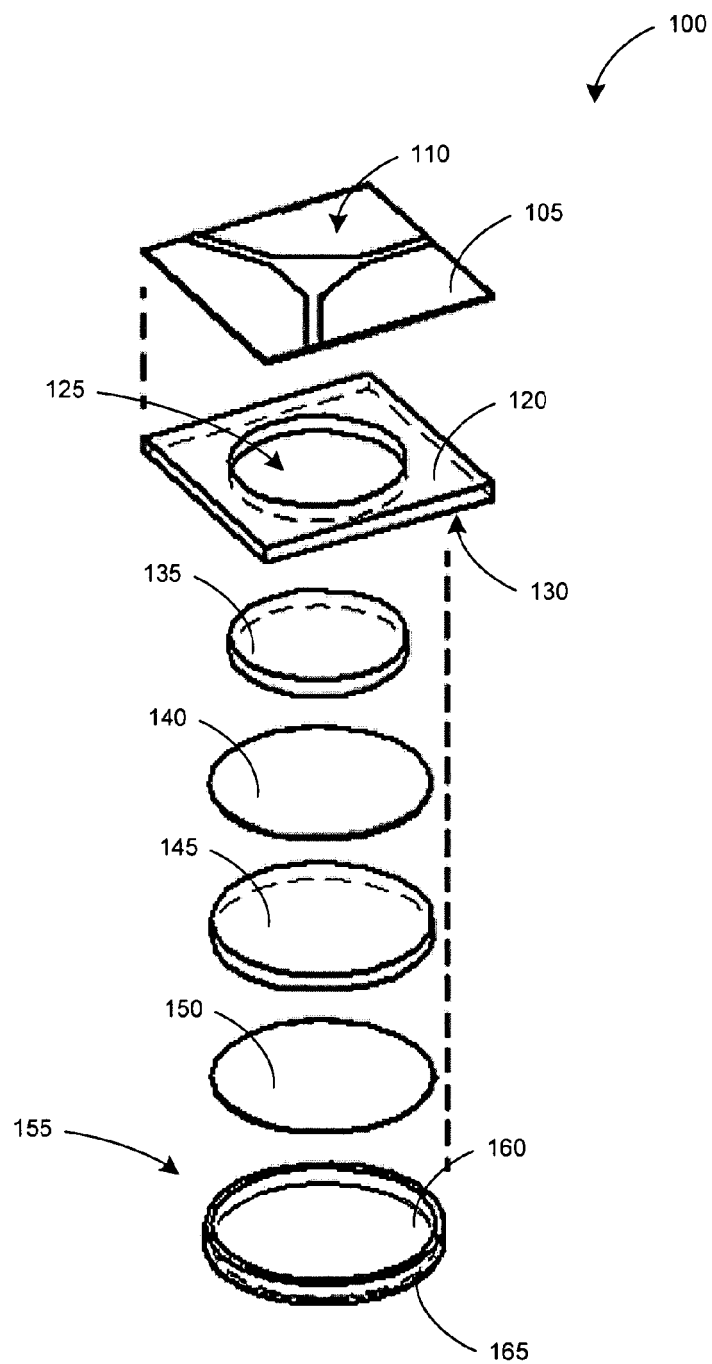


FIG. 2A

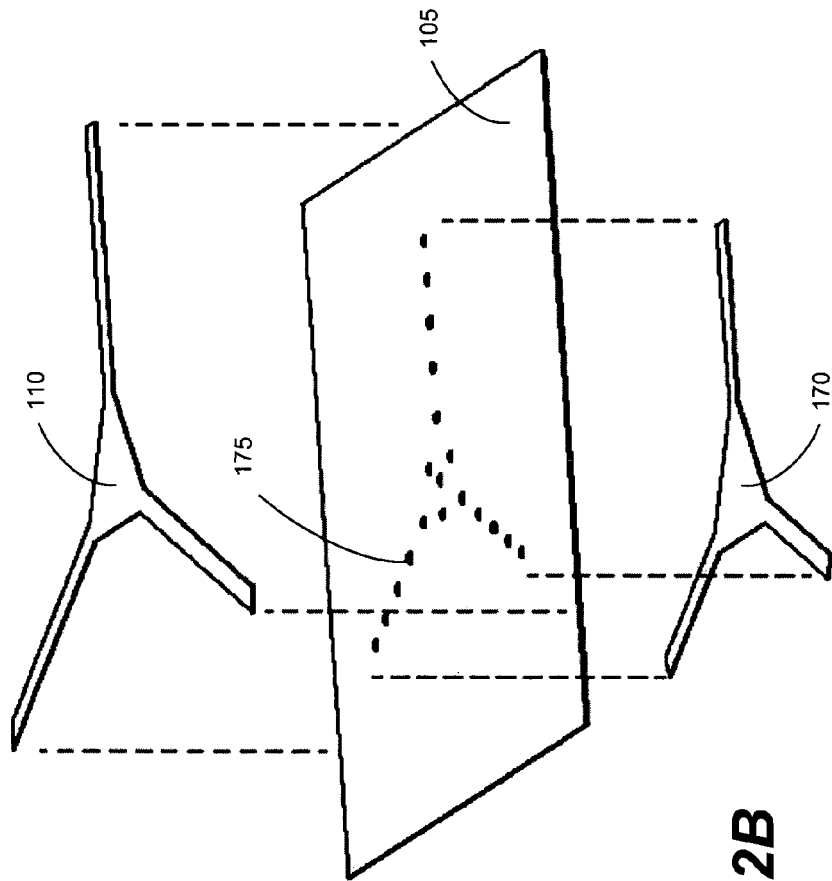


FIG. 2B

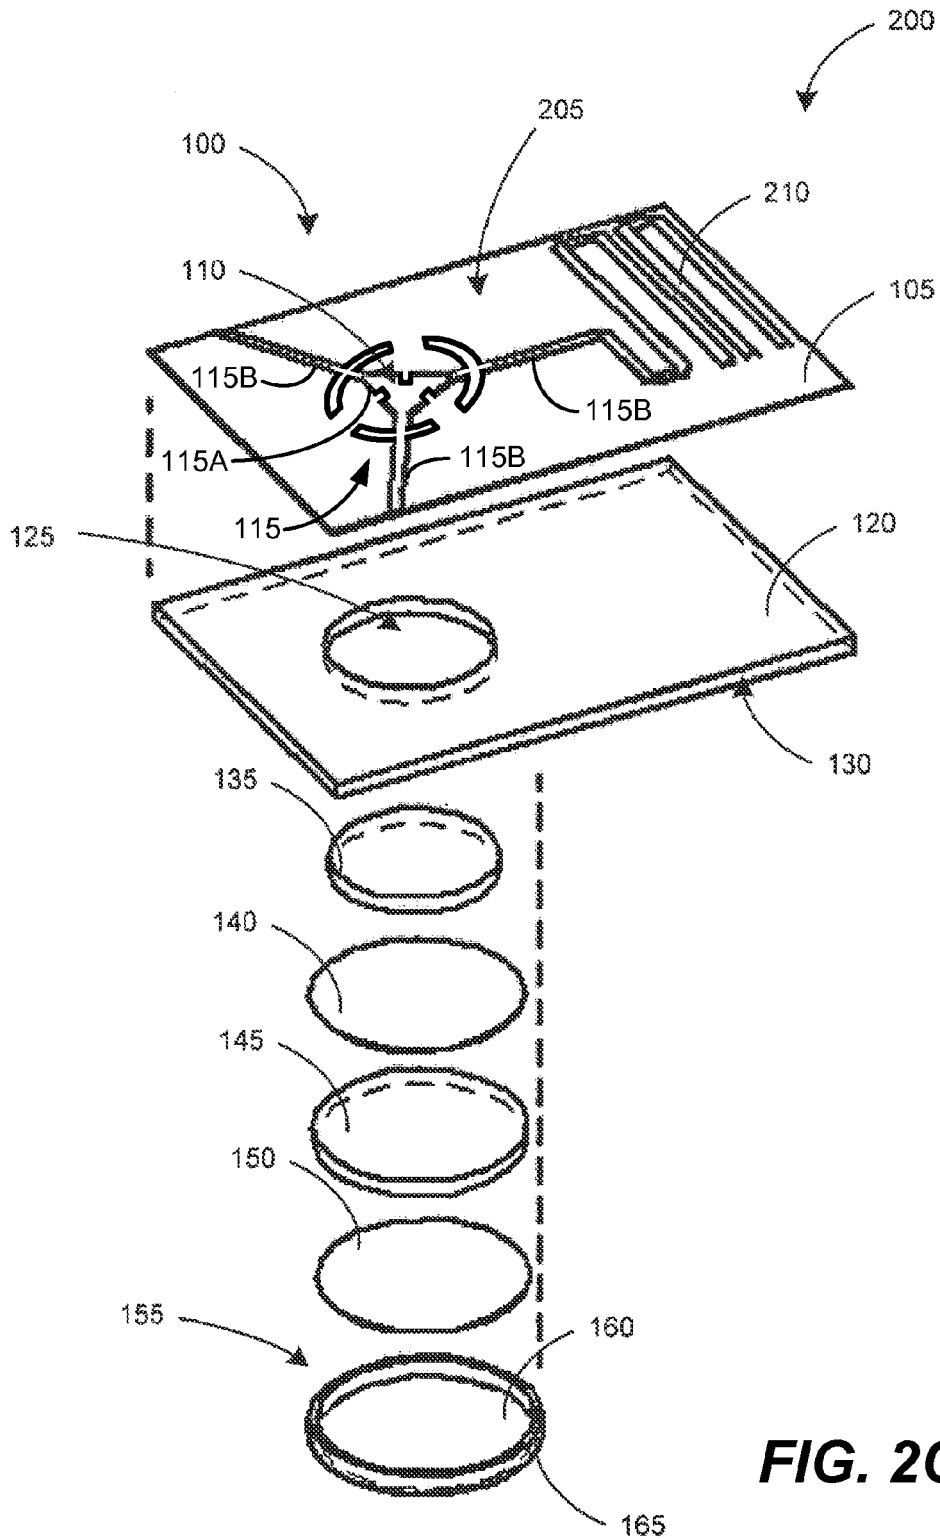


FIG. 2C

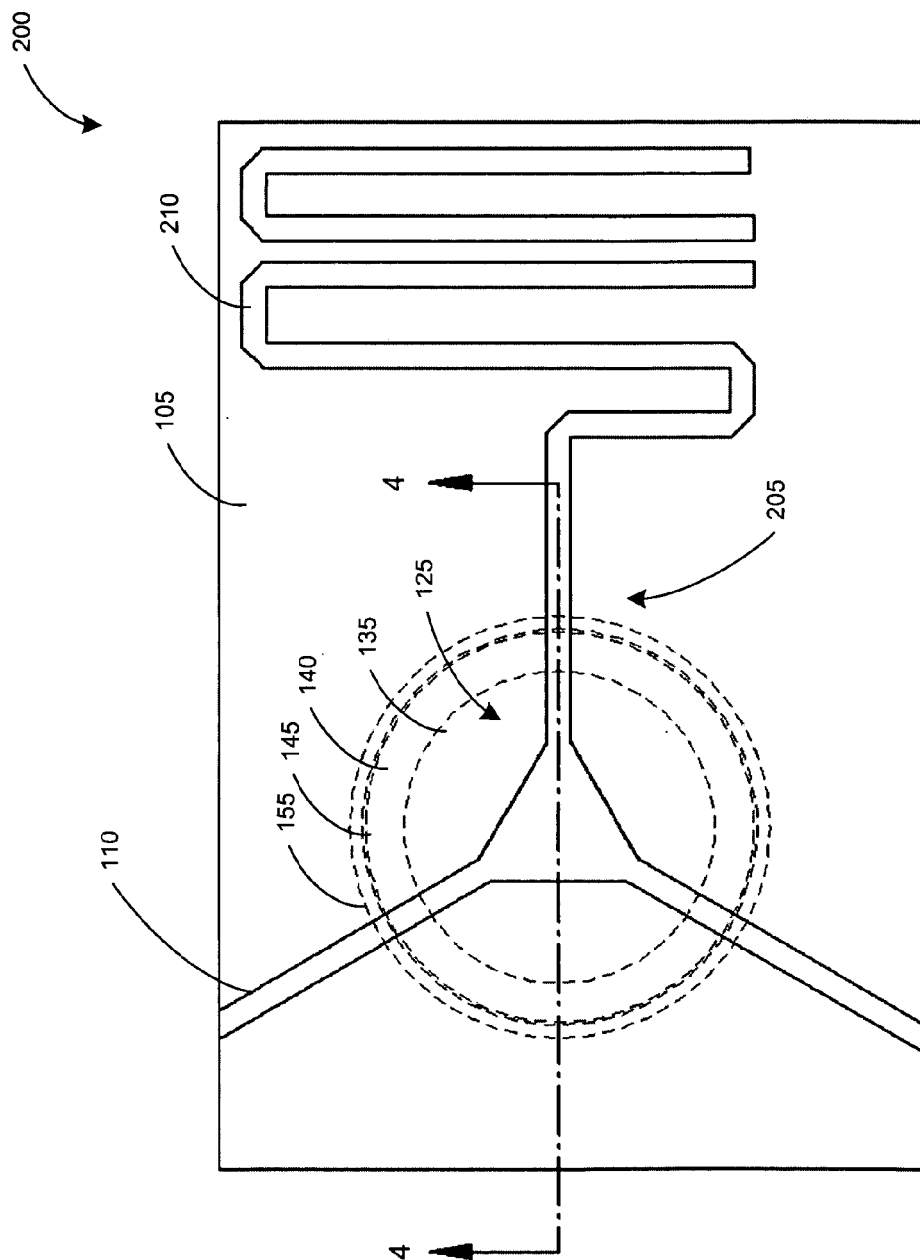
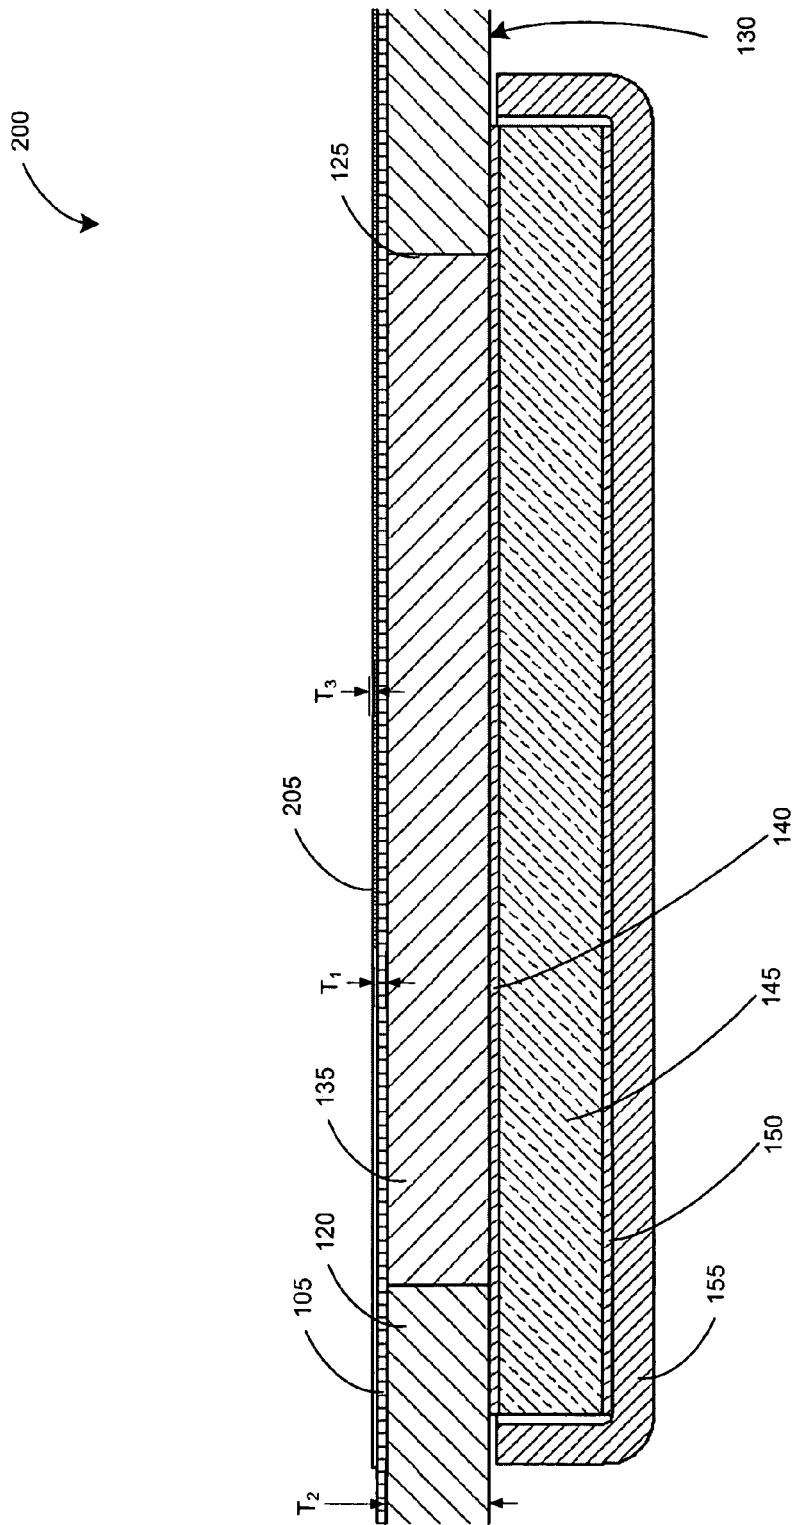


FIG. 3

**FIG. 4**

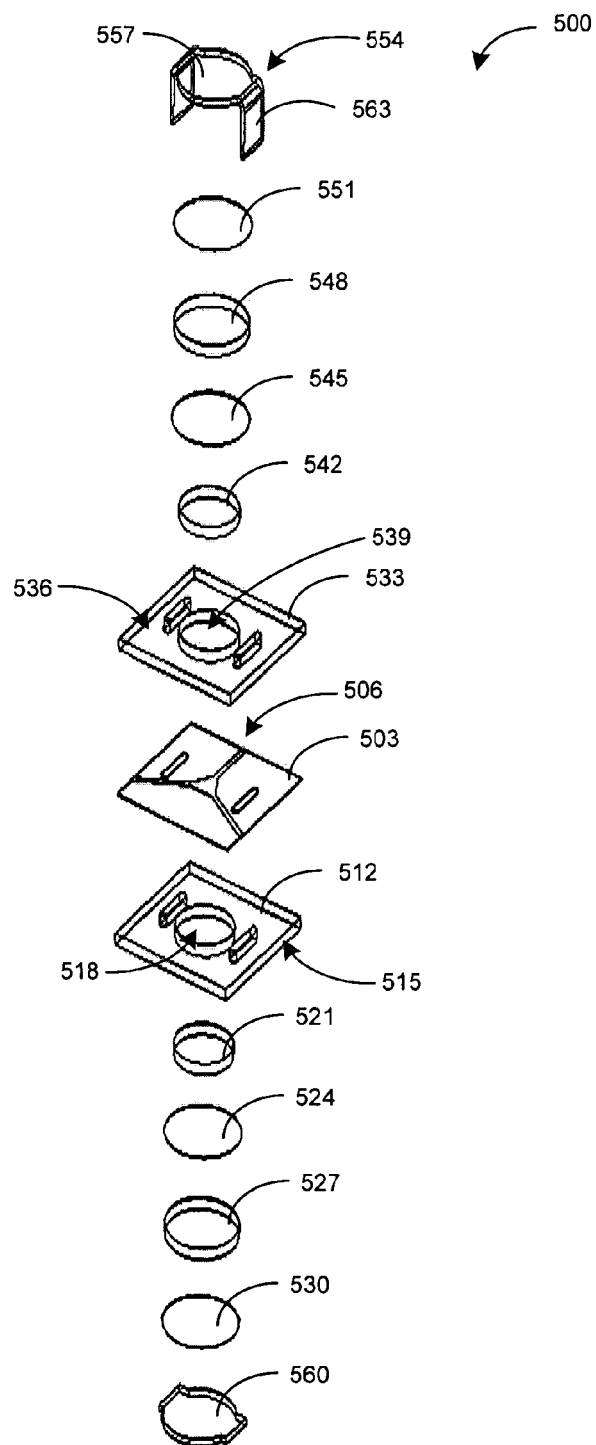


FIG. 5

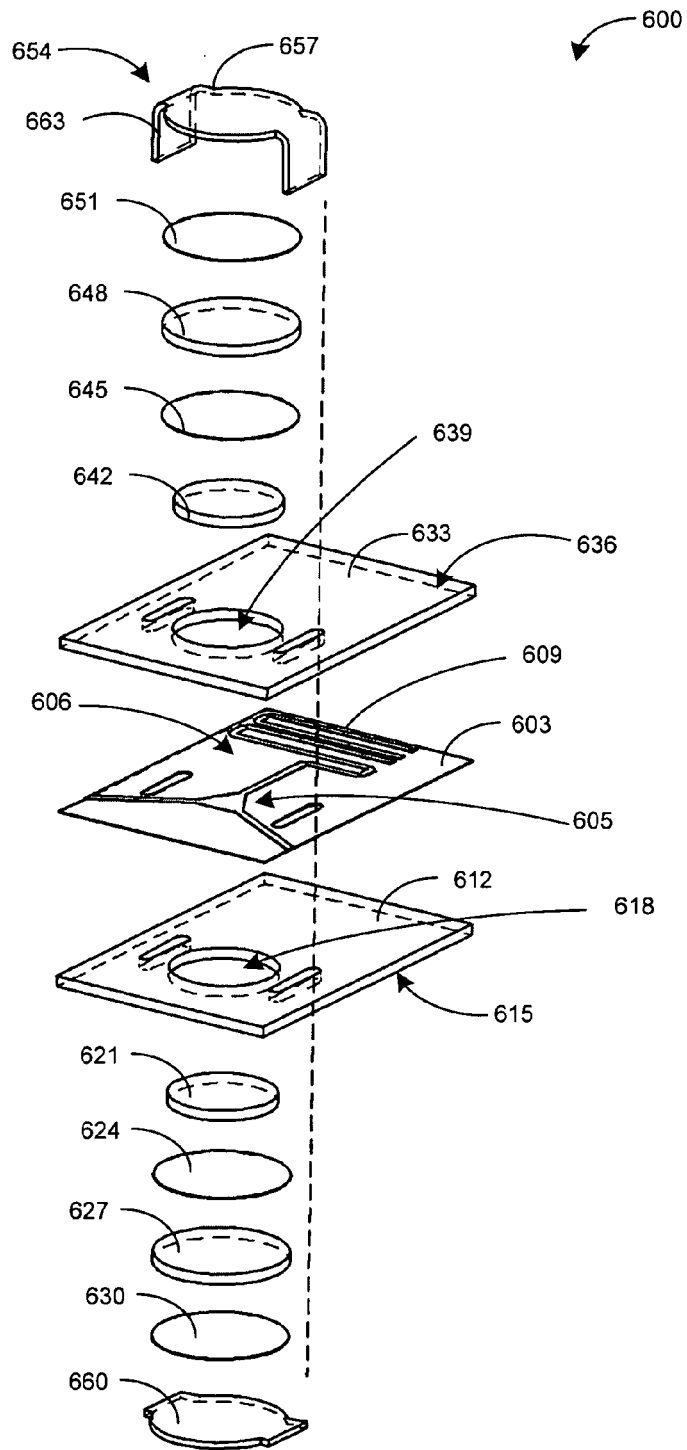


FIG. 6

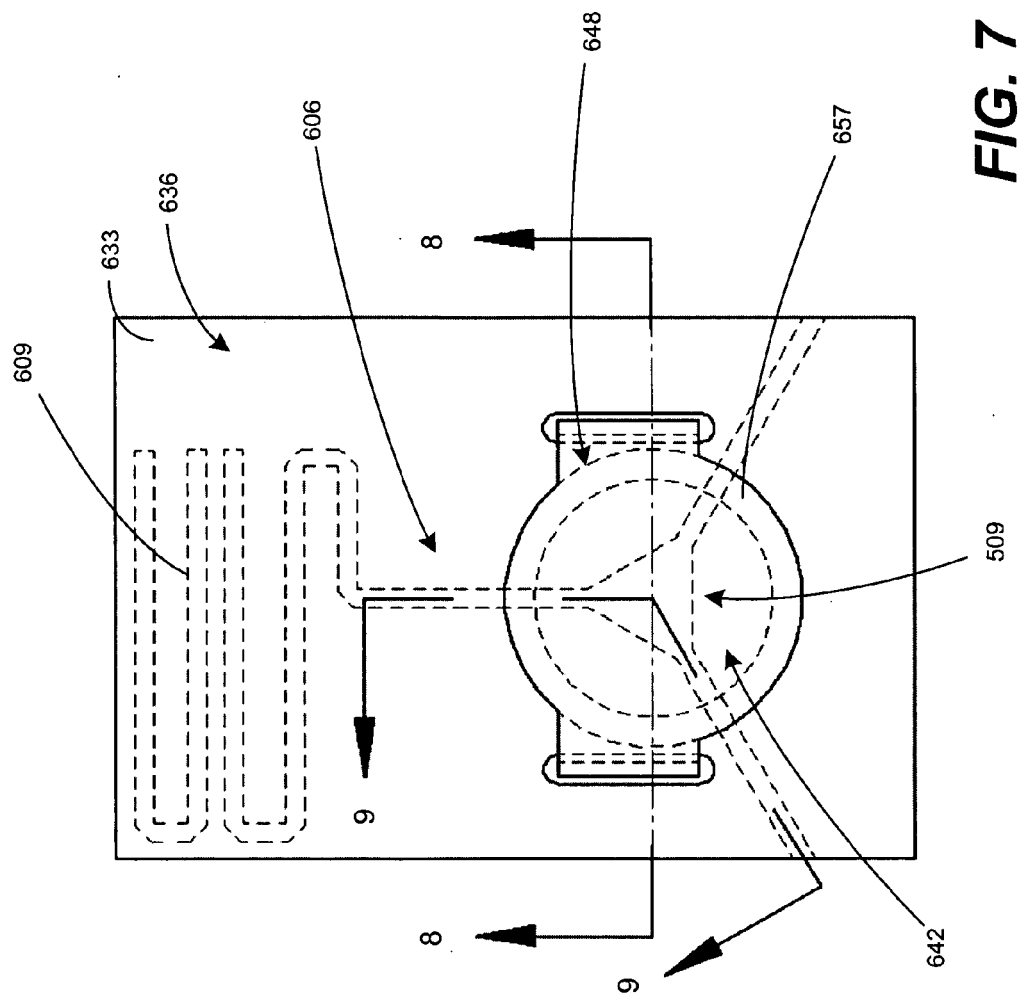


FIG. 7

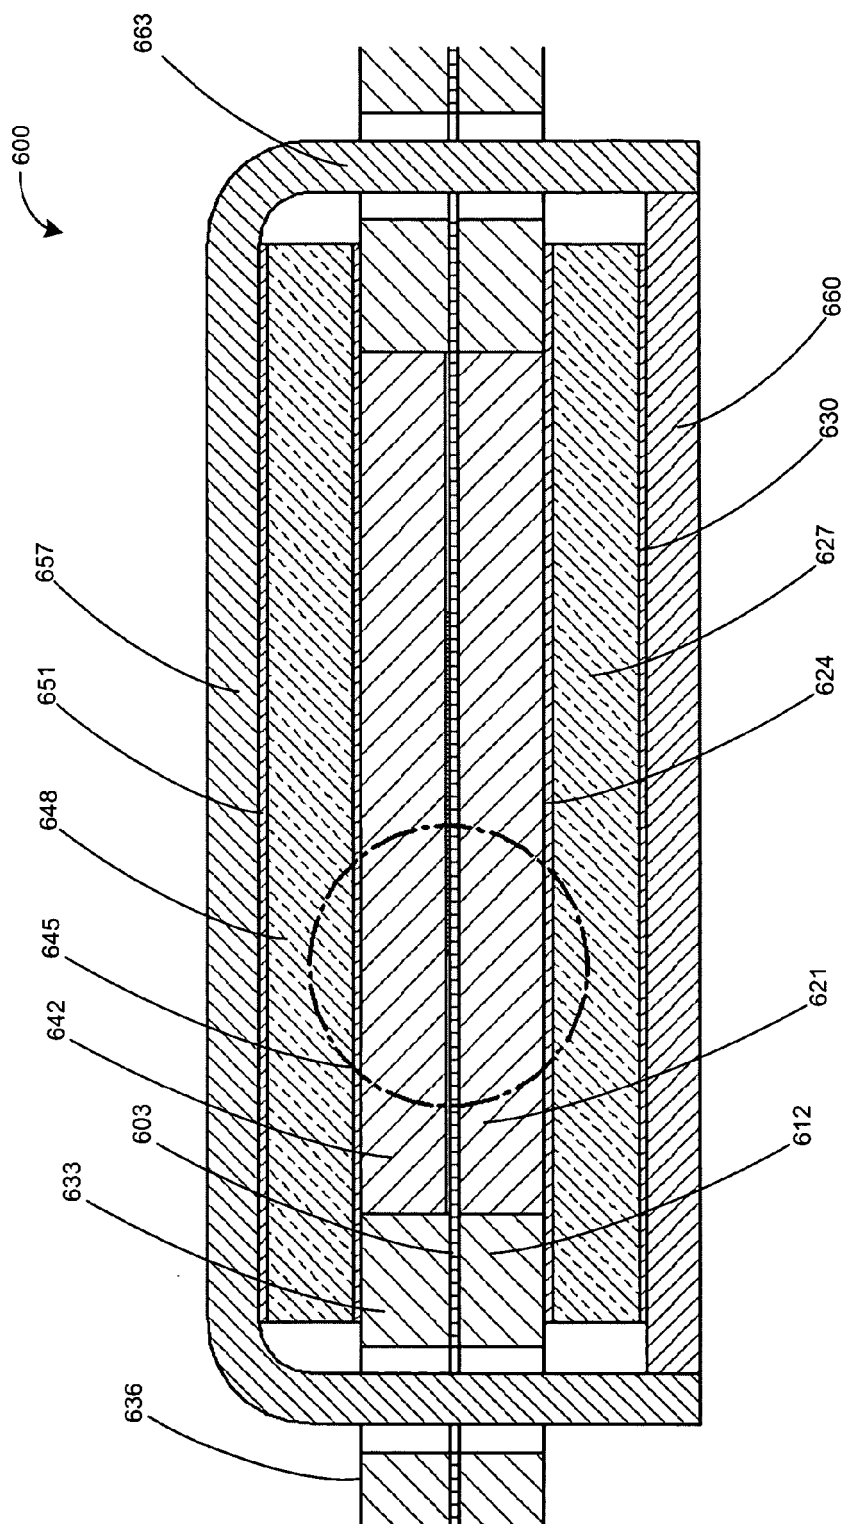


FIG. 8A

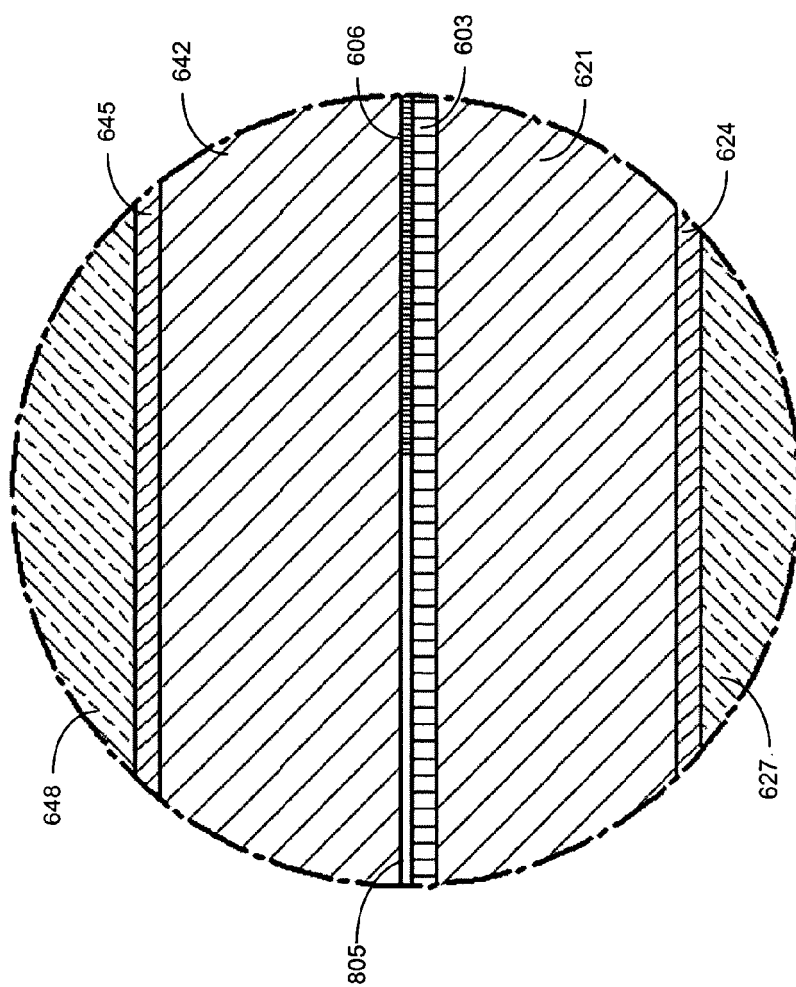


FIG. 8B

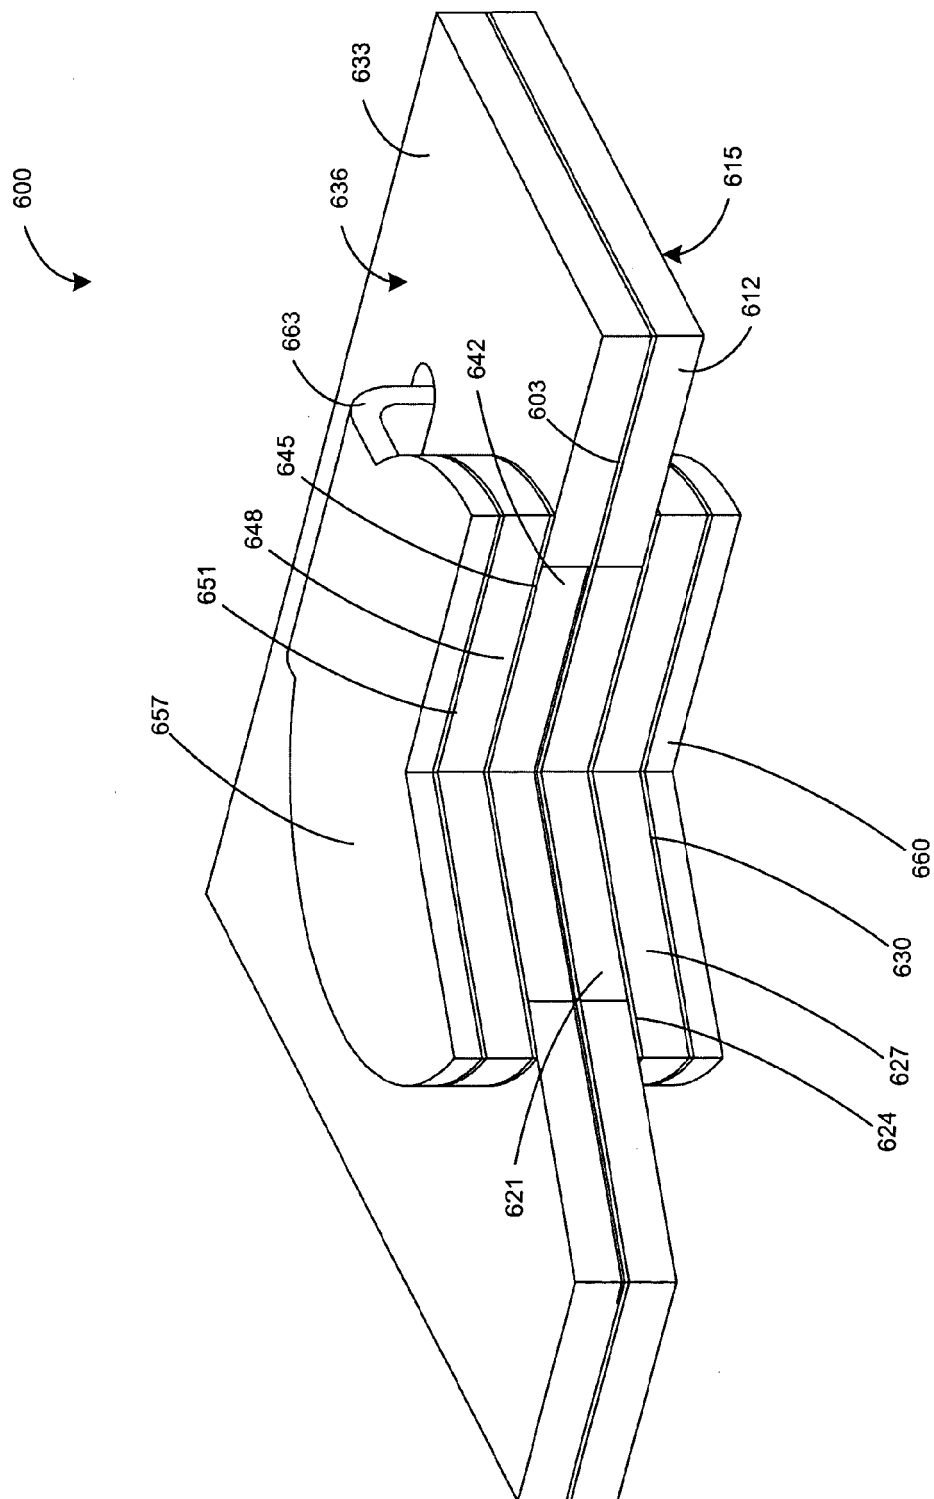


FIG. 9

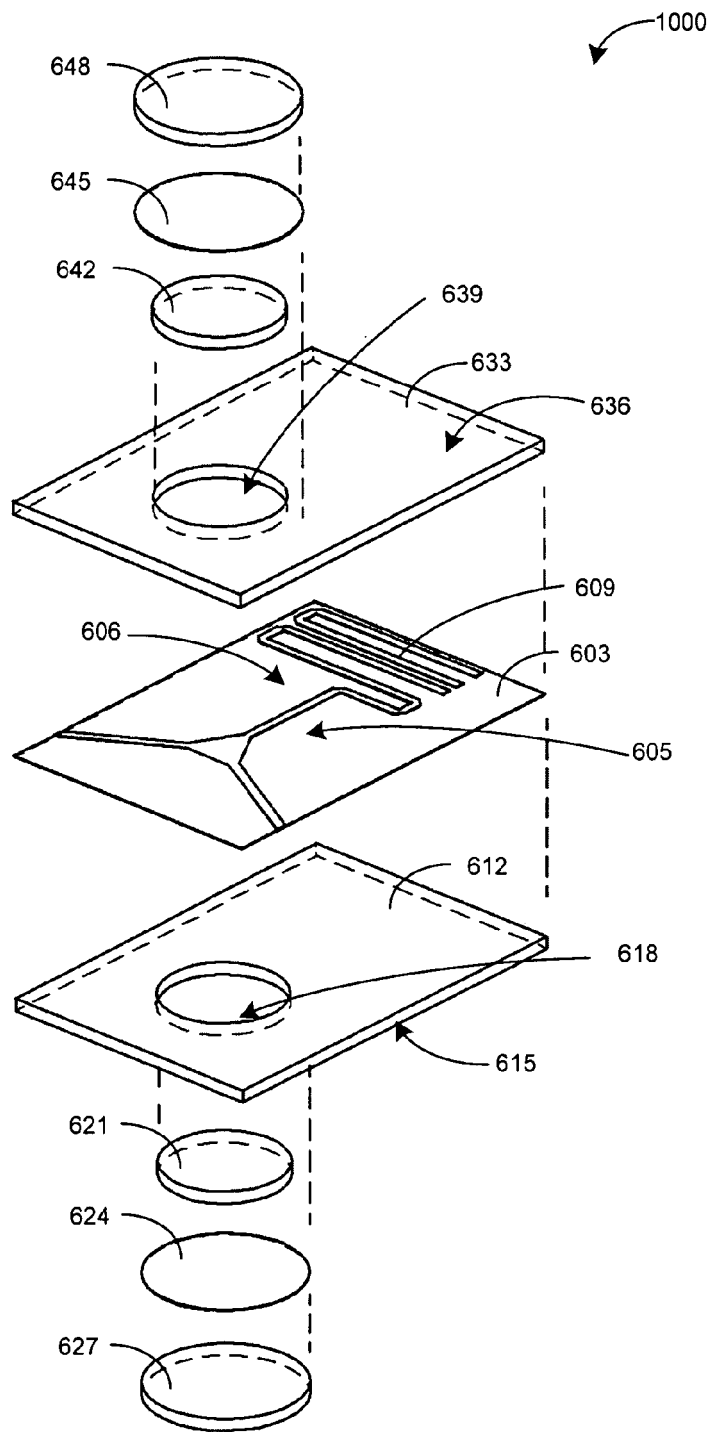


FIG. 10


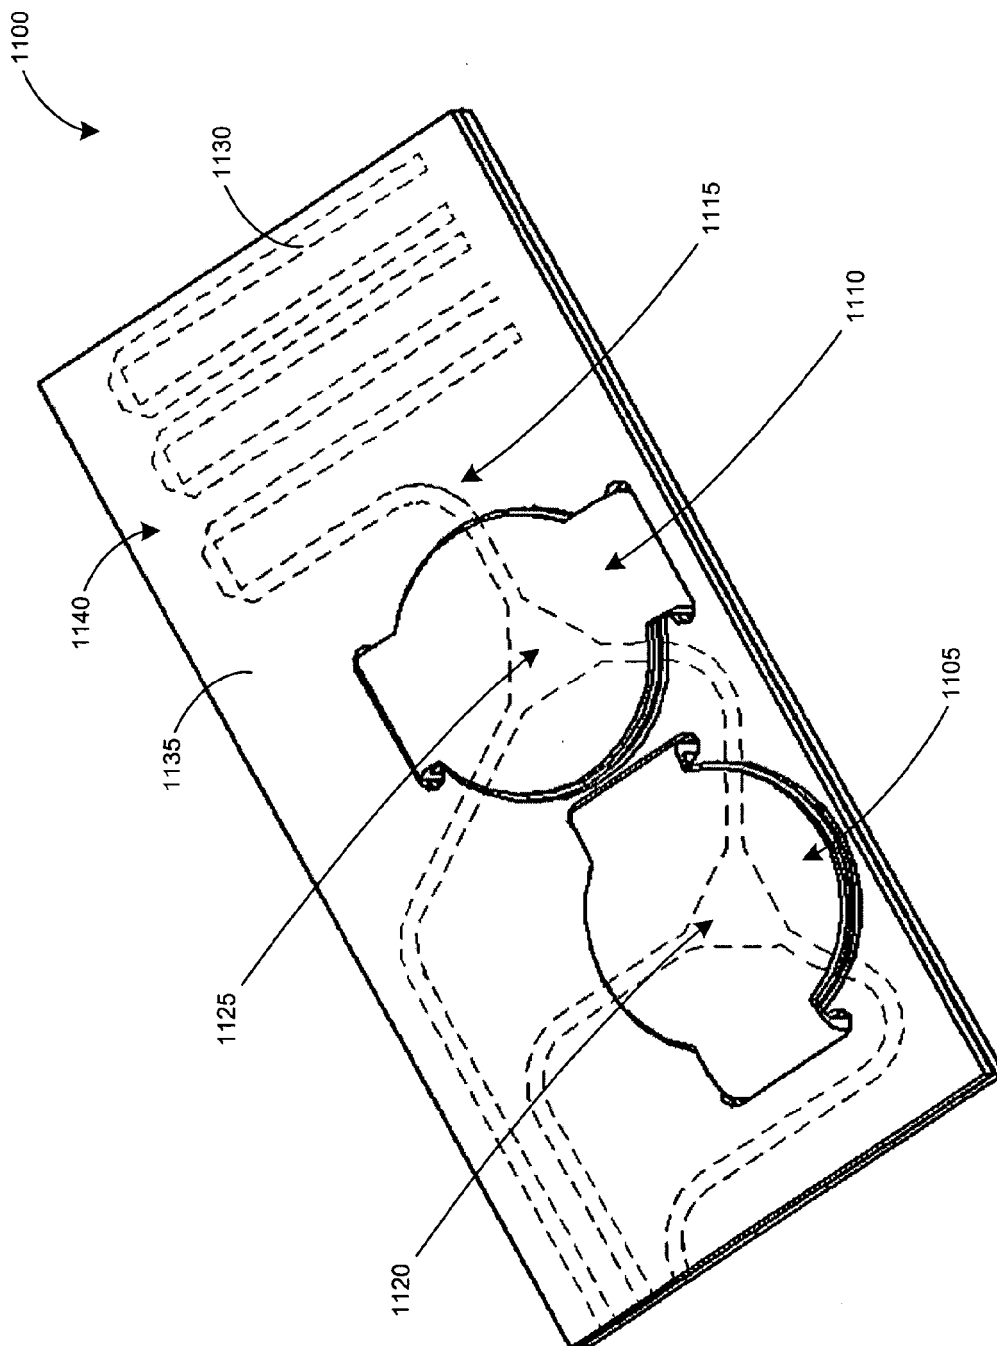


FIG. 11



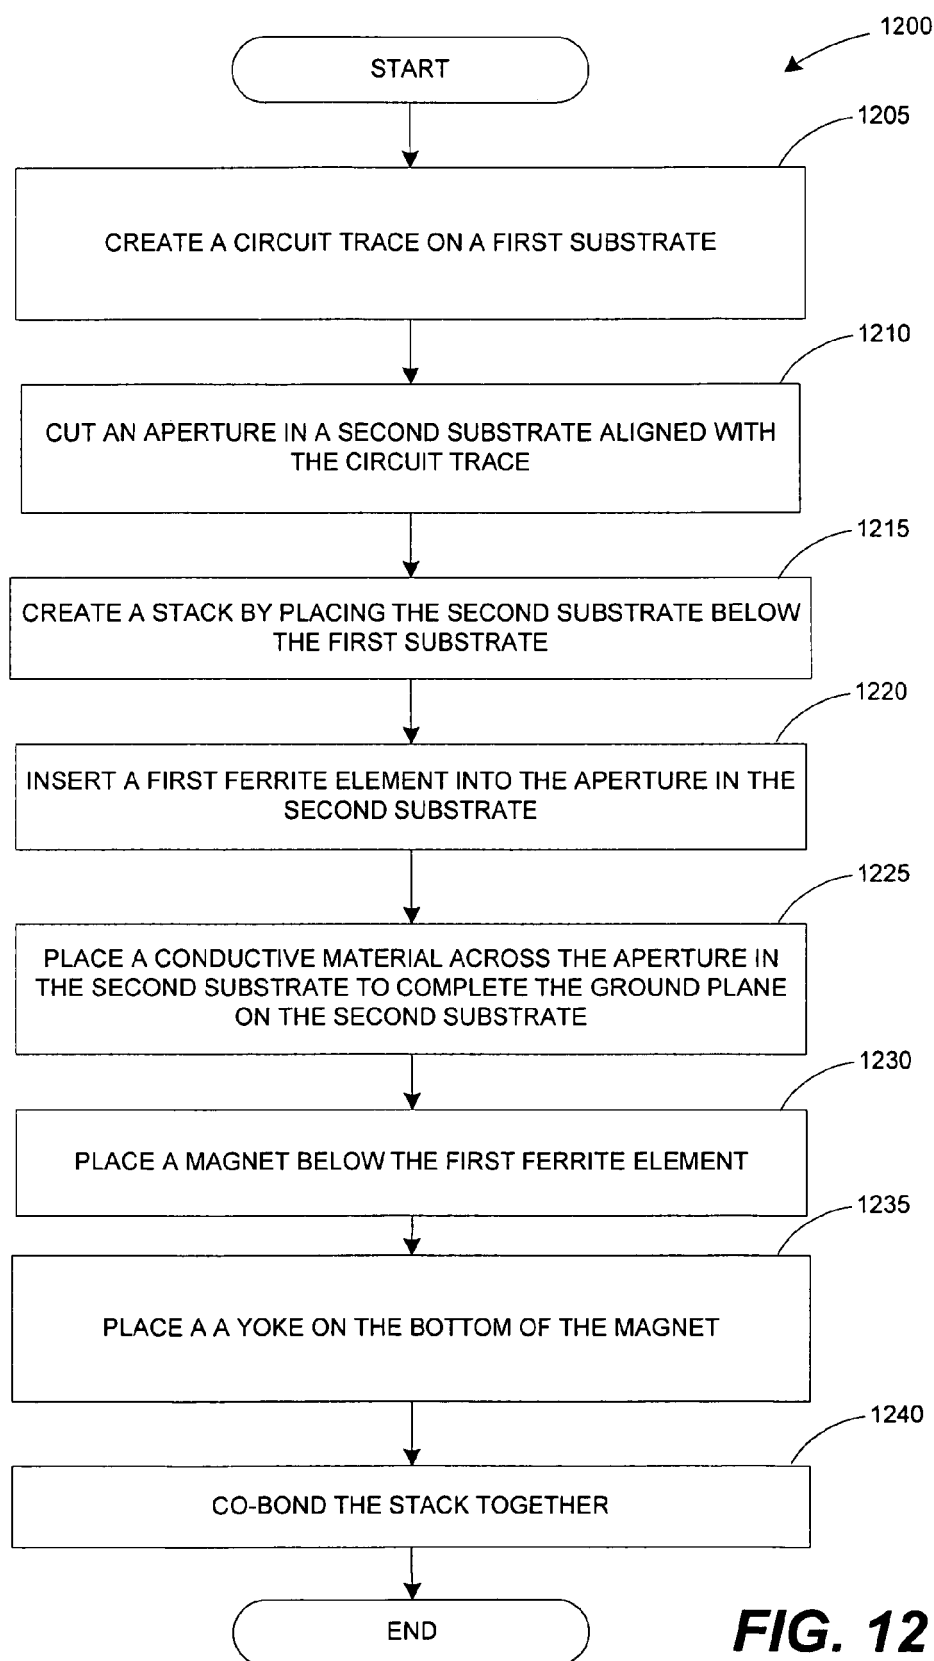

EUROPEAN SEARCH REPORT

Application Number
EP 12 15 4357

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2006/139118 A1 (VAUGHN TODD [US] ET AL) 29 June 2006 (2006-06-29)	1,4-10	INV. H01P1/387
Y	* the whole document *	2,3	

X	WO 2006/066254 A1 (EMS TECHNOLOGIES INC [US]; VAUGHN JOHN [US]; POPELKA DAVID J [US]; VOS) 22 June 2006 (2006-06-22)	1,4-10	
Y	* the whole document *	2,3	

Y	EP 1 816 702 A1 (HITACHI METALS LTD [JP]) 8 August 2007 (2007-08-08) * paragraph [0012] - paragraph [0020]; figures 1-3 *	2,3	

			TECHNICAL FIELDS SEARCHED (IPC)
			H01P
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 15 May 2012	Examiner Pastor Jiménez, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03.82 (F04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 15 4357

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-05-2012

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2006139118	A1	29-06-2006	NONE	

WO 2006066254	A1	22-06-2006	NONE	

EP 1816702	A1	08-08-2007	CN 101051703 A	10-10-2007
			EP 1816702 A1	08-08-2007
			JP 4817050 B2	16-11-2011
			JP 2007214608 A	23-08-2007
			US 2007182504 A1	09-08-2007

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 314160 A [0001]
- US 63694504 P [0001]
- US 4761621 A, Kane [0005]
- US 3334317 A, Andre [0006]
- US 3854106 A, Tresselt [0048]