



(11) **EP 2 899 897 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
26.07.2017 Bulletin 2017/30

(51) Int Cl.:
H04B 7/04 ^(2017.01) **H04B 7/0426** ^(2017.01)
H04B 7/0456 ^(2017.01) **H04B 7/06** ^(2006.01)
H04L 27/26 ^(2006.01) **H04L 5/00** ^(2006.01)
H04L 25/03 ^(2006.01)

(21) Application number: **15159987.5**

(22) Date of filing: **12.02.2008**

(54) **Methods and systems for combined precoding and cyclic delay diversity**

Verfahren und Systeme für kombinierte Vorcodierung und zyklische Verzögerungsdiversität

Procédés et systèmes pour précodage combiné avec diversité de retard cyclique

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR

(30) Priority: **13.02.2007 SE 0700367**

(43) Date of publication of application:
29.07.2015 Bulletin 2015/31

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
08712791.6 / 2 119 038

(73) Proprietor: **Telefonaktiebolaget LM Ericsson (publ)**
164 83 Stockholm (SE)

(72) Inventors:
• **Jöngren, George**
SE-174 62 Sundbyberg (SE)
• **Göransson, Bo**
SE-191 38 Sollentuna (SE)

(74) Representative: **Ericsson Patent Development**
Torshamnsgatan 21-23
164 80 Stockholm (SE)

(56) References cited:
WO-A2-2007/139305

- **QUALCOMM EUROPE: "CDD Based Precoding for DL MIMO - R1-070655", 3GPP DRAFT; 3GPP TSG RAN WG1 MEETING #48, vol. RAN WG1, 6 February 2007 (2007-02-06), XP050104691, F-06921 SOPHIA-ANTIPOLIS, FRANCE**
- **ERICSSON: "High Delay CDD in Rank Adapted Spatial Multiplexing Mode for LTE DL - R1-072461", 3GPP DRAFT; 3GPP TSG RAN WG1 MEETING #49, vol. RAN WG1, 2 May 2007 (2007-05-02), XP050106177, F-06921 SOPHIA-ANTIPOLIS, FRANCE**
- **SAMSUNG: "Further Considerations of CDD Precoding - R1-073097", 3GPP DRAFT; 3GPP TSG RAN WG1 MEETING #49BIS, vol. RAN WG1, 20 June 2007 (2007-06-20), XP050106749, F-06921 SOPHIA-ANTIPOLIS, FRANCE**
- **QUALCOMM EUROPE: "CDD Precoding for 4Tx Antennas - R1-072019", 3GPP DRAFT; 3GPP TSG RAN WG1 MEETING #49 - R1-072019, vol. RAN WG1, 2 May 2007 (2007-05-02), XP050105775, F-06921 SOPHIA-ANTIPOLIS, FRANCE**
- **LG ELECTRONICS: "Link-level Evaluation of the CDD-based Precoding under Open-loop Scenario - R1-072871", 3GPP DRAFT; 3GPP TSG RAN WG1 MEETING #49BIS - R1-072871, vol. RAN WG1, 20 June 2007 (2007-06-20), XP050106551, F-06921 SOPHIA-ANTIPOLIS, FRANCE**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 899 897 B1

Description**TECHNICAL FIELD**

5 **[0001]** The present invention generally relates to radio communication systems, devices, software and methods and, more particularly, to mechanisms and techniques for combining precoding and cyclic delay diversity associated therewith.

BACKGROUND

10 **[0002]** At its inception radio telephony was designed, and used for, voice communications. As the consumer electronics industry continued to mature, and the capabilities of processors increased, more devices became available use that allowed the wireless transfer of data between devices and more applications became available that operated based on such transferred data. Of particular note are the Internet and local area networks (LANs). These two innovations allowed multiple users and multiple devices to communicate and exchange data between different devices and device types.
15 With the advent of these devices and capabilities, users (both business and residential) found the need to transmit data, as well as voice, from mobile locations.

[0003] The infrastructure and networks which support this voice and data transfer have likewise evolved. Limited data applications, such as text messaging, were introduced into the so-called "2G" systems, such as the Global System for Mobile (GSM) communications. Packet data over radio communication systems became more usable in GSM with the addition of the General Packet Radio Services (GPRS). 3G systems and, then, even higher bandwidth radio communications introduced by Universal Terrestrial Radio Access (UTRA) standards made applications like surfing the web more easily accessible to millions of users (and with more tolerable delay).

[0004] Even as new network designs are rolled out by network manufacturers, future systems which provide greater data throughputs to end user devices are under discussion and development. For example, the so-called 3GPP Long Term Evolution (LTE) standardization project is intended to provide a technical basis for radiocommunications in the decades to come. Among other things of note with regard to LTE systems is that they will provide for downlink communications (i.e., the transmission direction from the network to the mobile terminal) using orthogonal frequency division multiplexing (OFDM) as a transmission format and will provide for uplink communications (i.e., the transmission direction from the mobile terminal to the network) using single carrier frequency division multiple access (FDMA).

30 **[0005]** Another interesting feature of LTE is its support for multiple antennas at both the transmit side and the receive side. This provides the opportunity to leverage several different techniques to improve the quality and/or data rate of received radio signals. Such techniques include, for example, diversity against fading (e.g., spatial diversity), shaping the overall antenna beam to maximize gain in the direction of the target (beamforming), and the generation of what can be seen as multiple, parallel "channels" to improve bandwidth utilization (spatial multiplexing or multi-input multi-output (MIMO)).

35 **[0006]** Precoding is a popular technique used in conjunction with multi-antenna transmission. The basic principle involved in precoding is to mix and distribute the modulation symbols over the antennas while potentially also taking the current channel conditions into account. Precoding can be implemented by, for example, multiplying the information carrying symbol vector containing modulation symbols by a matrix which is selected to match the channel. Sequences of symbol vectors thus form a set of parallel symbol streams and each such symbol stream is referred to as a "layer". Thus, depending on the choice of precoder in a particular implementation, a layer may directly correspond to a certain antenna or a layer may, via the precoder mapping, be distributed onto several antennas.

40 **[0007]** Cyclic delay diversity (CDD) is a form of open-loop precoding in which the precoding matrix is intentionally varied over the frequency within the transmission (or system) bandwidth. Typically, this is realized by introducing different cyclic time delay for the different antennas, or alternatively realized by varying the phase of the transmitted signals from the different antennas. This kind of phase shift means that the effective channel, comprising the true channel and the CDD precoding, varies faster over frequency than the original channel. By distributing the transmission over frequency, this kind of artificially induced frequency-selectivity is useful in achieving frequency diversity.

45 **[0008]** One of the more significant characteristics of the radio channel conditions to consider in the context of high rate, multi-antenna transmission is the so-called channel rank. Generally speaking, the channel rank can vary from one up to the minimum of number of transmit and receive antennas. For example, given a 4x2 system as an example, i.e., a system with four transmit antennas and two receive antennas, the maximum channel rank is two. The channel rank associated with a particular connection varies in time and frequency as the fast fading alters the channel coefficients. Moreover, the channel rank determines how many layers, also referred to as the transmission rank, can be successfully transmitted simultaneously. For example, if the channel rank is one at the instant of the transmission of two layers, there is a strong likelihood that the two signals corresponding to the two layers will interfere so much that both of the layers are erroneously detected at the receiver. In conjunction with precoding, adapting the transmission to the channel rank involves striving for using as many layers as the channel rank.

[0009] Figure 1 illustrates a transmission structure 108 for combining CDD and, possibly channel dependent, precoding. Therein, each layer 110 created by the transmitter presents a stream of information carrying modulation symbols to the CDD based precoder 112 as a sequence of symbol vectors 114. The CDD precoder 112 applies the two matrices 116 and 118 illustrated therein to each incoming symbol vector to perform the precoding process. More specifically, the CDD precoder 112 first applies the matrix $U_{N_T \times r}$ 118 to the symbol vector 114. followed by the diagonal CDD matrix 116. $U_{N_T \times r}$ matrix 118 is a column subset of a (possibly scaled) unitary matrix, r denotes the transmission rank and N_T is the number of transmit antennas in the transmitting device. The notation $\mathbf{A}_{k \times l}$ means a matrix \mathbf{A} having k rows and l columns. The diagonal CDD matrix 116 has non-zero values along the diagonal including an antenna phase shift value θ indexed by a parameter k which is a function of frequency. If OFDM is used for the transmission, k may e.g. represent the subcarrier index or the closely related data resource element index (which excludes resource elements containing reference symbols). It should also be noted that k may be a more arbitrary function of the position of the resource elements on the resource grid in OFDM. The resulting, precoded modulation symbol vector is then output for, e.g., resource mapping and OFDM modulation 120. prior to being transmitted via antennas 122 (also referred to as antenna ports).

[0010] The transmission structure 108 illustrated in Figure 1 can be utilized in several ways. For example, one option is to use a fixed, channel independent, unitary matrix $U_{N_T \times r}$ 118 with a certain number of columns r corresponding to the transmission rank. The unitary matrix 118 serves to distribute each symbol on all antennas 122, while the diagonal CDD matrix 116 varies (shifts) the phase of each antenna 122. This increases the frequency selectivity of the effective channel each layer 110 experiences which, as mentioned above, can be useful for achieving frequency diversity (as well as multi-user diversity when frequency domain scheduling is used).

[0011] There are, however, certain problems associated with using the transmission structure 108 illustrated in Figure 1 to perform precoding. The spatial correlation properties vary as a function of k and these variations need to be fast in order to ensure sufficient frequency diversity over even rather narrowband transmissions. This makes it difficult for a receiver to estimate the properties of interference stemming from such kind of transmissions. The transmission structure 108 also does not provide sufficient freedom to design the precoding onto the antenna ports. Furthermore, considering for example a $r = 1$ rank one transmission, the transmission structure 108 will inherently use one column of the $U_{N_T \times r}$ matrix 118 to apply to the incoming symbol vector 114. This column would for example (in a two transmit antenna scenario) be equal to $[1, 1]$. Thus, this column together with the diagonal CDD matrix 116. forms a frequency selective beamformer which may be varied in a periodic fashion over the scheduled bandwidth. The period will depend on the selected speed of the phase variations. However, such beamforming may be problematic because, if the MIMO channel is correlated at the transmit side, severe cancellation of signals may occur at some frequencies. If the coding rate is not low enough over the scheduled bandwidth this will in turn result in communication errors. Similar cancellation can occur even for transmission ranks greater than one. So, generally, it will be difficult to use high coding rates in conjunction with the transmission structure 108 (and its technique for precoding) if the scheduled bandwidth is over a significant portion of the previously mentioned beamformer period. Such a scenario, however, typically occurs when large delay CDD is used, i.e., corresponding to fast phase shift variations in the frequency domain.

[0012] A representative example is found in 3GPP paper R1-070655 "CCD-based precoding for DL MIMO" (Qualcomm Europe), which discloses a conventional CDD-based precoding scheme similar to that discussed above with reference to Fig. 1. This scheme suffers from drawbacks similar to those mentioned above. Here, the base station selects a best precoding for the data channel based on a sum capacity metric and feedback reliability as reported by each UE for the best extended precoding matrix when evaluating the candidate sub-matrices for each subband. By choosing a suitable cyclic delay between a zero/small delay and a large delay, it is possible to efficiently adapt to a proper MIMO mode with a single unified precoding structure.

[0013] Accordingly, it would be desirable to provide precoding systems, methods, devices and software which avoid the afore-described problems and drawbacks.

SUMMARY

[0014] The invention is defined by the independent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate one or more embodiments and, together with the description, explain these embodiments. In the drawings:

Figure 1 illustrates a transmission structure including a conventional precoder;

Figure 2 illustrates an exemplary LTE access network in which exemplary embodiments can be implemented;

Figure 3 depicts exemplary LTE physical layer information signal processing with which exemplary embodiments

can be associated;

Figure 4 shows an example of an antenna mapping function in more detail;

Figure 5 illustrates a transmission structure including a precoder according to an exemplary embodiment;

Figure 6 is a block diagram of an exemplary transmitting device in which precoding according to these exemplary
5 embodiments can be implemented:

Figure 7 is a flowchart illustrating a method for transmitting information signals according to an exemplary embod-
iment:

Figure 8 is a block diagram of an exemplary receiving device in which signals which have been precoded according
to these exemplary embodiments can be processed; and

10 Figure 9 is a flowchart illustrating a method for processing received information signals.

DETAILED DESCRIPTION

15 **[0016]** The following description of the exemplary embodiments of the present invention refers to the accompanying drawings. The same reference numbers in different drawings identify the same or similar elements. The following detailed description does not limit the invention. Instead, the scope of the invention is defined by the appended claims. The following description and the accompanying drawings illustrate both the embodiments of the invention that comprise the features of the independent claims and other embodiments of related inventions that do not comprise all the features of the independent claims but are useful for better understanding the claimed invention.

20 **[0017]** As mentioned above, the transmission structure 108 illustrated in Figure 1 and, more particularly, the CDD precoder 112, suffer from certain drawbacks when considering its applicability in the context of matrices 118 which are channel independent. In addition to the problem described in the Background section, another problem with the transmission structure 108 can occur if channel dependent precoding is to be used in conjunction with CDD. Since the diagonal CDD matrix 116 is applied to the symbol vector 114 before the, in this example channel dependent precoding matrix
25 118, the precoding matrix 118 will then need to deal with a more frequency-selective effective channel, i.e., comprising the true channel and the applied CDD diagonal matrix 118. In order to ensure an effective precoding scheme under these circumstances, the precoder 112 must then switch the elements representing matrix 118 at a finer frequency granularity than if only the original channel was present. This, in turn, may lead to substantially higher signaling overhead because the precoder elements which are used to precode transmitted symbols are typically identified to the receiver
30 in the form additional (overhead) signaling.

[0018] According to exemplary embodiments these problems are addressed by providing a different transmission structure in which an additional (channel dependent or channel independent) precoder element is applied to the symbol vector output from the CDD operation comprising application of diagonal CDD matrix and column subset of a channel independent unitary matrix as described above. This can be seen by, for example, noting the additional matrix 515 in
35 Figure 5, where for future reference, it should be noted that the symbol vector after application of the diagonal CDD matrix is referred to as virtual antennas. The resulting vector $\mathbf{x}(k)$ transmitted on a resource indexed by k can thus be written as

40
$$\mathbf{x}(k) = \mathbf{W}_{N_T \times l}(k) \mathbf{D}(k) \mathbf{U}_{l \times r} \mathbf{s}(k) \quad (1)$$

where $\mathbf{D}(k)$ is the second diagonal CDD matrix 516 and it is emphasized that the third precoding matrix 515. $\mathbf{W}_{N_T \times l}(k)$, may potentially be different for different values of k . The parameter l would here typically be set to equal the transmission rank r . These exemplary embodiments can be used to, for example, add a channel dependent precoding stage directly
45 at the input of the true channel (i.e., outputting onto the antenna ports), which in turn allows CDD to be combined with channel dependent precoding without requiring finer precoding granularity, thus saving signaling overhead. Even if the third precoding matrix is not channel dependent, the structure indicated by the exemplary embodiments provides additional freedom in selecting suitable precoders for the third precoding stage so as to avoid some of the previously mentioned problems associated with the use of the structure 108.

50 **[0019]** To provide some context for the more detailed discussion of combined CDD and precoding according to these exemplary embodiments, consider first the exemplary radiocommunication system illustrated in Figures 2-4. Beginning with the radio access network nodes and interfaces in Figure 2, it will be seen that this particular example is provided in the context of LTE systems. Nonetheless, the present invention is not limited in its applicability to transmitters or transmissions associated with LTE systems and can instead be used in any system wherein multiple transmit antennas
55 and precoding are employed, including, but not limited to Wideband Code Division Multiple Access (WCDMA), GSM, UTRA, E-UTRA, High Speed Packet Access (HSPA), UMB, WiMaX and other, systems, devices and methods. Since, however, the example in Figure 2 is provided in terms of LTE, the network node which transmits and receives over the

air interface is termed an eNodeB, several of which eNodeBs 200 are illustrated therein.

[0020] In the context of the air interface, each eNodeB 200 is responsible for transmitting signals toward, and receiving signals from, one or more cells 202. Each eNodeB includes multiple antennas, e.g., 2, 4, or more transmit antennas, and handles functions including, but not limited to coding, decoding, modulation, demodulation, interleaving, de-interleaving, etc., with respect to the physical layer of such signals. Note that the phrase "transmit antennas" as used herein is specifically meant to include, and be generic to, physical antennas, virtual antennas and antenna ports. The eNodeBs 200 are also responsible for many higher functions associated with handling communications in the system including, for example, scheduling users, handover decisions, and the like. The interested reader who desires more information regarding transmit or receive functions associated with LTE or other systems in which these exemplary embodiments may be deployed is directed toward the book entitled "3G Evolution - HSPA and LTE for Mobile Broadband", by Erik Dahlman et al., published by Elsevier Ltd., 2007.

[0021] Nonetheless, to briefly discuss the baseband processing associated with the transmission of signals in the downlink (i.e., possibly transferred through the core network 203 to an eNodeB 200 and then into the cells 202 toward target mobile terminal or stations, e.g., MS 204 in Figure 2), consider Figure 3. Therein, two transport blocks of data 300 are being processed for transmission by an eNodeB 200 using spatial multiplexing. Cyclic redundancy check (CRC) bits are inserted at steps 302 to be used by the receiver to detect errors. Channel coding is applied to the transport blocks at steps 304 to provide protection to the payload data against the impairments presented by the radio channel. The hybrid automatic retransmission request (HARQ) steps 306 operate to extract or repeat code bits from the blocks of code bits provided by the channel encoder to generate a precise set of bits to be retransmitted within a transmit time interval (TTI). e.g., based upon various criteria such as the number of assigned resource blocks, the selected modulation scheme and the spatial multiplexing order.

[0022] At step 308, the code words output from the HARQ block are scrambled (multiplied) by a bit-level scrambling sequence or mask, which aids the receive in suppressing interference to the radio signal. The selected data modulation, e.g., Quadrature Phase-Shift Keying (QPSK), 16 Quadrature Amplitude Modulation (QAM), or 64 QAM, is then applied at step 310 to transform blocks of scrambled bits into corresponding blocks of modulation symbols. These modulation symbols are then mapped to different antennas and/or different antenna ports at step 312. In LTE nomenclature, an antenna port corresponds to the transmission of a particular downlink reference signal which may, or may not, correspond to an actual, physical antenna. The symbols to be transmitted on each antenna (1-n in Figure 3, e.g., 2, 4, 8, 16) are then mapped to respective resource blocks 314 and sent off for OFDM processing (not shown) prior to transmission by the eNodeB 200.

[0023] Of particular interest in the downlink processing for these exemplary embodiments is the antenna mapping step/block 312. The antenna mapping process can be further subdivided into layer mapping of the codewords output from the modulation block 310 and precoding of the resulting symbol vectors to generate the antenna (or antenna port) mapped symbols, as shown in Figure 4. Therein an example is provided with two sets of codewords being mapped by layer mapping function 400 into three layers. Two symbol vectors v_1 and v_2 associated with the three layers are illustrated in Figure 4. These symbol vectors are then precoded by applying one or more precoding matrices by precoding function 402. i.e., by matrix multiplication of the precoding matrix or matrices with the incoming symbol vectors. According to one exemplary embodiment, the precoding function 402 can apply three different matrices as will be described below with respect to Figure 5. It will be appreciated that the selections of mapping to three layers and four antennas in Figure 4 is purely exemplary. Selection of the number of layers will, as described earlier, vary based upon the channel rank (among possibly other criteria) and the number of antennas may vary from system to system or even among transmit devices within systems.

[0024] Figure 5 illustrates a precoder according to exemplary embodiments which can be used to perform precoding, e.g., as described with respect to blocks 312 and 402 above. Therein, each layer 510 created by the transmitter presents a stream of modulation symbols to the CDD based precoder 512 as a sequence of symbol vectors 514. The CDD precoder 512 applies the three matrices 515, 516 and 518 illustrated therein to each incoming symbol vector to perform the precoding process. More specifically, the CDD precoder 512 according to this exemplary embodiment first applies the matrix $U_{J \times r}$ 518, which is a column subset of a possibly scaled unitary $I \times I$ matrix, to the symbol vector 514, followed by diagonal CDD matrix 516, followed then by a precoding matrix $W_{N_T \times I}$ 515 resulting in the transmit vector previously given in equation (1).

[0025] The columns of the matrix 518 are taken from a possibly scaled unitary matrix. A unitary matrix exhibits the property that its inverse is equal to the complex conjugate transpose of the unitary matrix of interest. Thus, the columns of the matrix 518 are orthogonal and of equal norm. The first applied, matrix 518 operates to spread the symbols across the antenna ports. The second applied CDD matrix 516 will have the qualities of a diagonal matrix, i.e., elements on one diagonal are non-zero and the remaining matrix elements are zero. This CDD matrix 516 operates to vary (shift) the phase of each antenna or antenna port 522. The third applied, precoding matrix 515 operates to distribute the transmission energy across the antennas or antenna ports. It may be determined in either a channel independent manner or based upon, at least in part, current radio channel conditions resulting in a channel dependent precoder operation.

As discussed above, application of these matrices to the incoming symbol vectors can be performed by a processing unit within the transmitter by way of matrix multiplication.

[0026] The parameter l is introduced in this exemplary embodiment as a size parameter of the three matrices used to perform precoding, i.e., the number of columns in the last applied precoding matrix 515, the number of rows and columns in the second applied, diagonal CDD matrix 516 and the number of rows in the first applied, unitary matrix 518. Thus, unlike the transmission structure illustrated in Figure 1, the size of the matrices involved in performing precoding according to these exemplary embodiments may vary dynamically for a given transmitter according to the transmission rank of the channel (or the number of layers), e.g., the number of rows in the unitary matrix 518 may be different than the number of transmit antennas. As previously mentioned, the parameter l is typically set equal to the transmission rank r . By way of contrast, the matrices 116 and 118 discussed above with respect to Figure 1 were fixedly sized to the number of transmit antennas associated with the particular transmitter performing the precoding.

[0027] Looking more closely at the three matrices used to perform precoding according to this exemplary embodiment shown in Figure 5, the matrix $U_{l \times r}$ 518 is, like matrix 118, a column subset of a (possibly scaled) unitary matrix where l denotes the number of rows in the matrix and r denotes the transmission rank and number of columns. The diagonal CDD matrix 516 includes $\exp(j\theta_n k)$ elements along the diagonal wherein θ_n represents a phase value associated with a particular antenna or antenna port and k is an index associated with a particular resource element (e.g. indices of all subcarriers or indices of only those subcarriers which carry data rather than those which carry reference symbols). The matrix $W_{N_T \times l}$ 515 is a precoding matrix which can have various values. e.g., to perform channel dependent beamforming or precoding in a channel independent manner, some examples of which are described below, and which has a size of N_T (the number of transmit antennas / antenna ports in the transmitting device) by l . The resulting, precoded modulation symbol vector is then output for, e.g., resource mapping and OFDM modulation 520, prior to being transmitted via antennas 522.

[0028] According to these exemplary embodiments, the precoding matrix 515 $W_{N_T \times l}$ is now applied directly on the MIMO channel matrix. This means that, in for example the case of a channel-dependent precoding, $W_{N_T \times l}$ can "see" the true channel which is unaffected by any potential CDD operation. The diagonal CDD matrix and $U_{l \times r}$ can then be used to perform CDD operation on the new, improved, effective channel comprising the true channel and $W_{N_T \times l}$. The number of rows l can moreover be adapted so that CDD operation is only performed among the virtual antennas taken as input to $W_{N_T \times l}$.

[0029] For example, for transmission rank one (and therefore, the number of layers is one given that these examples are concerned with spatial multiplexing), l could be set to one, the diagonal matrix would be 1, and $W_{N_T \times l}$ would be one column vector performing possibly channel dependent beamforming. If different $W_{N_T \times l}$ are used for different indices k frequency dependent precoding is possible. Similarly, for transmission rank two, l could be two, $U_{l \times r}$ could have two columns, and $W_{N_T \times l}$ could be channel dependent and have two columns as well. The diagonal matrix together with $U_{l \times r}$ then performs CDD like operation on the virtual antennas, meaning that the two layers see a mixture of the virtual antenna channels which in turn are formed from the true channel and $W_{N_T \times l}$. Thus, the three matrices 515, 516 and 518 could, for example, be selected from the following table:

Maximum Number of Layers	W	D	U
1	$\begin{bmatrix} a \\ b \end{bmatrix}$	[1]	[1]
2	$\begin{bmatrix} c & d \\ e & f \end{bmatrix}$	$\begin{bmatrix} g & 0 \\ 0 & h \end{bmatrix}$	$\begin{bmatrix} k & l \\ m & n \end{bmatrix}$

[0030] Therein, variables a, b, c, d, e, f, g, h, k, l, m, and n represent, potentially complex, values which are selected to provide the functions or matrix-types described above, resulting in a so-called precoder codebook. Examples of these values can be found in, for example, the standards specification 3GPP TS 36.211 V1.3.1, (2007-08), at section 6.3.3.2. By using precoding as described above and illustrated in Figure 5, beamforming on the virtual antennas (antenna ports) spreads energy in designated sub-spaces, which sub-spaces focus the transmission energy toward the intended recipient (e.g., mobile station) of the transmission. Channel independent precoding is also possible in for example the sense of varying the selection of precoders in a more random manner so as to avoid focusing the energy in any particular direction.

[0031] According to another exemplary embodiment, a transmission structure could provide for precoding wherein the precoding matrix 515 i.e., $W_{N_T \times l}$, is instead set to be a fixed channel and frequency independent matrix with orthogonal and equal norm columns, the diagonal CDD matrix set to be of size $N_T \times N_T$ (i.e., a square matrix equal to the number

of transmit antennas) and the matrix $518 U_{J \times R}$ can then be a single column of all ones. This exemplary embodiment provides another form of CDD which does not suffer from the previously mentioned cancellation problem when correlated fading is present on the transmit side.

[0032] As mentioned above, the transmit processing techniques described herein may be used for various communication systems such as Code Division Multiple Access (CDMA) systems, Time Division Multiple Access (TDMA) systems, Frequency Division Multiple Access (FDMA) systems, Orthogonal FDMA (OFDMA) systems, Single-Carrier FDMA (SC-FDMA) systems, etc. The transmitter may, for example, be disposed within a radio base station, NodeB, eNodeB, or the like, to transmit information signals on a downlink radio channel. Alternatively, the transmitter may, for example, be disposed in a mobile unit, terminal device, user equipment, or the like to transmit information signals on an uplink radio channel. Regardless of the particular type of communication system in which these exemplary embodiments are presented, the transmit device will typically include the components illustrated generally in Figure 6.

[0033] Therein, the transmitter includes a plurality of physical transmit antennas 602 in this example numbering four, although more or fewer than four transmit antennas can be used. The physical transmit antennas 602 are connected to a processor 606 via transmit (TX) chain elements 604 which can include one or more of filters, power amplifiers and the like, as will be appreciated by those skilled in the art, Processor(s) 606, in conjunction with memory device(s) 608 (and potentially other devices not shown) can operate to perform the transmit processes discussed above with respect to Figures 3-5, e.g., by way of software stored therein, additional hardware or some combination of software and hardware. Thus, the precoding functionality described above can, for example, be performed in software by executing computer-readable instructions from memory device 608 to perform the matrix multiplications described above with respect to Figure 5. Thus, it will be apparent that exemplary embodiments also relate to software, e.g., program code or instructions which are stored on a computer-readable medium and which, when read by a computer, processor or the like, perform certain steps associated with transmitting information signals which are precoded in the manner described above. An example of such steps is illustrated in the flowchart of Figure 7.

[0034] Therein, at step 700, symbol vectors are precoded by multiplying them with a first unitary matrix which spreads symbols in the symbol vectors across the virtual transmit antennas, a second diagonal matrix which changes a phase of the virtual transmit antennas, and a third precoding matrix which distributes the transmission across the transmit antennas. After precoding the symbol vectors, they can undergo further processing at step 702 to generate information signals. For example, such additional signal processing can include mapping precoded symbols to resource blocks to be transmitted via at least one of the transmit antennas and orthogonal frequency division multiplexing (OFDM) the resource blocks, although other processing, e.g., for non-OFDM systems, could alternately be performed downstream of the precoding operation. Then, at step 704, the resultant information signals are transmitted.

[0035] Exemplary embodiments also provide for receive side processing of signals which have been transmitted using the foregoing exemplary precoding embodiments. In systems using common pilots (common reference symbols (RS)), the receiver needs to be aware of the transmission structure in order to be able to properly decode the transmission. LTE is one example of such a system where this transmission mode is using common reference symbols and is thus not transparent to the UE. Thus, all of the involved matrices described above (i.e., W , D and U) need to be known on the receive side (e.g., at the UE) to be used for equalizing the channel. For example, the UE may first form the effective channel $H_{\text{eff}} = HWDU$, where H is a channel estimate obtained from the common RS, equalize the effective channel, e.g. by using a linear filter $\text{inv}(H_{\text{eff}}^* H_{\text{eff}}) H_{\text{eff}}^*$, producing the equalized vector sequence z , which is input to a demodulator, producing soft values of coded bits which are finally input to, e.g., a turbo decoder to produce an estimate of the transmitted information bits.

[0036] It will be appreciated that there are numerous implementations for receiving and decoding wirelessly received information symbols and that the foregoing is simply one exemplary implementation. The receive side processing according to these exemplary embodiments will essentially provide a mirrored processing to that performed on the transmit side. The receiver will use its knowledge of the precoding performed by the transmitter to perform its channel estimation/equalization function. Such knowledge on the part of the receiver may be predefined *a priori* or it may be passed on to the receiver explicitly as part of the transmitted information.

[0037] Thus, an exemplary receiver 800 for receiving and processing information signals which have been precoded as described above is illustrated in Figure 8. Therein, one (or more) receive antennas 802 receive the information signals which have been precoded during transmit side processing. After passing through one or more receive (RX) chain processing elements 804 (e.g., filters, amplifiers or the like), processor(s) 806 will process the received information signals to extract the information contained therein, e.g., in conjunction with processing software stored on memory device(s) 808, by using its knowledge of the precoding performed on those information signals to calculate a channel estimate used in subsequent receive side processing. For example, as shown in the flowchart of Figure 9, a method for equalizing received information signals includes the steps of forming a channel estimate associated with the received information signals by multiplying an initial channel estimate with a plurality of matrices, the plurality of matrices including a first column subset of a unitary matrix, a second diagonal matrix, and a third precoding matrix at step 900, and equalizing the information signals using the formed channel estimate at step 902.

Claims

1. A method for transmitting and receiving information signals having a plurality of symbol vectors associated therewith, the method comprising:

precoding (700) said symbol vectors, each comprising two or more symbols, by multiplying, in the following order, said symbol vectors with:

a first column subset of a unitary matrix (518) which spreads symbols in said symbol vectors across all virtual transmit antennas,
 a second diagonal cyclic delay diversity, CDD, matrix (516) which changes a phase of the symbols spread across said virtual transmit antennas, and
 a third precoding matrix (515) which distributes transmit energy across a plurality of physical transmit antennas,

further processing (702) said precoded symbol vectors to generate said information signals;
 transmitting (704) said information signals;
 receiving the transmitted information signals and estimating the symbol vectors associated therewith.

2. The method according to claim 1, wherein said physical transmit antennas are antenna ports.
3. The method according to any of claims 1-2, wherein when the information signals are generated by transmit processing using r layers, said third precoding matrix has l columns, said second diagonal matrix has l rows and l columns, said first column subset of said unitary matrix has l rows and r columns, and said symbol vectors have r elements.
4. The method according to any of claims 1-3, wherein when the information signals are generated by transmit processing using r layers, said third precoding matrix has r columns, said second diagonal matrix has r rows and r columns, said first column subset of unitary matrix is a unitary matrix having r rows and r columns, and said symbol vectors have r elements.
5. The method according to any of claims 1-4, wherein said first column subset of said unitary matrix and said second diagonal matrix together provide cyclic delay diversity, CDD, for spatial multiplexing when represented in the frequency domain.
6. The method according to any of claims 1-5, wherein said third precoding matrix is performing channel dependent precoding.
7. A system comprising a receiver and a transmitter, the transmitter being adapted to transmit information signals having a plurality of symbol vectors associated therewith and comprising:

a plurality of physical transmit antennas (602);
 a processor (606) adapted for precoding said symbol vectors, each comprising two or more symbols, by multiplying, in the following order, said symbol vectors with:

a first column subset of a unitary matrix (518) which spreads symbols in said symbol vectors across all virtual transmit antennas,
 a second diagonal cyclic delay diversity, CDD, matrix (516) which changes a phase of the symbols spread across said virtual transmit antennas, and
 a third precoding matrix (515) which distributes transmit energy across said physical transmit antennas,

the processor being moreover adapted for further processing (702) said precoded symbol vectors to generate said information signals; and
 a transmit chain of elements (604) for transmitting said information signals, and
 the receiver being adapted to receive the transmitted information signals and estimate the symbol vectors associated therewith.

8. The system according to claim 7, wherein said physical transmit antennas are antenna ports.

9. The system according to any of claims 7-8, wherein when the information signals are generated by transmit processing using r layers, said third precoding matrix has l columns, said second diagonal matrix has l rows and l columns, said first column subset of said unitary matrix has l rows and r columns, and said symbol vectors have r elements.
- 5 10. The system according to any of claims 7-9, wherein when the information signals are generated by transmit processing using r layers, said third precoding matrix has r columns, said second diagonal matrix has r rows and r columns, said first column subset of unitary matrix is a unitary matrix having r rows and r columns, and said symbol vectors have r elements.
- 10 11. The system according to any of claims 7-10, wherein said first column subset of said unitary matrix and said second diagonal matrix together provide cyclic delay diversity, CDD, for spatial multiplexing when represented in the frequency domain.
- 15 12. The system according to any of claims 7-11, wherein said third precoding matrix is performing channel dependent precoding.

Patentansprüche

- 20 1. Verfahren zum Übertragen und Empfangen von Informationssignalen mit einer Vielzahl von damit verknüpften Symbolvektoren, wobei das Verfahren umfasst:
- Vorcodieren (700) der Symbolvektoren, wobei jeder zwei oder mehr Symbole umfasst, durch Multiplizieren der Symbolvektoren, in der nachfolgenden Reihenfolge, mit:
- 25 einer ersten Spaltenuntermenge einer Einheitsmatrix (518), die Symbole in den Symbolvektoren über alle virtuellen Sendeantennen verteilt,
 einer zweiten diagonalen zyklischen Verzögerungsdiversitäts-, CDD, Matrix (516), die eine Phase der Symbole, die über die virtuellen Sendeantennen verteilt sind, ändert, und
 30 einer dritten Vorcodierungsmatrix (515), die Übertragungsenergie über eine Vielzahl von physischen Sendeantennen verteilt,
- Weiterverarbeiten (702) der vorcodierten Symbolvektoren, um die Informationssignale zu erzeugen;
 Übertragen (704) der Informationssignale;
 35 Empfangen der übertragenen Informationssignale und Schätzen der damit verknüpften Symbolvektoren.
2. Verfahren nach Anspruch 1, wobei die physischen Sendeantennen Antennen-Ports sind.
3. Verfahren nach einem der Ansprüche 1-2, wobei, wenn die Informationssignale durch Übertragungsverarbeitung unter Verwendung von r Schichten erzeugt werden, die dritte Vorcodierungsmatrix l Spalten aufweist, die zweite diagonale Matrix l Reihen und l Spalten aufweist, die erste Spaltenuntermenge der Einheitsmatrix l Reihen und r Spalten aufweist, und die Symbolvektoren r Elemente aufweisen.
4. Verfahren nach einem der Ansprüche 1-3, wobei, wenn die Informationssignale durch Übertragungsverarbeitung unter Verwendung von r Schichten erzeugt werden, die dritte Vorcodierungsmatrix r Spalten aufweist, die zweite diagonale Matrix r Reihen und r Spalten aufweist, die erste Spaltenuntermenge der Einheitsmatrix eine Einheitsmatrix mit r Reihen und r Spalten ist, und die Symbolvektoren r Elemente aufweisen.
5. Verfahren nach einem der Ansprüche 1-4, wobei die erste Spaltenuntermenge der Einheitsmatrix und die zweite diagonale Matrix zusammen eine zyklische Verzögerungsdiversität, CDD, für räumliches Multiplexen bereitstellen, wenn sie im Frequenzbereich dargestellt sind.
6. Verfahren nach einem der Ansprüche 1-5, wobei die dritte Vorcodierungsmatrix eine kanalabhängige Vorcodierung durchführt.
- 55 7. System, umfassend einen Empfänger und einen Sender, wobei der Sender ausgelegt ist, um Informationssignale mit einer Vielzahl von damit verknüpften Symbolvektoren zu übertragen und umfassend:

eine Vielzahl von physischen Sendeantennen (602);
einen Prozessor (606), ausgelegt zum Vorcodieren der Symbolvektoren, wobei jeder zwei oder mehr Symbole umfasst, durch Multiplizieren der Symbolvektoren, in der nachfolgenden Reihenfolge, mit:

5 einer ersten Spaltenuntermenge einer Einheitsmatrix (518), die Symbole in den Symbolvektoren über alle virtuellen Sendeantennen verteilt,
einer zweiten diagonalen zyklischen Verzögerungsdiversitäts-, CDD, Matrix (516), die eine Phase der Symbole, die über die virtuellen Sendeantennen verteilt sind, ändert, und
10 einer dritten Vorcodierungsmatrix (515), die Übertragungsenergie über die physischen Sendeantennen verteilt,

wobei der Prozessor ferner ausgelegt ist zum Weiterverarbeiten (702) der vorcodierten Symbolvektoren, um die Informationssignale zu erzeugen; und
eine Übertragungskette von Elementen (604) zum Übertragen der Informationssignale; und
15 wobei der Empfänger ausgelegt ist zum Empfangen der übertragenen Informationssignale und Schätzen der damit verknüpften Symbolvektoren.

8. System nach Anspruch 7, wobei die physischen Sendeantennen Antennen-Ports sind.

20 9. System nach einem der Ansprüche 7-8, wobei, wenn die Informationssignale durch Übertragungsverarbeitung unter Verwendung von r Schichten erzeugt werden, die dritte Vorcodierungsmatrix r Spalten aufweist, die zweite diagonale Matrix r Reihen und r Spalten aufweist, die erste Spaltenuntermenge der Einheitsmatrix r Reihen und r Spalten aufweist, und die Symbolvektoren r Elemente aufweisen.

25 10. System nach einem der Ansprüche 7-9, wobei, wenn die Informationssignale durch Übertragungsverarbeitung unter Verwendung von r Schichten erzeugt werden, die dritte Vorcodierungsmatrix r Spalten aufweist, die zweite diagonale Matrix r Reihen und r Spalten aufweist, die erste Spaltenuntermenge der Einheitsmatrix eine Einheitsmatrix mit r Reihen und r Spalten ist, und die Symbolvektoren r Elemente aufweisen.

30 11. System nach einem der Ansprüche 7-10, wobei die erste Spaltenuntermenge der Einheitsmatrix und die zweite diagonale Matrix zusammen eine zyklische Verzögerungsdiversität, CDD, für räumliches Multiplexen bereitstellen, wenn sie im Frequenzbereich dargestellt sind.

35 12. System nach einem der Ansprüche 7-11, wobei die dritte Vorcodierungsmatrix eine kanalabhängige Vorcodierung durchführt.

Revendications

40 1. Procédé de transmission et de réception de signaux d'information ayant une pluralité de vecteurs de symbole associés à ceux-ci, le procédé comprenant :

le précodage (700) desdits vecteurs de symbole, chacun comprenant deux ou plusieurs symboles, en multipliant, dans l'ordre suivant, lesdits vecteurs de symbole avec :

45 un premier sous-ensemble de colonne d'une matrice unitaire (518) qui propage des symboles dans lesdits vecteurs de symbole à travers toutes les antennes de transmission virtuelles,
une deuxième matrice diagonale de diversité de retard cyclique, CDD, (516) qui change une phase des symboles propagés à travers lesdites antennes de transmission virtuelles, et
50 une troisième matrice de précodage (515) qui distribue l'énergie de transmission à travers une pluralité d'antennes de transmission physiques,

un traitement plus poussé (702) desdits vecteurs de symbole précodés pour générer lesdits signaux d'information ;

55 la transmission (704) desdits signaux d'information ;

la réception des signaux d'information transmis et l'estimation des vecteurs de symbole associés à ceux-ci.

2. Procédé selon la revendication 1, dans lequel lesdites antennes de transmission physiques sont des ports d'anten-

nes.

- 5 3. Procédé selon l'une quelconque des revendications 1 à 2, dans lequel lorsque les signaux d'information sont générés par traitement de transmission utilisant r couches, ladite troisième matrice de précodage comporte l colonnes, ladite deuxième matrice diagonale comporte l lignes et l colonnes, ledit premier sous-ensemble de colonne de ladite matrice unitaire comporte l lignes et r colonnes, et lesdits vecteurs de symbole comportent r éléments.
- 10 4. Procédé selon l'une quelconque des revendications 1 à 3, dans lequel lorsque les signaux d'information sont générés par traitement de transmission utilisant r couches, ladite troisième matrice de précodage comporte r colonnes, ladite deuxième matrice diagonale comporte r lignes et r colonnes, ledit premier sous-ensemble de colonne de la matrice unitaire est une matrice unitaire comportant r lignes et r colonnes, et lesdits vecteurs de symbole comportent r éléments.
- 15 5. Procédé selon l'une quelconque des revendications 1 à 4, dans lequel ledit premier sous-ensemble de colonne de ladite matrice unitaire et ladite deuxième matrice diagonale procurent ensemble une diversité de retard cyclique, CDD, pour le multiplexage spatial lorsque représenté dans le domaine de fréquence.
- 20 6. Procédé selon l'une quelconque des revendications 1 à 5, dans lequel ladite troisième matrice de précodage réalise un précodage dépendant du canal.
- 25 7. Système comprenant un récepteur et un transmetteur, le transmetteur étant conçu pour transmettre des signaux d'information ayant une pluralité de vecteurs de symbole associés à ceux-ci et comprenant :
- une pluralité d'antennes de transmission physiques (602) ;
un processeur (606) conçu pour précoder lesdits vecteurs de symbole, chacun comprenant deux ou plusieurs symboles, en multipliant, dans l'ordre suivant, lesdits vecteurs de symbole avec :
- un premier sous-ensemble de colonne d'une matrice unitaire (518) qui propage des symboles dans lesdits vecteurs de symbole à travers toutes les antennes de transmission virtuelles,
une deuxième matrice diagonale de diversité de retard cyclique, CDD, (516) qui change une phase des symboles propagés à travers lesdites antennes de transmission virtuelles, et
une troisième matrice de précodage (515) qui distribue l'énergie de transmission à travers lesdites antennes de transmission physiques,
- le processeur étant en outre conçu pour un traitement plus poussé (702) desdits vecteurs de symbole précodés pour générer lesdits signaux d'information ; et
une chaîne d'éléments de transmission (604) pour transmettre lesdits signaux d'information, et
le récepteur étant conçu pour recevoir les signaux d'information transmis et estimer les vecteurs de symbole associé à ceux-ci.
- 35 8. Système selon la revendication 7, dans lequel lesdites antennes de transmission physiques sont des ports d'antennes.
- 40 9. Système selon l'une quelconque des revendications 7 à 8, dans lequel lorsque les signaux d'information sont générés par traitement de transmission utilisant r couches, ladite troisième matrice de précodage comporte l colonnes, ladite deuxième matrice diagonale comporte l lignes et l colonnes, ledit premier sous-ensemble de colonne de ladite matrice unitaire comporte l lignes et r colonnes, et lesdits vecteurs de symbole comportent r éléments.
- 45 10. Système selon l'une quelconque des revendications 7 à 9, dans lequel lorsque les signaux d'information sont générés par traitement de transmission utilisant r couches, ladite troisième matrice de précodage comporte r colonnes, ladite deuxième matrice diagonale comporte r lignes et r colonnes, ledit premier sous-ensemble de colonne de la matrice unitaire est une matrice unitaire comportant r lignes et r colonnes, et lesdits vecteurs de symbole comportent r éléments.
- 50 11. Système selon l'une quelconque des revendications 7 à 10, dans lequel ledit premier sous-ensemble de colonne de ladite matrice unitaire et ladite deuxième matrice diagonale procurent ensemble une diversité de retard cyclique, CDD, pour le multiplexage spatial lorsque représenté dans le domaine de fréquence.

EP 2 899 897 B1

12. Système selon l'une quelconque des revendications 7 à 11, dans lequel ladite troisième matrice de précodage réalise un précodage dépendant du canal.

5

10

15

20

25

30

35

40

45

50

55

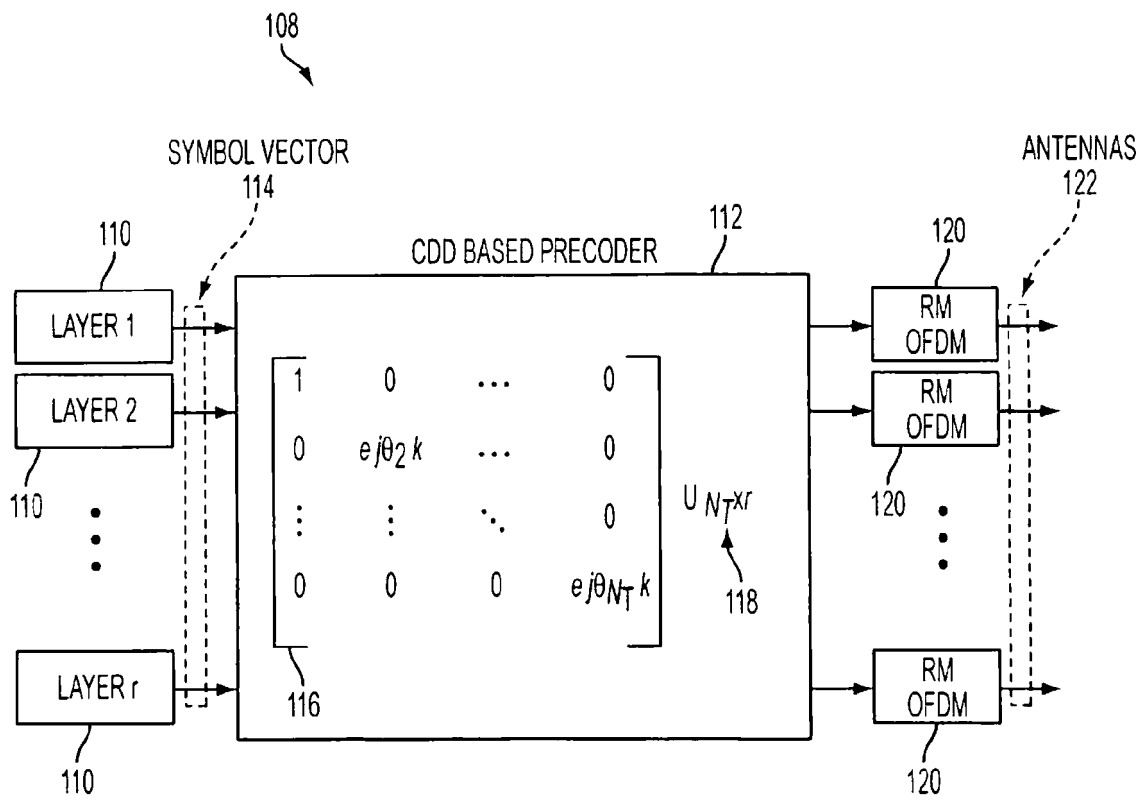


FIG. 1
PRIOR ART

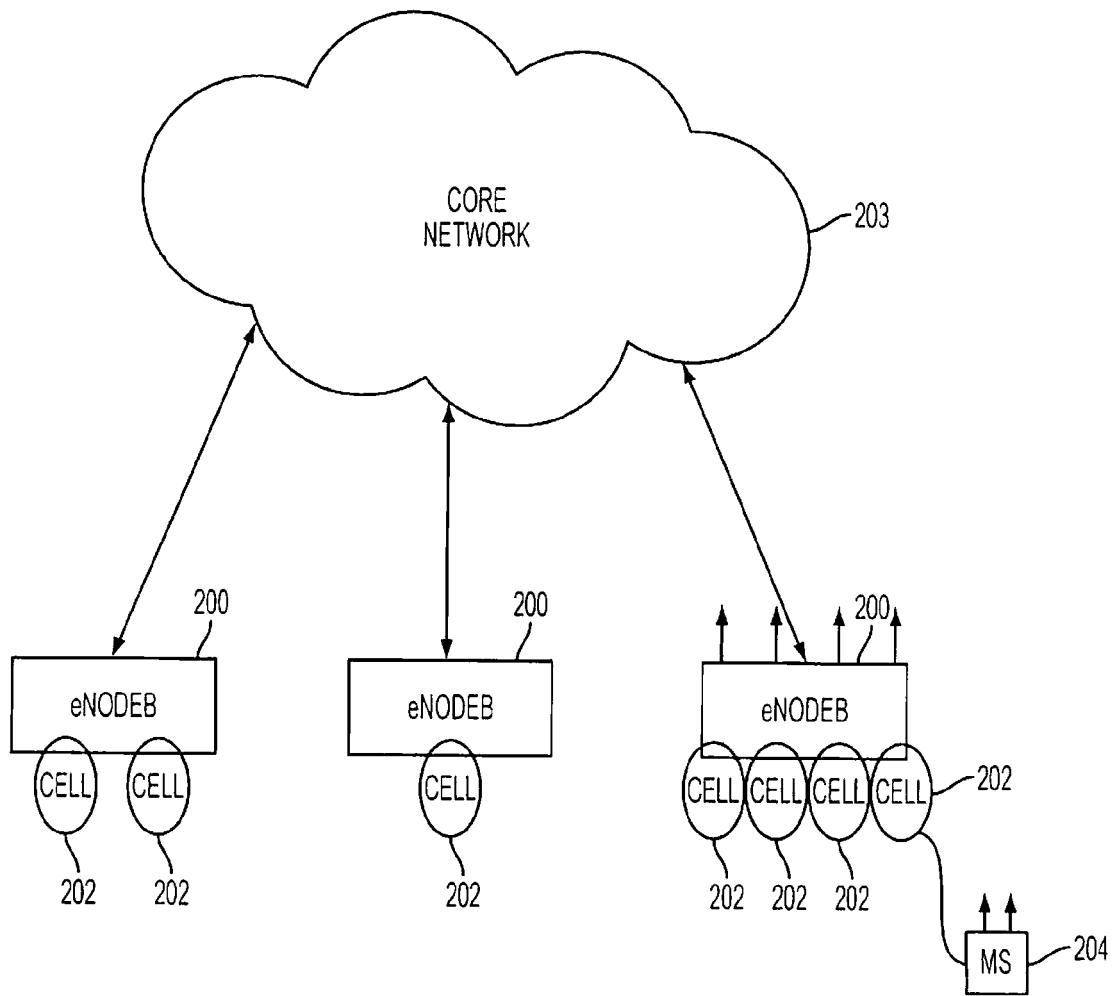


FIG. 2

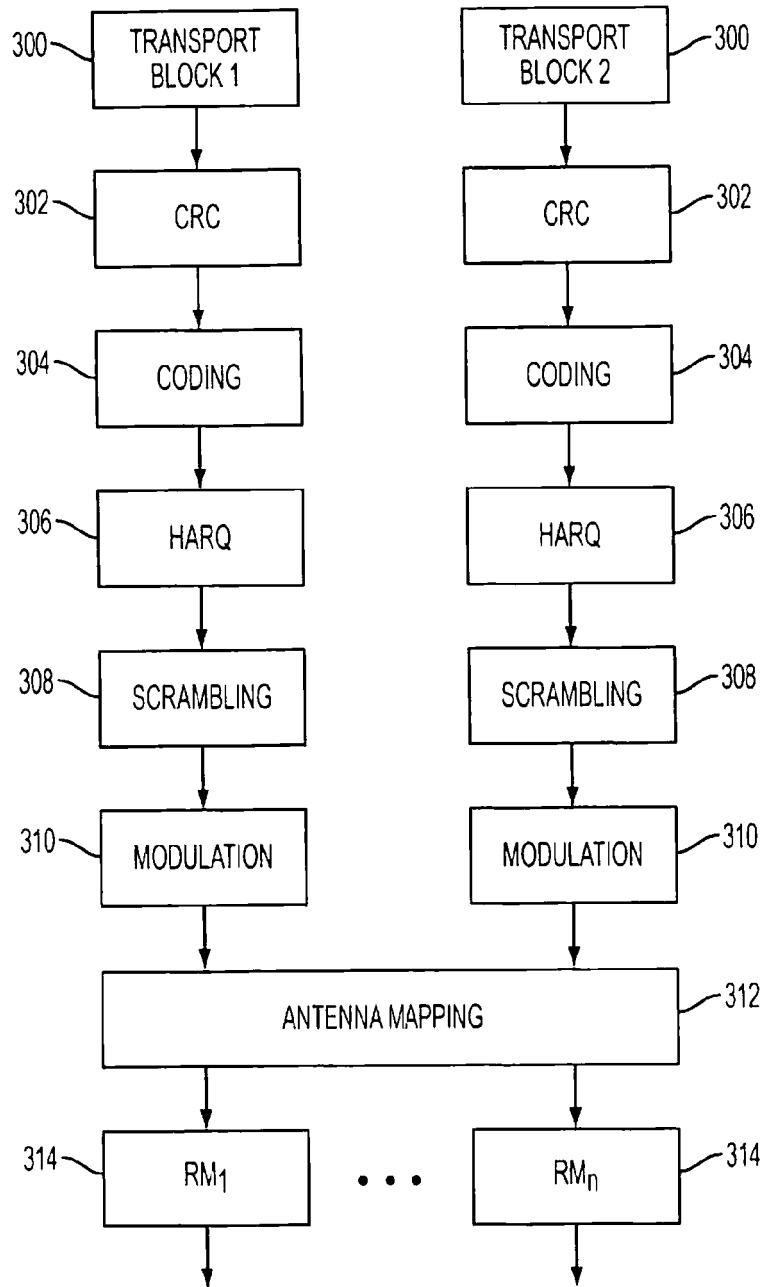


FIG. 3

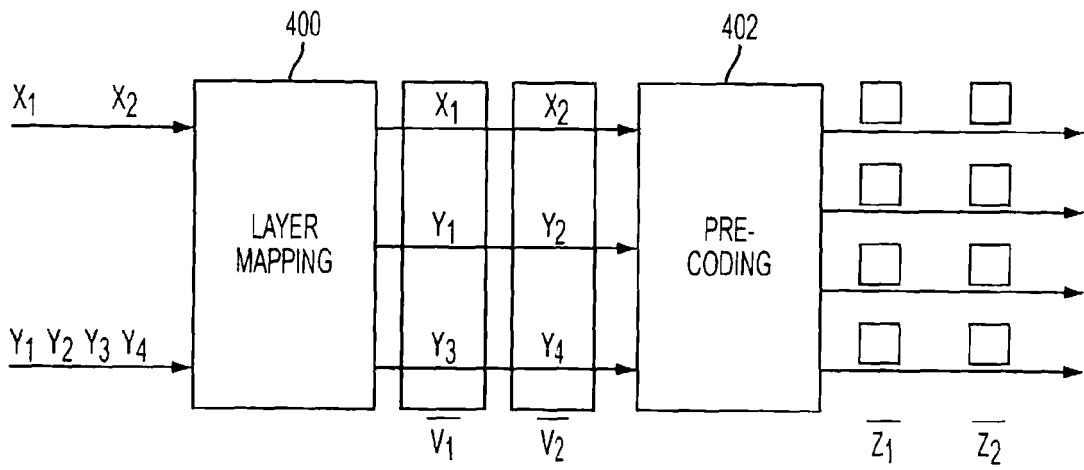


FIG. 4

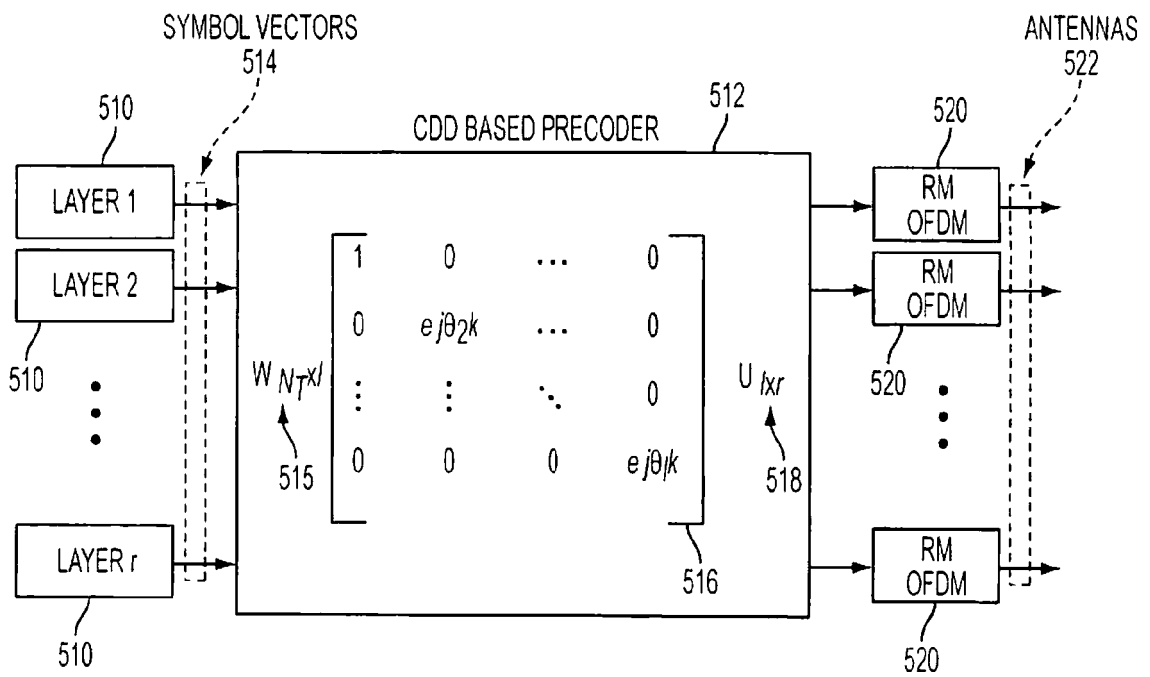


FIG. 5

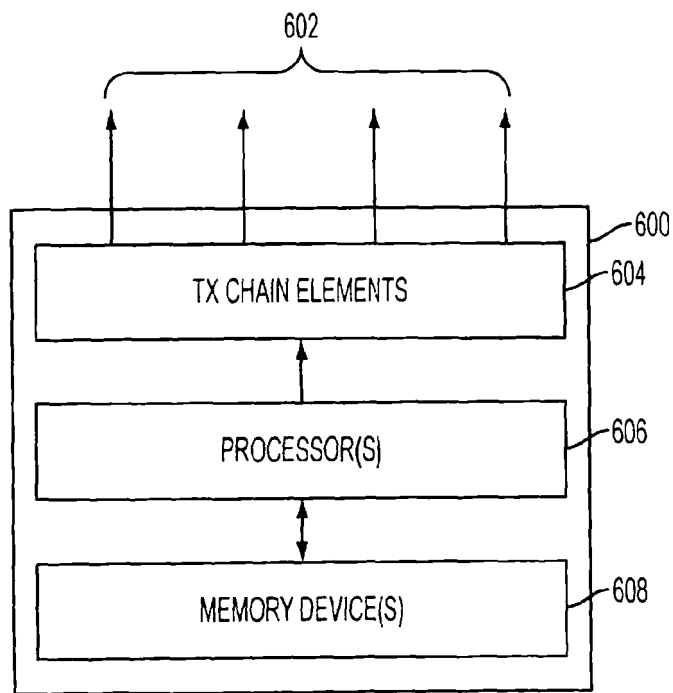


FIG. 6

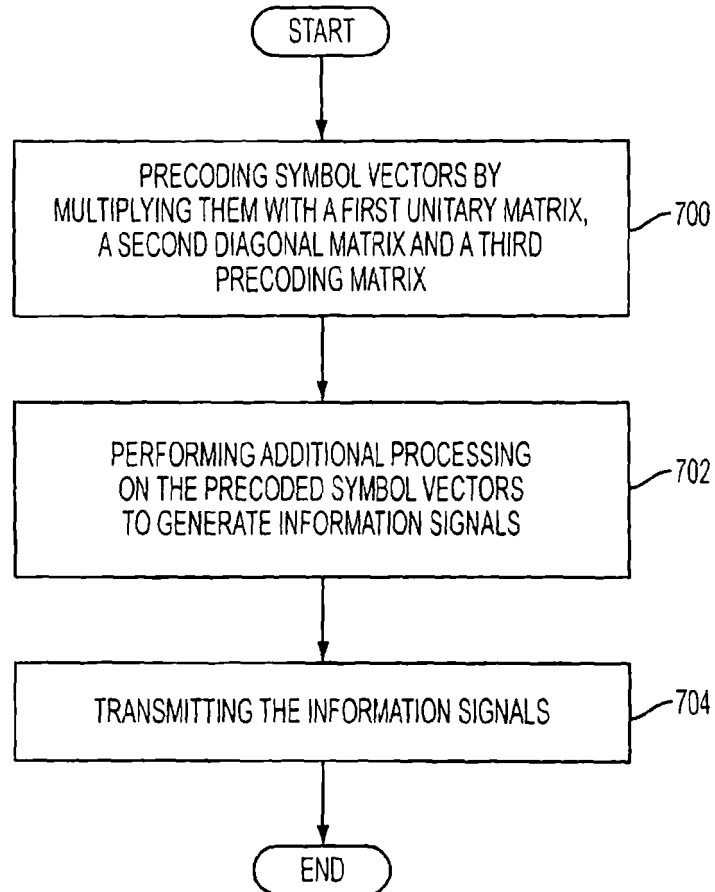


FIG. 7

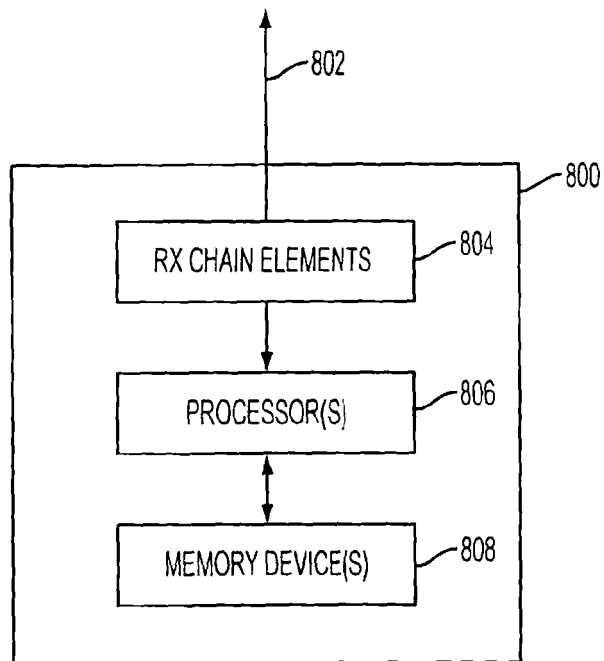


FIG. 8

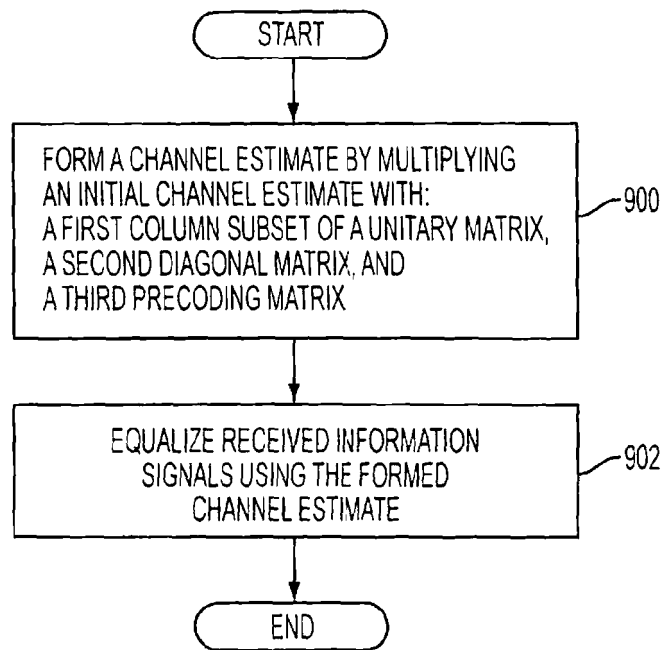


FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Non-patent literature cited in the description

- **ERIK DAHLMAN et al.** 3G Evolution - HSPA and LTE for Mobile Broadband. Elsevier Ltd, 2007 **[0020]**