

(19)



(11)

EP 3 079 204 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

12.10.2016 Bulletin 2016/41

(51) Int Cl.:

H01Q 13/28 (2006.01) **H01Q 15/00** (2006.01)

H01Q 3/44 (2006.01) **H01Q 21/06** (2006.01)

H01Q 21/24 (2006.01) **H01Q 21/00** (2006.01)

(21) Application number: **16157596.4**

(22) Date of filing: **26.02.2016**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

Designated Validation States:

MA MD

(71) Applicant: **The Boeing Company**
Chicago, IL 60606-2016 (US)

(72) Inventors:

• **PATEL, Amit M.**
CHICAGO, Illinois 60606-2016 (US)

• **QUARFOTH, Ryan G.**
CHICAGO, Illinois 60606-2016 (US)

(30) Priority: **09.04.2015 US 201514682643**

(74) Representative: **Cabinet Plasseraud**
66, rue de la Chaussée d'Antin
75440 Paris Cedex 09 (FR)

(54) **TWO-Dimensionally ELECTRONICALLY-STEERABLE ARTIFICIAL IMPEDANCE SURFACE ANTENNA**

(57) A method and apparatus for electronically steering an antenna system is provided. A surface wave is propagated along each of a number of surface wave channels formed in each of a plurality of radiating elements to form a radiation pattern. Each surface wave channel in the number of surface wave channels formed in each radiating element in the plurality of radiating elements is coupled to a transmission line configured to

carry a radio frequency signal using a surface wave feed in a plurality of surface wave feed associated with the plurality of radiating elements. A main lobe of the radiation pattern is electronically steered by controlling voltages applied to a plurality of switch elements connecting a plurality of impedance elements in each of the number of surface wave channels.

EP 3 079 204 A1

Description**1. Field:**

[0001] The present disclosure relates generally to antennas and, in particular, to electronically-steerable antennas. Still more particularly, the present disclosure relates to an electronically-steerable artificial impedance antenna capable of being steered in two dimensions.

2. Background:

[0002] In various applications, having the capability to electronically steer an antenna in two directions may be desirable. As used herein, "steering" an antenna may include directing the primary gain lobe, or main lobe, of the radiation pattern of the antenna in a particular direction. Electronically steering an antenna means steering the antenna using electronic, rather than mechanical, means. Steering an antenna with respect to two dimensions may be referred to as two-dimensional steering.

[0003] Currently, two-dimensional steering is typically provided by phased array antennas. However, currently available phased array antennas have electronic configurations that are more complex and/or more costly than desired. Consequently, having some other type of antenna that can be electronically steered in two dimensions and that is low-cost relative to a phased array antenna may be desirable.

[0004] Artificial impedance surface antennas (AISAs) may be less expensive than phased array antennas. An artificial impedance surface antenna may be implemented by launching a surface wave across an artificial impedance surface (AIS) having an impedance that is spatially modulated across the artificial impedance surface according to a function that matches the phase fronts between the surface wave on the artificial impedance surface and the desired far-field radiation pattern. The basic principle of an artificial impedance surface antenna operation is to use the grid momentum of the modulated artificial impedance surface to match the wave vectors of an excited surface wave front to a desired plane wave.

[0005] Some low-cost artificial impedance surface antennas may only be capable of being electronically steered in one dimension. In some cases, mechanical steering may be used to steer a one-dimensional artificial impedance surface antenna in a second dimension. However, mechanical steering may be undesirable in certain applications.

[0006] A two-dimensional electronically-steerable artificial impedance surface antenna has been described in prior art. However, this type of antenna is more expensive and electronically complex than desired. For example, electronically steering this type of antenna in two dimensions may require a complex network of voltage control for a two-dimensional array of impedance elements. This network is used to create an arbitrary impedance pattern that can produce beam steering in any direction.

[0007] In one illustrative example, a two-dimensional artificial impedance surface antenna may be implemented as a grid of metallic patches on a dielectric substrate. Each metallic path may be referred to as an impedance element. The surface wave impedance of the artificial impedance surface may be locally controlled at each position on the artificial impedance surface by applying a variable voltage to voltage-variable varactors connected between each of the patches. A varactor is a semiconductor element diode that has a capacitance dependent on the voltage applied to this diode.

[0008] The surface wave impedance of the artificial impedance surface can be tuned with capacitive loads inserted between the patches. Each patch is electrically connected to neighboring patches on all four sides with voltage-variable varactor capacitors. The voltage is applied to the varactors through electrical vias connected to each patch. An electrical via may be an electrical connection that goes through the plane of one or more adjacent layers in an electronic circuit.

[0009] One portion of the patches may be electrically connected to the ground plane with vias that run from the center of each patch down through the dielectric substrate. The rest of the patches may be electrically connected to voltage sources that run through the dielectric substrate, and through holes in the ground plane to the voltage sources.

[0010] Computer control allows any desired impedance pattern to be applied to the artificial impedance surface within the limits of the varactor tunability and the limitations of the surface wave properties of the artificial impedance surface. One of the limitations of this method is that the vias can severely reduce the operational bandwidth of the artificial impedance surface because the vias also impart an inductance to the artificial impedance surface that shifts the surface wave bandgap to a lower frequency. As the varactors are tuned to higher capacitance, the artificial impedance surface inductance is increased, which may further reduce the surface wave bandgap frequency. The net result of the surface wave bandgap is that it does not allow the artificial impedance surface to be used above the bandgap frequency. Further, the surface wave bandgap also limits the range of surface wave impedance to that which the artificial impedance surface can be tuned.

[0011] Consequently, an artificial impedance surface antenna that can be electronically steered in two dimensions and that is less expensive and less complex than some currently available two-dimensional artificial impedance surface antennas, such as the one described above, may be desirable in certain applications. Therefore, it would be desirable

to have a method and apparatus that take into account at least some of the issues discussed above, as well as other possible issues.

SUMMARY

[0012] In one illustrative embodiment, an apparatus comprises a plurality of radiating elements and a plurality of surface wave feeds. Each radiating element in the plurality of radiating elements comprises a number of surface wave channels in which each of the number of surface wave channels is configured to constrain a path of a surface wave and comprises a plurality of switch elements and a plurality of impedance elements. A surface wave feed in the plurality of surface wave feeds is configured to couple a surface wave channel in the number of surface wave channels of a radiating element in the plurality of radiating elements to a transmission line configured to carry a radio frequency signal.

[0013] In another illustrative embodiment, an antenna system comprises a plurality of radiating elements and a plurality of surface wave feeds. Each of the plurality of radiating elements comprises a number of surface wave channels in which each of the number of surface wave channels is configured to constrain a path of a surface wave. Each of the number of surface wave channels comprises a plurality of impedance elements located on a surface of a dielectric substrate and a plurality of switch elements located on the surface of the dielectric substrate. Each of the plurality of switch elements has only two states. The plurality of surface wave feeds is configured to couple the number of surface wave channels of each of the plurality of radiating elements to a number of transmission lines.

[0014] In yet another illustrative embodiment, a method for electronically steering an antenna system is provided. A surface wave is propagated along each of a number of surface wave channels formed in each of a plurality of radiating elements to form a radiation pattern. Each surface wave channel in the number of surface wave channels formed in each radiating element in the plurality of radiating elements is coupled to a transmission line configured to carry a radio frequency signal using a surface wave feed in a plurality of surface wave feed associated with the plurality of radiating elements. A main lobe of the radiation pattern is electronically steered by controlling voltages applied to a plurality of switch elements connecting a plurality of impedance elements in each of the number of surface wave channels.

[0015] The features and functions can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments in which further details can be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The novel features believed characteristic of the illustrative embodiments are set forth in the appended claims. The illustrative embodiments, however, as well as a preferred mode of use, further objectives and features thereof, will best be understood by reference to the following detailed description of an illustrative embodiment of the present disclosure when read in conjunction with the accompanying drawings, wherein:

Figure 1 is an illustration of an antenna system in the form of a block diagram in accordance with an illustrative embodiment;

Figure 2 is an illustration of an antenna system in accordance with an illustrative embodiment;

Figure 3 is an illustration of a side view of a portion of a tunable artificial impedance surface antenna in accordance with an illustrative embodiment;

Figure 4 is an illustration of a different configuration for an antenna system in accordance with an illustrative embodiment;

Figure 5 is an illustration of another configuration for an antenna system in accordance with an illustrative embodiment;

Figure 6 is an illustration of a side view of a dielectric substrate in accordance with an illustrative embodiment;

Figure 7 is an illustration of a dielectric substrate having embedded pockets of material in accordance with an illustrative embodiment;

Figure 8 is an illustration of an antenna system in accordance with an illustrative embodiment;

Figure 9 is another illustration of an antenna system in accordance with an illustrative embodiment;

Figure 10 is an illustration of an antenna system with a different voltage controller in accordance with an illustrative embodiment;

Figures 11A and 11B are an illustration of yet another configuration for an antenna system in accordance with an illustrative embodiment;

Figure 12 is an illustration of a portion of an antenna system in accordance with an illustrative embodiment;

Figure 13 is an illustration of an antenna system having two radio frequency assemblies in accordance with an illustrative embodiment;

Figure 14 is an illustration of another antenna system in accordance with an illustrative embodiment;

Figure 15 is an illustration of a different configuration for an artificial impedance surface antenna in an antenna system in the form of a block diagram in accordance with an illustrative embodiment;

Figure 16 is an illustration of an artificial impedance surface antenna in accordance with an illustrative embodiment;

Figure 17 is an illustration of a cross-sectional side view of an artificial impedance surface antenna in accordance with an illustrative embodiment;

Figure 18 is an illustration of an impedance pattern for an artificial impedance surface antenna in accordance with an illustrative embodiment;

Figure 19 is an illustration of a portion of an artificial impedance surface antenna in accordance with an illustrative embodiment;

Figure 20 is an illustration of a cross-sectional side view of an artificial impedance surface antenna in accordance with an illustrative embodiment;

Figure 21 is an illustration of an artificial impedance surface antenna in the form of a block diagram in accordance with an illustrative embodiment;

Figure 22 is an illustration of a radiating element in accordance with an illustrative embodiment;

Figure 23 is an illustration of an enlarged view of a portion of a surface wave channel in accordance with an illustrative embodiment;

Figure 24 is an illustration of a radiating element in accordance with an illustrative embodiment;

Figure 25 is an illustration of a process for electronically steering an antenna system in the form of a flowchart in accordance with an illustrative embodiment;

Figure 26 is an illustration of a process for electronically steering an antenna system in the form of a flowchart in accordance with an illustrative embodiment; and

Figure 27 is an illustration of a process for electronically steering an antenna system in the form of a flowchart in accordance with an illustrative embodiment.

DETAILED DESCRIPTION

[0017] Referring now to the figures and, in particular, with reference to **Figure 1**, an illustration of an antenna system in the form of a block diagram is depicted in accordance with an illustrative embodiment. Antenna system **100** may include antenna **102**, voltage controller **104**, phase shifter **106**, and radio frequency module **108**. Antenna **102** takes the form of artificial impedance surface antenna (AISA) **110** in this illustrative example.

[0018] Antenna **102** is configured to transmit and/or receive radiation pattern **112**. Radiation pattern **112** is a plot of the gain of antenna **102** as a function of direction. The gain of antenna **102** may be considered a performance parameter for antenna **102**. In some cases, "gain" is considered the peak value of gain.

[0019] Antenna **102** is configured to electronically control radiation pattern **112**. When antenna **102** is used for transmitting, radiation pattern **112** may be the strength of the radio waves transmitted from antenna **102** as a function of direction. Radiation pattern **112** may be referred to as a transmitting pattern when antenna **102** is used for transmitting. The gain of antenna **102**, when transmitting, may describe how well antenna **102** converts electrical power into electro-

magnetic radiation, such as radio waves, and transmits the electromagnetic radiation in a specified direction.

[0020] When antenna **102** is used for receiving, radiation pattern **112** may be the sensitivity of antenna **102** to radio waves as a function of direction. Radiation pattern **112** may be referred to as a receiving pattern when antenna **102** is used for receiving. The gain of antenna **102**, when used for receiving, may describe how well antenna **102** converts electromagnetic radiation, such as radio waves, arriving from a specified direction into electrical power.

[0021] The transmitting pattern and receiving pattern of antenna **102** may be identical. Consequently, the transmitting pattern and receiving pattern of antenna **102** may be simply referred to as radiation pattern **112**.

[0022] Radiation pattern **112** may include main lobe **116** and one or more side lobes. Main lobe **116** may be the lobe at the direction in which antenna **102** is being directed. When antenna **102** is used for transmitting, main lobe **116** is located at the direction in which antenna **102** transmits the strongest radio waves to form a radio frequency beam. When antenna **102** is used for transmitting, main lobe **116** may also be referred to as the primary gain lobe of radiation pattern **112**. When antenna **102** is used for receiving, main lobe **116** is located at the direction in which antenna **102** is most sensitive to incoming radio waves.

[0023] In this illustrative example, antenna **102** is configured to electronically steer main lobe **116** of radiation pattern **112** in desired direction **114**. Main lobe **116** of radiation pattern **112** may be electronically steered by controlling phi steering angle **118** and theta steering angle **120** at which main lobe **116** is directed. Phi steering angle **118** and theta steering angle **120** are spherical coordinates. When antenna **102** is operating in an X-Y plane, phi steering angle **118** is the angle of main lobe **116** in the X-Y plane relative to the X-axis. Further, theta steering angle **120** is the angle of main lobe **116** relative to a Z-axis that is orthogonal to the X-Y plane.

[0024] Antenna **102** may operate in the X-Y plane by having array of radiating elements **122** that lie in the X-Y plane. As used herein, an "array" of items may include one or more items arranged in rows and/or columns. In this illustrative example, array of radiating elements **122** may be a single radiating element or a plurality of radiating elements. In one illustrative example, each radiating element in array of radiating elements **122** may take the form of an artificial impedance surface, surface wave waveguide structure.

[0025] Radiating element **123** may be an example of one radiating element in array of radiating elements **122**. Radiating element **123** may be configured to emit radiation that contributes to radiation pattern **112**.

[0026] As depicted, radiating element **123** is implemented using dielectric substrate **124**. Dielectric substrate **124** may be implemented as a layer of dielectric material. A dielectric material is an electrical insulator that can be polarized by an applied electric field.

[0027] Radiating element **123** may include one or more surface wave channels that are formed on dielectric substrate **124**. For example, radiating element **123** may include surface wave channel **125**. Surface wave channel **125** is configured to constrain the path of surface waves propagated along dielectric substrate **124**, and surface wave channel **125** in particular.

[0028] In one illustrative example, array of radiating elements **122** may be positioned substantially parallel to the X-axis and arranged and spaced along the Y-axis. Further, when more than one surface wave channel is formed on a dielectric substrate, these surface wave channels may be formed substantially parallel to the X-axis and arranged and spaced along the Y-axis.

[0029] In this illustrative example, impedance elements and tunable elements located on a dielectric substrate may be used to form each surface wave channel of a radiating element in array of radiating elements **122**. For example, surface wave channel **125** may be comprised of plurality of impedance elements **126** and plurality of tunable elements **128** located on the surface of dielectric substrate **124**. Together, plurality of impedance elements **126**, plurality of tunable elements **128**, and dielectric substrate **124** form an artificial impedance surface from which radiation is generated.

[0030] An impedance element in plurality of impedance elements **126** may be implemented in a number of different ways. In one illustrative example, an impedance element may be implemented as a resonating element. In one illustrative example, an impedance element may be implemented as an element comprised of a conductive material. The conductive material may be, for example, without limitation, a metallic material. Depending on the implementation, an impedance element may be implemented as a metallic strip, a patch of conductive paint, a metallic mesh material, a metallic film, a deposit of a metallic substrate, or some other type of conductive element. In some cases, an impedance element may be implemented as a resonant structure such as, for example, a split-ring resonator (SRR), an electrically-coupled resonator (ECR), a structure comprised of one or more metamaterials, or some other type of structure or element.

[0031] As used herein, a metamaterial may be an artificial material engineered to have properties that may not be found in nature. A metamaterial may be an assembly of multiple individual elements formed from conventional microscopic materials. These conventional materials may include, for example, without limitation, metal, a metal alloy, a plastic material, and other types of materials. However, these conventional materials may be arranged in repeating patterns.

The properties of a metamaterial may be based, not on the composition of the metamaterial, but on the exactly-designed structure of the metamaterial. In particular, the precise shape, geometry, size, orientation, arrangement, or combination thereof may be exactly designed to produce a metamaterial with specific properties that may not be found or readily found in nature.

[0032] Each one of plurality of tunable elements **128** may be an element that can be controlled, or tuned, to change an angle of the one or more surface waves being propagated along radiating element **123**. In this illustrative example, each of plurality of tunable elements **128** may be an element having a capacitance that can be varied based on the voltage applied to the tunable element.

[0033] In one illustrative example, plurality of impedance elements **126** takes the form of plurality of metallic strips **132** and plurality of tunable elements **128** takes the form of plurality of varactors **134**. Each of plurality of varactors **134** may be a semiconductor element diode that has a capacitance dependent on the voltage applied to the semiconductor element diode.

[0034] In one illustrative example, plurality of metallic strips **132** may be arranged in a row that extends along the X-axis. For example, plurality of metallic strips **132** may be periodically distributed on dielectric substrate **124** along the X-axis. Plurality of varactors **134** may be electrically connected to plurality of metallic strips **132** on the surface of dielectric substrate **124**. In particular, at least one varactor in plurality of varactors **134** may be positioned between each adjacent pair of metallic strips in plurality of metallic strips **132**. Further, plurality of varactors **134** may be aligned such that all of the varactor connections on each metallic strip have the same polarity.

[0035] Dielectric substrate **124**, plurality of impedance elements **126**, and plurality of tunable elements **128** may be configured with respect to selected design configuration **136** for surface wave channel **125**, and radiating element **123** in particular. Depending on the implementation, each radiating element in array of radiating elements **122** may have a same or different selected design configuration.

[0036] As depicted, selected design configuration **136** may include a number of design parameters such as, but not limited to, impedance element width **138**, impedance element spacing **140**, tunable element spacing **142**, and substrate thickness **144**. Impedance element width **138** may be the width of an impedance element in plurality of impedance elements **126**. Impedance element width **138** may be selected to be the same or different for each of plurality of impedance elements **126**, depending on the implementation.

[0037] Impedance element spacing **140** may be the spacing of plurality of impedance elements **126** with respect to the X-axis. Tunable element spacing **142** may be the spacing of plurality of tunable elements **128** with respect to the X-axis. Further, substrate thickness **144** may be the thickness of dielectric substrate **124** on which a particular waveguide is implemented.

[0038] The values for the different parameters in selected design configuration **136** may be selected based on, for example, without limitation, the radiation frequency at which antenna **102** is configured to operate. Other considerations include, for example, the desired impedance modulations for antenna **102**.

[0039] Voltages may be applied to plurality of tunable elements **128** by applying voltages to plurality of impedance elements **126** because plurality of impedance elements **126** may be electrically connected to plurality of tunable elements **128**. In particular, the voltages applied to plurality of impedance elements **126**, and thereby plurality of tunable elements **128**, may change the capacitance of plurality of tunable elements **128**. Changing the capacitance of plurality of tunable elements **128** may, in turn, change the surface impedance of antenna **102**. Changing the surface impedance of antenna **102** changes radiation pattern **112** produced.

[0040] In other words, by controlling the voltages applied to plurality of impedance elements **126**, the capacitances of plurality of tunable elements **128** may be varied. Varying the capacitances of plurality of tunable elements **128** may vary, or modulate, the capacitive coupling and impedance between plurality of impedance elements **126**. Varying, or modulating, the capacitive coupling and impedance between plurality of impedance elements **126** may change theta steering angle **120**.

[0041] The voltages may be applied to plurality of impedance elements **126** using voltage controller **104**. Voltage controller **104** may include number of voltage sources **146**, number of grounds **148**, number of voltage lines **150**, and/or some other type of component. In some cases, voltage controller **104** may be referred to as a voltage control network. As used herein, a "number of" items may include one or more items. For example, number of voltage sources **146** may include one or more voltage sources; number of grounds **148** may include one or more grounds; and number of voltage lines **150** may include one or more voltage lines.

[0042] A voltage source in number of voltage sources **146** may take the form of, for example, without limitation, a digital to analog converter (DAC), a variable voltage source, or some other type of voltage source. Number of grounds **148** may be used to ground at least a portion of plurality of impedance elements **126**. Number of voltage lines **150** may be used to transmit voltage from number of voltage sources **146** and/or number of grounds **148** to plurality of impedance elements **126**. In some cases, each of number of voltage lines **150** may be referred to as a via. In one illustrative example, number of voltage lines **150** may take the form of a number of metallic vias.

[0043] In one illustrative example, each of plurality of impedance elements **126** may receive voltage from one of number

of voltage sources **146**. In another illustrative example, a portion of plurality of impedance elements **126** may receive voltage from number of voltage sources **146** through a corresponding portion of number of voltage lines **150**, while another portion of plurality of impedance elements **126** may be electrically connected to number of grounds **148** through a corresponding portion of number of voltage lines **150**.

[0044] In some cases, controller **151** may be used to control number of voltage sources **146**. Controller **151** may be considered part of or separate from antenna system **100**, depending on the implementation. Controller **151** may be implemented using a microprocessor, an integrated circuit, a computer, a central processing unit, a plurality of computers in communication with each other, or some other type of computer or processor.

[0045] Surface waves **152** propagated along array of radiating elements **122** may be coupled to number of transmission lines **156** by plurality of surface wave feeds **130** located on dielectric substrate **124**. A surface wave feed in plurality of surface wave feeds **130** may be any device that is capable of converting a surface wave into a radio frequency signal and/or a radio frequency signal into a surface wave. In one illustrative example, a surface wave feed in plurality of surface wave feeds **130** is located at the end of each waveguide in array of radiating elements **122** on dielectric substrate **124**.

[0046] For example, when antenna **102** is in a receiving mode, the one or more surface waves propagating along radiating element **123** may be received at a corresponding surface wave feed in plurality of surface wave feeds **130** and converted into a corresponding radio frequency signal **154**. Radio frequency signal **154** may be sent to radio frequency module **108** over one or more of number of transmission lines **156**. Radio frequency module **108** may then function as a receiver and process radio frequency signal **154** accordingly.

[0047] Depending on the implementation, radio frequency module **108** may function as a transmitter, a receiver, or a combination of the two. In some illustrative examples, radio frequency module **108** may be referred to as transmit/receive module **158**. In some cases, when configured for transmitting, radio frequency module **108** may be referred to as a radio frequency source.

[0048] In some cases, radio frequency signal **154** may pass through phase shifter **106** prior to being sent to radio frequency module **108**. Phase shifter **106** may include any number of phase shifters, power dividers, transmission lines, and/or other components configured to shift the phase of radio frequency signal **154**. In some cases, phase shifter **106** may be referred to as a phase-shifting network.

[0049] When antenna **102** is in a transmitting mode, radio frequency signal **154** may be sent from radio frequency module **108** to antenna **102** over number of transmission lines **156**. In particular, radio frequency signal **154** may be received at one of plurality of surface wave feeds **130** and converted into one or more surface waves that are then propagated along a corresponding waveguide in array of radiating elements **122**.

[0050] In this illustrative example, the relative phase difference between plurality of surface wave feeds **130** may be changed to change phi steering angle **118** of radiation pattern **112** that is transmitted or received. Thus, by controlling the relative phase difference between plurality of surface wave feeds **130** and controlling the voltages applied to the tunable elements of each waveguide in array of radiating elements **122**, phi steering angle **118** and theta steering angle **120**, respectively, may be controlled. In other words, antenna **102** may be electronically steered in two dimensions.

[0051] Depending on the implementation, radiating element **123** may be configured to emit linearly polarized radiation or circularly polarized radiation. When configured to emit linearly polarized radiation, the plurality of metallic strips used for each surface wave channel on radiating element **123** may be angled in the same direction relative to the X-axis along which the plurality of metallic strips are distributed. Typically, only a single surface wave channel is needed for each radiating element **123**.

[0052] However, when radiating element **123** is configured for producing circularly polarized radiation, surface wave channel **125** may be a first surface wave channel and second surface wave channel **145** may be also present in radiating element **123**. Surface wave channel **125** and second surface wave channel **145** may be about 90 degrees out of phase from each other. The interaction between the radiation from these two coupled surface wave channels makes it possible to create circularly polarized radiation.

[0053] Plurality of impedance elements **126** that form surface wave channel **125** may be a first plurality of impedance elements that radiate with a polarization at an angle to the polarization of the surface wave electric field. A second plurality of impedance elements that form second surface wave channel **145** may radiate with a polarization at an angle offset about 90 degrees as compared to surface wave channel **125**.

[0054] For example, each impedance element in the first plurality of impedance elements of surface wave channel **125** may have a tensor impedance with a principal angle that is angled at a first angle relative to an X-axis of radiating element **123**. Further, each impedance element in the second plurality of impedance elements of second surface wave channel **145** may have a tensor impedance that is angled at a second angle relative to the X-axis of the corresponding radiating element. The difference between the first angle and the second angle may be about 90 degrees.

[0055] The capacitance between the first plurality of impedance elements may be controlled using plurality of tunable elements **128**, which may be a first plurality of tunable elements. The capacitance between the second plurality of impedance elements may be controlled using a second plurality of tunable elements.

[0056] As a more specific example, plurality of metallic strips **132** on surface wave channel **125** may be angled at

about positive 45 degrees with respect to the X-axis along which plurality of metallic strips **132** is distributed. However, the plurality of metallic strips used for second surface wave channel **145** may be angled at about negative 45 degrees with respect to the X-axis along which the plurality of metallic strips is distributed. This variation in tilt angle produces radiation of different linear polarizations, that when combined with a 90 degree phase shift, may produce circularly polarized radiation.

[0057] The illustration of antenna system **100** in **Figure 1** is not meant to imply physical or architectural limitations to the manner in which an illustrative embodiment may be implemented. Other components in addition to or in place of the ones illustrated may be used. Some components may be optional. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined, divided, or combined and divided into different blocks when implemented in an illustrative embodiment.

[0058] For example, in other illustrative examples, phase shifter **106** may not be included in antenna system **100**. Instead, number of transmission lines **156** may be used to couple plurality of surface wave feeds **130** to a number of power dividers and/or other types of components, and these different components to radio frequency module **108**. In some examples, number of transmission lines **156** may directly couple plurality of surface wave feeds **130** to radio frequency module **108**.

[0059] In some illustrative examples, a tunable element in plurality of tunable elements **128** may be implemented as a pocket of variable material embedded in dielectric substrate **124**. As used herein, a "variable material" may be any material having a permittivity that may be varied. The permittivity of the variable material may be varied to change, for example, the capacitance between two impedance elements between which the variable material is located. The variable material may be a voltage-variable material or any electrically variable material, such as, for example, without limitation, a liquid crystal material or barium strontium titanate (BST).

[0060] In other illustrative examples, a tunable element in plurality of tunable elements **128** may be part of a corresponding impedance element in plurality of impedance elements **126**. For example, a resonant structure having a tunable element may be used. The resonant structure may be, for example, without limitation, a split-ring resonator, an electrically-coupled resonator, or some other type of resonant structure.

[0061] With reference now to **Figure 2**, an illustration of an antenna system is depicted in accordance with an illustrative embodiment. Antenna system **200** may be an example of one implementation for antenna system **100** in **Figure 1**. As depicted, antenna system **200** includes tunable artificial impedance surface antenna (AISA) **201**, which may be an example of one implementation for artificial impedance surface antenna **110** in **Figure 1**. Further, antenna system **200** may also include voltage controller **202** and phase shifter **203**. Voltage controller **202** and phase shifter **203** may be examples of implementations for voltage controller **104** and phase shifter **106**, respectively, in **Figure 1**.

[0062] In this illustrative example, tunable artificial impedance surface antenna **201** is a relatively low cost antenna capable of being electronically steered in both theta, θ , and phi, ϕ , directions. When tunable artificial impedance surface antenna **201** is operating in the X-Y plane, the theta direction may be a direction perpendicular to the Z axis that is perpendicular to the X-Y plane, while the phi direction may be a direction parallel to the X-Y plane.

[0063] As depicted, tunable artificial impedance surface antenna **201** includes dielectric substrate **206**, metallic strips **207**, varactors **209**, and radio frequency (RF) surface wave feeds **208**. Metallic strips **207** may be a periodic array of metallic strips **207** that are located on one surface of dielectric substrate **206**. Varactors **209** may be located between metallic strips **207**. Dielectric substrate **206** may or may not have a ground plane (not shown in this view) on a surface of dielectric substrate **206** opposite to the surface on which metallic strips **207** are located.

[0064] Steering of the main lobe of tunable artificial impedance surface antenna **201** in the theta direction is controlled by varying, or modulating, the surface wave impedance of tunable artificial impedance surface antenna **201**. For example, the impedance of tunable artificial impedance surface antenna **201** may be varied, or modulated, by controlling the voltages applied to metallic strips **207** located on the surface of dielectric substrate **206**. With varactors **209** present between metallic strips **207**, the voltage applied to varactors **209** may be controlled using metallic strips **207**. Each of varactors **209** is a type of diode that has a capacitance that varies as a function of the voltage applied across the terminals of the diode.

[0065] The voltages applied to metallic strips **207** may change the capacitance of varactors **209** between metallic strips **207**, which may, in turn, change the impedance of tunable artificial impedance surface antenna **201**. In other words, by controlling the voltages applied to metallic strips **207**, the capacitances of varactors **209** may be varied. Varying the capacitances of varactors **209** may vary or modulate the capacitive coupling and impedance between metallic strips **207** to steer the beam produced by antenna system **200** in the theta direction.

[0066] In this illustrative example, radio frequency surface wave feeds **208** may be a two-dimensional array of radio frequency surface wave feeds. Steering of the main lobe of tunable artificial impedance surface antenna **201** in the phi direction is controlled by changing the relative phase difference between radio frequency surface wave feeds **208**.

[0067] Voltage controller **202** is used to apply direct current (DC) voltages to metallic strips **207** on the structure of tunable artificial impedance surface antenna **201**. Voltage controller **202** may be controlled based on commands received through control bus **205**. In this manner, control bus **205** provides control for voltage controller **202**. Further, control bus

204 may provide control for phase shifter **203**. Each of control bus **204** and control bus **205** may be a bus from a microprocessor, a central processing unit (CPU), one or more computers, or some other type of computer or processor.

[0068] In this illustrative example, the polarities of varactors **209** may be aligned such that all varactor connections to any one of metallic strips **207** may be connected with the same polarity. One terminal on a varactor may be referred to as an anode, and the other terminal may be referred to as a cathode. Thus, some of metallic strips **207** are only connected to anodes of varactors **209**, while other of metallic strips **207** are only connected to cathodes of varactors **209**. Further, as depicted, adjacent metallic strips **207** may alternate with respect to which ones are connected to the anodes of varactors **209** and which ones are connected to the cathodes of varactors **209**.

[0069] The spacing of metallic strips **207** in one dimension of tunable artificial impedance surface antenna **201**, which may be in an X direction, may be a fraction of the radio frequency surface wave wavelength of the radio frequency waves that propagate across tunable artificial impedance surface antenna **201** from radio frequency surface wave feeds **208**. In one illustrative example, the spacing of metallic strips **207** may be at most 2/5 of the radio frequency surface wave wavelength of the radio frequency waves. In another illustrative example, the fraction may be only about 2/10 of the radio frequency surface wave wavelength of the radio frequency waves. Depending on the implementation, the spacing between varactors **209** connected to metallic strips **207** in a second dimension of tunable artificial impedance surface antenna **201**, which may be in a Y direction, may be about the same as the spacing between metallic strips **207**.

[0070] Radio frequency surface wave feeds **208** may form a phased array corporate feed structure, or may take the form of conformal surface wave feeds, which are integrated into tunable artificial impedance surface antenna **201**. The surface wave feeds may be integrated into tunable artificial impedance surface antenna **201**, for example, using microstrips. The spacing between radio frequency surface wave feeds **208** in the Y direction may be based on selected rules that indicate that the spacing be no farther apart than the free-space wavelength for the highest frequency signal to be transmitted or received.

[0071] In this illustrative example, the thickness of dielectric substrate **206** may be determined by the permittivity of dielectric substrate **206** and the frequency of radiation to be transmitted or received. The higher the permittivity, the thinner dielectric substrate **206** may be.

[0072] The capacitance values of varactors **209** may be determined by the range needed for the desired impedance modulations for tunable artificial impedance surface antenna **201** in order to obtain the various angles of radiation. Further, the particular substrate used for dielectric substrate **206** may be selected based on the operating frequency, or radio frequency, of tunable artificial impedance surface antenna **201**.

[0073] For example, when tunable artificial impedance surface antenna **201** is operating at about 20 gigahertz, dielectric substrate **206** may be implemented using, without limitation, a substrate, available from Rogers Corporation, having a thickness of about 50 millimeters (mm). In this example, dielectric substrate **206** may have a relative permittivity equal to about 12.2. Metallic strips **207** may be spaced about two millimeters to about three millimeters apart on dielectric substrate **206**. Further, radio frequency surface wave feeds **208** may be spaced about 2.5 centimeters apart and varactors **209** may be spaced about two millimeters to about three millimeters apart in this example. Varactors **209** may vary in capacitance from about 0.2 picofarads (pF) to about 2.0 picofarads. Of course, other specifications may be used for tunable artificial impedance surface antenna **201** for different radiation frequencies.

[0074] To transmit or receive a radio frequency signal using tunable artificial impedance surface antenna **201**, transmit/receive module **210** is connected to phase shifter **203**. Phase shifter **203** may be a one-dimensional phase shifter in this illustrative example. Phase shifter **203** may be implemented using any type of currently available phase shifter, including those used in phased array antennas.

[0075] In this illustrative example, phase shifter **203** includes radio frequency transmission lines **211** connected to transmit/receive module **210**, power dividers **212**, and phase shifters **213**. Phase shifters **213** are controlled by voltage control lines **216** connected to digital to analog converter (DAC) **214**. Digital to analog converter **214** receives digital control signals from control bus **204** to control the steering in the phi direction.

[0076] The main lobe of tunable artificial impedance surface antenna **201** may be steered in the phi direction by using phase shifter **203** to impose a phase shift between each of radio frequency surface wave feeds **208**. If radio frequency surface wave feeds **208** are spaced uniformly, then the phase shift between adjacent radio frequency surface wave feeds **208** may be substantially constant. The relationship between the phi (ϕ) steering angle and the phase shift may be calculated using standard phased array methods, according to the following equation:

$$\phi = \sin^{-1}(\lambda \Delta \psi / 2\pi d) \quad (1)$$

where λ is the radiation wavelength, d is the spacing between radio frequency surface wave feeds **208**, and $\Delta \psi$ is the phase shift between these surface wave feeds. In some cases, these surface wave feeds may also be spaced non-uniformly, and the phase shifts adjusted accordingly.

[0077] As described earlier, the main lobe of tunable artificial impedance surface antenna **201** may be steered in the theta (θ) direction by applying voltages to varactors **209** such that tunable artificial impedance surface antenna **201** has surface wave impedance Z_{sw} , which is modulated or varied periodically with the distance (x) away from radio frequency surface wave feeds **208**, according to the following equation:

$$Z_{sw} = X + M \cos(2\pi x / p) \quad (2)$$

where X and M are the mean impedance and the amplitude, respectively, of the modulation of tunable artificial impedance surface antenna **201**, and p is the modulation period. The variation of the surface wave impedance, Z_{sw} , may be modulated sinusoidally. The theta steering angle, θ , is related to the impedance modulation by the following equation:

$$\theta = \sin^{-1}(n_{sw} - \lambda / p) \quad (3)$$

where λ is the wavelength of the radiation, and

$$n_{sw} = \sqrt{(X / 377\Omega)^2 + 1} \quad (4)$$

is the mean surface wave index.

[0078] The beam is steered in the theta direction by tuning the voltages applied to varactors **209** such that X , M , and p result in the desired theta steering angle, θ . The dependence of the surface wave impedance on the varactor capacitance is calculated using transcendental equations resulting from the transverse resonance method or by using full-wave numerical simulations.

[0079] Voltages may be applied to varactors **209** by grounding alternate metallic strips **207** to ground **220** via voltage control lines **218** and applying tunable voltages via voltage control lines **219** to the rest of metallic strips **207**. The voltage applied to each of voltage control lines **219** may be a function of the desired theta steering angle and may be different for each of voltage control lines **219**. The voltages may be applied from digital-to-analog converter (DAC) **217** that receives digital controls from control bus **205** from a controller for steering in the theta direction. The controller may be a microprocessor, central processing unit (CPU) or any computer, processor or controller.

[0080] One benefit of grounding half of metallic strips **207** is that only half as many voltage control lines **219** are required as there are metallic strips **207**. However, in some cases, the spatial resolution of the voltage control and hence, the impedance modulation, may be limited to twice the spacing between metallic strips **207**.

[0081] With reference now to **Figure 3**, an illustration of a side view of a portion of tunable artificial impedance surface antenna **201** from **Figure 2** is depicted in accordance with an illustrative embodiment. In this illustrative example, dielectric substrate **206** has ground plane **300**.

[0082] With reference now to **Figure 4**, an illustration of a different configuration for an antenna system is depicted in accordance with an illustrative embodiment. Antenna system **400** may be an example of one implementation for antenna system **100** in **Figure 1**. Antenna system **400** includes tunable artificial impedance surface antenna (AISA) **401**, which may be an example of one implementation for artificial impedance surface antenna **110** in **Figure 1**.

[0083] Antenna system **400** and tunable artificial impedance surface antenna **401** may be implemented in a manner similar to antenna system **200** and tunable artificial impedance surface antenna **201**, respectively, from **Figure 2**. As depicted, antenna system **400** includes tunable artificial impedance surface antenna **401**, voltage controller **402**, and phase shifter **403**. Tunable artificial impedance surface antenna **401** includes dielectric substrate **406**, metallic strips **407**, varactors **409**, and radio frequency surface wave feeds **408**. Further, antenna system **400** may include transmit/receive module **410**.

[0084] However, in this illustrative example, voltage controller **402** may be implemented in a manner different from the manner in which voltage controller **202** is implemented in **Figure 2**. In **Figure 4**, voltage controller **402** may include voltage lines **411** that allow voltage to be applied from digital to analog converter **412** to each of metallic strips **407**. Alternating metallic strips **407** are not grounded as in **Figure 2**. Digital to analog converter **412** may receive digital controls from control bus **205** in **Figure 2** from, for example, controller **414**, for steering in the theta direction. Controller **414** may be implemented using a microprocessor, a central processing unit, or some other type of computer or processor. Steering in the phi direction may be performed using phase shifter **403** in a manner similar to the manner in which phase shifter **203** is used in **Figure 2**.

[0085] With voltage lines **411** applying voltage to all of metallic strips **407**, twice as many control voltages are required

compared to antenna system 200 in Figure 2. However, the spatial resolution of the impedance modulation of tunable artificial impedance surface antenna 401 is doubled. In this illustrative example, the voltage applied to each of voltage lines 411 is a function of the desired theta steering angle, and may be different for each of voltage lines 411.

[0086] With reference now to Figure 5, an illustration of another configuration for an antenna system is depicted in accordance with an illustrative embodiment. Antenna system 500 may be an example of one implementation for antenna system 100 in Figure 1. Antenna system 500 includes tunable artificial impedance surface antenna (AISA) 501, which may be an example of one implementation for artificial impedance surface antenna 110 in Figure 1.

[0087] Antenna system 500 and tunable artificial impedance surface antenna 501 may be implemented in a manner similar to antenna system 200 and tunable artificial impedance surface antenna 201, respectively, from Figure 2. Further, antenna system 500 and tunable artificial impedance surface antenna 501 may be implemented in a manner similar to antenna system 400 and tunable artificial impedance surface antenna 401, respectively, from Figure 4.

[0088] As depicted, antenna system 500 includes tunable artificial impedance surface antenna 501, voltage controller 502, and phase shifter 503. Tunable artificial impedance surface antenna 501 includes dielectric substrate 506, metallic strips 507, varactors 509, and radio frequency surface wave feeds 508. Further, antenna system 500 may include transmit/receive module 510.

[0089] However, in this illustrative example, voltage controller 502 may be implemented in a manner different from the manner in which voltage controller 202 is implemented in Figure 2 and in a manner different from the manner in which voltage controller 402 is implemented in Figure 4. In Figure 5, the digital to analog converters of Figure 2 and Figure 4 have been replaced by variable voltage source 512.

[0090] As the voltage of variable voltage source 512 is varied, the radiation angle of the beam produced by tunable artificial impedance surface antenna 501 varies between a minimum theta steering angle and a maximum theta steering angle. This range for the theta steering angle may be determined by the details of the design configuration of tunable artificial impedance surface antenna 501.

[0091] The voltage is applied to metallic strips 507 through voltage control lines 514 and voltage control lines 516. Voltage control lines 516 may provide a ground for metallic strips 507, while voltage control lines 514 may provide metallic strips 507 with a variable voltage. Across the X dimension, metallic strips 507 are alternately connected to voltage control lines 514 or voltage control lines 516. In other words, alternating metallic strips 507 are grounded.

[0092] Metallic strips 507 may have centers that are equally spaced in the X dimension, with the widths of metallic strips 507 periodically varying with a period (p) 518. The number of metallic strips 507 in period 518 may be any number. For example, metallic strips 507 may be between 10 and 20 metallic strips per period 518. The width variation per period 518 may be configured to produce surface wave impedance with a periodic modulation in the X-direction with period 518, such as, for example, the sinusoidal variation of equation (3) described above.

[0093] The surface wave impedance at each point on tunable artificial impedance surface antenna 501 is determined by the width of each of metallic strips 507 and the voltage applied to varactors 509. The capacitance of varactors 509 may vary with the varying applied voltage. When the voltage is about 0 volts, the capacitance of a varactor may be at a maximum value of C_{max} . The capacitance decreases as the voltage is increased until the capacitance reaches a minimum value of C_{min} . As the capacitance is varied, the impedance modulation parameters, X and M, as described in equation 2 above, may also vary from minimum values of X_{min} and M_{min} , respectively, to maximum values of X_{max} and M_{max} , respectively.

[0094] Further, the mean surface wave index of equation 4 described above varies from $n_{min} = \sqrt{(X_{min} / 377\Omega)^2 + 1}$ to $n_{max} = \sqrt{(X_{max} / 377\Omega)^2 + 1}$. Further, as described in equation 3 above, the range that the radiation angle of tunable artificial impedance surface antenna 501 may be scanned may vary from a minimum of

$$\theta_{min} = \sin^{-1}(n_{min} - \lambda / p) \quad (5)$$

to a maximum of

$$\theta_{max} = \sin^{-1}(n_{max} - \lambda / p) \quad (6)$$

with variation of a single control voltage.

[0095] With reference now to Figure 6, an illustration of a side view of a dielectric substrate is depicted in accordance

with an illustrative embodiment. In this illustrative example, dielectric substrate **601** may be used to implement dielectric substrate **206** from **Figure 2**, dielectric substrate **406** from **Figure 4**, and/or dielectric substrate **506** from **Figure 5**. Dielectric substrate **601** may have an electrical permittivity that is varied with the application of an electric field.

[0096] Metallic strips **602** are shown located on one surface of dielectric substrate **601**. As depicted, no varactors are used in this illustrative example. When a voltage is applied to metallic strips **602**, an electric field is produced between adjacent metallic strips **602** and also between metallic strips **602** and ground plane **603**. The electric field changes the permittivity of dielectric substrate **601**, which results in a change in the capacitance between adjacent metallic strips **602**. The capacitance between adjacent metallic strips **602** determines the surface wave impedance of the tunable artificial impedance surface antenna that uses dielectric substrate **601**.

[0097] With reference now to **Figure 7**, an illustration of dielectric substrate **601** from **Figure 6** having embedded pockets of material is depicted in accordance with an illustrative embodiment. In this illustrative example, dielectric substrate **601** may take the form of inert substrate **700**. A voltage differential may be applied to adjacent metallic strips **602**, which may create an electric field between metallic strips **602** and produce a permittivity change in pockets of variable material **702** located between metallic strips **602**.

[0098] Pockets of variable material **702** may be an example of one manner in which plurality of tunable elements **128** in **Figure 1** may be implemented. The variable material in pockets of variable material **702** may be any electrically variable material, such as, for example, without limitation, a liquid crystal material or barium strontium titanate (BST). In particular, variable material **702** is embedded in pockets within dielectric substrate **601** between metallic strips **602**.

[0099] With reference now to **Figure 8**, an illustration of an antenna system is depicted in accordance with an illustrative embodiment. In this illustrative example, antenna system **800** may be an example of one implementation for antenna system **100** in **Figure 1**. Antenna system **800** includes antenna **802**, voltage controller **803**, phase shifter **804**, and radio frequency module **806**. Antenna **802**, voltage controller **803**, phase shifter **804**, and radio frequency module **806** may be examples of implementations for antenna **102**, voltage controller **104**, phase shifter **106**, and radio frequency module **108**, respectively, in **Figure 1**.

[0100] Antenna **802** is supplied voltage by voltage controller **803**. Voltage controller **803** includes digital to analog converter (DAC) **808** and voltage lines **811**. Digital to analog converter **808** may be an example of one implementation for a voltage source in number of voltage sources **146** in **Figure 1**. Voltage lines **811** may be an example of one implementation for number of voltage lines **150** in **Figure 1**.

[0101] Voltage may be applied to antenna **802** from digital to analog converter **808** through voltage lines **811**. Controller **810** may be used to control the voltage signals sent from digital to analog converter **808** to antenna **802**. Controller **810** may be an example of one implementation for controller **151** in **Figure 1**. In this illustrative example, controller **810** may be considered part of antenna system **800**.

[0102] As depicted, antenna **802** may include radiating structure **812** formed by array of radiating elements **813**. Array of radiating elements **813** may be an example of one implementation for array of radiating elements **122** in **Figure 1**. In this illustrative example, each radiating element in array of radiating elements **813** may be implemented as an artificial impedance surface, surface wave waveguide.

[0103] Array of radiating elements **813** may include radiating elements **814**, **815**, **816**, **818**, **820**, **822**, **824**, and **826**. Each of these radiating elements may be implemented using a dielectric substrate. Further, each of these dielectric substrates may have a plurality of metallic strips, a plurality of varactors, and a surface wave feed located on the surface of the dielectric substrate that forms a surface wave channel for the corresponding radiating element.

[0104] As one illustrative example, radiating element **814** may be formed by dielectric substrate **827**. Plurality of metallic strips **828** and plurality of varactors **830** may be located on the surface of dielectric substrate **827** to form surface wave channel **831**. Further, surface wave feed **832** may be located on the surface of dielectric substrate **827**. Plurality of metallic strips **828** and plurality of varactors **830** may be examples of implementations for plurality of metallic strips **132** and plurality of varactors **134**, respectively, in **Figure 1**.

[0105] In the transmitting mode, surface wave feed **832** feeds a surface wave into surface wave channel **831** of radiating element **814**. Surface wave channel **831** confines the surface wave to propagate linearly along a confined path across plurality of metallic strips **828**. In particular, surface wave channel **831** creates a region of high surface wave index surrounded by a region of lower surface wave index to confine the surface wave to the set path. The surface wave index is the ratio between the speed of light and the propagation speed of the surface wave.

[0106] The regions of high surface wave index are created by plurality of metallic strips **828** and plurality of varactors **830**, while the regions of low surface wave index are created by the bare surface of dielectric substrate **827**. The widths of the regions of high surface wave index may be 50 percent to about 100 percent times the length of the surface wave wavelength. The surface wave wavelength is as follows:

$$\lambda_{sw} = 2\pi n_{sw} \frac{c}{f} \quad (7)$$

where λ_{sw} is the surface wave wavelength, f is the frequency of the surface wave, c is the speed of light, and n_{sw} is the surface wave index.

[0107] Each of plurality of metallic strips **828** located on dielectric substrate **827** may have the same width. Further, these metallic strips may be equally spaced along dielectric substrate **827**. Additionally, plurality of varactors **830** may also be equally spaced along dielectric substrate **827**. In other words, plurality of metallic strips **828** and plurality of varactors **830** may be periodically distributed on dielectric substrate **827**. Further, plurality of varactors **830** may be aligned such that all of the varactors connections of plurality of metallic strips **828** have the same polarity.

[0108] The thickness of dielectric substrate **827** may be determined by its permittivity and the frequency of radiation to be transmitted or received. The higher the permittivity, the thinner dielectric substrate **827** may be.

[0109] The capacitance values of plurality of varactors **830** may be determined by the range needed for the desired impedance modulations for the various angles of radiation. The main lobe of the radiation pattern produced by antenna **802** may be electronically steered in the theta direction by applying voltages to the various varactors in array of radiating elements **813**. Voltage may be applied to these varactors such that antenna **802** has a surface wave impedance that varies sinusoidally with a distance, x , away from the surface wave feeds on the different dielectric substrates.

[0110] Voltage from digital to analog converter **808** may be applied to the metallic strips on array of radiating elements **813** through voltage lines **811**. In this illustrative example, surface waves propagated across array of radiating elements **813** may be coupled to phase shifter **804** by the surface wave feeds on array of radiating elements **813**. Phase shifter **804** includes plurality of phase-shifting devices **834**.

[0111] The main lobe of antenna **802** may be electronically steered in the phi direction by imposing a phase shift between each of the surface wave feeds on array of radiating elements **813**. If the surface wave feeds are uniformly spaced, the phase shift between adjacent surface wave feeds may be substantially constant. The relation between the phi steering angle and this phase shift may be calculated as follows:

$$\phi = \sin^{-1} \left(\frac{\lambda \Delta \psi}{2\pi d} \right). \quad (8)$$

[0112] In other illustrative examples, a radio frequency module, a phase shifter, and a plurality of surface wave feeds may be present on the opposite side of antenna **802** relative to radio frequency module **806**. This configuration may be used in order to facilitate steering in the negative theta direction.

[0113] With reference now to **Figure 9**, another illustration of an antenna system is depicted in accordance with an illustrative embodiment. In this illustrative example, antenna system **900** may be an example of one implementation for antenna system **100** in **Figure 1**. Antenna system **900** includes antenna **902**, voltage controller **903**, phase shifter **904**, and radio frequency module **906**.

[0114] Voltage controller **903** is configured to supply voltage to antenna **902**. Voltage controller **903** includes variable voltage source **908**. Voltage lines **911** apply voltage to antenna **902**, while voltage lines **913** provide ground for antenna **902**.

[0115] Antenna **902** may include array of radiating elements **915** that may include radiating elements **912**, **914**, **916**, **918**, **920**, **922**, **924**, and **926**. Each of these radiating elements may be implemented using a dielectric substrate. A surface wave channel may be formed on each radiating element by a plurality of metallic strips, a plurality of varactors, and the dielectric substrate.

[0116] For example, radiating element **912** may be formed using dielectric substrate **927**. First plurality of metallic strips **928**, second plurality of metallic strips **930**, and plurality of varactors **932** located on the surface of dielectric substrate **927** may form surface wave channel **931**. Surface wave feed **933** is also located on the surface of dielectric substrate **927** and couples a surface wave propagated along surface wave channel **931** to phase shifter **904**.

[0117] Each of first plurality of metallic strips **928** located on array of radiating elements **915** may have the same width. Further, each of second plurality of metallic strips **930** located on array of radiating elements **915** may have the same width. The width of the metallic strips in both first plurality of metallic strips **928** and second plurality of metallic strips **930** varies periodically along dielectric substrate **927** with period, p , **934**. This period may be determined by the size of the metallic strips, the radiation frequency, the theta steering angle, and the properties and thickness of dielectric substrate **927**.

[0118] Although only two widths for the metallic strips are shown within one period, any number of metallic strips may be included within a period. Further, any number of different widths may be included within a period.

[0119] Voltage from variable voltage source **908** may be applied to first plurality of metallic strips **928** through voltage lines **911**. Second plurality of metallic strips **930** may be grounded through voltage lines **913**.

[0120] In this illustrative example, surface waves propagated over array of radiating elements **915** may be transmitted to phase shifter **904** as radio frequency signals by the surface wave feeds on array of radiating elements **915**. As depicted, phase shifter **904** includes plurality of phase-shifting devices **936**.

[0121] Transmission lines 938 couple the surface wave feeds to plurality of phase-shifting devices 936 and couple plurality of phase-shifting devices 936 to radio frequency module 906. Radio frequency module 906 may be configured to function as a transmitter, a receiver, or a combination of the two.

[0122] Turning now to Figure 10, an illustration of antenna system 900 from Figure 9 with a different voltage controller is depicted in accordance with an illustrative embodiment. In this illustrative example, voltage controller 903 from Figure 9 has been replaced with voltage controller 1000. Voltage controller 1000 includes ground 1002, digital to analog converter 1004, voltage lines 1006, and voltage lines 1008.

[0123] Voltage lines 1006 allow second plurality of metallic strips 930 to be grounded to ground 1002. Voltage lines 1008 supply voltage from digital to analog converter 1004 to first plurality of metallic strips 928. Controller 1010 is used to control digital to analog converter 1004. In this illustrative example, different voltages are sent to each radiating element in array of radiating elements 915.

[0124] Further, as depicted, phase shifter 904 is not included in this configuration for antenna system 900. Transmission lines 1012 directly couple radio frequency module 906 to the surface wave feeds on array of radiating elements 915.

[0125] In this illustrative example, the radiation pattern created by antenna 902 is steered in the theta direction by controlling the voltages applied to the different varactors in array of radiating elements 915. The radiation pattern created by antenna 902 is steered in the phi direction by the slight variations in surface wave index between neighboring radiating elements. This variation results in phase shifts between the surface waves propagated along these radiating elements, which results in steering in the phi direction.

[0126] With reference now to Figures 11A and 11B, an illustration of yet another configuration for antenna system 900 is depicted in accordance with an illustrative embodiment. In this illustrative example, phase shifter 904 from Figure 9 has been replaced with phase shifter 1100.

[0127] Phase shifter 1100 may be used to control the phi steering angle for antenna system 900. Phase shifter 1100 includes waveguides 1102, 1104, 1106, 1108, 1110, 1112, 1114, and 1116. Each of these waveguides is a surface wave waveguide formed by a plurality of metallic strips and a plurality of varactors located on a dielectric substrate. Voltages may be applied to at least a portion of the metallic strips on the different dielectric substrates to control the phase of the surface waves being propagated along these waveguides to steer the radiation towards the phi steering angle.

[0128] The phase of the surface waves may be controlled such that the phase shift of the surface waves at the end of the adjacent waveguides is $\Delta\psi$. The phase of the surface waves at the end of each of the waveguides is varied by controlling the propagation speed of the surface waves. The propagation speed of the surface waves may be controlled by controlling the voltage applied to the varactors on the dielectric substrates.

[0129] Voltage controller 1118 may be used to apply voltages to at least a portion of the metallic strips of the dielectric substrates, and thereby, at least a portion of the varactors on the dielectric substrates. Voltage controller 1118 includes digital to analog converter 1120, voltage lines 1122, and ground 1121. Voltages may be applied to at least a portion of the metallic strips on the dielectric substrates from digital to analog converter 1120 by voltage lines 1122. Another portion of the metallic strips may be grounded to ground 1121. Controller 1123 may be used to control digital to analog converter 1120.

[0130] The phase of the surface waves at the end of a waveguide may be given by the following equation:

$$\psi(V) = 2\pi n_{sw}(V)f/c \quad (9)$$

where $n_{sw}(V)$ is the surface wave index and is dependent on voltage. Each waveguide may be controlled with a different voltage from voltage controller 1118 in order to create a phase difference at the surface wave feeds on the waveguides. The radio frequency signals may be sent between the surface wave feeds and radio frequency module 906 over transmission lines 1124.

[0131] With reference now to Figure 12, an illustration of a portion of an antenna system is depicted in accordance with an illustrative embodiment. In this illustrative example, a portion of antenna system 1200 is depicted. Antenna system 1200 is an example of one implementation of antenna system 100 in Figure 1. As depicted, antenna system 1200 includes radiating element 1201 and radio frequency assembly 1202.

[0132] Radiating element 1201 is an example of one implementation for radiating element 123 in Figure 1. Further, radiating element 1201 is an example of an implementation for array of radiating elements 122 in Figure 1 comprising only a single radiating element. Only a portion of radiating element 1201 is shown in this illustrative example. In this example, the radiation pattern produced by antenna system 1200 may only be electronically scanned in the X-Z plane.

[0133] In this illustrative example, radio frequency assembly 1202 includes radio frequency module 1203, phase shifting device 1204, transmission line 1206, transmission line 1208, surface wave feed 1210, and surface wave feed 1211. Radio frequency module 1203 may be configured to function as a transmitter, a receiver, or a combination of the two. Phase shifting device 1204 takes the form of a hybrid power splitter in this example. In particular, the hybrid power

splitter is configured for use in varying the phase difference between the radio frequency signal traveling along transmission line **1206** and the radio frequency signal traveling along transmission line **1208**. In this illustrative example, the hybrid power splitter may be used to vary the phase difference between these two transmission lines between about 0 degrees and about 90 degrees.

[0134] Of course, in other illustrative examples, radio frequency module **1203** and phase shifting device **1204** may be implemented in some other manner. For example, radio frequency module **1203** may be configured to enable dual polarization with phase shifting device **1204** taking the form of a four port variable phase power splitter.

[0135] Radiating element **1201** is implemented using dielectric substrate **1205**. Surface wave channel **1212** and surface wave channel **1213** are formed on dielectric substrate **1205**. Surface wave feed **1210** couples transmission line **1206** to surface wave channel **1212**. Surface wave feed **1211** couples transmission line **1208** to surface wave channel **1213**. Surface wave channel **1212** and surface wave channel **1213** may be examples of implementations for surface wave channel **125** and second surface wave channel **145** in **Figure 1**.

[0136] As depicted, surface wave channel **1212** is formed by plurality of metallic strips **1214** and plurality of varactors **1215**. In this illustrative example, plurality of metallic strips **1214** are periodically arranged at an angle of about positive 45 degrees relative to X-axis **1216**. X-axis **1216** is the longitudinal axis along radiating element **1201**. Plurality of varactors **1215** are electrically connected to plurality of metallic strips **1214**. Voltage lines **1218** are used to apply voltages to plurality of varactors **1215**. Pins **1220** may be used to connect voltage lines **1218** to one or more voltage sources and/or one or more grounds.

[0137] Further, as depicted, surface wave channel **1213** is formed by plurality of metallic strips **1224** and plurality of varactors **1226**. As depicted, plurality of metallic strips **1224** are periodically arranged at an angle of about negative 45 degrees relative to X-axis **1216**. Voltage lines **1228** are used to apply voltages to plurality of varactors **1226**. Pins **1230** are used to connect voltage lines **1228** to one or more voltage sources and/or one or more grounds.

[0138] The radiation pattern formed by radiating element **1201** may be scanned in the X-Z plane by changing the voltages applied to plurality of varactors **1215** such that the surface wave impedance modulation pattern results in the desired radiation angle. Surface wave channel **1212** and surface wave channel **1213** are configured such that the radiation from these two surface wave channels may be orthogonal to each other. The net radiation from the combination of these two surface wave channels is circularly polarized. When fed by phase shifting device **1204** in the form of a 0°-90° hybrid splitter, surface wave channel **1212** and surface wave channel **1213** are fixed into receiving or transmitting circularly-polarized radiation with either right-hand polarization or left-hand polarization. Of course, in other illustrative examples, phase shifting device **1204** may be implemented in some other manner such that the radiation may be switched between left-hand circular polarization (LHCP) and right-hand circular polarization (RHCP).

[0139] The radiation from surface wave channel **1212** and surface wave channel **1213** is polarized because of the angles at which plurality of metallic strips **1214** and plurality of metallic strips **1224**, respectively, are tilted relative to X-axis **1216**. Plurality of metallic strips **1214** and plurality of metallic strips **1224** are tensor impedance elements having a major principal axis that is perpendicular to the long edges of the metallic strips and a minor axis that is along the edges. The local tensor admittance of each surface wave channel in the coordinate frame of the principal axes may be given as follows:

$$Y_{sw} = \begin{bmatrix} Y(x) & 0 \\ 0 & 0 \end{bmatrix}, \quad (10)$$

where Y_{sw} is the local tensor admittance and is determined by the voltage applied to the metallic strips at position x.

[0140] The surface wave current, which is along the major principal axis, is as follows:

$$\mathbf{J}_{sw} = Y_{sw} \mathbf{E}_{sw} = \frac{\begin{bmatrix} Y(x) & 0 \\ 0 & 0 \end{bmatrix} E_{sw} \begin{bmatrix} 1 \\ 1 \end{bmatrix}}{\sqrt{2}} = \frac{E_{sw}}{\sqrt{2}} \begin{bmatrix} 1 \\ 1 \end{bmatrix}, \quad (11)$$

where $\mathbf{J}_{sw}$ is the current of the surface wave and $\mathbf{E}_{sw}$ is the electric field of the surface wave.

[0141] The radiation is driven by the surface wave currents according to the following equation:

$$\mathbf{E}_{rad} \propto \left[\int \{ \hat{\mathbf{k}} \times \mathbf{J}_{sw} \} \times \hat{\mathbf{k}} e^{-i\mathbf{k} \cdot \mathbf{r}'} dx \right] e^{i\mathbf{k} \cdot \mathbf{r}}, \quad (12)$$

and is therefore polarized in the direction across the gaps between the metallic strips. $\mathbf{E}_{rad}$ is the electric field of the

radiation.

[0142] With reference now to **Figure 13**, an illustration of antenna system **1200** from **Figure 12** having two radio frequency assemblies is depicted in accordance with an illustrative embodiment. In this illustrative example, radio frequency assembly **1202** is located at end **1300** of radiating element **1201**, while radio frequency assembly **1301** is located at end **1303** of radiating element **1201**.

[0143] Radio frequency assembly **1301** includes radio frequency module **1302**, phase shifting device **1304**, transmission line **1306**, transmission line **1308**, surface wave feed **1310**, and surface wave feed **1312**. Surface wave feed **1310** feeds into surface wave channel **1212**. Further, surface wave feed **1312** feeds into surface wave channel **1213**.

[0144] Either radio frequency assembly **1301** or radio frequency assembly **1202** may function as a sink for any surface wave energy that is not radiated away. In this manner, surface waves may be prevented from reflecting off at the end of radiating element **1201**, which would lead to undesired distortion of the radiation pattern.

[0145] Further, by having two radio frequency assemblies, the radiation pattern may be more effectively tuned over a larger angular range. Thus, when radiation is to be tilted towards the positive portion of X-axis **1216**, radio frequency assembly **1202** may be used to feed the radio frequency signal to radiating element **1201**. When radiation is to be tilted towards the negative portion of X-axis **1216**, radio frequency assembly **1301** may be used to feed the radio frequency signal to radiating element **1201**. In this manner, as the radio frequency beam formed by the radiation pattern is scanned in an angle, beams directed with angles of positive theta and negative theta may be mirror images of each other.

[0146] With reference now to **Figure 14**, an illustration of another antenna system is depicted in accordance with an illustrative embodiment. In this illustrative example, antenna system **1400** is another example of one implementation for antenna system **100** in **Figure 1**. Antenna system **1400** includes antenna **1401**, phase shifter **1402**, and radio frequency module **1404**. Antenna system **1400** may also include a voltage controller (not shown in this example).

[0147] Antenna **1401** includes array of radiating elements **1406** and plurality of surface wave feeds **1407**. Array of radiating elements **1406** includes radiating elements **1408**, **1410**, **1412**, **1414**, **1416**, **1418**, **1420**, and **1422**. Each of these radiating elements may be implemented in a manner similar to radiating element **1201** in **Figure 12**.

[0148] Plurality of surface wave feeds **1407** couple array of radiating elements **1406** to phase shifter **1402**. Phase shifter **1402** includes plurality of phase-shifting devices **1424**. Transmission lines **1426** connect plurality of surface wave feeds **1407** to plurality of phase-shifting devices **1424** and connect plurality of phase-shifting devices **1424** to radio frequency module **1404**. Radio frequency module **1404** may be configured to function as a transmitter, a receiver, or a combination of the two.

[0149] Plurality of phase-shifting devices **1424** are variable phase shifters in this example. In this illustrative example, plurality of phase-shifting devices **1424** may be tuned such that the net phase shift at each one of plurality of surface wave feeds **1407** differs from the phase at a neighboring surface wave feed by a constant, $\Delta\phi$. As this constant is varied, the radiation pattern formed may be scanned in the Y-Z plane.

[0150] The illustrations in **Figures 2-14** are not meant to imply physical or architectural limitations to the manner in which an illustrative embodiment may be implemented. Other components in addition to or in place of the ones illustrated may be used. Some components may be optional.

[0151] The different components shown in **Figures 2-14** may be illustrative examples of how components shown in block form in **Figure 1** can be implemented as physical structures. Additionally, some of the components in **Figures 2-14** may be combined with components in **Figure 1**, used with components in **Figure 1**, or a combination of the two.

[0152] In some cases, it may be desirable to improve the gain of an antenna, such as artificial impedance surface antenna **110** in **Figure 1**. The gain of an artificial impedance surface antenna may be improved by improving the accuracy with which the artificial impedance surface antenna is electronically steered to reduce fall off in gain. The illustrative embodiments recognize and take into account that a substantially, radially symmetric arrangement of surface wave channels may allow more accurate electronic steering of the artificial impedance surface antenna. Further, with this type of arrangement, the impedance elements used to form the surface wave channels may be spaced apart greater than half a wavelength. Still further, this type of arrangement may be used to produce radiation of any polarization.

[0153] With reference now to **Figure 15**, an illustration of a different configuration for artificial impedance surface antenna **110** in antenna system **100** from **Figure 1** is depicted in the form of a block diagram in accordance with an illustrative embodiment. Antenna system **100** from **Figure 1** is depicted with artificial impedance surface antenna **110** having radial configuration **1500**.

[0154] When artificial impedance surface antenna **110** has radial configuration **1500**, artificial impedance surface antenna **110** includes dielectric substrate **1501**, plurality of radiating spokes **1502**, and number of surface wave feeds **1504**. Dielectric substrate **1501** may be implemented in a manner similar to dielectric substrate **124** in **Figure 1**. However, with radial configuration **1500**, dielectric substrate **1501** may be the only dielectric substrate used. Dielectric substrate **1501** may be comprised of any number of layers of dielectric material.

[0155] In one illustrative example, dielectric substrate **1501** may be comprised of a material with tunable electrical properties. For example, without limitation, dielectric substrate **1501** may be comprised of a liquid crystal material.

[0156] In this illustrative example, dielectric substrate **1501** has circular shape **1506** with center point **1508**. In other

words, dielectric substrate **1501** may be substantially symmetric about center point **1508**. In other illustrative examples, dielectric substrate **1501** may have some other shape. For example, without limitation, dielectric substrate **1501** may have an oval shape, a square shape, a hexagonal shape, an octagonal shape, or some other type of shape. However, when dielectric substrate **1501** is not substantially symmetric about center point **1508**, the radiation pattern **112** produced may not have the same gain at different steering angles.

[0157] Plurality of radiating spokes **1502** may be implemented using dielectric substrate **1501**. In particular, plurality of radiating spokes **1502** may be formed on dielectric substrate **1501**.

[0158] Plurality of radiating spokes **1502** may be arranged radially with respect to center point **1508** of dielectric substrate **1501**. In these illustrative examples, being arranged radially with respect to center point **1508** means that each of plurality of radiating spokes **1502** may extend from center point **1508** towards an outer circumference of dielectric substrate **1501**. Each of plurality of radiating spokes **1502** may be arranged substantially perpendicular to a center axis through center point **1508** of dielectric substrate **1501**. Further, each of plurality of radiating spokes **1502** may be arranged in a manner such that each radiating spoke is substantially symmetric about center point **1508**.

[0159] Each of plurality of radiating spokes **1502** may be implemented in a manner similar to radiating element **123** from **Figure 1**. Radiating spoke **1510** may be an example of one implementation for each radiating spoke in plurality of radiating spokes **1502**. Radiating spoke **1510** is configured to form surface wave channel **1512**. In this manner, plurality of radiating spokes **1502** may form a plurality of surface wave channels. Surface wave channel **1512** is configured to constrain a path of a surface wave.

[0160] As depicted, radiating spoke **1510** may include plurality of impedance elements **1514** and plurality of tunable elements **1516**. Plurality of impedance elements **1514** and plurality of tunable elements **1516** may be implemented in a manner similar to plurality of impedance elements **126** and plurality of tunable elements **128**, respectively, from **Figure 1**.

[0161] In this illustrative example, plurality of impedance elements **1514** and plurality of tunable elements **1516** may be located on surface **1513** of dielectric substrate **1501**. In particular, plurality of impedance elements **1514** and plurality of tunable elements **1516** may be located on surface **1513** of corresponding portion **1515** of dielectric substrate **1501**.

[0162] Plurality of impedance elements **1514**, plurality of tunable elements **1516**, and corresponding portion **1515** of dielectric substrate **1501** may form an artificial impedance surface from which radiation may be generated. In this illustrative example, corresponding portion **1515** of dielectric substrate **1501** may be considered part of radiating spoke **1510**. However, in other illustrative examples, dielectric substrate **1501** may be considered separate from plurality of radiating spokes **1502**.

[0163] An impedance element in plurality of impedance elements **1514** may be implemented in a number of different ways. In one illustrative example, an impedance element may be implemented as a resonating element. In one illustrative example, an impedance element may be implemented as an element comprised of a conductive material. The conductive material may be, for example, without limitation, a metallic material. Depending on the implementation, an impedance element may be implemented as a metallic strip, a patch of conductive paint, a metallic mesh material, a metallic film, a deposit of a metallic substrate, or some other type of conductive element. In some cases, an impedance element may be implemented as a resonant structure such as, for example, a split-ring resonator (SRR), an electrically-coupled resonator (ECR), a structure comprised of one or more metamaterials, or some other type of structure or element.

[0164] Each one of plurality of tunable elements **1516** may be an element that can be controlled, or tuned, to change an angle of radiation pattern **112** produced by radiating spoke **1510**. In this illustrative example, each of plurality of tunable elements **1516** may be an element having a capacitance that can be varied based on the voltage applied to the tunable element.

[0165] In one illustrative example, plurality of impedance elements **1514** takes the form of plurality of metallic strips **1518** and plurality of tunable elements **1516** takes the form of plurality of varactors **1520**. Each of plurality of varactors **1520** may be a semiconductor element diode that has a capacitance dependent on the voltage applied to the semiconductor element diode.

[0166] Plurality of metallic strips **1518** may be arranged in a row on corresponding portion **1515** of dielectric substrate **1501** substantially parallel to a plane that is substantially perpendicular to a center axis through center point **1508** of dielectric substrate **1501**. For example, plurality of metallic strips **1518** may be periodically distributed on corresponding portion **1515** of dielectric substrate **1501** along an axis that is substantially perpendicular to and that passes through the center axis through dielectric substrate **1501**.

[0167] In some illustrative examples, plurality of metallic strips **1518** may be printed onto dielectric substrate **1501**. For example, plurality of metallic strips **1518** may be printed onto dielectric substrate **1501** using any number of three-dimensional printing techniques, additive deposition techniques, inkjet deposition techniques, or other types of printing techniques.

[0168] Plurality of varactors **1520** may be electrically connected to plurality of metallic strips **1518** on surface **1513** of corresponding portion **1515** of dielectric substrate **1501**. As one illustrative example, at least one varactor in plurality of varactors **1520** may be positioned between each adjacent pair of metallic strips in plurality of metallic strips **1518**. Further, plurality of varactors **1520** may be aligned such that all of the varactor connections on each metallic strip have the same

polarity.

[0169] Voltages may be applied to plurality of tunable elements **1516** by applying voltages to plurality of impedance elements **1514**. In particular, varying the voltages applied to plurality of impedance elements **1514** varies the capacitance of plurality of tunable elements **1516**. Varying the capacitances of plurality of tunable elements **1516** may vary, or modulate, the capacitive coupling and impedance between plurality of impedance elements **1514**.

[0170] Corresponding portion **1515** of dielectric substrate **1501**, plurality of impedance elements **1514**, and plurality of tunable elements **1516** may be configured with respect to selected design configuration **1522** for surface wave channel **1512** formed by radiating spoke **1510**. Depending on the implementation, each radiating spoke in plurality of radiating spokes **1502** may have a same or different selected design configuration.

[0171] As depicted, selected design configuration **1522** for radiating spoke **1510** may include a number of design parameters such as, but not limited to, impedance element width **1524**, impedance element spacing **1526**, tunable element spacing **1528**, and substrate thickness **1530**. Impedance element width **1524** may be the width of an impedance element in plurality of impedance elements **1514**. Impedance element width **1524** may be selected to be the same or different for each of plurality of impedance elements **1514**, depending on the implementation.

[0172] Impedance element spacing **1526** may be the spacing of plurality of impedance elements **1514** along surface **1513** of corresponding portion **1515** of dielectric substrate **1501**. Tunable element spacing **1528** may be the spacing of plurality of tunable elements **1516** along surface **1513** of corresponding portion **1515** of dielectric substrate **1501**. Further, substrate thickness **1530** may be the thickness of corresponding portion **1515** of dielectric substrate **1501**. In this illustrative example, an entirety of dielectric substrate **1501** may have a substantially same thickness. However, in other illustrative examples, the different portions of dielectric substrate **1501** corresponding to the different radiating spokes in plurality of radiating spokes **1502** may have different thicknesses.

[0173] The values for the different parameters in selected design configuration **1522** may be selected based on, for example, without limitation, the radiation frequency at which artificial impedance surface antenna **110** is configured to operate. Other considerations include, for example, the desired impedance modulations for artificial impedance surface antenna **110**.

[0174] The surface waves propagated along each of plurality of radiating spokes **1502** may be coupled to number of transmission lines **156** by number of surface wave feeds **1504** located on dielectric substrate **1501**. Each of number of surface wave feeds **1504** couples at least one corresponding radiating spoke in plurality of radiating spokes **1502** to a transmission line that carries a radio frequency signal, such as one of number of transmission lines **156**.

[0175] A surface wave feed in number of surface wave feeds **1504** may be any device that is capable of converting a surface wave into a radio frequency signal, a radio frequency signal into a surface wave, or both. In one illustrative example, a surface wave feed in number of surface wave feeds **1504** may be located substantially at center point **1508** of dielectric substrate **1501**.

[0176] In one illustrative example, number of surface wave feeds **1504** takes the form of a single surface wave feed positioned at center point **1508** of dielectric substrate **1501**. This single surface wave feed, which may be referred to as a central feed, may couple each of plurality of radiating spokes **1502** to number of transmission lines **156**. In this example, number of transmission lines **156** may take the form of a coaxial cable.

[0177] In another illustrative example, number of surface wave feeds **1504** may take the form of a plurality of surface wave feeds located at or near center point **1508** and configured to couple plurality of radiating spokes **1502** to number of transmission lines **156**. In this example, number of transmission lines **156** may take the form of a single transmission line or a plurality of transmission lines.

[0178] When artificial impedance surface antenna **110** is in a receiving mode, electromagnetic radiation received at artificial impedance surface antenna **110** may be propagated as surface waves along plurality of radiating spokes **1502**. These surface waves are received by number of surface wave feeds **1504** and converted into number of radio frequency signals **1532**. Number of radio frequency signals **1532** may be sent to radio frequency module **108** over one or more of number of transmission lines **156**. Radio frequency module **108** may then process number of radio frequency signals **1532** accordingly.

[0179] When artificial impedance surface antenna **110** is in a transmitting mode, number of radio frequency signals **1532** may be sent from radio frequency module **108** to artificial impedance surface antenna **110** over number of transmission lines **156**. In particular, number of radio frequency signals **1532** may be received at number of surface wave feeds **1504** and converted into surface waves that are propagated along plurality of radiating spokes **1502**.

[0180] Radiation pattern **112** of artificial impedance surface antenna **110** may be electronically steered in both a theta direction and a phi direction. Radiation pattern **112** may be formed by number of radiation sub-patterns **1533**. Number of radiation sub-patterns **1533** may be produced by a corresponding portion of plurality of radiating spokes **1502**. This corresponding portion may be one or more of plurality of radiating spokes **1502**. In some cases, number of radiation sub-patterns **1533** may be produced by all of plurality of radiating spokes **1502**.

[0181] For example, number of radiation sub-patterns **1533** may be produced by a corresponding number of radiating spokes in plurality of radiating spokes **1502**. Each of number of radiation sub-patterns **1533** is the radiation pattern

produced by a particular radiating spoke. Number of radiating sub-patterns **1533** forms radiation pattern **112**. For example, when number of radiating sub-patterns **1533** includes multiple radiating sub-patterns corresponding to multiple radiating spokes, the combination and overlapping of these multiple radiation sub-patterns forms radiation pattern **112**.

[0182] In this illustrative example, each of plurality of radiating spokes **1502** may be independently controlled such that each of number of radiation sub-patterns **1533** may be electronically steered. For example, without limitation, radiating spoke **1510** may have radiation sub-pattern **1534**. Radiation sub-pattern **1534** may be controlled independently of the other radiation sub-patterns formed by the other radiating spokes in plurality of radiating spokes **1502**.

[0183] As one illustrative example, voltage controller **104** may be used to control the voltages applied to plurality of tunable elements **1516** to control both the theta and phi steering angles of a main lobe of radiation sub-pattern **1534**. Similarly, voltage controller **104** may be configured to control the voltages applied to the plurality of tunable elements in each of plurality of radiating spoke **1502** to control both the theta and phi steering angles of a main lobe of the radiation sub-pattern formed by each of plurality of radiating spokes **1502**.

[0184] Thus, each of number of radiation sub-patterns **1533** may be directed in a particular theta direction and a broad phi direction. For example, a particular radiation sub-pattern may be directed at a theta steering angle of about 45 degrees and may fan out over a broad range of phi angles. In this manner, each radiation sub-pattern may form, for example, a fan beam.

[0185] Number of radiation sub-patterns **1533** overlap to form radiation pattern **112** having main lobe **116** directed in a particular phi direction and a particular theta direction. Radiation pattern **112** may be formed such that a beam of radiation is produced. The beam may take the form of, for example, a pencil beam that is directed at a particular phi steering angle **118** and a particular theta steering angle **120**. In this manner, artificial impedance surface antenna **110** may be electronically steered in two dimensions.

[0186] Depending on the implementation, artificial impedance surface antenna **110** may be configured to emit linearly polarized radiation or circularly polarized radiation. In other words, artificial impedance surface antenna **110** may be used to produce radiation pattern **112** that is linearly polarized or circularly polarized. Further, radiation pattern **112** may be switched between being linearly polarized and circularly polarized by adjusting the voltages applied to plurality of tunable elements **1516** and without needing to change a physical configuration of artificial impedance surface antenna **110**.

[0187] The impedance sub-patterns produced by the surface wave channels formed by plurality of radiating spokes **1502** may be modulated to produce overall radiation pattern **112** that is linearly polarized. For example, the voltages applied to the tunable elements of each of a corresponding portion of plurality of radiating spokes **1502** may be set such that the impedance sub-pattern produced along the surface wave channel formed by each radiating spoke is given as follows:

$$Z(r, \varnothing_{SWC}) = X + M \cos(k_0 r (n_0 - \cos(\varnothing_{SWC} - \varnothing_0) \sin(\theta_0))) \quad (13)$$

where θ_0 is the theta angle of the main lobe of the radiation pattern, $\varnothing_0$ is the phi angle of the main lobe of the radiation pattern, $\varnothing_{SWC}$ is the polar angle of the line that extends along a center of the surface wave channel, r is the radial distance along the surface wave channels, X and M are the mean impedance and the amplitude, respectively, of the modulation of artificial impedance surface antenna **110**, and $Z(r, \varnothing_{SWC})$ is the impedance sub-pattern produced along the surface wave channel. This impedance sub-pattern may produce radiation that is linearly polarized in the direction of the theta unit vector, $\hat{\theta}$, where:

$$\hat{\theta} = \sin(\theta) \cos(\varnothing) \hat{x} + \sin(\theta) \sin(\varnothing) \hat{y} + \cos(\theta) \hat{z}. \quad (14)$$

[0188] In other examples, the impedance sub-patterns of the surface wave channels formed by plurality of radiating spokes **1502** may be modulated to produce overall radiation pattern **112** that is circularly polarized. The voltages applied to the tunable elements of each of a corresponding portion of plurality of radiating spokes **1502** may be set such that the impedance sub-pattern produced by the surface wave channel formed by each radiating spoke is given as follows:

$$Z(r, \varnothing_{SWC}) = X + M \sin(\gamma \pm \gamma_0) \sqrt{\frac{\cos^2(\varphi)}{\cos^2(\theta_0)} + \sin^2(\varphi)} \quad (15)$$

where

$$\varphi = \varnothing_{SWC} - \varnothing_0; \quad (16)$$

$$\gamma = k_0 r (n_0 - \cos(\varphi) \sin(\theta_0)); \quad (17)$$

$$\gamma_0 = \text{atan}(\cos(\theta_0) \tan(\varphi)); \text{ and} \quad (18)$$

where the "+" of $\pm$ indicates the impedance pattern that produces left-handed circular polarization, and the "-" of $\pm$ indicates the impedance pattern that produces right-handed circular polarization.

[0189] Equation 15 may be approximated as follows:

$$Z = X + M \sin(\gamma \pm \varphi). \quad (19)$$

[0190] In other illustrative examples, the impedance sub-patterns may be given by other types of equations involving periodic functions. For example, the sine function of $\sin(\gamma \pm \varphi)$ in Equation (19), the sine function of $\sin(\gamma \pm \gamma_0)$ in Equation (15), and the cosine function of $\cos(k_0 r (n_0 - \cos(\varnothing_{SWC} - \varnothing_0) \sin(\theta_0)))$ in Equation (13) may each be replaced by some other type of periodic function.

[0191] In this manner, artificial impedance surface antenna **110** may be used to produce radiation of any polarization without requiring a change in the physical configuration of artificial impedance surface antenna **110**. Artificial impedance surface antenna **110** may be used to produce linearly polarized or circularly polarized radiation just by changing the voltages applied to the tunable elements of plurality of radiating spokes **1502**.

[0192] Depending on the implementation, artificial impedance surface antenna **110** may propagate surface waves towards or away from center point **1508** of dielectric substrate **1501**. In some illustrative examples, artificial impedance surface antenna **110** may include absorption material **1536** when the surface waves are propagated away from center point **1508**. Absorption material **1536** may be located at and around an edge of dielectric substrate **1501**. Absorption material **1536** is configured to absorb excess energy from the surface waves propagated radially outward away from center point **1508** through plurality of radiating spokes **1502**.

[0193] In some illustrative examples, dielectric substrate **1501** may be grounded using grounding element **1538**. In particular, grounding element **1538** may be located at an impedance surface of dielectric substrate **1501**.

[0194] The illustration of antenna system **100** in **Figure 1** is not meant to imply physical or architectural limitations to the manner in which an illustrative embodiment may be implemented. Other components in addition to or in place of the ones illustrated may be used. Some components may be optional. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined, divided, or combined and divided into different blocks when implemented in an illustrative embodiment.

[0195] In some illustrative examples, a tunable element in plurality of tunable elements **1516** may be implemented as a pocket of variable material embedded in dielectric substrate **1501**.

[0196] In other illustrative examples, a tunable element in plurality of tunable elements **1516** may be part of a corresponding impedance element in plurality of impedance elements **1514**. For example, a resonant structure having a tunable element may be used. The resonant structure may be, for example, without limitation, a split-ring resonator, an electrically-coupled resonator, or some other type of resonant structure.

[0197] In other illustrative examples, center point **1508** may be the center point about which plurality of radiating spokes **1502** are arranged but may not be the geometric center of dielectric substrate **1501**. For example, center point **1508** may be offset from the geometric center of dielectric substrate **1501**.

[0198] In yet other illustrative examples, each of plurality of radiating spokes **1502** may have two independently controllable portions configured to form a surface wave channel. For example, radiating spoke **1510** may have a first portion that extends in one direction away from center point **1508** and a second portion that extends in the substantially opposite direction away from center point **1508**. These two portions may have a same or different design configuration, depending on the implementation. Further, these two portions may be individually referred to as radiating spokes or radiating sub-spokes in some cases.

[0199] With reference now to **Figure 16**, an illustration of an artificial impedance surface antenna is depicted in accordance with an illustrative embodiment. In this illustrative example, artificial impedance surface antenna **1600** may be an example of one implementation for artificial impedance surface antenna **110** having radial configuration **1500** in **Figure 15**. Artificial impedance surface antenna **1600** has radial configuration **1601**, which may be an example of one implementation for radial configuration **1500** in **Figure 15**.

[0200] As depicted, artificial impedance surface antenna **1600** includes dielectric substrate **1602**, central surface wave feed **1604**, and plurality of radiating spokes **1606**. Dielectric substrate **1602**, central surface wave feed **1604**, and plurality of radiating spokes **1606** may be examples of implementations for dielectric substrate **1501**, number of surface wave feeds **1504**, and plurality of radiating spokes **1502**, respectively, in **Figure 15**.

[0201] In this illustrative example, dielectric substrate **1602** has a circular shape with center point **1605**. Plurality of radiating spokes **1606** are arranged radially with respect to center point **1605** such that artificial impedance surface antenna **1600** is substantially radially symmetric. Radiating spoke **1608**, radiating spoke **1610**, radiating spoke **1612**, and radiating spoke **1614** may be examples of some of plurality of radiating spokes **1606**.

[0202] Plurality of radiating spokes **1606** are formed by impedance elements **1616** that have been printed on dielectric substrate **1602**. Impedance elements **1616** take the form of metallic strips in this illustrative example. Plurality of radiating spokes **1606** may also include tunable elements (not shown in this view) located between impedance elements **1616**.

[0203] Central surface wave feed **1604** may couple plurality of radiating spokes **1606** to a transmission line (not shown in this view). The transmission line may be configured to carry a radio frequency to, from, or both to and from central surface wave feed **1604**.

[0204] Artificial impedance surface antenna **1600** may be electronically steered with a desired level of accuracy in a theta direction and a phi direction. Each of plurality of radiating spokes **1606** may be individually electronically steered in a particular theta direction and a broad phi direction to produce a fan beam. For example, radiating spoke **1608**, radiating spoke **1612**, and radiating spoke **1614** may be electronically steered to produce fan beam **1618**, fan beam **1620**, and fan beam **1622**, respectively. The radiation patterns corresponding to fan beam **1618**, fan beam **1620**, and fan beam **1622** may overlap such that pencil beam **1624** is produced. Pencil beam **1624** may be directed at a particular theta steering angle and a particular phi steering angle.

[0205] As depicted, absorption material **1626** is located at and around an outer edge of dielectric substrate **1602**. Absorption material **1626** may be an example of one implementation for absorption material **1536** in **Figure 15**. Absorption material **1626** is configured to absorb excess energy resulting from surface waves propagating away from center point **1605**.

[0206] With reference now to **Figure 17**, an illustration of a cross-sectional side view of artificial impedance surface antenna **1600** from **Figure 16** is depicted in accordance with an illustrative embodiment. In this illustrative example, a cross-sectional side view of artificial impedance surface antenna **1600** from **Figure 16** is depicted taken with respect to cross-section lines **17-17** in **Figure 17**.

[0207] In this illustrative example, grounding element **1700** may be seen along the surface of dielectric substrate **1602**. Grounding element **1700** is an example of one implementation for grounding element **1538** in **Figure 15**.

[0208] Transmission line **1702** is also shown in this view. Transmission line **1702** may carry a radio frequency to, from, or both to and from central surface wave feed **1604**. In one illustrative example, transmission line **1702** takes the form of a coaxial cable.

[0209] As depicted, surface waves may propagate in the direction of arrow **1704**, substantially parallel to dielectric substrate **1602** and substantially perpendicular to center axis **1706** through center point **1605** of dielectric substrate **1602**. Plurality of radiating spokes **1606** (not shown in this view) may be arranged such that plurality of radiating spokes **1606** are substantially symmetric about center axis **1706**.

[0210] With reference now to **Figure 18**, an illustration of an impedance pattern for artificial impedance surface antenna **1600** from **Figures 16-17** is depicted in accordance with an illustrative embodiment. In this illustrative example, impedance pattern **1800** may be produced when artificial impedance surface antenna **1600** is linearly polarized and configured to produce a radiation pattern having a main lobe directed at a theta steering angle of about 45 degrees and a phi steering angle of about 0 degrees.

[0211] Impedance pattern **1800** is shown with respect to first axis **1802** and second axis **1804**. First axis **1802** and second axis **1804** may represent the two axes that form the plane substantially parallel to dielectric substrate **1602** in **Figure 16**. Impedance pattern **1800** is comprised of impedance sub-patterns **1806** formed by plurality of radiating spokes **1606** in **Figures 16**. Scale **1808** provides the correlation between the impedance sub-patterns **1806** and impedance values. The impedance values may be in units of j-Ohms in which j is equal to $\sqrt{-1}$.

[0212] With reference now to **Figure 19**, an illustration of a portion of an artificial impedance surface antenna is depicted in accordance with an illustrative embodiment. In this illustrative example, artificial impedance surface antenna **1900** may be another example of one implementation for artificial impedance surface antenna **110** having radial configuration **1500** in **Figure 15**. Artificial impedance surface antenna **1900** has radial configuration **1901**, which may be an example of one implementation for radial configuration **1500** in **Figure 15**.

[0213] In this illustrative example, artificial impedance surface antenna **1900** includes dielectric substrate **1902**, radiating spokes **1904**, and central surface wave feed **1906**. Only a portion of the total plurality of radiating spokes that form artificial impedance surface antenna **1900** are shown in this view.

[0214] Radiating spoke **1907** is an example of one of radiating spokes **1904**. Only a portion of radiating spoke **1907**

is shown. Radiating spoke **1907** is located on corresponding portion **1908** of dielectric substrate **1902**. Radiating spoke **1907** includes plurality of metallic strips **1909** and plurality of varactors **1910**. Plurality of metallic strips **1909** and plurality of varactors **1910** may be an example of one implementation for plurality of metallic strips **1518** and plurality of varactors **1520**, respectively, in **Figure 15**.

[0215] As depicted, voltages may be applied to plurality of metallic strips **1909**, and thereby plurality of varactors **1910**, through conductive lines **1912**, which terminate at terminals **1914**. Terminals **1914** may be connected to electrical vias (not shown in this view) that pass through the thickness of dielectric substrate **1902** and through a grounding element (not shown in this view) to connectors that connect to control hardware, such as a voltage controller.

[0216] With reference now to **Figure 20**, an illustration of a cross-sectional side view of artificial impedance surface antenna **1900** from **Figure 19** is depicted in accordance with an illustrative embodiment. In this illustrative example, a cross-sectional side view of artificial impedance surface antenna **1900** from **Figure 19** is depicted taken with respect to cross-section lines **20-20** in **Figure 19**.

[0217] In this illustrative example, electrical vias **2000** that connect terminals **1914** in **Figure 19** to voltage controller **2002** are shown. Voltage controller **2002** may vary the voltages applied to the metallic strips of plurality of radiating spokes **1904** in **Figure 19**.

[0218] The illustrative embodiments recognize and take into account that different types of configurations for artificial impedance surface antenna **110** in **Figure 1** may improve the efficiency and thereby, overall performance, of artificial impedance surface antenna **110**. For example, the illustrative embodiments recognize and take into account that in some cases, it may be desirable to provide a square-wave-type profile of surface impedance across each surface wave channel formed on each radiating element of artificial impedance surface antenna **110** in **Figure 1**.

[0219] The illustrative embodiments recognize that using switch elements that have only two possible states as compared to varactors that can be tuned to have any of various capacitance states across a range of capacitance values may enable achieving a square-wave-type profile of surface impedance for a surface wave channel. These switch elements may take the form of, for example, without limitation, PIN diodes.

[0220] With reference now to **Figure 21**, an illustration of artificial impedance surface antenna **110** from **Figure 1** is depicted in the form of a block diagram in accordance with an illustrative embodiment. In this illustrative example, at least one surface wave channel on at least one radiating element in artificial impedance surface antenna **110** in **Figure 21** may be implemented differently than as described in **Figure 1**.

[0221] As depicted, surface wave channel **125** from **Figure 1** may not include plurality of tunable elements **128** from **Figure 1**. Rather, in this illustrative example, surface wave channel **125** includes plurality of switch elements **2100** instead of plurality of tunable elements **128** from **Figure 1**. Each of plurality of switch elements **2100** may have only two states **2102**. Two states **2102** may include first state **2104** and second state **2106**. In some cases, first state **2104** may be referred to as an on state and second state **2106** may be referred to as an off state.

[0222] In one illustrative example, plurality of switch elements **2100** takes the form of plurality of PIN diodes **2108**. In other illustrative examples, a switch element in plurality of switch elements **2100** may be selected from one of a semiconductor switch, a microelectromechanical systems (MEMS) switch, a high frequency diode, a Schottky diode, and a phase-change material switch.

[0223] Switch element **2101** may be an example of one of plurality of switch elements **2100**. Switch element **2101** may be placed within the gap between first impedance element **2113** of plurality of impedance elements **126** and second impedance element **2115** of plurality of impedance elements **126**. Further, switch element **2101** may electrically connect first impedance element **2113** to second impedance element **2115**. The capacitance of switch element **2101** and the capacitance of the gap between first impedance element **2113** and second impedance element **2115** contribute to the total capacitance between first impedance element **2113** and second impedance element **2115**. In some cases, the capacitance of the gap between first impedance element **2113** and second impedance element **2115** may be negligible.

[0224] When switch element **2101** takes the form of a PIN diode, first state **2104** may take the form of inductance state **2105** and second state **2106** may take the form of capacitance state **2107**. Switch element **2101** may be placed in inductance state **2105** by applying a first level of voltage to switch element **2101**. Switch element **2101** may be placed in capacitance state **2107** by applying a second level of voltage to switch element **2101**.

[0225] Whether switch element **2101** is in inductance state **2105** or in capacitance state **2107** may be determined by the reactance of switch element **2101**. For example, the surface impedance associated with switch element **2101** may be defined as follows:

$$Z = R + jX, \quad (20)$$

where R is resistance and is the real part of the surface impedance and where X is reactance and is the imaginary part of the surface impedance. The resistance may also be referred to as surface resistance and the reactance may also be

referred to as surface reactance. When the reactance is positive, the reactance is described as inductive and switch element **2101** may be considered in inductance state **2105**. When the reactance is negative, the reactance is described as capacitive and switch element **2101** may be considered in capacitance state **2107**. When the reactance is substantially zero, the surface impedance may be considered substantially purely resistive.

[0226] In inductance state **2105**, switch element **2101** may have substantially zero capacitance but may have parasitic inductance. In other words, the capacitance of switch element **2101** may be zero or negligible when switch element **2101** is in inductance state **2105**. In this manner, in inductance state **2105**, switch element **2101** may be modeled as a series resistor-inductor circuit. In capacitance state **2107**, switch element **2101** may have some selected non-zero capacitance value. In this manner, in capacitance state **2107**, switch element **2101** may be modeled as a parallel resistor-capacitor circuit.

[0227] Because each of plurality of switch elements **2100** may have only one of two states **2102** at any given point in time, the voltages applied to plurality of switch elements **2100** may be used to create surface impedance profile **2114** for surface wave channel **125**. In particular, one of two levels of voltage may be applied to each of plurality of switch elements **2100** to create surface impedance profile **2114**. Surface impedance profile **2114** may be created such that only a selected high surface impedance, a selected low surface impedance, or some combination of the two is formed.

[0228] For example, without limitation, the voltages applied to plurality of switch elements **2100** may be controlled such that surface impedance profile **2114** takes the form of square-wave modulation **2110** of high surface impedance and low surface impedance. Square-wave modulation **2110** may be a square-wave-type modulation. In other words, in one illustrative example, the state of each of plurality of switch elements **2100** may be controlled to modulate high surface impedance and low surface impedance in the form of a square-wave as compared to a sinusoidal wave. These two surface impedance levels may be modulated over each surface wave channel on each radiating element of artificial impedance surface antenna **110** to electronically steer artificial impedance surface antenna **110** in a theta direction, a phi direction, or both.

[0229] In one illustrative example, each of plurality of impedance elements **126** may take the form of a rectangular metallic strip. In some illustrative examples, each of plurality of impedance elements **126** may have a shape that has repeating pattern **2112**. Repeating pattern **2112** may be a pattern of shapes. For example, a particular impedance element of plurality of impedance elements **126** may have a repeating pattern of a same shape that is selected from one of a hexagonal-type shape, a diamond-type shape, or some other type of shape.

[0230] Using plurality of switch elements **2100** for surface wave channel **125** may improve the gain of artificial impedance surface antenna **110**. Further, using plurality of switch elements **2100** may enable artificial impedance surface antenna **110** to be operated at a frequency in the Ka-band with a desired level of aperture efficiency. In this manner, using plurality of switch elements **2100** may reduce power loss. The Ka-band may include frequencies between about 26.5 gigahertz and about 40 gigahertz. As one illustrative example, using plurality of PIN diodes **2108** may enable artificial impedance surface antenna **110** to be operated at a frequency of about 30 gigahertz with greater than about 25 percent aperture efficiency.

[0231] The illustration of artificial impedance surface antenna **110** in **Figure 21** is not meant to imply physical or architectural limitations to the manner in which an illustrative embodiment may be implemented. Other components in addition to or in place of the ones illustrated may be used. Some components may be optional. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined, divided, or combined and divided into different blocks when implemented in an illustrative embodiment.

[0232] With reference now to **Figure 22**, an illustration of a radiating element is depicted in accordance with an illustrative embodiment. In this illustrative example, radiating element **2200** may be an example of one implementation for radiating element **123** in **Figure 21**.

[0233] As depicted, radiating element **2200** includes dielectric substrate **2202**. Surface wave channel **2204** is formed on dielectric substrate **2202**. Surface wave channel **2204** may be an example of one implementation for surface wave channel **125** in **Figure 21**.

[0234] In this illustrative example, surface wave channel **2204** comprises plurality of impedance elements **2206** and plurality of switch elements **2208**. Plurality of switch elements **2208** may be an example of one implementation for plurality of switch elements **2100** in **Figure 21**.

[0235] Each of plurality of switch elements **2208** may have only one of two states at any given point in time in this illustrative example. For example, when one of plurality of switch elements **2208** is in an on state, the switch element may function in a manner similar to a circuit comprising a resistor and inductor in series. The on state corresponds to high surface impedance. The inductance that is provided may be important to enable operation of the artificial surface impedance antenna to which surface wave channel **2204** belongs within the Ka-band of frequencies. When the switch element is in an off state, the switch element may function in a manner similar to a circuit comprising a resistor and capacitor in parallel. The off state corresponds to low surface impedance.

[0236] The state of each of plurality of switch elements **2208** may be controlled to modulate between high surface impedance and low surface impedance to create a surface impedance profile for surface wave channel **2204**. In this

illustrative example, this surface impedance profile may resemble a square-wave-type modulation. Portion **2210** of surface wave channel **2204** is shown enlarged in **Figure 23** below.

[0237] With reference now to **Figure 23**, an illustration of an enlarged view of portion **2210** of surface wave channel **2204** from **Figure 22** is depicted in accordance with an illustrative embodiment. As depicted, plurality of impedance elements **2206** includes impedance element **2300** and impedance element **2302**. Impedance element **2300** and impedance element **2302** may be examples of implementations for first impedance element **2113** and second impedance element **2115**, respectively, from **Figure 21**.

[0238] Plurality of switch elements **2208** includes set of switch elements **2304** positioned within the gap between impedance element **2300** and impedance element **2302**. Each of set of switch elements **2304** has only two possible states and may be in only one of these two possible states at any given point in time. In one illustrative example, these two states may be an inductance state and a capacitance state.

[0239] As depicted, set of switch elements **2304** includes switch element **2306**, switch element **2308**, and switch element **2310**. Switch element **2306**, switch element **2308**, and switch element **2310** electrically connect impedance element **2300** and impedance element **2302**.

[0240] Each of plurality of impedance elements **2206** in **Figure 22** may have a repeating pattern of shapes. For example, impedance element **2302** has repeating pattern **2312**. Repeating pattern **2312** is a series of same shapes. In this illustrative example, repeating pattern **2312** is a series of hexagonal-type shapes. As depicted, repeating pattern **2312** includes hexagonal-type shape **2314**, hexagonal-type shape **2316**, and hexagonal-type shape **2318**.

[0241] With reference now to **Figure 24**, an illustration of another configuration for a radiating element is depicted in accordance with an illustrative embodiment. In this illustrative example, radiating element **2400** may be an example of one implementation for radiating element **123** in **Figure 21**.

[0242] As depicted, radiating element **2400** includes dielectric substrate **2402**. Surface wave channel **2404** is formed on dielectric substrate **2402**. Surface wave channel **2404** may be an example of one implementation for surface wave channel **125** in **Figure 21**. Surface wave channel **2404** comprises plurality of impedance elements **2406** and plurality of switch elements **2408**.

[0243] Plurality of impedance elements **2406** may be an example of one implementation for plurality of impedance elements **126** in **Figure 1**. In this illustrative example, each of plurality of impedance elements **2406** may take the form of a rectangular metallic strip.

[0244] Plurality of switch elements **2408** may be an example of one implementation for plurality of switch elements **2100** in **Figure 21**. In this illustrative example, each of plurality of switch elements **2408** may have only one of two states at any given point in time. In one illustrative example, each of plurality of switch elements **2408** may be implemented in the form of a PIN diode.

[0245] For example, when one of plurality of switch elements **2408** is in an on state, the switch element may function in a manner similar to a circuit comprising a resistor and inductor in series. The on state corresponds to high surface impedance. The inductance that is provided may be important to enable operating within the Ka-band of frequencies. When the switch element is in an off state, the switch element may function in a manner similar to a circuit comprising a resistor and capacitor in parallel. The off state corresponds to low surface impedance.

[0246] The illustrations in **Figures 22-24** are not meant to imply physical or architectural limitations to the manner in which an illustrative embodiment may be implemented. Other components in addition to or in place of the ones illustrated may be used. Some components may be optional.

[0247] The different components shown in **Figures 22-24** may be illustrative examples of how components shown in block form in **Figures 1** and **2** can be implemented as physical structures. Additionally, some of the components in **Figures 22-24** may be combined with components in **Figures 1** and **2**, used with components in **Figures 1** and **2**, or a combination of the two.

[0248] Turning now to **Figure 25**, an illustration of a process for electronically steering an antenna system is depicted in the form of a flowchart in accordance with an illustrative embodiment. The process illustrated in **Figure 25** may be implemented to electronically steer antenna system **100** in **Figure 1**.

[0249] The process begins by propagating a surface wave along each of a number of surface wave channels formed in each of a plurality of radiating elements to form a radiation pattern (operation **2500**). Each surface wave channel in the number of surface wave channels formed in each radiating element in the plurality of radiating elements is coupled to a transmission line configured to carry a radio frequency signal using a surface wave feed in a plurality of surface wave feeds associated with the plurality of radiating elements (operation **2502**).

[0250] Thereafter, a main lobe of the radiation pattern is electronically steered in a theta direction by controlling voltages applied to the number of surface wave channels in each radiating element in the plurality of radiating elements (operation **2504**). Further, the main lobe of the radiation pattern is electronically steered in a phi direction by controlling a relative phase difference between the plurality of surface wave feeds (operation **2506**), with the process terminating thereafter.

[0251] With reference now to **Figure 26**, an illustration of a process for electronically steering an antenna system is depicted in the form of a flowchart in accordance with an illustrative embodiment. The process illustrated in **Figure 26**

may be implemented to electronically steer, for example, artificial impedance surface antenna **110** having radial configuration **1500** in **Figure 15**.

[0252] The process begins by propagating a surface wave along a plurality of surface wave channels formed by a plurality of radiating spokes in an antenna to generate a number of radiation sub-patterns in which the plurality of radiating spokes is arranged radially with respect to a center point of a dielectric substrate (operation **2600**). Next, a main lobe of a radiation pattern of the antenna is electronically steered in two dimensions (operation **2602**), with the process terminating thereafter.

[0253] With reference now to **Figure 27**, an illustration of a process for electronically steering an antenna system is depicted in the form of a flowchart in accordance with an illustrative embodiment. The process illustrated in **Figure 27** may be implemented to electronically steer, for example, artificial impedance surface antenna **110** having switch elements as described in **Figure 21**.

[0254] The process begins by propagating a surface wave along each of a number of surface wave channels formed in each of a plurality of radiating elements to form a radiation pattern (operation **2700**). Next, each surface wave channel in the number of surface wave channels formed in each radiating element in the plurality of radiating elements may be coupled to a transmission line configured to carry a radio frequency signal using a surface wave feed in a plurality of surface wave feeds associated with the plurality of radiating elements (operation **2702**).

[0255] A main lobe of the radiation pattern may be electronically steered by controlling voltages applied to a plurality of switch elements connecting a plurality of impedance elements in each of the number of surface wave channels (operation **2704**), with the process terminating thereafter.

[0256] The flowcharts and block diagrams in the different depicted embodiments illustrate the architecture, functionality, and operation of some possible implementations of apparatuses and methods in an illustrative embodiment. In this regard, each block in the flowcharts or block diagrams may represent a module, a segment, a function, and/or a portion of an operation or step.

[0257] In some alternative implementations of an illustrative embodiment, the function or functions noted in the blocks may occur out of the order noted in the figures. For example, in some cases, two blocks shown in succession may be executed substantially concurrently, or the blocks may sometimes be performed in the reverse order, depending upon the functionality involved. Also, other blocks may be added in addition to the illustrated blocks in a flowchart or block diagram.

[0258] Further, the disclosure comprises embodiments according to the following clauses:

Clause 1: An apparatus comprising: a plurality of radiating elements, wherein each radiating element in the plurality of radiating elements comprises a number of surface wave channels in which each of the number of surface wave channels is configured to constrain a path of a surface wave and comprises: a plurality of switch elements; and a plurality of impedance elements; and a plurality of surface wave feeds, wherein a surface wave feed in the plurality of surface wave feeds is configured to couple a surface wave channel in the number of surface wave channels of a radiating element in the plurality of radiating elements to a transmission line configured to carry a radio frequency signal.

Clause 2: The apparatus of clause 1, wherein the plurality of radiating elements and the plurality of surface wave feeds form an artificial impedance surface antenna that is configured to be electronically steered in a theta direction and a phi direction.

Clause 3: The apparatus of clause 2, wherein the artificial impedance surface antenna operates at a frequency between about 26.5 gigahertz and about 40 gigahertz.

Clause 4: The apparatus of clause 2, wherein the artificial impedance surface antenna operates at a frequency of about 30 gigahertz with an aperture efficiency greater than about 25 percent.

Clause 5: The apparatus of clause 2, wherein the plurality of switch elements of each surface wave channel of the number of surface wave channels enables creating a surface impedance profile of high surface impedance and low surface impedance for the each surface wave channel.

Clause 6: The apparatus of clause 5, wherein the surface impedance profile is a square-wave-type modulation.

Clause 7: The apparatus of clause 5, wherein the high surface impedance and the low surface impedance are modulated to enable scanning in the theta direction and in the phi direction.

Clause 8: The apparatus of clause 1, wherein each switch element in the plurality of switch elements is a PIN diode

that has an inductance state and a capacitance state.

Clause 9: The apparatus of clause 1, wherein each switch element in the plurality of switch elements is a Schottky diode that has only two states.

Clause 10: The apparatus of clause 1, wherein each switch element in the plurality of switch elements is a semiconductor switch that has only two states.

Clause 11: The apparatus of clause 1, wherein each switch element in the plurality of switch elements is a microelectromechanical systems switch diode that has only two states.

Clause 12: The apparatus of clause 1, wherein each switch element in the plurality of switch elements is a phase-change material switch that has only two states.

Clause 13: The apparatus of clause 1, wherein each switch element in the plurality of switch elements is a high frequency diode that has only two states.

Clause 14: The apparatus of clause 1, wherein an impedance element in the plurality of impedance elements is selected from one of a metallic strip, a patch of conductive paint, a metallic mesh material, a metallic film, a deposit of a metallic substrate, a resonant structure, a split-ring resonator, and an electrically-coupled resonator, a structure comprised of one or more metamaterials.

Clause 15: The apparatus of clause 1, wherein an impedance element in the plurality of impedance elements has a pattern formed by a series of a same shape.

Clause 16: The apparatus of clause 15, wherein the same shape is selected from one of a diamond-type shape and a hexagonal-type shape.

Clause 17: An artificial impedance surface antenna comprising: a plurality of radiating elements, wherein each of the plurality of radiating elements comprises a number of surface wave channels in which each of the number of surface wave channels is configured to constrain a path of a surface wave and comprises: a plurality of impedance elements located on a surface of a dielectric substrate; and a plurality of switch elements located on the surface of the dielectric substrate in which each of the plurality of switch elements has a first state and a second state; and a plurality of surface wave feeds configured to couple the number of surface wave channels of each of the plurality of radiating elements to a number of transmission lines.

Clause 18: A method for electronically steering an antenna system, the method comprising: propagating a surface wave along each of a number of surface wave channels formed in each of a plurality of radiating elements to form a radiation pattern; coupling each surface wave channel in the number of surface wave channels formed in each radiating element in the plurality of radiating elements to a transmission line configured to carry a radio frequency signal using a surface wave feed in a plurality of surface wave feeds associated with the plurality of radiating elements; and electronically steering a main lobe of the radiation pattern by controlling voltages applied to a plurality of switch elements connecting a plurality of impedance elements in each of the number of surface wave channels.

Clause 19: The method of clause 18, wherein electronically steering the main lobe comprises: applying a first level of voltage or a second level of voltage to each of the plurality of switch elements to create a surface impedance profile for each surface wave channel of the number of surface wave channels.

Clause 20: The method of clause 18, wherein electronically steering the main lobe comprises: applying a first level of voltage or a second level of voltage to each of the plurality of switch elements to modulate between high surface impedance and low surface impedance.

[0259] The description of the different illustrative embodiments has been presented for purposes of illustration and description, and is not intended to be exhaustive or limited to the embodiments in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. Further, different illustrative embodiments may provide different features as compared to other desirable embodiments. The embodiment or embodiments selected are chosen and described in order to best explain the principles of the embodiments, the practical application, and to enable others of ordinary skill in the art to understand the disclosure for various embodiments with various modifications as are suited

to the particular use contemplated.

Claims

1. An apparatus comprising:

a plurality of radiating elements, wherein each radiating element (123) in the plurality of radiating elements comprises a number of surface wave channels in which each (125) of the number of surface wave channels is configured to constrain a path of a surface wave and comprises:

a plurality of switch elements (2100); and
a plurality of impedance elements (126); and

a plurality of surface wave feeds (130), wherein a surface wave feed in the plurality of surface wave feeds (130) is configured to couple a surface wave channel (125) in the number of surface wave channels of a radiating element (123) in the plurality of radiating elements to a transmission line configured to carry a radio frequency signal (154).

2. The apparatus of claim 1, wherein the plurality of radiating elements and the plurality of surface wave feeds (130) form an artificial impedance surface antenna (110) that is configured to be electronically steered in a theta direction and a phi direction.

3. The apparatus of claim 2, wherein the artificial impedance surface antenna (110) operates at a frequency between about 26.5 gigahertz and about 40 gigahertz.

4. The apparatus of any of claims 2-3, wherein the plurality of switch elements (2100) of each surface wave channel (125) of the number of surface wave channels enables creating a surface impedance profile (2114) of high surface impedance and low surface impedance for the each surface wave channel (125).

5. The apparatus of any of claims 1-2, wherein each switch element (2101) in the plurality of switch elements (2100) is a PIN diode that has an inductance state (2105) and a capacitance state (2107).

6. The apparatus of any of claims 1, 2, or 5, wherein each switch element (2101) in the plurality of switch elements (2100) is a Schottky diode that has only two states (2102).

7. The apparatus of any of claims 1, 2, 5, or 6, wherein each switch element (2101) in the plurality of switch elements (2100) is a semiconductor switch that has only two states (2102).

8. The apparatus of any of claims 1, 2, or 5-7, wherein each switch element (2101) in the plurality of switch elements (2100) is a microelectromechanical systems switch diode that has only two states (2102).

9. The apparatus of any of claims 1, 2, or 5-8, wherein each switch element (2101) in the plurality of switch elements (2100) is a phase-change material switch that has only two states (2102).

10. The apparatus of any of claims 1, 2, or 5-9, wherein each switch element (2101) in the plurality of switch elements (2100) is a high frequency diode that has only two states (2102).

11. The apparatus of any of claims 1, 2, or 5-10, wherein an impedance element in the plurality of impedance elements (126) is selected from one of a metallic strip, a patch of conductive paint, a metallic mesh material, a metallic film, a deposit of a metallic substrate, a resonant structure, a split-ring resonator, and an electrically-coupled resonator, a structure comprised of one or more metamaterials.

12. The apparatus of any of claims 1, 2, or 5-11, wherein an impedance element in the plurality of impedance elements (126) has a pattern formed by a series of a same shape.

13. A method for electronically steering an antenna system (100), the method comprising:

propagating (2700) a surface wave along each of a number of surface wave channels formed in each of a plurality of radiating elements to form a radiation pattern (112);
 coupling (2702) each surface wave channel (125) in the number of surface wave channels formed in each radiating element (123) in the plurality of radiating elements to a transmission line configured to carry a radio frequency signal (154) using a surface wave feed in a plurality of surface wave feeds (130) associated with the plurality of radiating elements; and
 electronically steering (2704) a main lobe (116) of the radiation pattern (112) by controlling voltages applied to a plurality of switch elements (2100) connecting a plurality of impedance elements (126) in each (125) of the number of surface wave channels.

14. The method of claim 13, wherein electronically steering the main lobe (116) comprises:

applying a first level of voltage or a second level of voltage to each of the plurality of switch elements (2100) to create a surface impedance profile (2114) for each surface wave channel (125) of the number of surface wave channels.

15. The method of any of claims 13-14, wherein electronically steering the main lobe (116) comprises:

applying a first level of voltage or a second level of voltage to each of the plurality of switch elements (2100) to modulate between high surface impedance and low surface impedance.

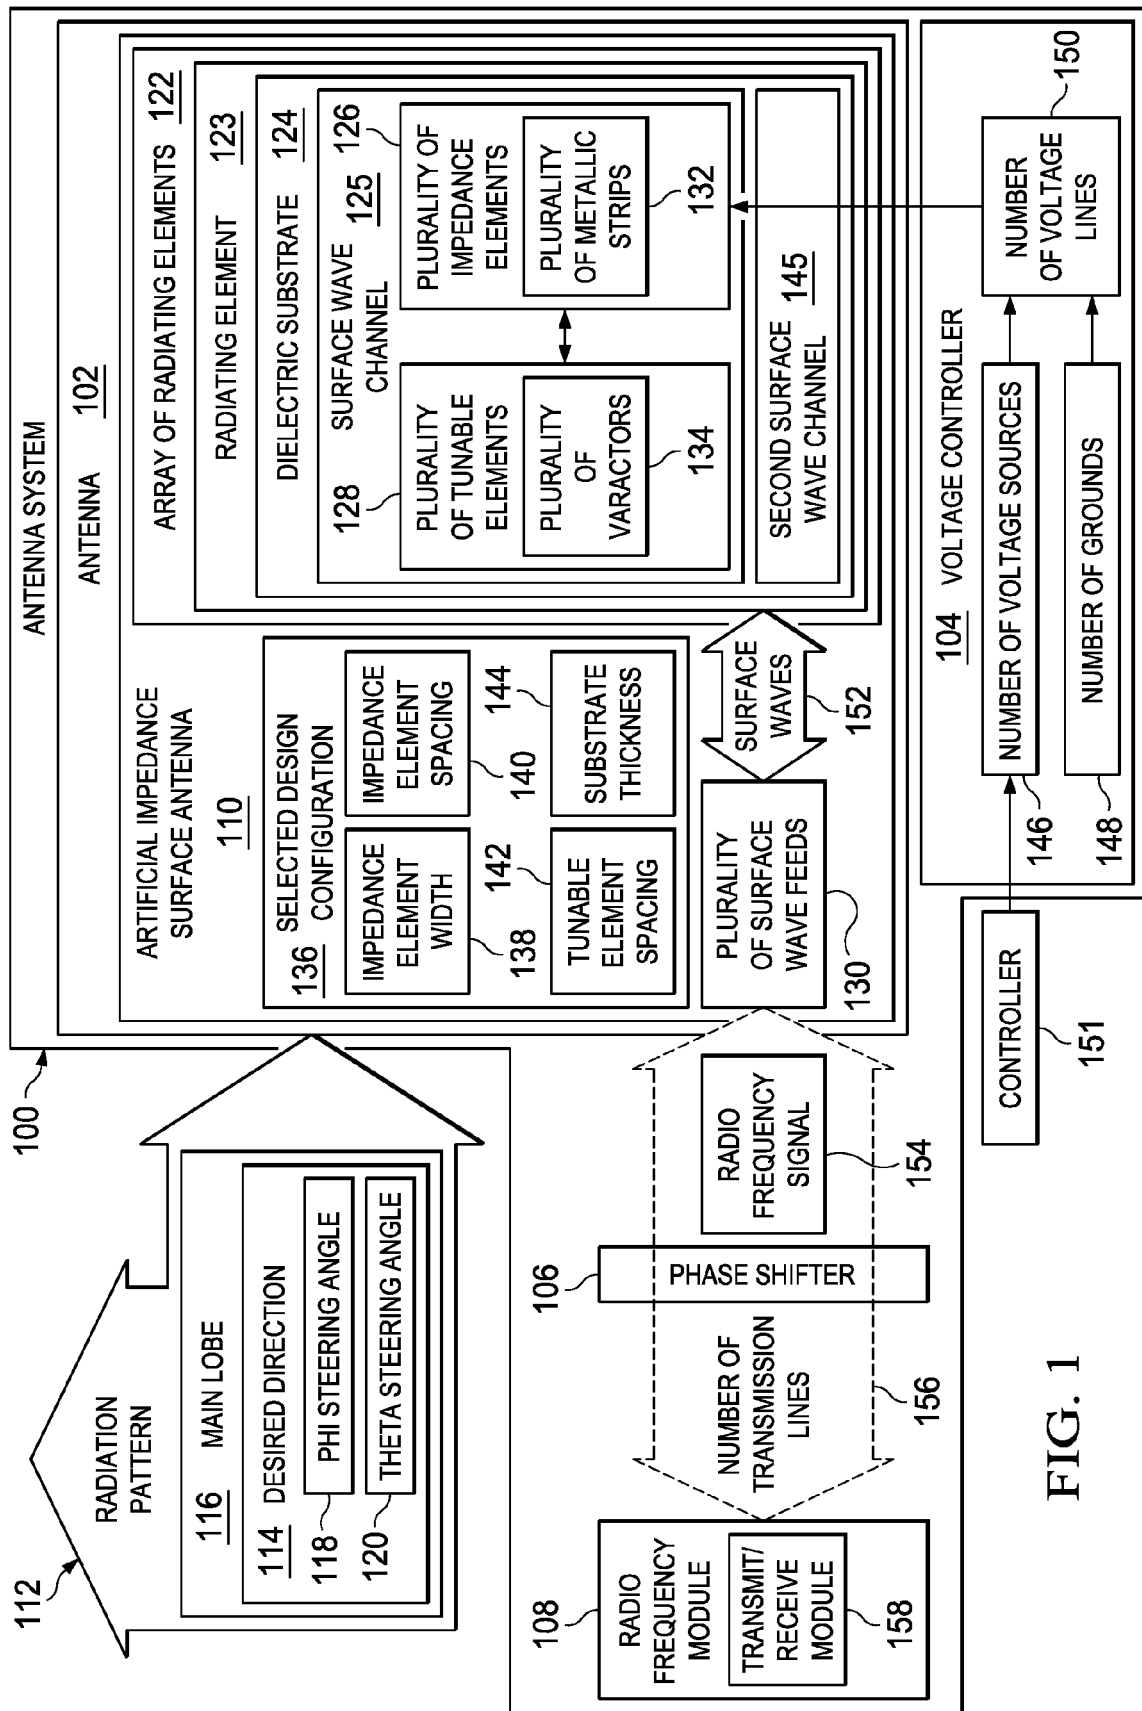
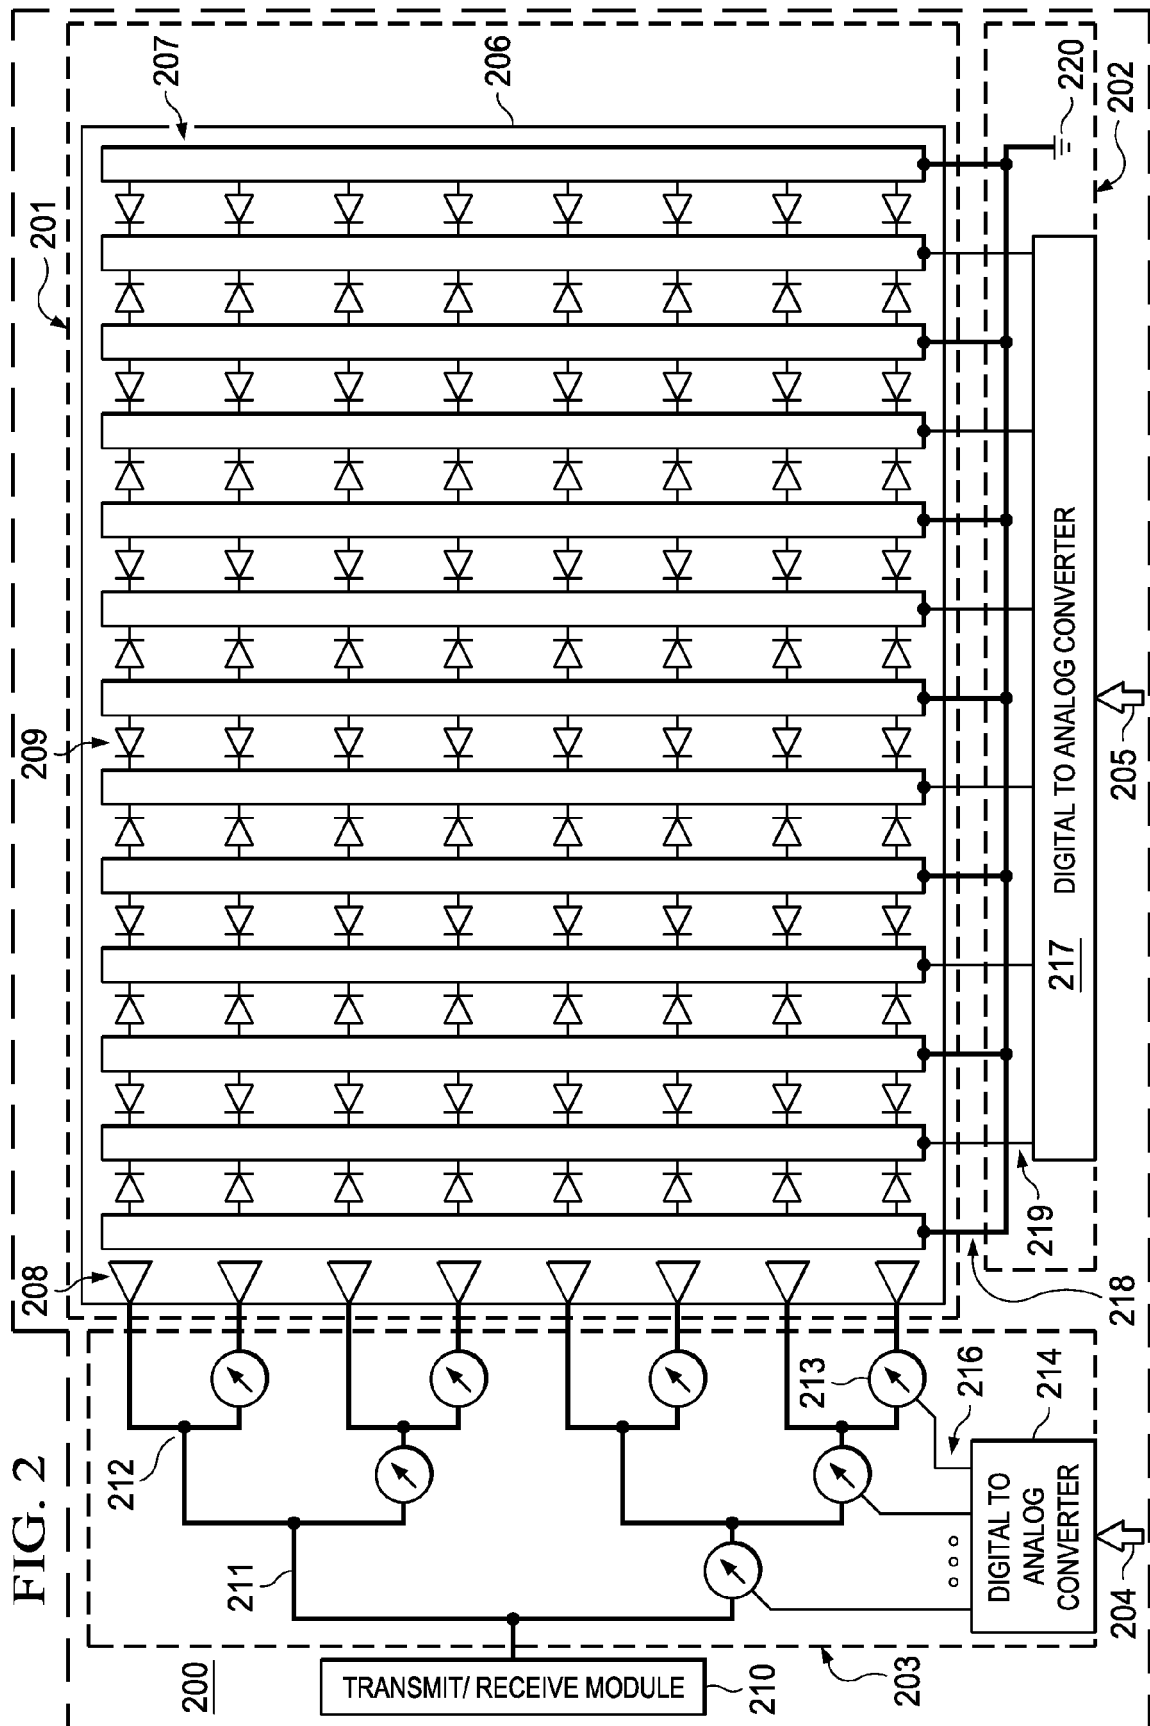
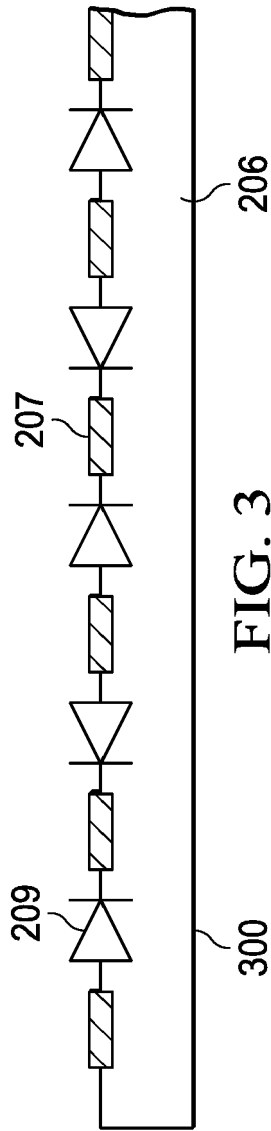
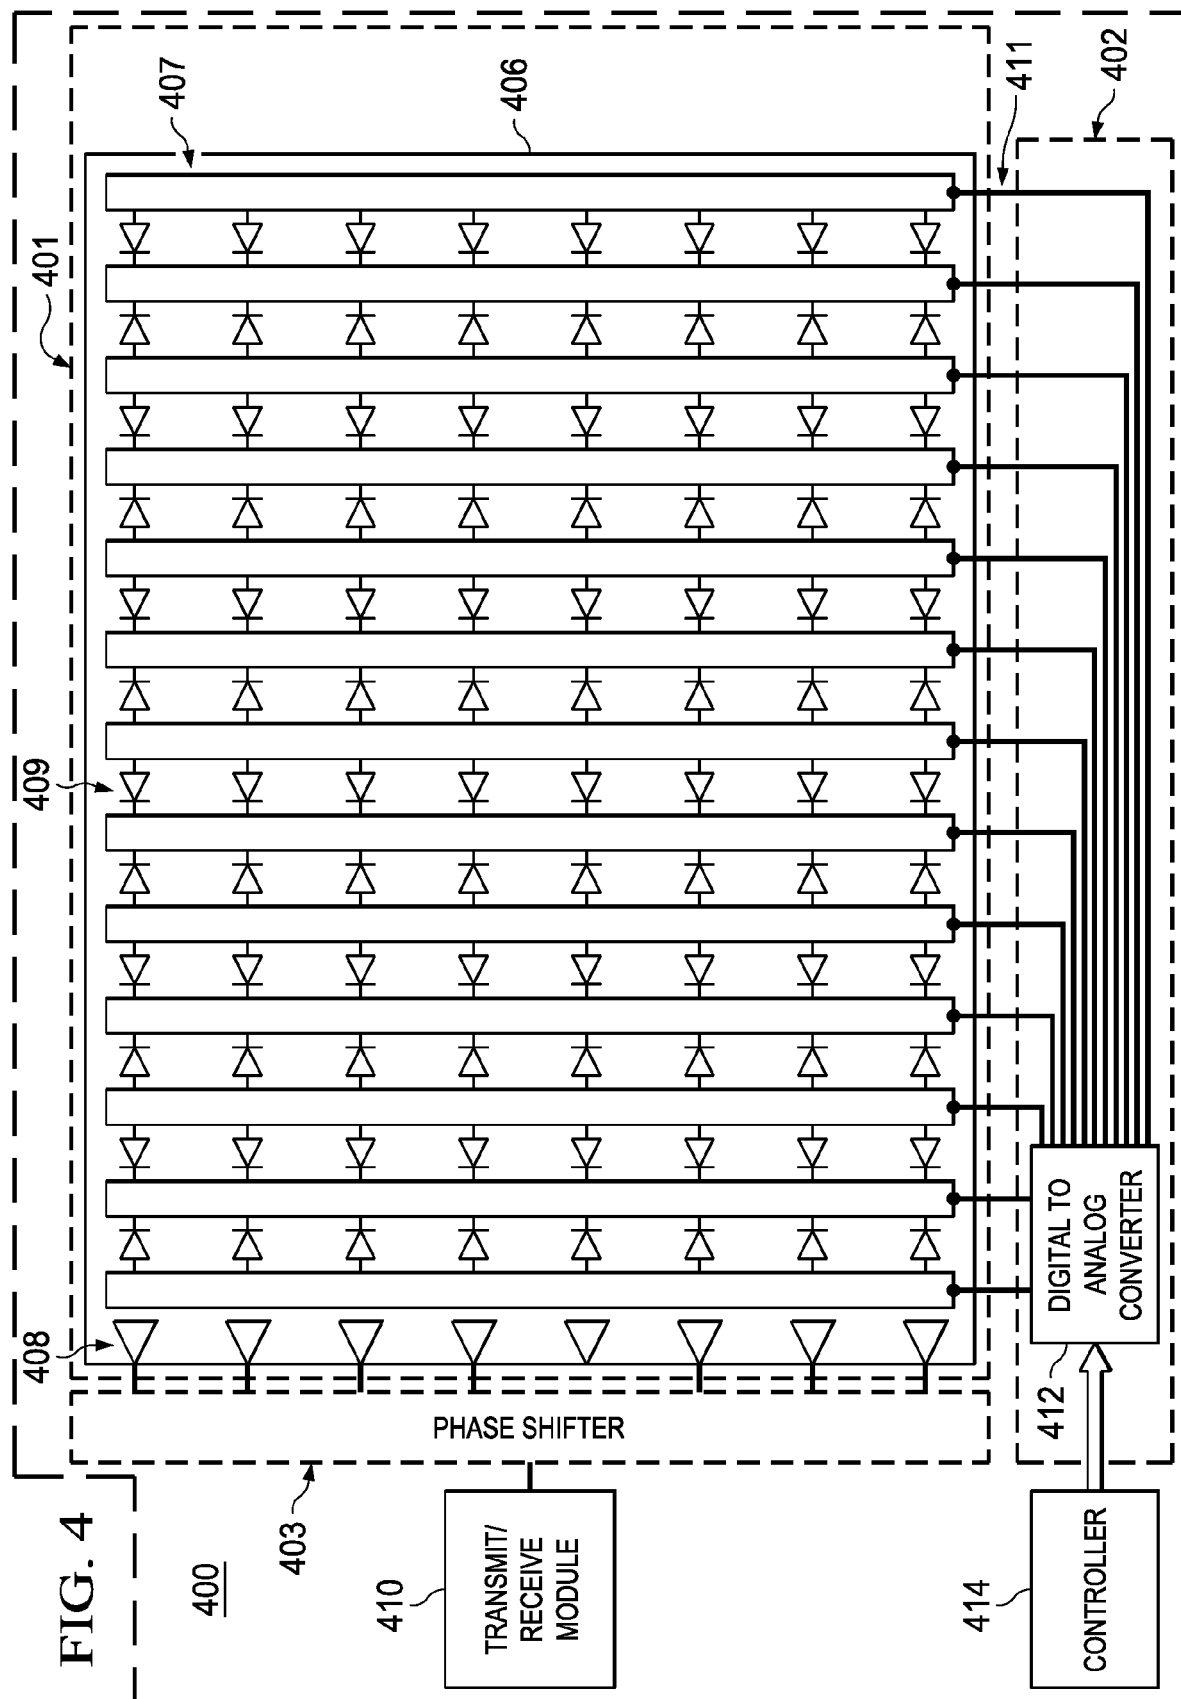
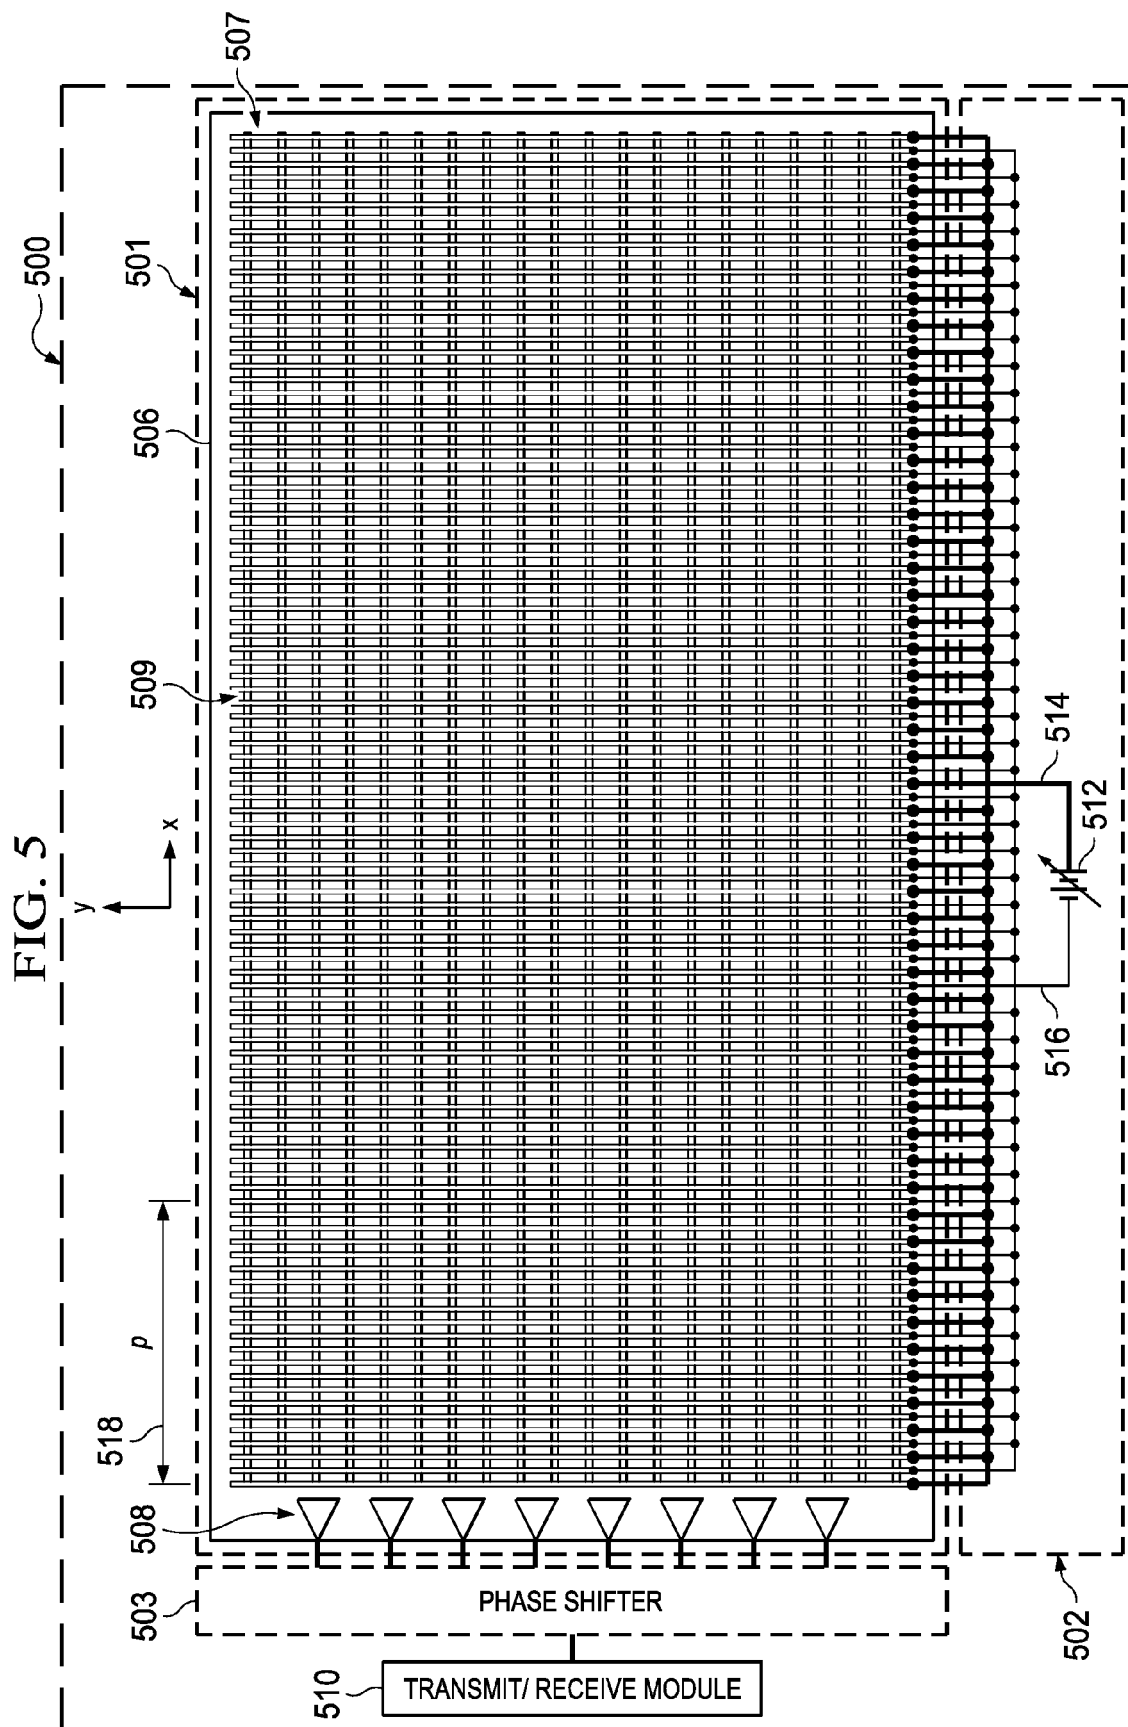


FIG. 1









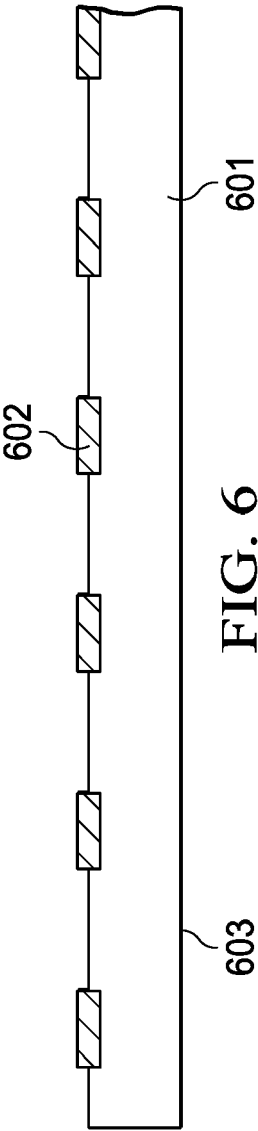


FIG. 6

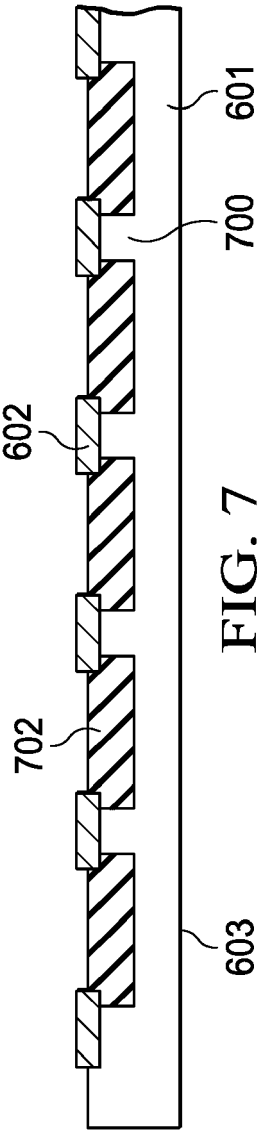
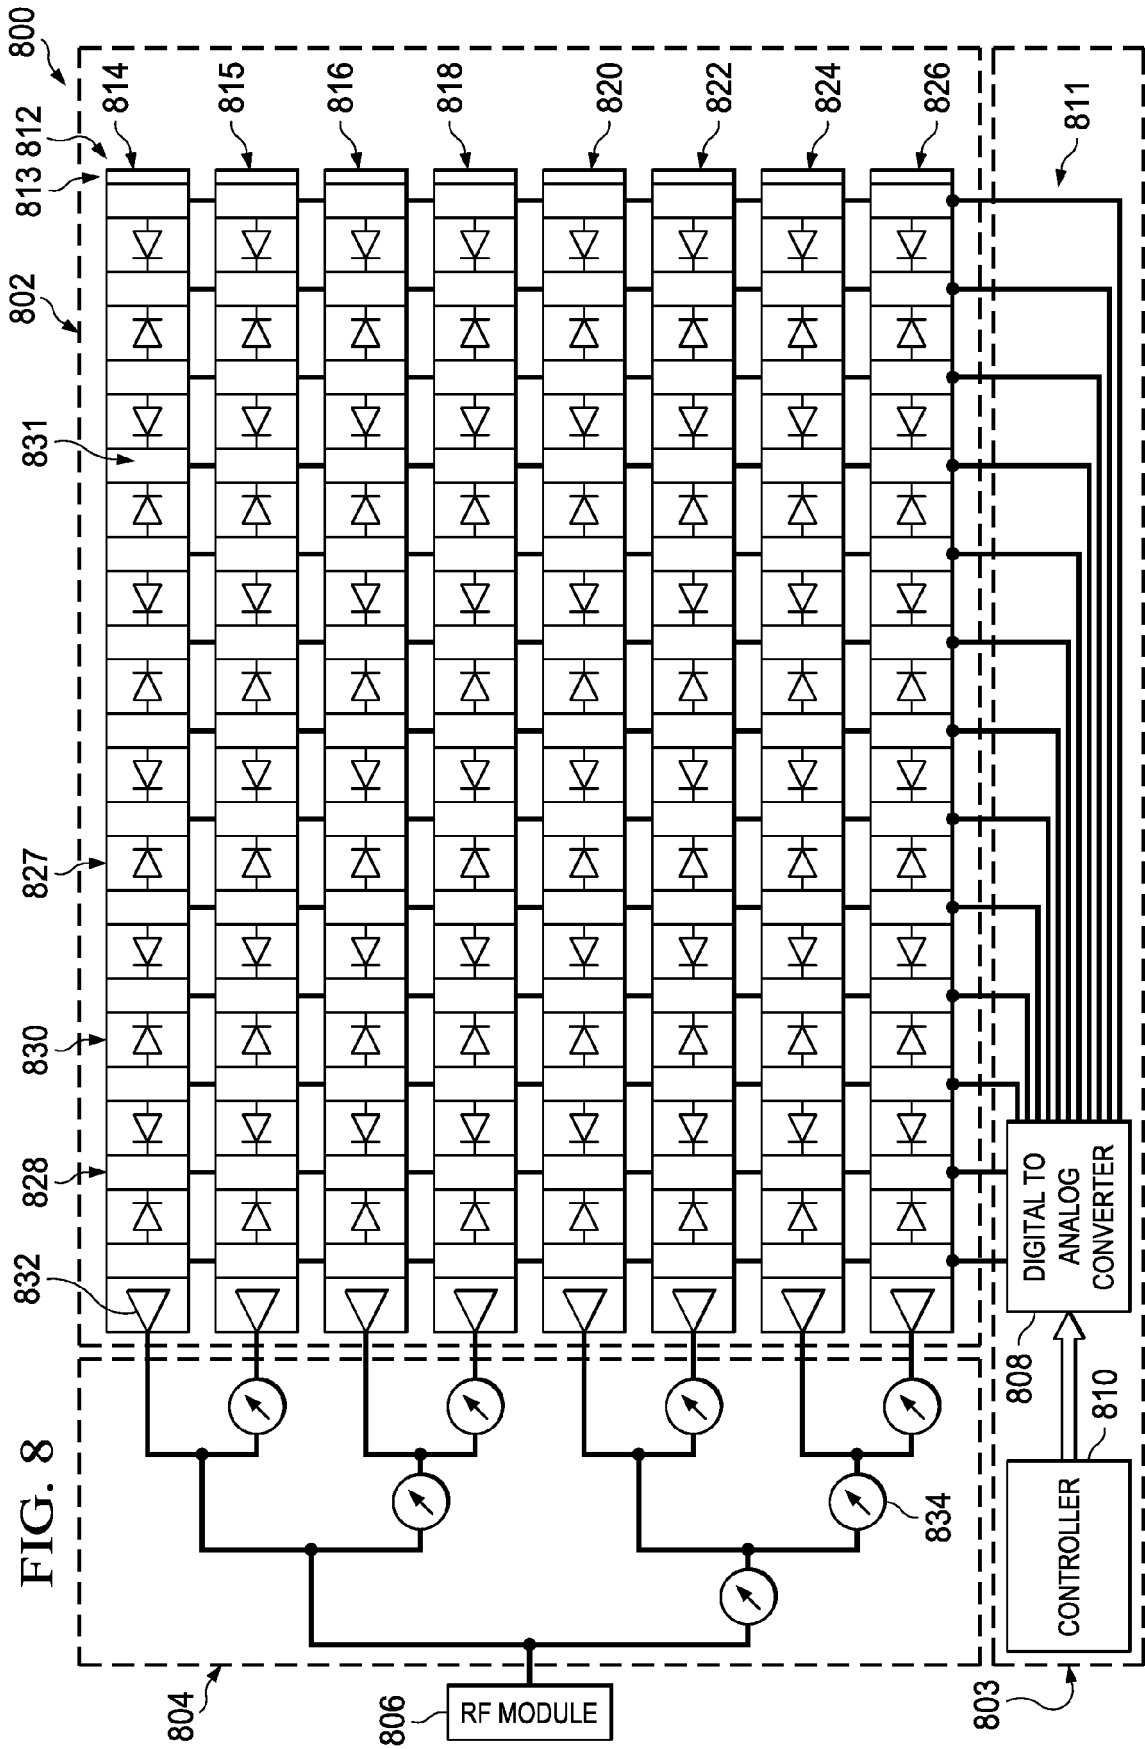


FIG. 7



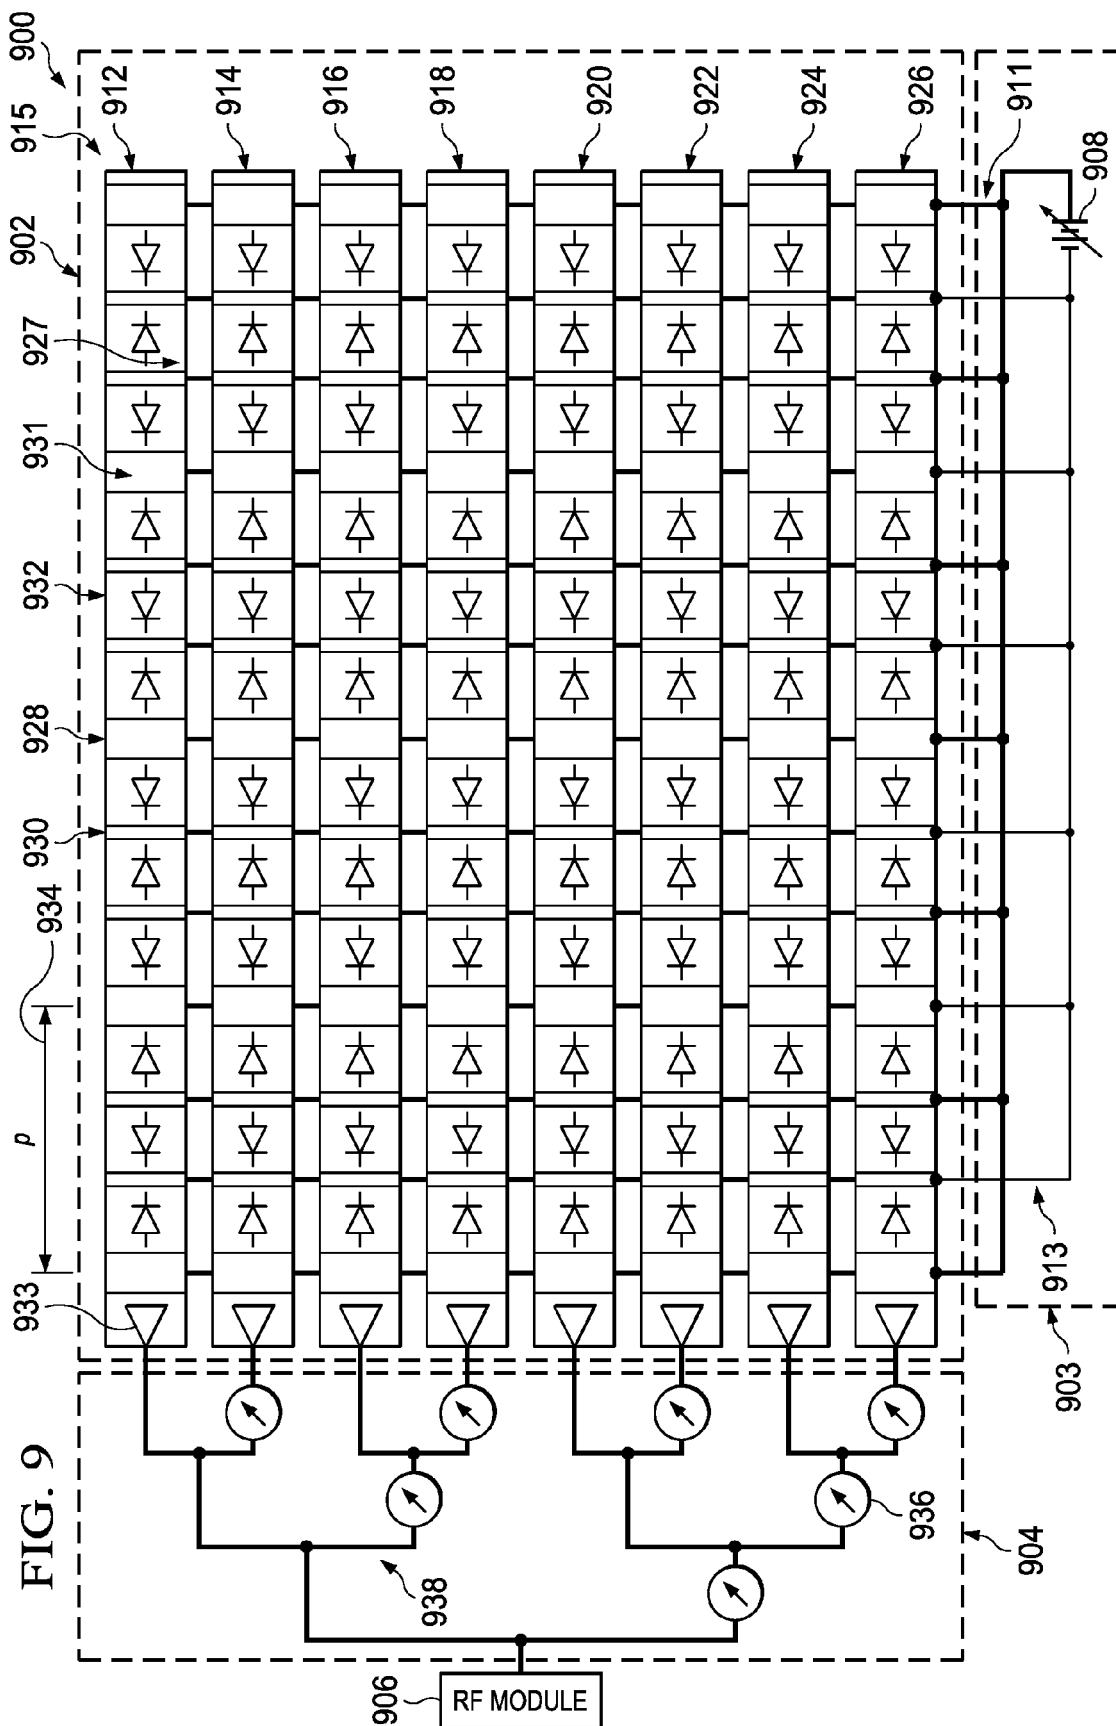
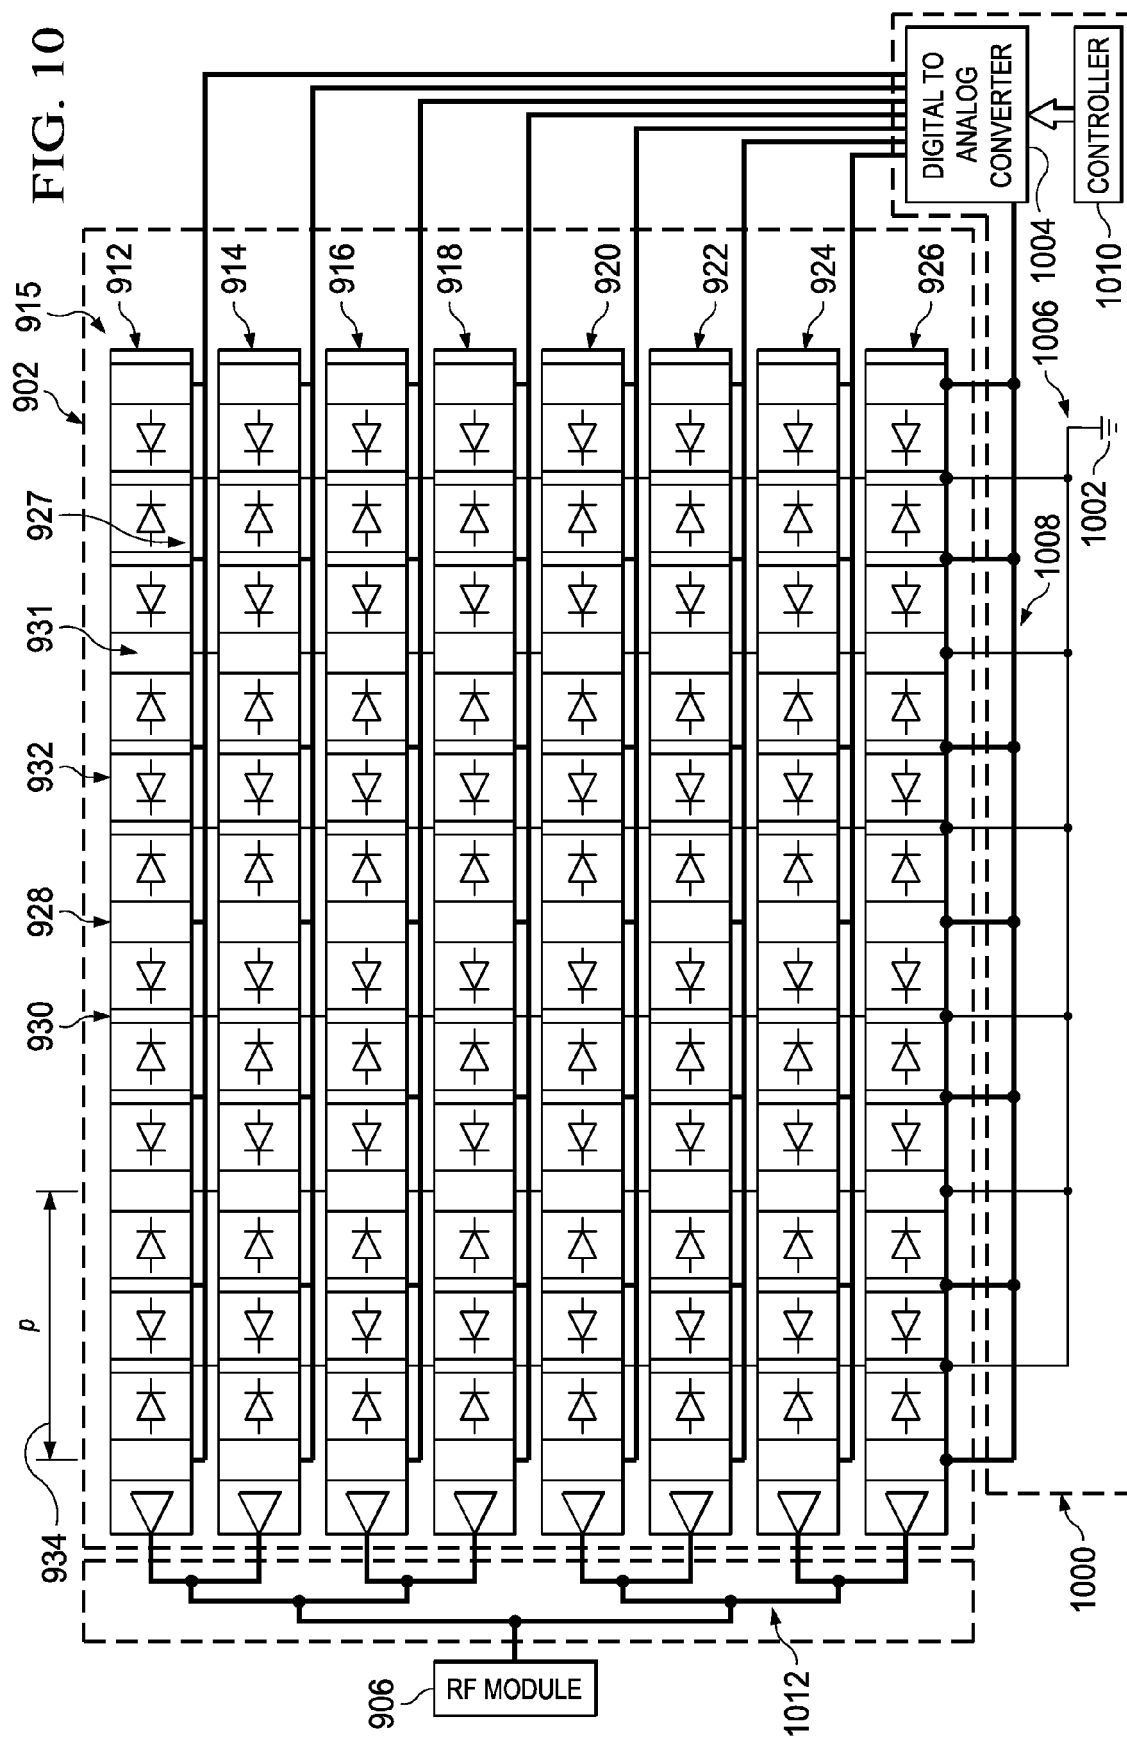
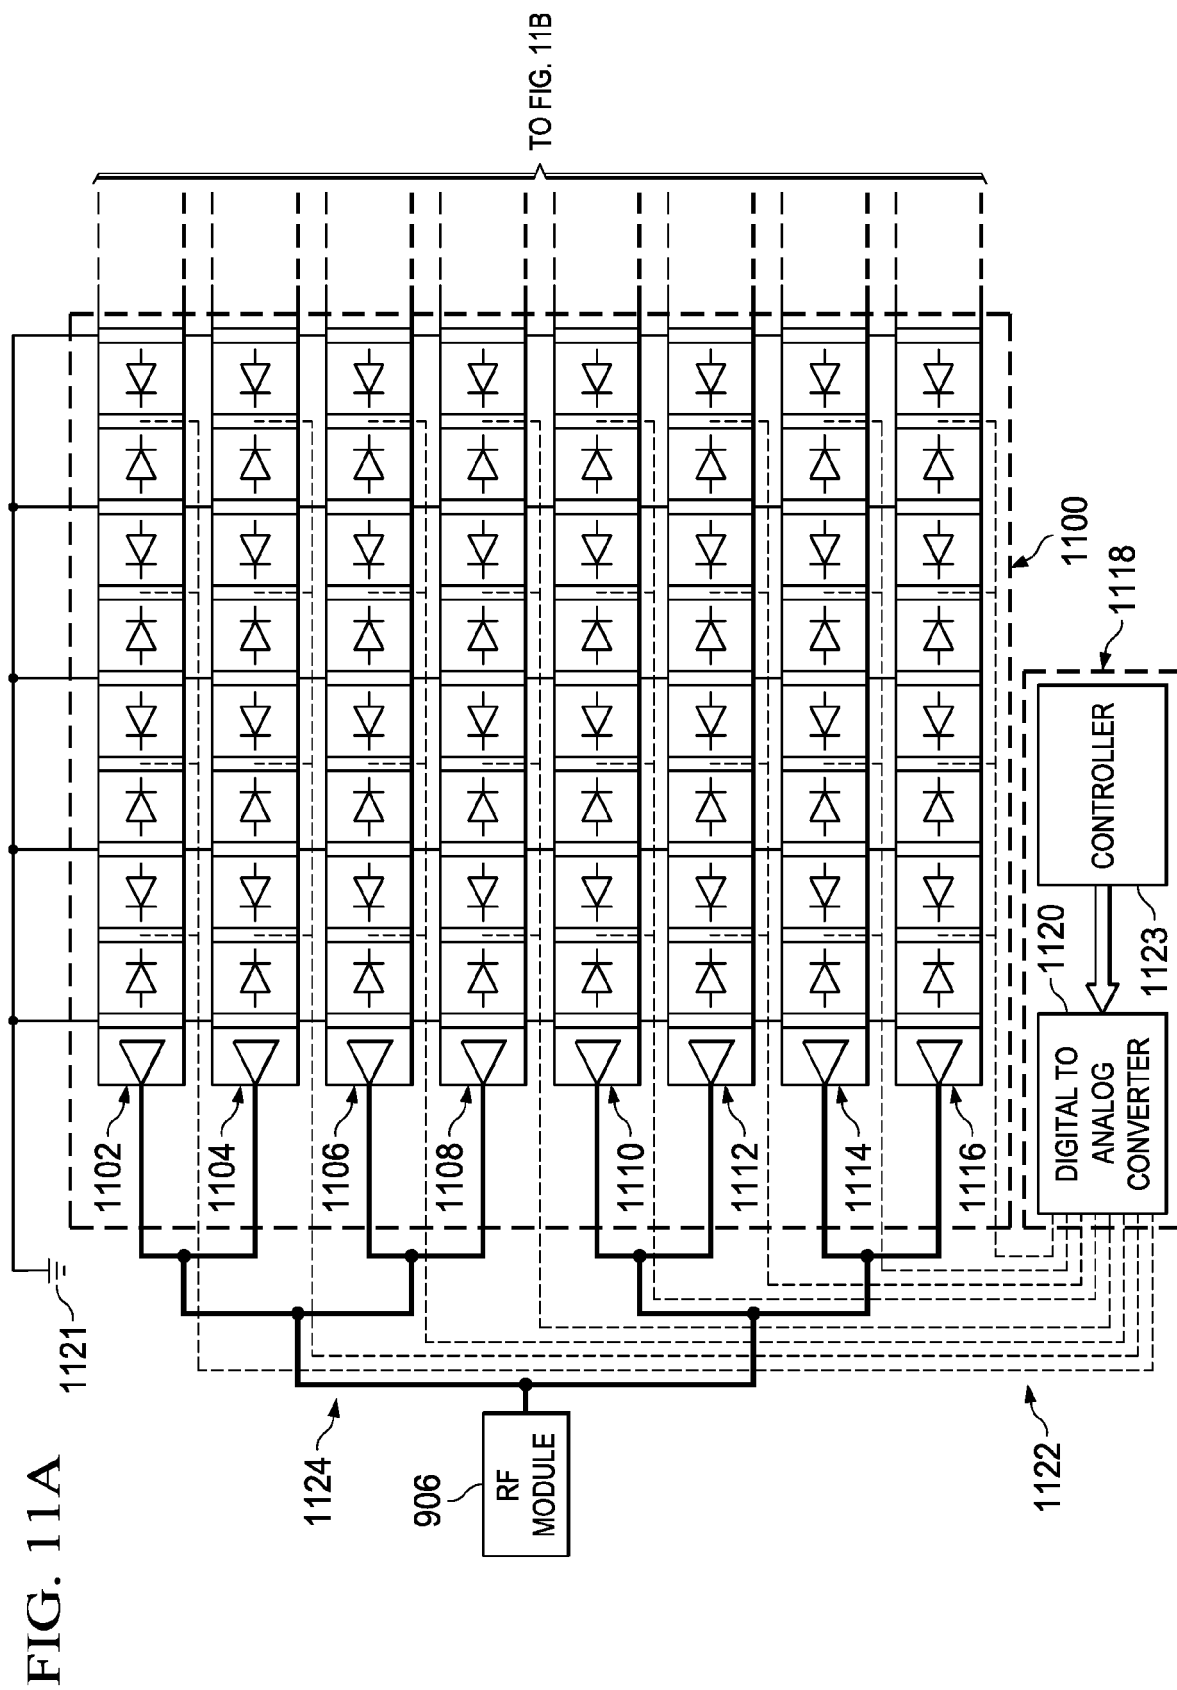
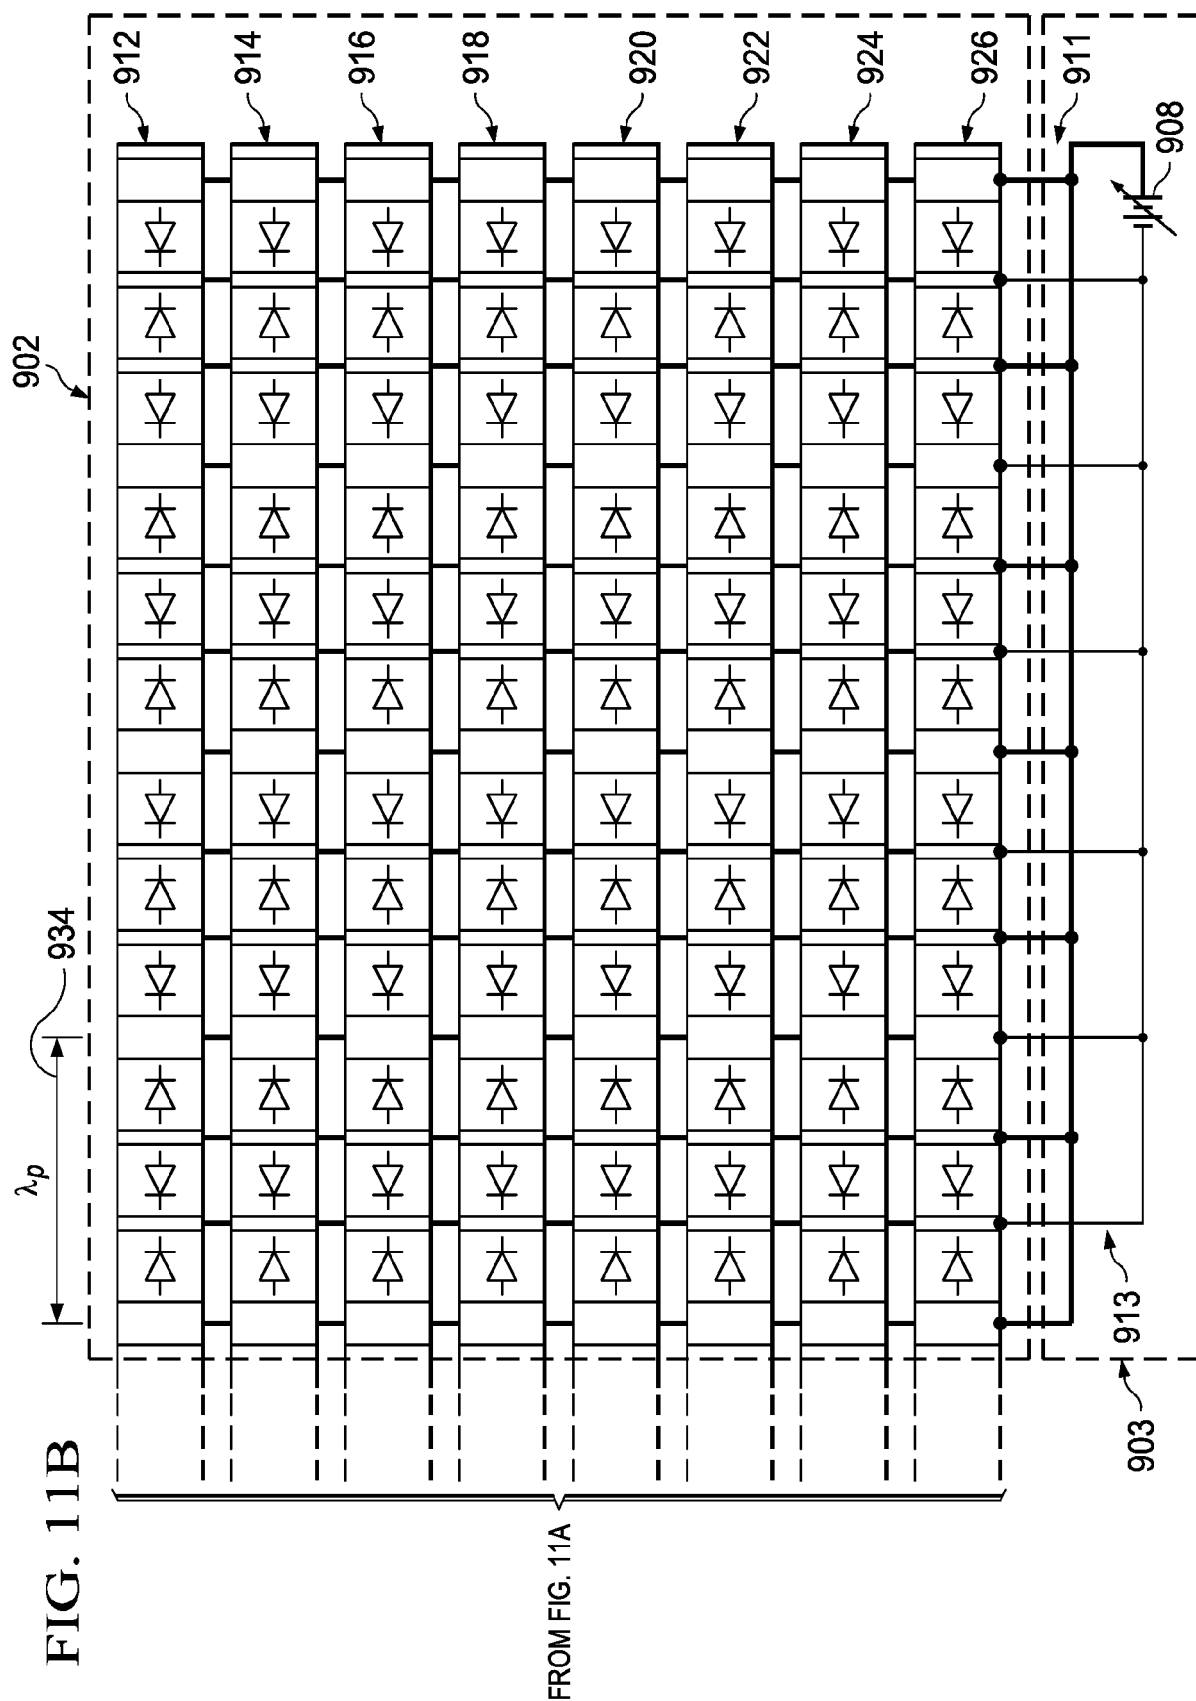
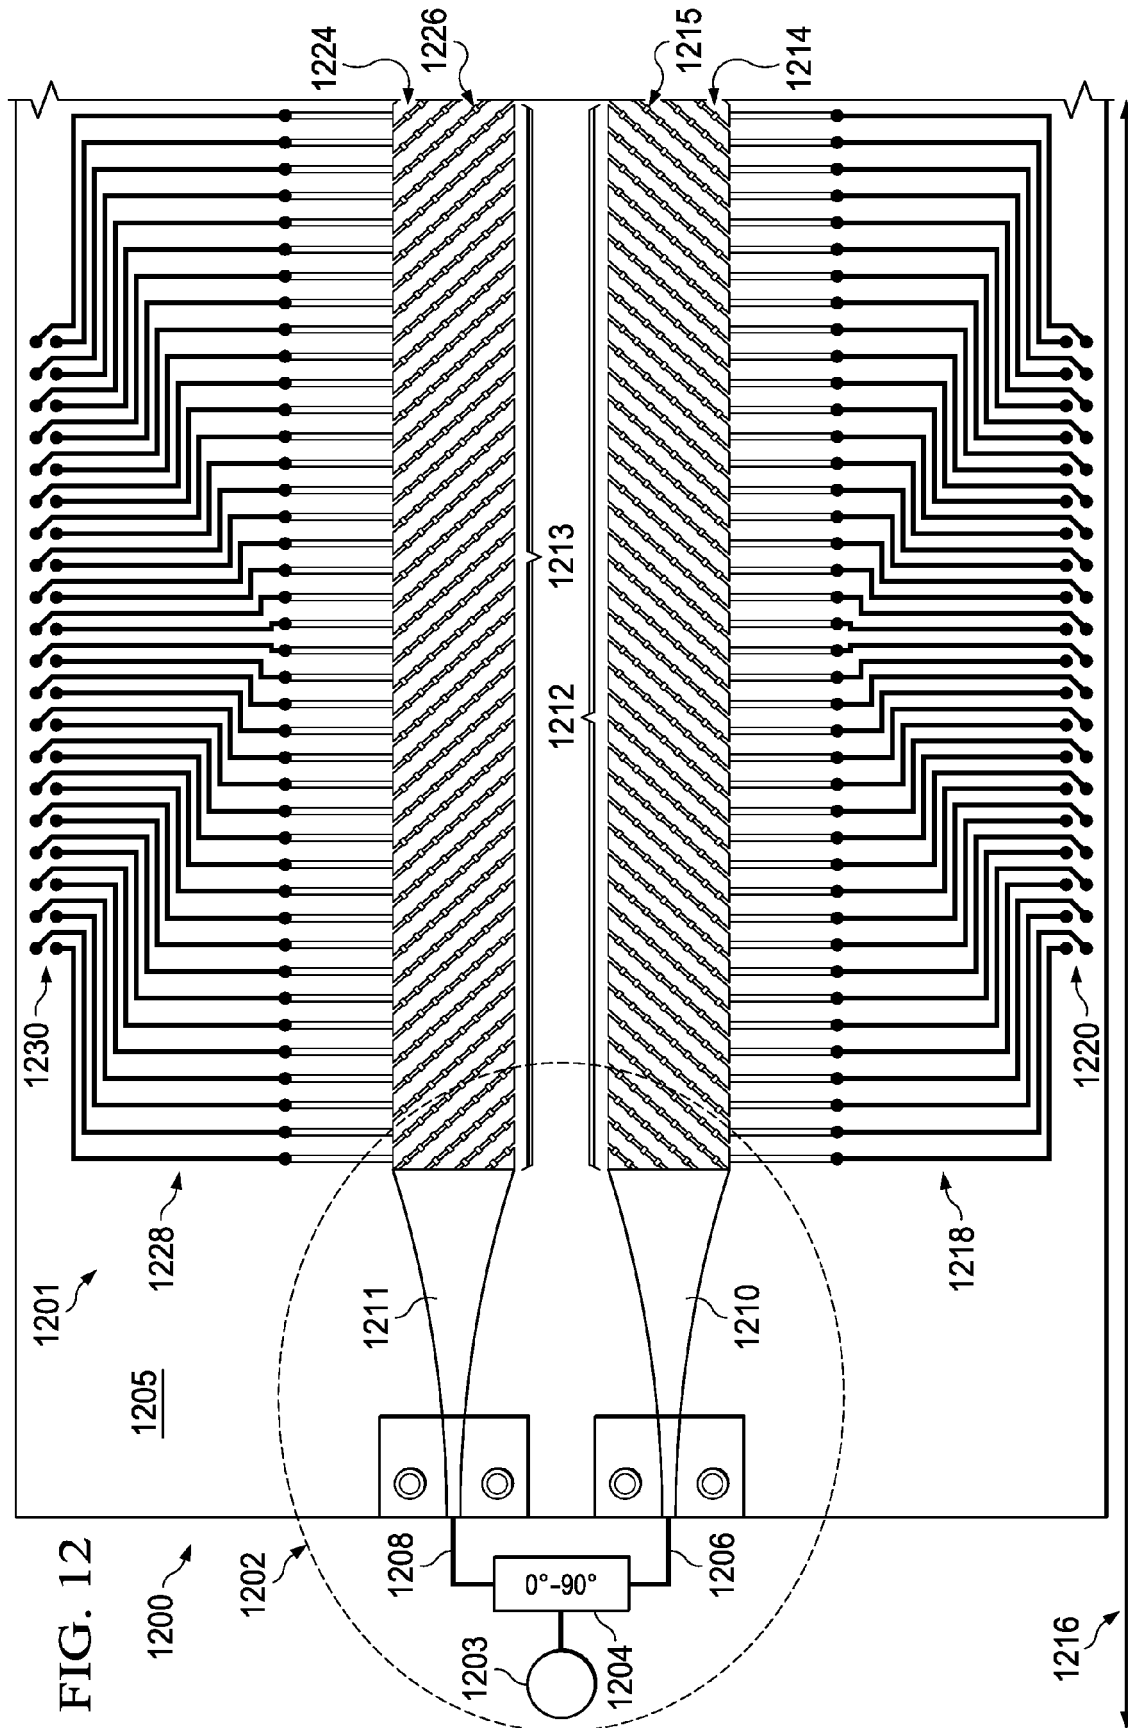



FIG. 10











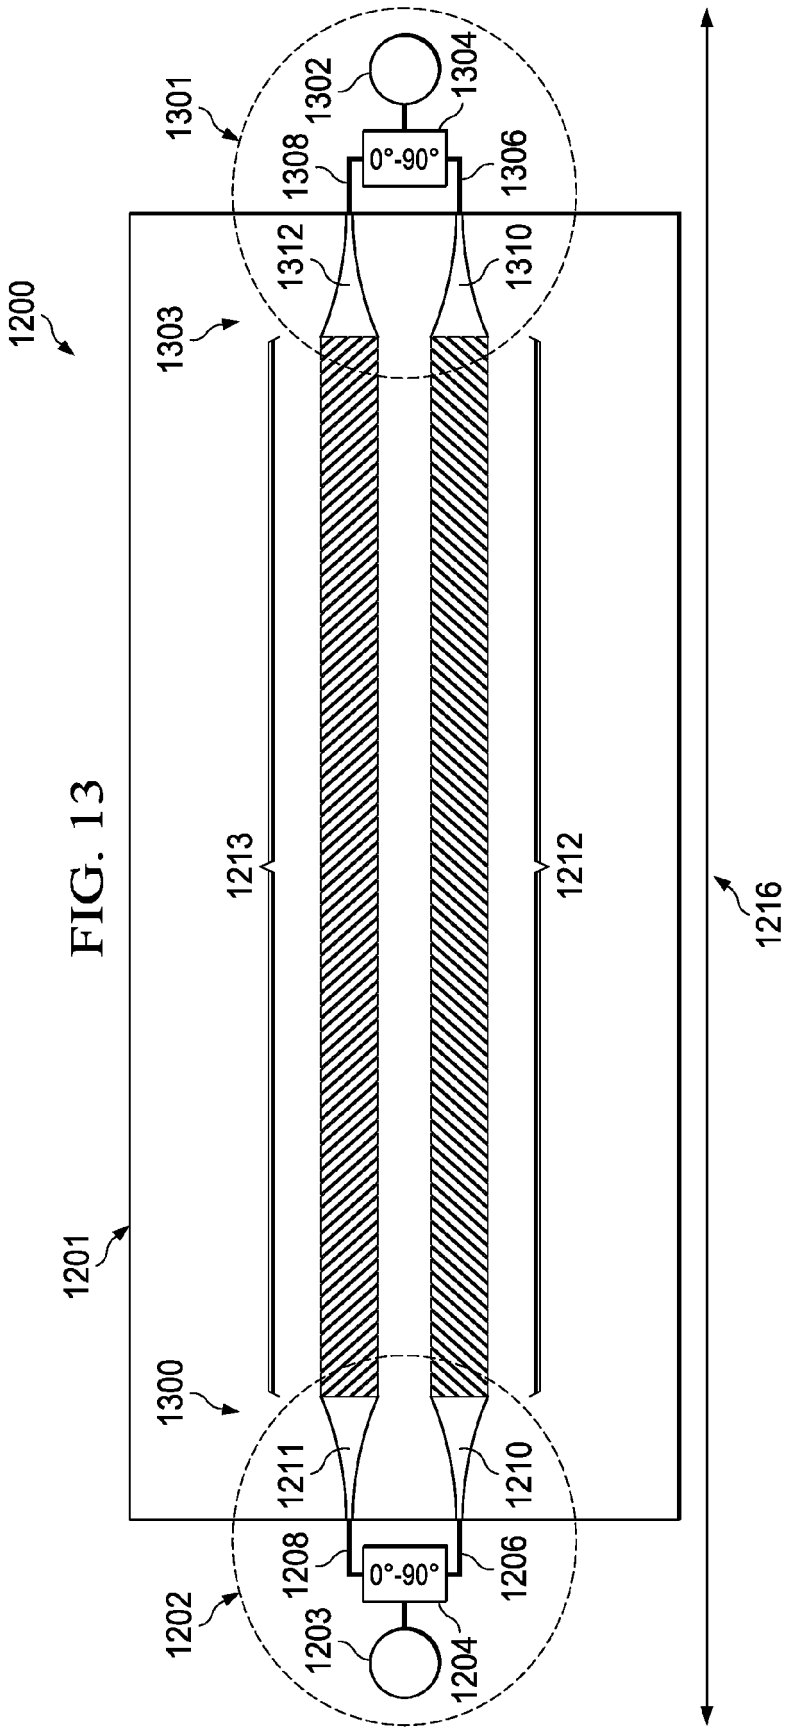

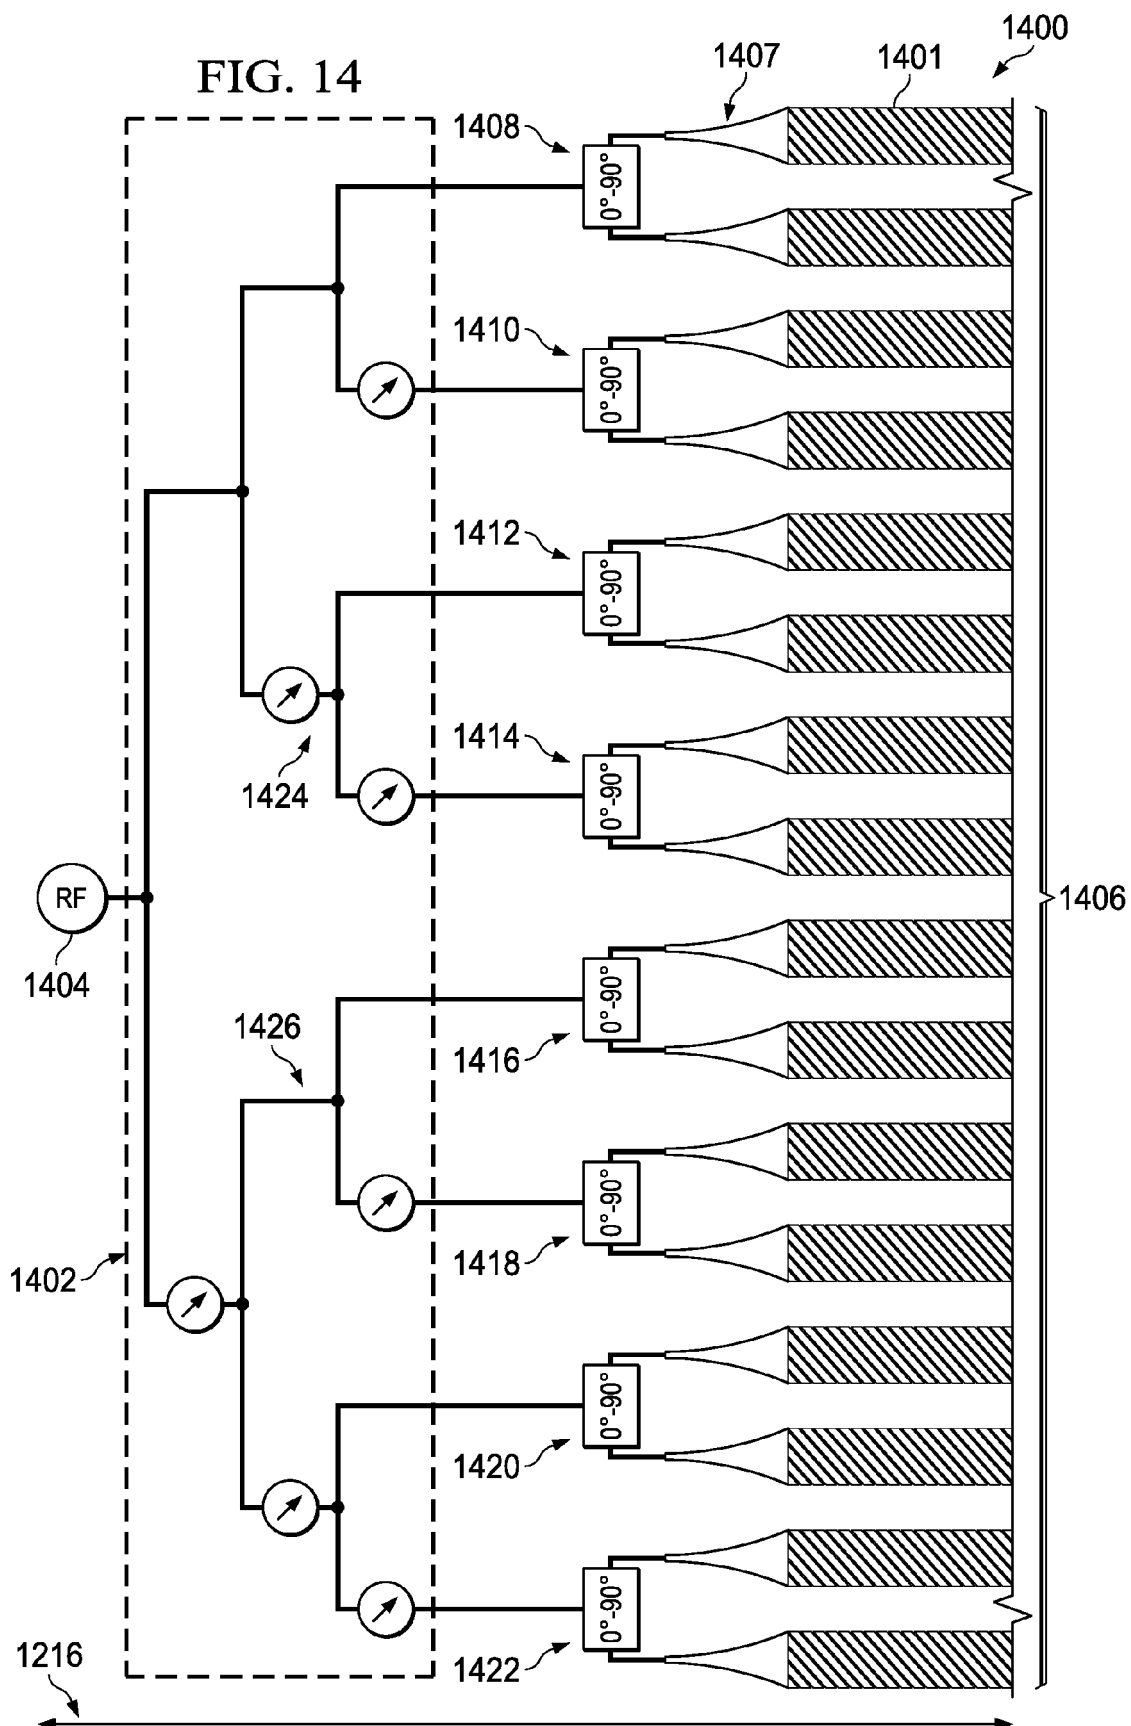

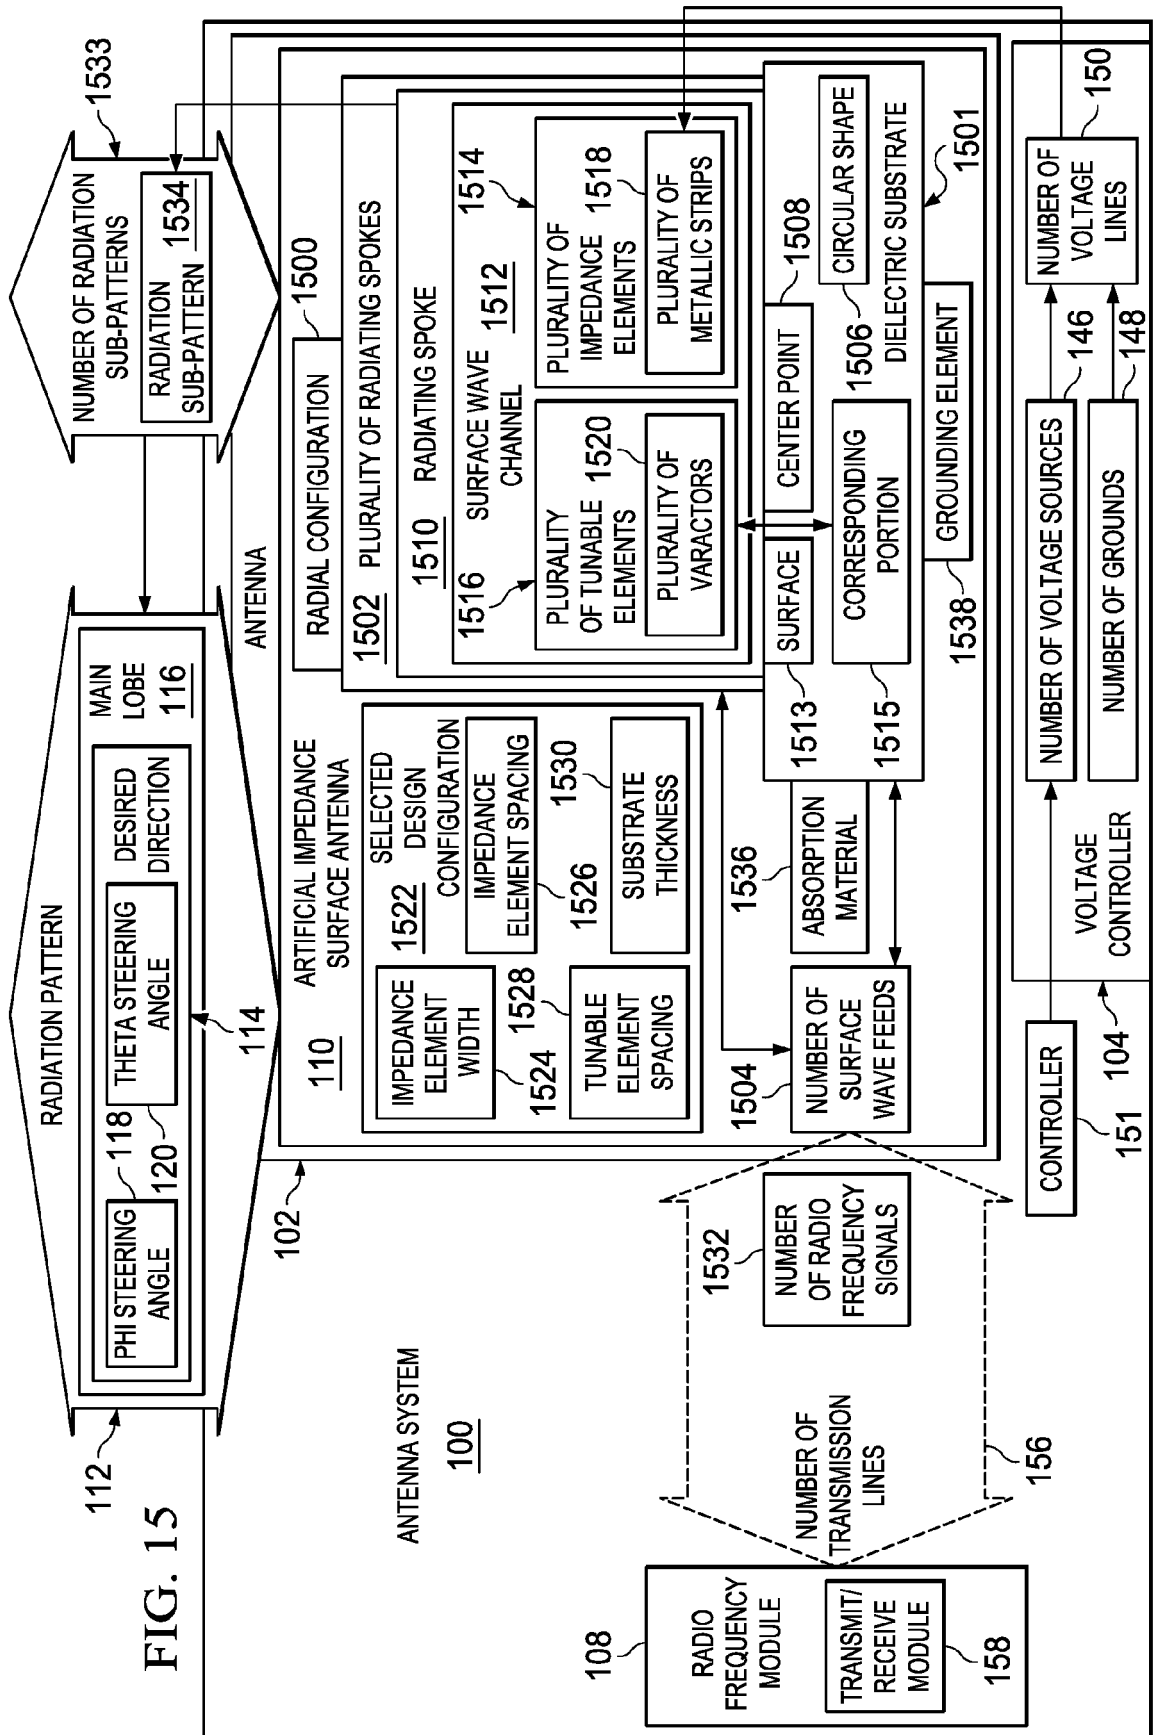

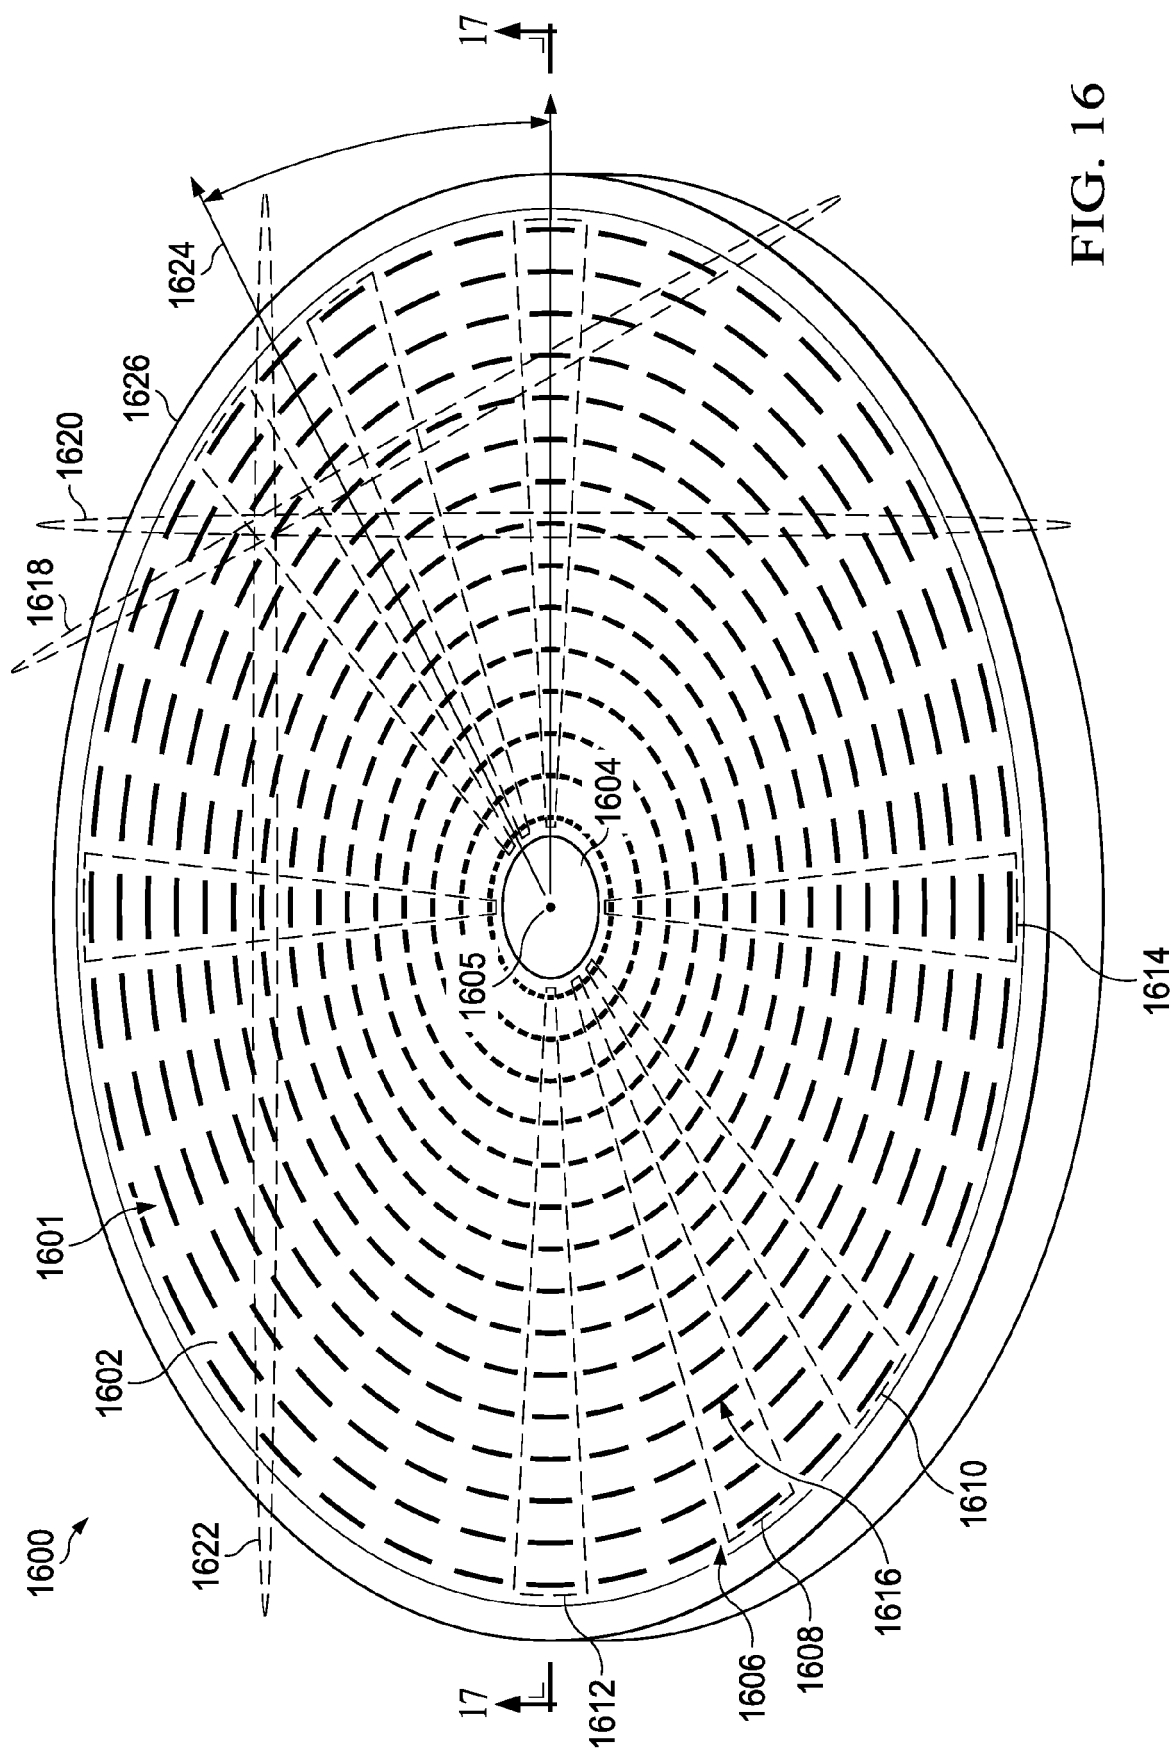


FIG. 16

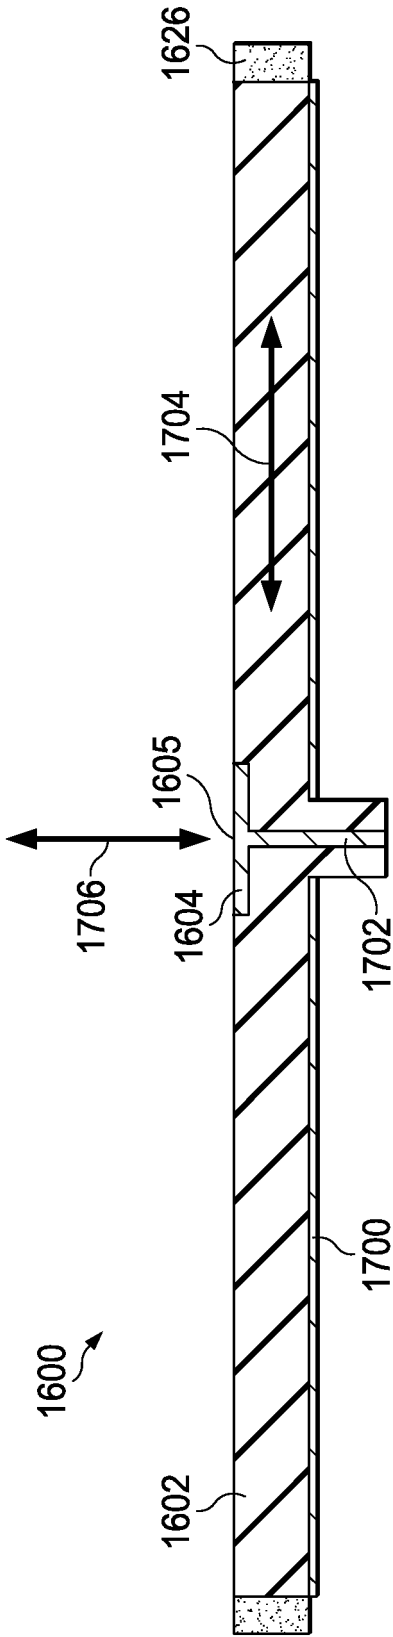
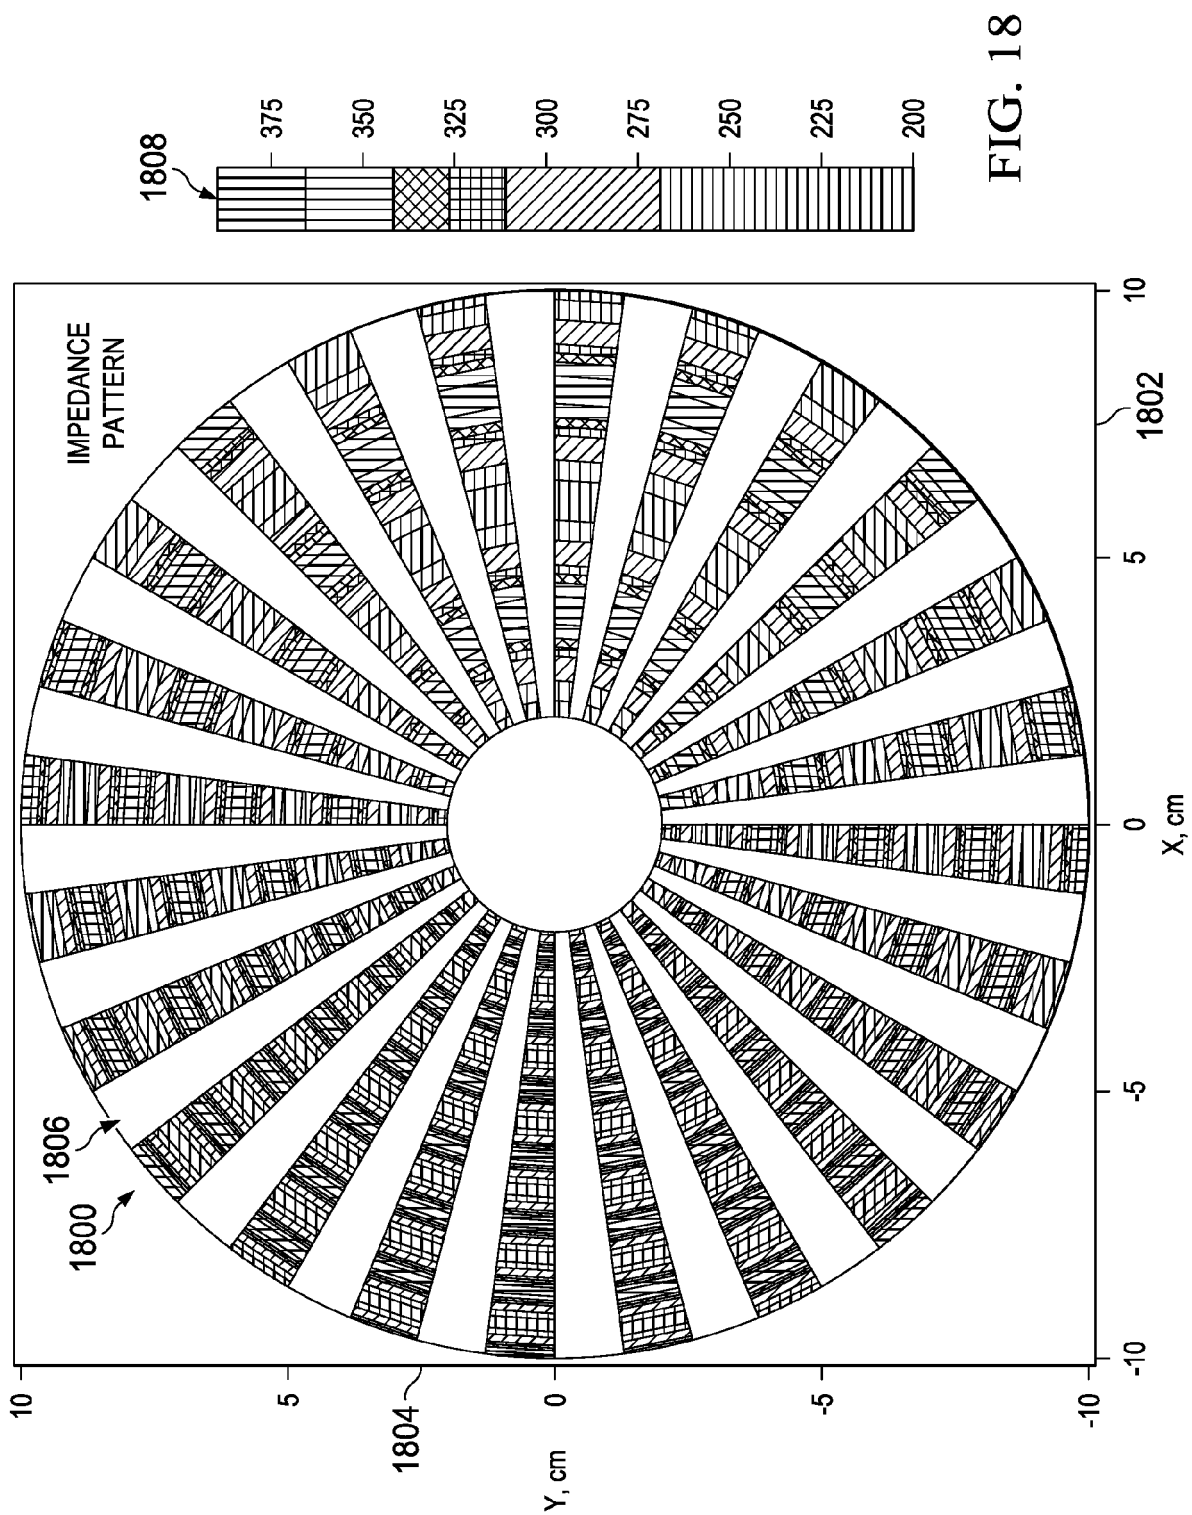


FIG. 17



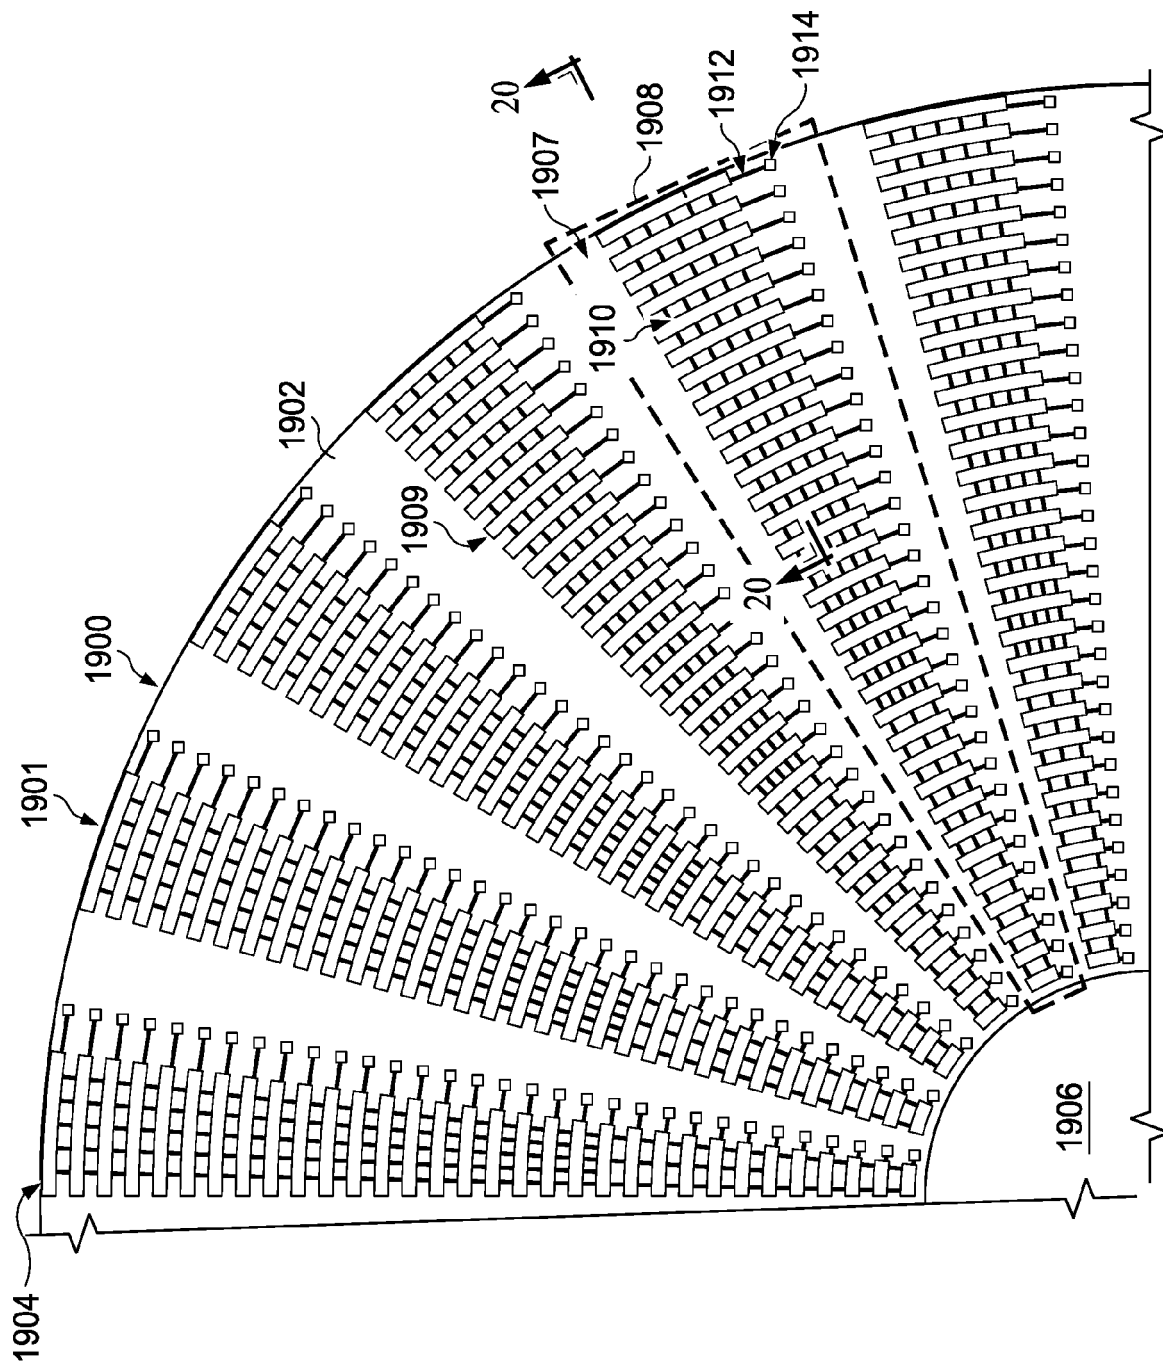


FIG. 19

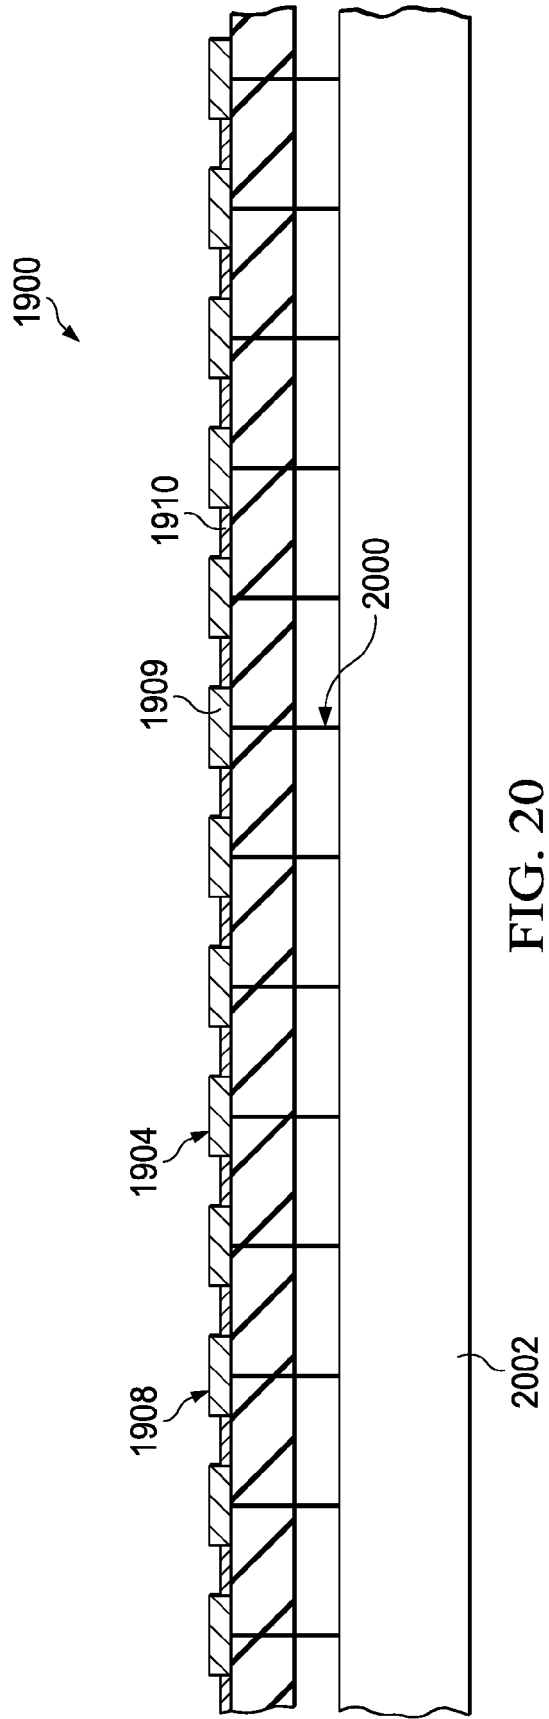


FIG. 20

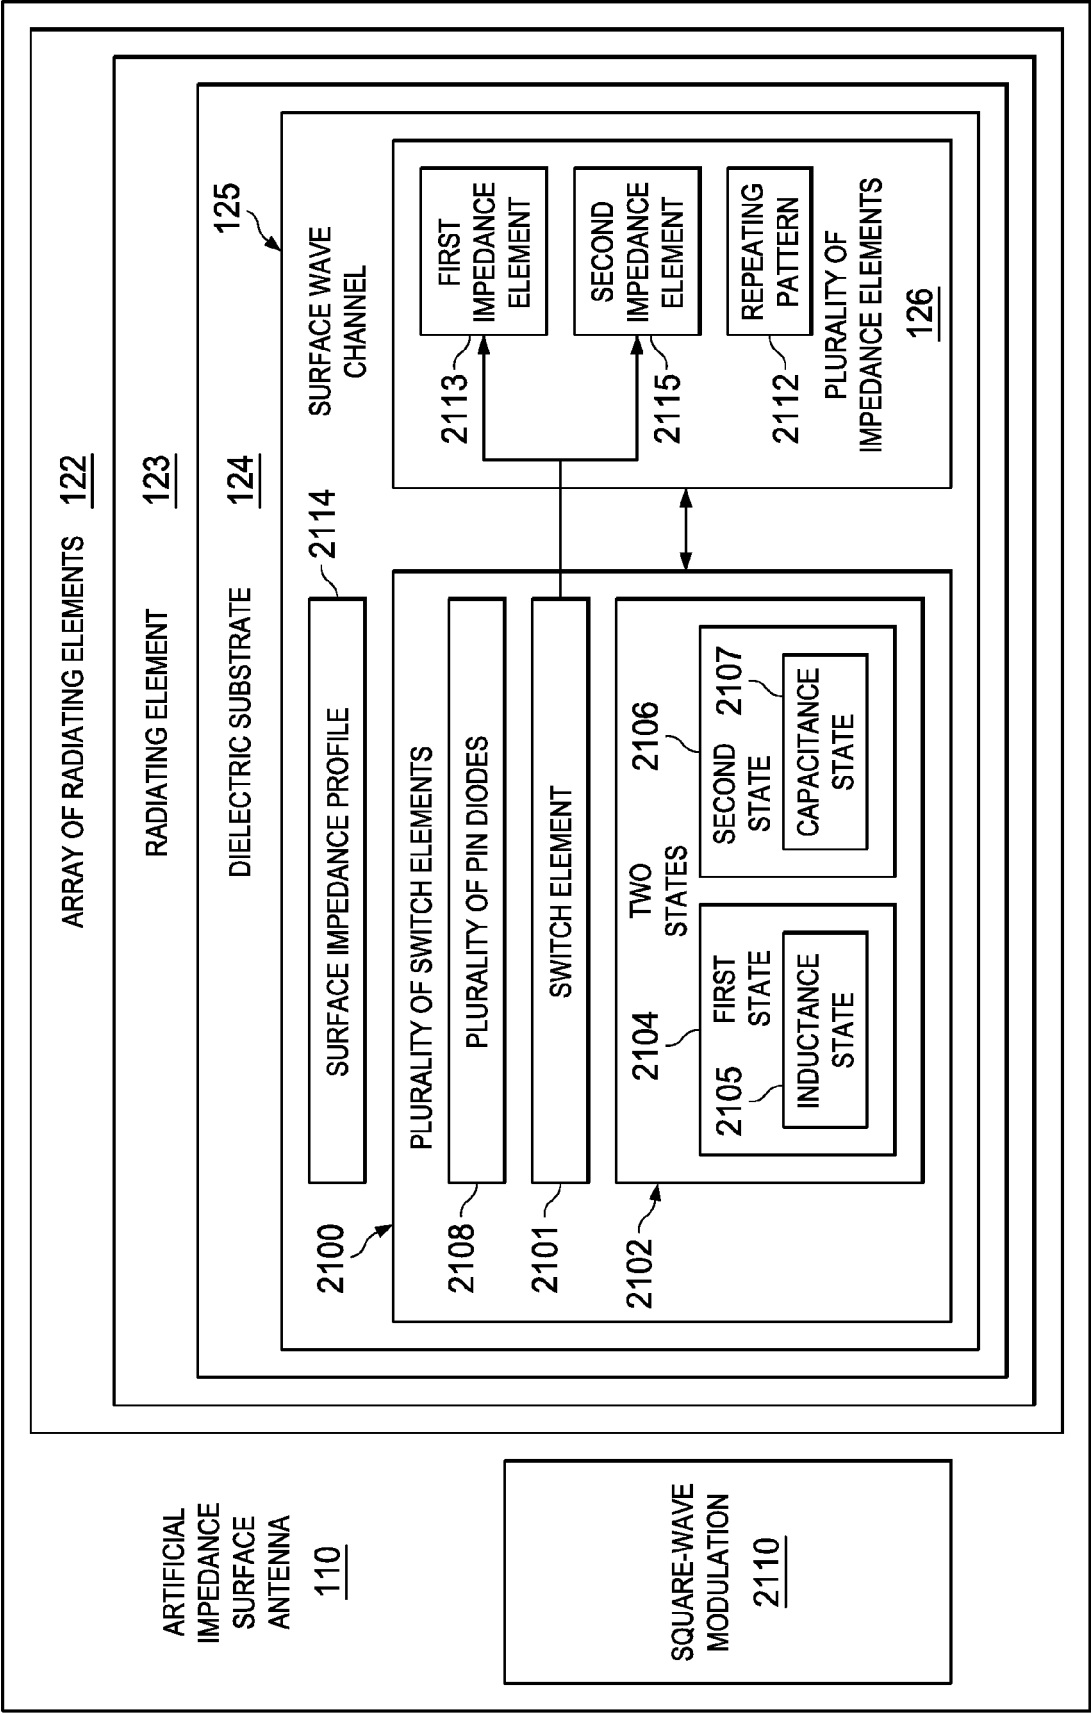


FIG. 21

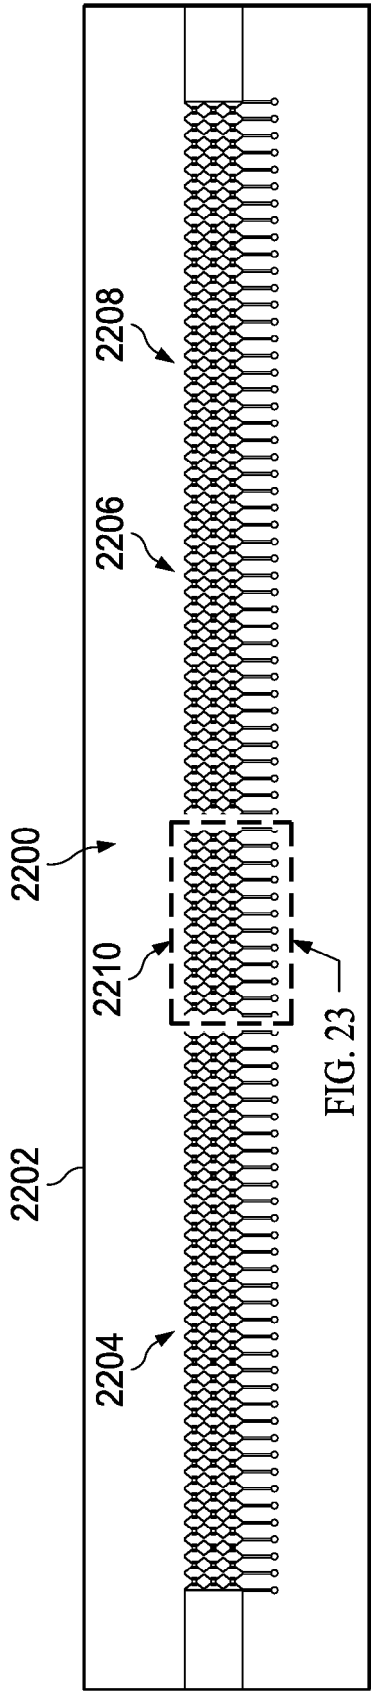


FIG. 22

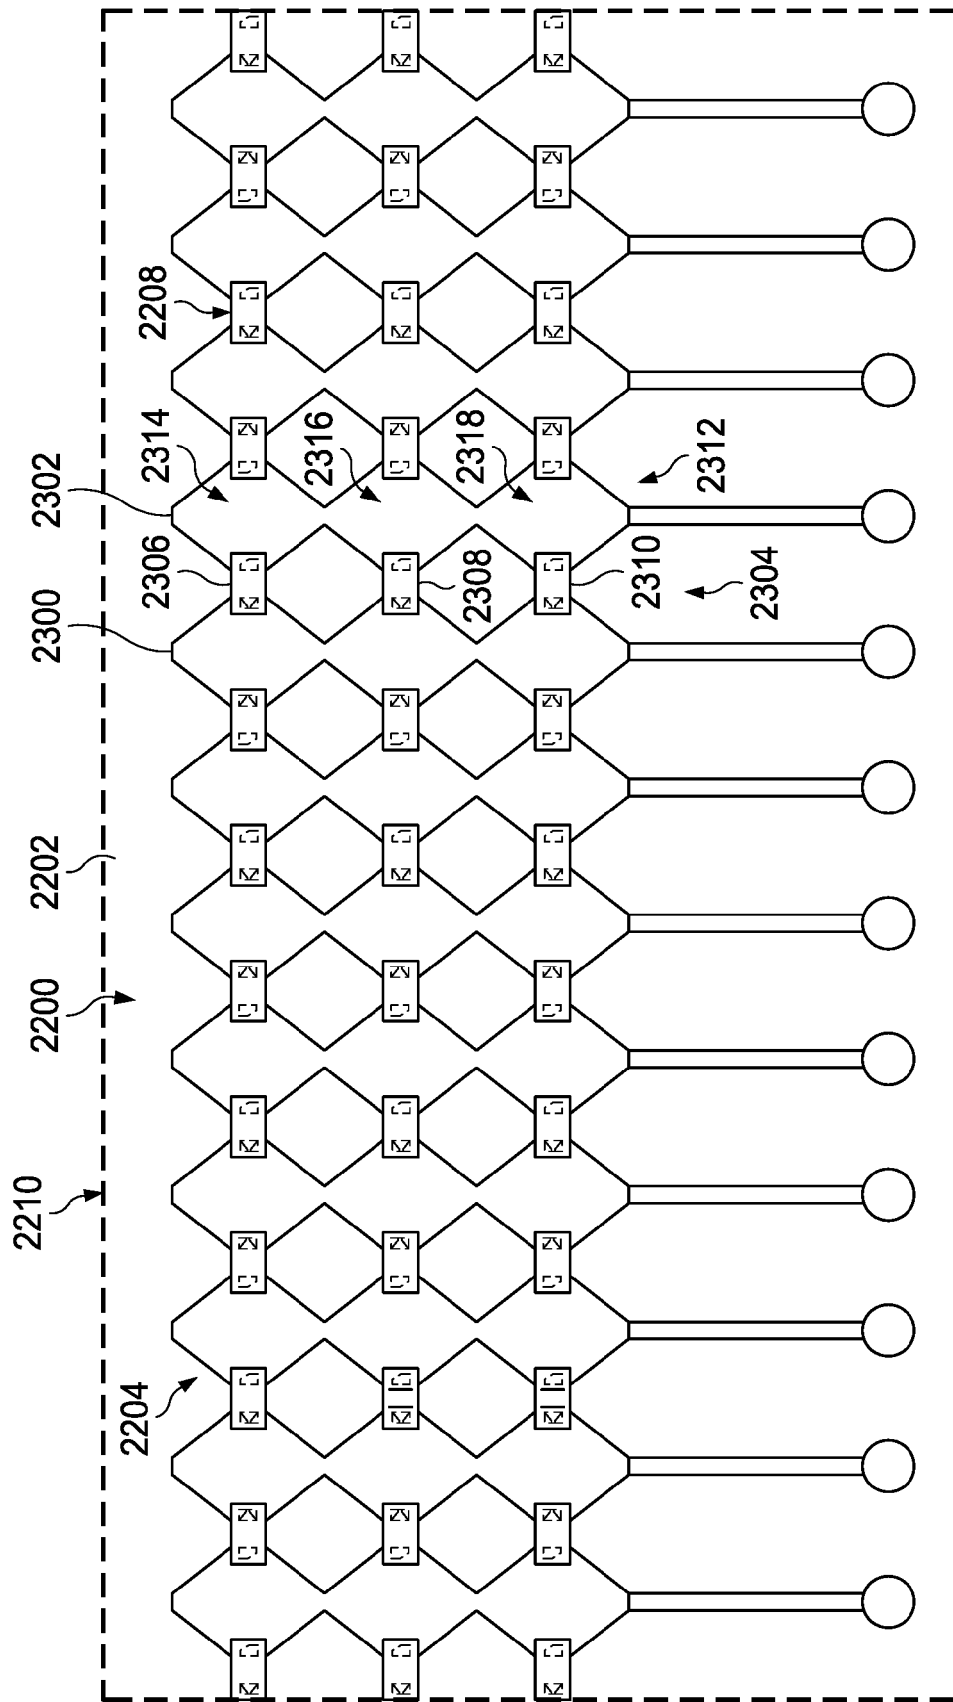


FIG. 23

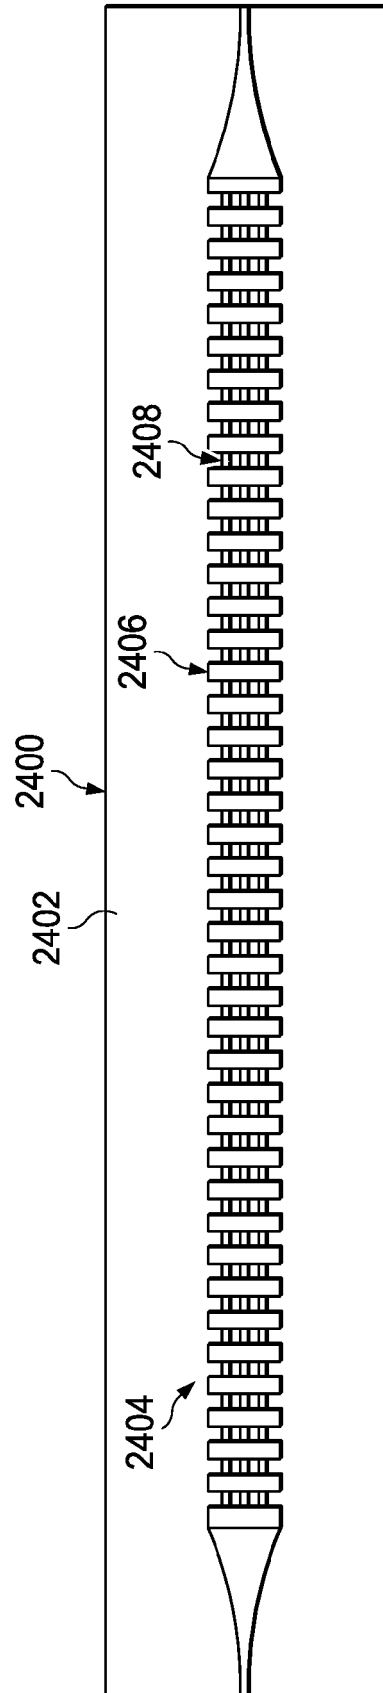


FIG. 24

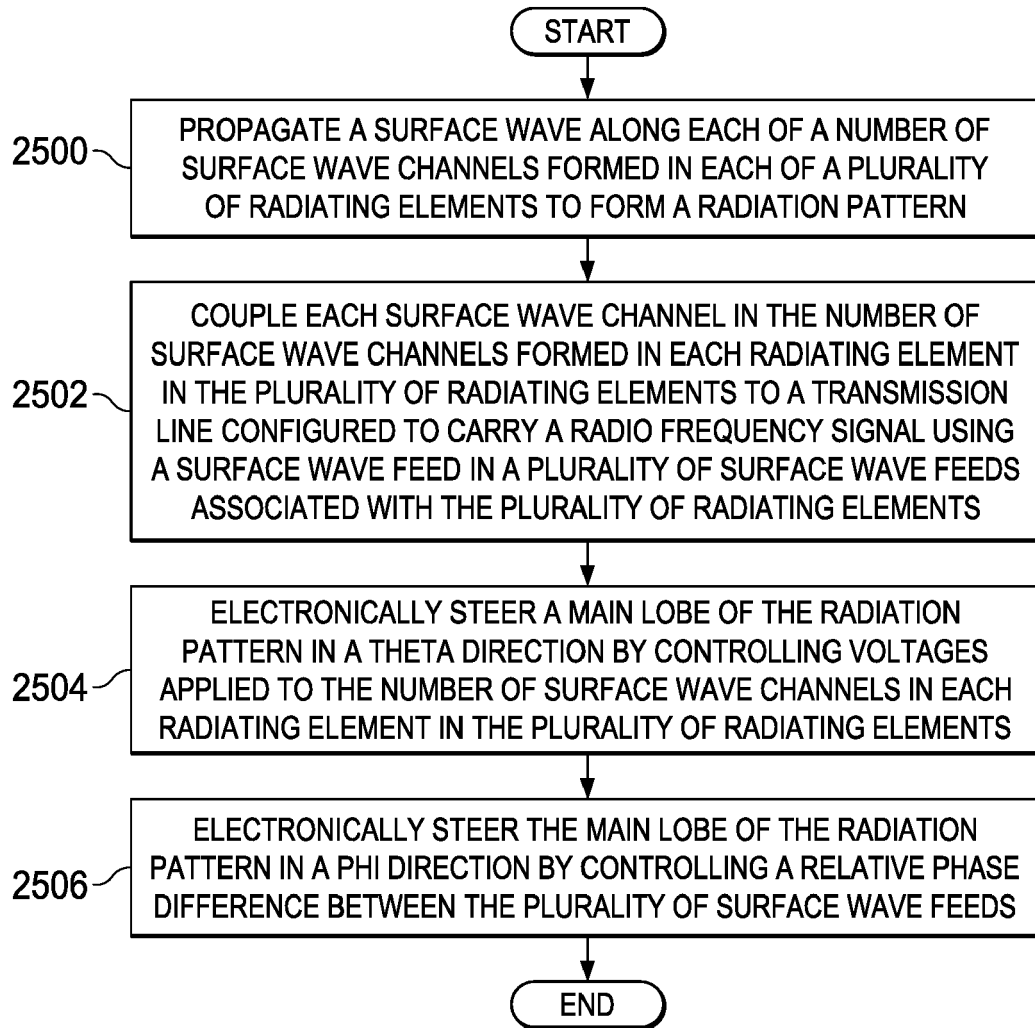


FIG. 25

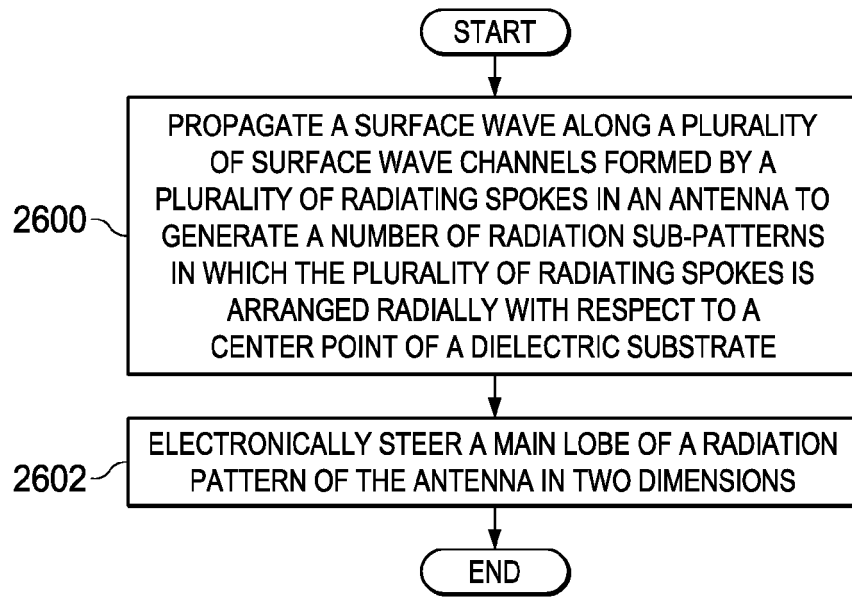


FIG. 26

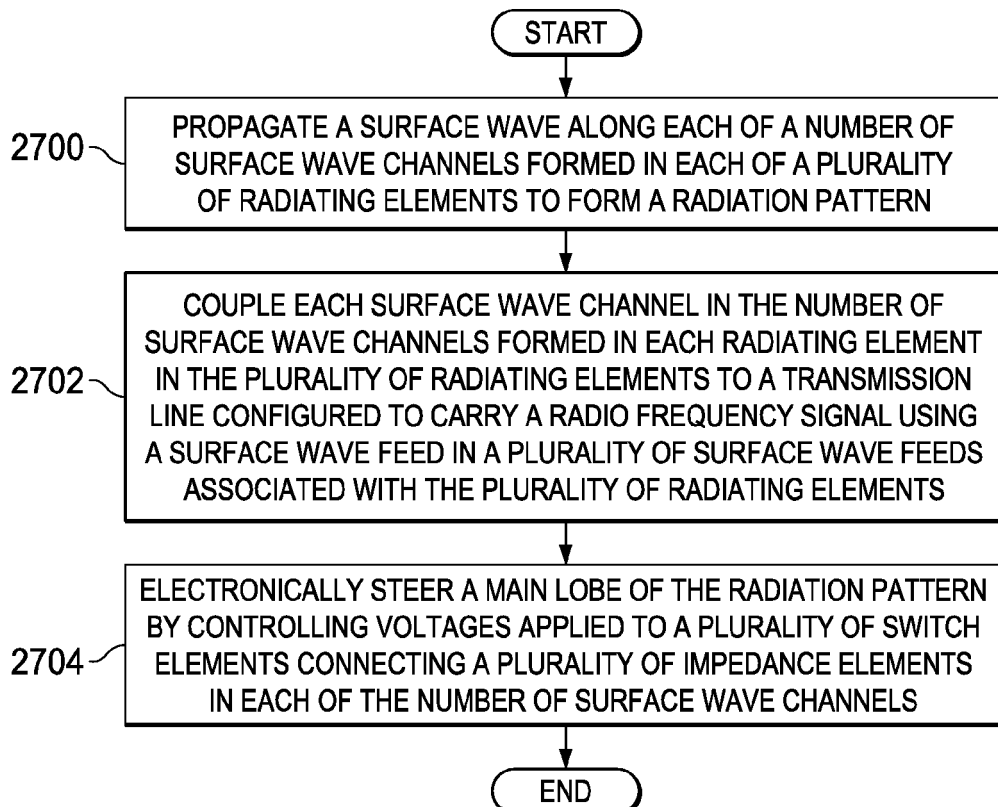


FIG. 27



EUROPEAN SEARCH REPORT

 Application Number
 EP 16 15 7596

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2014/266946 A1 (BILY ADAM [US] ET AL) 18 September 2014 (2014-09-18) * paragraphs [0021] - [0031] * * paragraphs [0056] - [0058] * * paragraphs [0064], [0067] * * figures 1-4B, 11A, 14, 15 * -----	1-15	INV. H01Q13/28 H01Q15/00 H01Q3/44 H01Q21/06 H01Q21/24 H01Q21/00
X	EP 2 822 096 A1 (BOEING CO [US]) 7 January 2015 (2015-01-07) * paragraph [0104] * * paragraphs [0126] - [0137] * * paragraphs [0148] - [0150] * * claims 2, 7 * * figures 12, 15 * -----	1,2,4, 11-13	
X	US 2012/206310 A1 (APOSTOLOS JOHN T [US] ET AL) 16 August 2012 (2012-08-16) * paragraph [0003] * * paragraphs [0070] - [0077] * * paragraphs [0129] - [0133] * * paragraphs [0139], [0140] * * figures 1-3, 11, 16, 17 * -----	1-3,9, 11,12	
A	VLADIMIR A MANASSON ET AL: "Electronically reconfigurable aperture (ERA): A new approach for beam-steering technology", PHASED ARRAY SYSTEMS AND TECHNOLOGY (ARRAY), 2010 IEEE INTERNATIONAL SYMPOSIUM ON, IEEE, PISCATAWAY, NJ, USA, 12 October 2010 (2010-10-12), pages 673-679, XP031828602, ISBN: 978-1-4244-5127-2 * the whole document * ----- -/--	1-15	TECHNICAL FIELDS SEARCHED (IPC) H01Q
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 18 August 2016	Examiner Culhaoglu, Ali
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 16 15 7596

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	MARTINEZ-ROS ALEJANDRO JAVIER ET AL: "Static and electronic shaping of the radiated electromagnetic fields in radial arrays of substrate integrated leaky-wave antennas", 2013 EUROPEAN RADAR CONFERENCE, EMA, 9 October 2013 (2013-10-09), pages 355-358, XP032533724, [retrieved on 2013-12-18] * the whole document * -----	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 18 August 2016	Examiner Culhaoglu, Ali
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 15 7596

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-08-2016

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014266946 A1	18-09-2014	CN 105706304 A	22-06-2016
		EP 2973860 A1	20-01-2016
		JP 2016512408 A	25-04-2016
		KR 20150137079 A	08-12-2015
		US 2014266946 A1	18-09-2014
		WO 2014149341 A1	25-09-2014

EP 2822096 A1	07-01-2015	EP 2822096 A1	07-01-2015
		US 2015009068 A1	08-01-2015
		US 2015009071 A1	08-01-2015

US 2012206310 A1	16-08-2012	NONE	
