



(11)

EP 3 190 839 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:
12.07.2017 Bulletin 2017/28

(51) Int Cl.:
H04W 52/14 (2009.01)

(21) Application number: **14902786.4**

(86) International application number:
PCT/CN2014/087700

(22) Date of filing: **28.09.2014**

(87) International publication number:
WO 2016/045130 (31.03.2016 Gazette 2016/13)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventor: **LIU, Jianqin**
Shenzhen
Guangdong 518129 (CN)

(71) Applicant: **Huawei Technologies Co., Ltd.**
Longgang District
Shenzhen, Guangdong 518129 (CN)

(74) Representative: **Maiwald Patentanwalts GmbH**
Engineering
Elisenhof
Elisenstrasse 3
80335 München (DE)

(54) **UPLINK POWER CONTROL METHOD AND DEVICE**

(57) Embodiments of the present invention provide an uplink power control method and an apparatus. The uplink power control method in the present invention includes: receiving a measurement pilot configured by a network device, where the measurement pilot is corresponding to information about a precoding matrix; and receiving a power control parameter configured by the

network device, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by user equipment UE to control transmit power of the UE in a serving cell. According to the embodiments of the present invention, accuracy of uplink power control is improved.

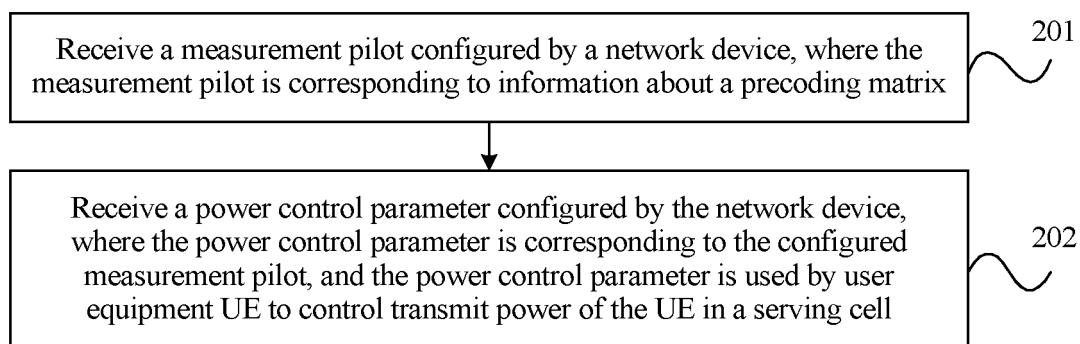


FIG. 2

Description**TECHNICAL FIELD**

5 **[0001]** Embodiments of the present invention relate to communications technologies, and in particular, to an uplink power control method and an apparatus.

BACKGROUND

10 **[0002]** A multi-antenna multiple input multiple output (Multiple Input Multiple Output, MIMO for short) technology has been widely used in a wireless communications system to improve a system capacity and ensure cell coverage. For example, multi-antenna-based transmit diversity, open-loop/closed-loop spatial multiplexing, and demodulation reference signal (Demodulation Reference Signal, DMRS for short) based multi-stream transmission are used in a downlink of a Long Term Evolution (Long Term Evolution, LTE for short) system. DMRS-based multi-stream transmission is a main transmission mode in an LTE-Advanced (LTE-Advanced, LTE-A for short) system and a subsequent LTE system.

15 To further improve performance of a multi-antenna system, a two-dimensional antenna configuration is being researched in the release Rel-12 standard, that is, an antenna is placed in both a horizontal direction and a vertical direction, so that beamforming can be performed in both a horizontal direction and a vertical direction, and beamforming performed in both a horizontal direction and a vertical direction is referred to as three-dimensional beamforming. FIG. 1A is a schematic diagram of a two-dimensional antenna configuration.

20 **[0003]** Furthermore, in addition to the two-dimensional antenna configuration, three-dimensional user equipment distribution is introduced in the current Rel-12 standard. That is, user equipment may be not only horizontally distributed, but also vertically distributed on the first floor to the eighth floor of a high-rise building. Location coordinates of each user equipment include both a horizontal coordinate and a vertical coordinate. When it is assumed that a height of user equipment is 1.5 meters and a height of each floor is 3 meters, a height range of user equipments on the first floor to the eighth floor is from 1.5 meters to 22.5 meters. If there is a higher-rise building (for example, the building has 20 to 30 floors), a height of user equipment on the top floor may reach 88.5 meters. In a 3D urban macro (Urban Macro, UMa for short) scenario and a 3D urban micro (Urban Micro, UMi for short) scenario that are researched in the Rel-12 standard, a path loss of each link between a base station and user equipment UE is in direct proportion to a height of the user equipment, and therefore, a path loss difference between user equipment on the top floor and user equipment on the first floor or on the ground is tens of dB. In addition to a path loss, large-scale fading on the link between the base station and the user equipment includes shadow fading, a penetration loss, an antenna gain, and the like. However, a shadow fading difference, a penetration loss difference, an antenna gain difference, or the like between the user equipment on the first floor and the user equipment on the top floor is far less than a path loss difference. FIG. 1B is a distribution diagram of large-scale fading of user equipment on the eighth floor and user equipment on the first floor in a 3D UMi scenario. In FIG. 1B, the user equipment on the first floor is served by a precoding beam that points at a 12 degree downtilt angle, and the user equipment on the eighth floor is served by a precoding beam that points at a -6 degree up tilt angle. It can be learned from FIG. 1B that a minimum large-scale fading difference between the user equipment on the eighth floor and the user equipment on the first floor is around 10-20 dB.

30 **[0004]** A prior-art problem is that because an uplink power control mechanism in the current LTE standard is a mechanism based on compensation for large-scale fading, and both a power control parameter and an adjustment value that are related to the large-scale fading are at a cell level, large-scale fading compensation and corresponding power control cannot be performed on different users or different user groups in a cell. Consequently, there is a problem of inaccuracy in a current uplink power control method used in a new 3D scenario.

SUMMARY

45 **[0005]** Embodiments of the present invention provide an uplink power control method and an apparatus, so as to resolve a prior-art problem of inaccuracy in a current uplink power control method used in a new 3D scenario.

50 **[0006]** According to a first aspect, an embodiment of the present invention provides an uplink power control method, including:

receiving a measurement pilot configured by a network device, where the measurement pilot is corresponding to information about a precoding matrix; and

55 receiving a power control parameter configured by the network device, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by user equipment UE to control transmit power of the UE in a serving cell.

[0007] With reference to the first aspect, in a first possible implementation manner of the first aspect, that the power control parameter is corresponding to the configured measurement pilot includes: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

[0008] With reference to the first aspect, in a second possible implementation manner of the first aspect, the power control parameter includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

[0009] With reference to the first aspect, or the first or the second possible implementation manner of the first aspect, in a third possible implementation manner of the first aspect, the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10} (M_{\text{PUSCH},c}(i) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i)) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10} (M_{\text{PUSCH},c}(i) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i)) \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c,k}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{\text{TF},c,k}(i) = 10 \log_{10} \left(\left(2^{BP_{\text{PRE}} \cdot K_{s,k}} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and

coding schemes, where when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $K_{s,k}$ is the power control parameter corresponding to the k^{th} measurement pilot set

and is semi-statically configured by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a

higher layer, and BP_{PRE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0010] With reference to the third possible implementation manner of the first aspect, in a fourth possible implementation manner of the first aspect, the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{0_PUCCH,k} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TxD}}(F) + g(i) \end{array} \right\},$$

where

$P_{0_PUCCH,k}$ includes $P_{0_NOMINAL_PUCCH,k}$ and $P_{0_UE_PUCCH,k}$, and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{0_NOMINAL_PUCCH,k}$ represents a power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using RRC signaling;

$\Delta_{\text{F_PUCCH}}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}})$ is a variable related to PUCCH transmission information;

$\Delta_{\text{TxD}}(F)$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0011] With reference to the third or the fourth possible implementation manner of the first aspect, in a fifth possible implementation manner of the first aspect, the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{\text{SRS_OFFSET},c}(m) + 10\log_{10}(M_{\text{SRS},c}) + P_{0_PUSCH,c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + f_c(i) \end{array} \right\},$$

where

$P_{0_PUSCH,c,k}(j)$ includes $P_{0_NOMINAL_PUSCH,c,k}(j)$ and $P_{0_UE_PUSCH,c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{0_NOMINAL_PUSCH,c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

$P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

[0012] According to a second aspect, an embodiment of the present invention provides an uplink power control method, including:

receiving, by user equipment UE, configuration information, sent by a network device, of a user-specific power control parameter, where a power control parameter configured by the network device includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE; and

controlling, by the UE, transmit power of the UE in a serving cell according to the power control parameter.

[0013] With reference to the second aspect, in a first possible implementation manner of the second aspect, the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the

UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), \left[10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right] \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), \left[10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right] \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{\text{TF},c}(i) = 10 \log_{10} \left(\left(2^{\text{BPRES} \cdot K_s} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, where K_s is the UE-specific power control parameter and is semi-statically configured by using

higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and BPRES is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0014] With reference to the first possible implementation manner of the first aspect, in a second possible implementation manner of the first aspect, the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ P_{\text{CMAX},c}(i), \left[P_{\text{O_PUCCH}} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TD}}(F) + g(i) \right] \right\},$$

where

$P_{\text{O_PUCCH}}$ includes $P_{\text{O_NOMINAL_PUCCH}}$ and $P_{\text{O_UE_PUCCH}}$, where $P_{\text{O_NOMINAL_PUCCH}}$ represents the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\Delta_{F_PUCCH}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;
 $h(n_{CQI}, n_{HARQ}, n_{SR})$ is a variable related to PUCCH transmission information;
 $\Delta_{TXD}(F)$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and
 $g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0015] With reference to the first or the second possible implementation manner of the first aspect, in a third possible implementation manner of the first aspect, the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{SRS,c}(i) = \min \left\{ P_{MAX,c}(i), P_{SRS_OFFSET,c}(m) + 10 \log_{10}(M_{SRS,c}) + P_{O_PUSCH,c}(j) + \alpha_c(j) \cdot PL_c + f_c(i) \right\},$$

where

$P_{O_PUSCH,c}(j)$ includes $P_{O_NOMINAL_PUSCH,c}(j)$ and $P_{O_UE_PUSCH,c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{O_NOMINAL_PUSCH,c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;
 $\alpha_c(j)$ represents a path loss compensation factor parameter in the user-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;
 $P_{SRS_OFFSET,c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and
 $M_{SRS,c}$ represents SRS transmission bandwidth of the UE.

[0016] According to a third aspect, an embodiment of the present invention provides an uplink power control method, including:

sending, by a network device, a configured measurement pilot to user equipment UE, where the measurement pilot is corresponding to information about a precoding matrix; and
 sending, by the network device, a configured power control parameter to the user equipment UE, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control transmit power of the UE in a serving cell.

[0017] With reference to the third aspect, in a first possible implementation manner of the third aspect, that the power control parameter is corresponding to the configured measurement pilot includes: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

[0018] With reference to the third aspect, in a second possible implementation manner of the third aspect, the power control parameter includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

[0019] With reference to the third aspect, or the first or the second possible implementation manner of the third aspect, in a third possible implementation manner of the third aspect, the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{PUSCH,c}(i) = \min \left\{ P_{MAX,c}(i), 10 \log_{10}(M_{PUSCH,c}(i)) + P_{O_PUSCH,c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{TF,c,k}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ \begin{array}{l} 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), \\ 10 \log_{10} (M_{\text{PUSCH},c}(i) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i)) \end{array} \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c,k}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$ and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{\text{TF},c,k}(i) = 10 \log_{10} \left(\left(2^{B_{\text{PRE}} \cdot K_{s,k}} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, where when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $K_{s,k}$ is the power control parameter corresponding to the k^{th} measurement pilot set

and is semi-statically configured by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and B_{PRE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0020] With reference to the third possible implementation manner of the third aspect, in a fourth possible implementation manner of the third aspect, the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{\text{O_PUCCH},k} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TxD}}(F') + g(i) \end{array} \right\},$$

where

$P_{\text{O_PUCCH},k}$ includes $P_{\text{O_NOMINAL_PUCCH},k}$ and $P_{\text{O_UE_PUCCH},k}$, and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUCCH},k}$ represents a power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using RRC signaling;

$\Delta_{\text{F_PUCCH}}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}})$ is a variable related to PUCCH transmission information;

$\Delta_{\text{TxD}}(F')$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission

mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0021] With reference to the third or the fourth possible implementation manner of the third aspect, in a fifth possible implementation manner of the third aspect, the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), P_{\text{SRS_OFFSET},c}(m) + 10 \log_{10}(M_{\text{SRS},c}) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + f_c(i) \right\},$$

where

$P_{\text{O_PUSCH},c,k}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$ and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

$P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

[0022] According to a fourth aspect, an embodiment of the present invention provides an uplink power control method, including:

sending, by a network device, configuration information of a UE-specific power control parameter to user equipment UE, where a power control parameter configured by the network device includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE, and the power control parameter is used by the UE to control transmit power of the UE in a serving cell according to the power control parameter.

[0023] With reference to the fourth aspect, in a first possible implementation manner of the fourth aspect, the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10}(M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ \begin{array}{l} 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), \\ 10 \log_{10} (M_{\text{PUSCH},c}(i) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i)) \end{array} \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{\text{TF},c}(i) = 10 \log_{10} \left(\left(2^{\text{BP} \cdot K_s} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, where K_s is the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and BP is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0024] With reference to the first possible implementation manner of the fourth aspect, in a second possible implementation manner of the fourth aspect, the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{\text{O_PUCCH}} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TXD}}(F) + g(i) \end{array} \right\},$$

where

$P_{\text{O_PUCCH}}$ includes $P_{\text{O_NOMINAL_PUCCH}}$ and $P_{\text{O_UE_PUCCH}}$, where $P_{\text{O_NOMINAL_PUCCH}}$ represents the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\Delta_{\text{F_PUCCH}}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}})$ is a variable related to PUCCH transmission information;

$\Delta_{\text{TXD}}(F)$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0025] With reference to the first or the second possible implementation manner of the fourth aspect, in a third possible implementation manner of the fourth aspect, the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), P_{\text{SRS_OFFSET},c}(m) + 10\log_{10}(M_{\text{SRS},c}) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + f_c(i) \right\},$$

where

$P_{\text{O_PUSCH},c}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the user-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

$P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

[0026] According to a fifth aspect, an embodiment of the present invention provides user equipment UE, including:

a receiving module, configured to receive a measurement pilot configured by a network device, where the measurement pilot is corresponding to information about a precoding matrix; where the receiving module is further configured to receive a power control parameter configured by the network device, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control transmit power of the UE in a serving cell.

[0027] With reference to the fifth aspect, in a first possible implementation manner of the fifth aspect, that the power control parameter is corresponding to the configured measurement pilot includes: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

[0028] With reference to the fifth aspect, in a second possible implementation manner of the fifth aspect, the power control parameter includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

[0029] With reference to the fifth aspect or the first or the second possible implementation manner of the fifth aspect, in a third possible implementation manner of the fifth aspect, the UE further includes:

a control module, configured to control, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10\log_{10}(M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10\log_{10}(P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10\log_{10}(M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit

of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{O_PUSCH,c,k}(j)$ includes $P_{O_NOMINAL_PUSCH,c,k}(j)$ and $P_{O_UE_PUSCH,c,k}(j)$ and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUSCH,c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{TF,c,k}(i) = 10 \log_{10} \left(\left(2^{BP_{RE} \cdot K_{s,k}} - 1 \right) \cdot \beta_{offset}^{PUSCH} \right)$ is a power adjustment value in different modulation

and coding schemes, where when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $K_{s,k}$ is the power control parameter corresponding to the k^{th} measurement

pilot set and is semi-statically configured by using higher layer RRC signaling, β_{offset}^{PUSCH} is a parameter configured by a higher layer, and BP_{RE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0030] With reference to the third possible implementation manner of the fifth aspect, in a fourth possible implementation manner of the fifth aspect, the control module is further configured to control, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{PUCCH}(i) = \min \left\{ P_{CMAX,c}(i), P_{0_PUCCH,k} + PL_c + h(n_{CQI}, n_{HARQ}, n_{SR}) + \Delta_{F_PUCCH}(F) + \Delta_{TXD}(F) + g(i) \right\},$$

where

$P_{0_PUCCH,k}$ includes $P_{O_NOMINAL_PUCCH,k}$ and $P_{O_UE_PUCCH,k}$, and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUCCH,k}$ represents a power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using RRC signaling;

$\Delta_{F_PUCCH}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{CQI}, n_{HARQ}, n_{SR})$ is a variable related to PUCCH transmission information;

$\Delta_{TXD}(F)$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0031] With reference to the third or the fourth possible implementation manner of the fifth aspect, in a fifth possible implementation manner of the fifth aspect, the control module is further configured to control, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), P_{\text{SRS_OFFSET},c}(m) + 10 \log_{10}(M_{\text{SRS},c}) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + f_c(i) \right\},$$

where

$P_{\text{O_PUSCH},c,k}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$ and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

$P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

[0032] According to a sixth aspect, an embodiment of the present invention provides user equipment UE, including:

a receiving module, configured to receive configuration information, sent by a network device, of a user-specific power control parameter, where a power control parameter configured by the network device includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE; and
a control module, configured to control transmit power of the UE in a serving cell according to the power control parameter.

[0033] With reference to the sixth aspect, in a first possible implementation manner of the sixth aspect, the control module is specifically configured to control, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10}(M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10}(P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10}(M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using

RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{TF,c}(i) = 10 \log_{10} \left(\left(2^{BP_{RE} \cdot K_s} - 1 \right) \cdot \beta_{offset}^{PUSCH} \right)$ is a power adjustment value in different modulation and coding schemes, where K_s is the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling, β_{offset}^{PUSCH} is a parameter configured by a higher layer, and BP_{RE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0034] With reference to the first possible implementation manner of the sixth aspect, in a second possible implementation manner of the sixth aspect, the control module is specifically configured to control, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{PUCCH}(i) = \min \left\{ P_{CMAX,c}(i), P_{0_PUCCH} + PL_c + h(n_{CQI}, n_{HARQ}, n_{SR}) + \Delta_{F_PUCCH}(F) + \Delta_{TxD}(F') + g(i) \right\},$$

where

P_{0_PUCCH} includes $P_{0_NOMINAL_PUCCH}$ and $P_{0_UE_PUCCH}$, where $P_{0_NOMINAL_PUCCH}$ represents the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\Delta_{F_PUCCH}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{CQI}, n_{HARQ}, n_{SR})$ is a variable related to PUCCH transmission information;

$\Delta_{TxD}(F')$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0035] With reference to the first or the second possible implementation manner of the sixth aspect, in a third possible implementation manner of the sixth aspect, the control module is specifically configured to control, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{SRS,c}(i) = \min \left\{ P_{CMAX,c}(i), P_{SRS_OFFSET,c}(m) + 10 \log_{10}(M_{SRS,c}) + P_{0_PUSCH,c}(j) + \alpha_c(j) \cdot PL_c + f_c(i) \right\},$$

where

$P_{0_PUSCH,c}(j)$ includes $P_{0_NOMINAL_PUSCH,c}(j)$ and $P_{0_UE_PUSCH,c,k}(j)$ and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{0_NOMINAL_PUSCH,c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the user-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

$P_{SRS_OFFSET,c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit

power relative to PUSCH transmit power; and
 $M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

[0036] According to a seventh aspect, an embodiment of the present invention provides a network device, including:

a sending module, configured to send a configured measurement pilot to user equipment UE, where the measurement pilot is corresponding to information about a precoding matrix; where the sending module is further configured to send a configured power control parameter to the user equipment UE, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control transmit power of the UE in a serving cell.

[0037] With reference to the seventh aspect, in a first possible implementation manner of the seventh aspect, that the power control parameter is corresponding to the configured measurement pilot includes: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

[0038] With reference to the seventh aspect, in a second possible implementation manner of the seventh aspect, the power control parameter includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

[0039] According to an eighth aspect, an embodiment of the present invention provides a network device, including:

a sending module, configured to send configuration information of a user-specific power control parameter to user equipment UE, where a power control parameter configured by the network device includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE, and the power control parameter is used by the UE to control transmit power of the UE in a serving cell according to the power control parameter.

[0040] According to a ninth aspect, an embodiment of the present invention provides user equipment UE, including:

a processor and a memory, where the memory stores an execution instruction; and when the user equipment runs, the processor communicates with the memory, and the processor executes the execution instruction to enable the user equipment to perform the method according to either the first aspect or the second aspect.

[0041] According to a tenth aspect, an embodiment of the present invention provides a network device, including:

a processor and a memory, where the memory stores an execution instruction; and when the network device runs, the processor communicates with the memory, and the processor executes the execution instruction to enable the user equipment to perform the method according to either the third aspect or the fourth aspect.

[0042] According to the uplink power control method and the apparatus provided in the embodiments of the present invention, a measurement pilot configured by a network device is received, where the measurement pilot is corresponding to information about a precoding matrix; and a power control parameter configured by the network device is received, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by user equipment UE to control transmit power of the UE in a serving cell; or user equipment UE receives configuration information, sent by a network device, of a user-specific power control parameter, where a power control parameter configured by the network device includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE; and the UE controls transmit power of the UE in a serving cell according to the power control parameter. In this way, an uplink power control mechanism based on compensation for large-scale fading is implemented, and both a power control parameter and an adjustment value that are related to the large-scale fading are at a user equipment group level or a user equipment level, thereby improving accuracy of uplink power control, and resolving a prior-art problem of inaccuracy in a current uplink power control method used in a new 3D scenario.

BRIEF DESCRIPTION OF DRAWINGS

[0043] To describe the technical solutions in the embodiments of the present invention or in the prior art more clearly, the following briefly describes the accompanying drawings required for describing the embodiments or the prior art. Apparently, the accompanying drawings in the following description show some embodiments of the present invention, and persons of ordinary skill in the art may still derive other drawings from these accompanying drawings without creative efforts.

FIG. 1A is a schematic diagram of a two-dimensional antenna configuration;

FIG. 1B is a distribution diagram of large-scale fading of user equipment on the eighth floor and user equipment on the first floor in a 3D UMi scenario;

FIG. 2 is a flowchart of Embodiment 1 of an uplink power control method according to the present invention;

FIG. 3 is a flowchart of Embodiment 3 of an uplink power control method according to the present invention;

FIG. 4 is a flowchart of Embodiment 4 of an uplink power control method according to the present invention;

FIG. 5 is a schematic structural diagram of Embodiment 1 of user equipment UE according to the present invention;

FIG. 6 is a schematic structural diagram of Embodiment 1 of a network device according to the present invention;

FIG. 7 is a schematic structural diagram of Embodiment 2 of user equipment UE according to the present invention; and

FIG. 8 is a schematic structural diagram of Embodiment 2 of a network device according to the present invention.

DESCRIPTION OF EMBODIMENTS

[0044] To make the objectives, technical solutions, and advantages of the embodiments of the present invention clearer, the following clearly and completely describes the technical solutions in the embodiments of the present invention with reference to the accompanying drawings in the embodiments of the present invention. Apparently, the described embodiments are some but not all of the embodiments of the present invention. All other embodiments obtained by persons of ordinary skill in the art based on the embodiments of the present invention without creative efforts shall fall within the protection scope of the present invention.

[0045] FIG. 2 is a flowchart of Embodiment 1 of an uplink power control method according to the present invention. This embodiment may be executed by user equipment, and the solution in this embodiment is used by a network device and the user equipment to perform uplink power control. As shown in FIG. 2, the method in this embodiment may include the following steps.

Step 201: Receive a measurement pilot configured by the network device, where the measurement pilot is corresponding to information about a precoding matrix.

Step 202: Receive a power control parameter configured by the network device, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control transmit power of the UE in a serving cell.

[0046] Specifically, the user equipment UE receives the measurement pilot configured by the network device, where the measurement pilot is corresponding to the information about a precoding matrix; and receives the power control parameter configured by the network device, where the power control parameter is corresponding to the measurement pilot. The UE controls the transmit power of the UE in the serving cell according to the power control parameter.

[0047] Optionally, that the power control parameter is corresponding to the configured measurement pilot includes: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

[0048] Optionally, the power control parameter includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

[0049] The power control parameter may be delivered by a base station by using a multicast radio network temporary identifier RNTI or a user-specific RNTI.

[0050] In this embodiment of the present invention, for a feature that different user equipment groups in each cell have different large-scale fading in a new 3D scenario or a high frequency, user equipments in each cell may be grouped for power control, that is, each cell is further divided into several "virtual cells", and each "virtual cell" is corresponding to one group of user equipments. For example, in a cell, all user equipments that are located on the first floor or on the ground are grouped into one group, and this group of user equipments are corresponding to a set of measurement pilot configurations of a beam that points at 12 degrees; and all user equipments that are located on the eighth floor are grouped into one group, and this group of user equipments are corresponding to a set of measurement pilot configurations of a beam that points at -6 degrees. Therefore, users in a set of measurement pilot configurations may be grouped into one group and are corresponding to one "virtual cell". Each "virtual cell" has an independent "cell"-level large-scale power control parameter. The "cell"-level large-scale power control parameter refers to all large-scale cell-specific power control parameters in a power control mechanism.

[0051] According to the uplink power control method and the apparatus in the embodiments of the present invention, a measurement pilot configured by a network device is received, where the measurement pilot is corresponding to information about a precoding matrix; and a power control parameter configured by the network device is received, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by user equipment UE to control transmit power of the UE in a serving cell. In this way, an uplink power control mechanism based on compensation for large-scale fading is implemented, and both a power control parameter and an adjustment value that are related to the large-scale fading are at a user equipment group level, that is, different

user equipment groups are corresponding to different measurement pilots and different power control parameters, thereby improving accuracy of uplink power control, and resolving a prior-art problem of inaccuracy in a current uplink power control method used in a new 3D scenario.

[0052] The following uses a specific embodiment to describe in detail the technical solution in the method embodiment shown in FIG. 2.

[0053] In Embodiment 2 of an uplink power control method in the present invention, the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c,k}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; when the measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell; and a definition of $P_{\text{O_UE_PUSCH},c,k}(j)$ is the same as that of $P_{\text{O_UE_PUSCH},c}(j)$ in the 3GPP protocol;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power (Reference Signal Received Power, RSRP for short), of a terminal;

$\Delta_{\text{TF},c,k}(i) = 10 \log_{10} \left(\left(2^{\text{BP} \cdot K_{s,k}} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, where when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $K_{s,k}$ is the power control parameter corresponding to the k^{th} measurement pilot set

and is semi-statically configured by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and BP is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0054] Specifically, the UE controls, according to the power control parameter, the total physical uplink shared channel (Physical Uplink Shared Channel, PUSCH for short) transmit power of the UE to meet the following formula:

at the transmission moment i , if the UE only performs PUSCH transmission but does not perform PUCCH transmission

in the serving cell c,

$$P_{\text{PUSCH},c}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \end{array} \right\},$$

or

at the transmission moment i, if the UE performs PUSCH transmission and also performs PUCCH transmission in the serving cell c,

$$P_{\text{PUSCH},c}(i) = \min \left\{ \begin{array}{l} 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), \\ 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \end{array} \right\},$$

where

$P_{\text{O_PUSCH},c,k}(j)$ in the foregoing formula includes $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is the power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is the total quantity of different measurement pilots configured in the serving cell, that is, parameters $P_{\text{O_PUSCH},c,k}(j)$ are different for user equipments with different measurement pilot configurations; and when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents the path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling, that is, parameters $\alpha_{c,k}(j)$ are different for user equipments with different measurement pilot configurations.

[0055] A variable j is related to a PUSCH scheduling grant manner. When PUSCH transmission is granted by means of semi-static scheduling, $j=0$; when PUSCH transmission is granted by means of dynamic scheduling, $j=1$; and when PUSCH transmission is granted by means of random access response, $j=2$. A value of $P_{\text{O_PUSCH},c,k}(j)$ is determined according to parameters that are configured by a higher layer in the serving cell c and that are corresponding to different values of j . $\Delta_{\text{TF},c,k}(i) = 10 \log_{10} \left(\left(2^{BP_{\text{PRE}} \cdot K_{s,k}} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is the power adjustment value for the different modulation and coding schemes, where when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $K_{s,k}$ is the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is the parameter configured by the higher layer, and BP_{PRE} is obtained by calculating the quantity of bits carried in the data of the UE and the quantity of resource elements REs allocated to the data of the UE, that is, parameters $\Delta_{\text{TF},c,k}(i)$ are different for user equipments with different measurement pilot configurations.

[0056] A definition of $P_{\text{PUCCH}}(i)$ is the same as that of $P_{\text{PUCCH}}(i)$ in the 3GPP protocol.

[0057] Optionally, the UE controls, according to the power control parameter, total physical uplink control channel (Physical Uplink Control Channel, PUCCH for short) transmit power of the UE to meet the following:

at a transmission moment i, total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{\text{O_PUCCH},k} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TD}}(F) + g(i) \end{array} \right\},$$

where

$P_{0_PUCCH,k}$ includes $P_{O_NOMINAL_PUCCH,k}$ and $P_{O_UE_PUCCH,k}$, and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUCCH,k}$ represents a power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using RRC signaling;

$\Delta_{F_PUCCH}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{CQI}, n_{HARQ}, n_{SR})$ is a variable related to PUCCH transmission information;

$\Delta_{TXD}(F)$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0058] Specifically, the UE controls, according to the power control parameter, the total physical uplink control channel PUCCH transmit power of the UE to meet the following formula:

at the transmission moment i , the total transmit power of the UE in the serving cell c is:

$$P_{PUCCH}(i) = \min \left\{ P_{CMAX,c}(i), P_{0_PUCCH,k} + PL_c + h(n_{CQI}, n_{HARQ}, n_{SR}) + \Delta_{F_PUCCH}(F) + \Delta_{TXD}(F) + g(i) \right\},$$

where

$P_{0_PUCCH,k}$ includes $P_{O_NOMINAL_PUCCH,k}$ and $P_{O_UE_PUCCH,k}$, and when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUCCH,k}$ represents the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using RRC signaling, that is, parameters $P_{0_PUCCH,k}$ are different for user equipments with different measurement pilot configurations; and a definition of $P_{0_PUCCH,k}$ is the same as that of P_{0_PUCCH} in the 3GPP protocol, a definition of $P_{O_NOMINAL_PUCCH,k}$ is the same as that of $P_{O_NOMINAL_PUCCH}$ in the 3GPP protocol, and a definition of $P_{O_UE_PUCCH,k}$ is the same as that of $P_{O_UE_PUCCH}$ in the 3GPP protocol.

[0059] Optionally, the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{SRS,c}(i) = \min \left\{ P_{CMAX,c}(i), P_{SRS_OFFSET,c}(m) + 10 \log_{10}(M_{SRS,c}) + P_{O_PUSCH,c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + f_c(i) \right\},$$

where

$P_{O_PUSCH,c,k}(j)$ includes $P_{O_NOMINAL_PUSCH,c,k}(j)$ and $P_{O_UE_PUSCH,c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUSCH,c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

$P_{SRS_OFFSET,c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{SRS,c}$ represents SRS transmission bandwidth of the UE.

[0060] Specifically, the UE controls, according to the power control parameter, the total sounding reference signal

SRS transmit power to meet the following:

at the transmission moment i , the total sounding reference signal SRS transmit power of the UE in the serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), P_{\text{SRS_OFFSET},c}(m) + 10 \log_{10}(M_{\text{SRS},c}) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + f_c(i) \right\},$$

where

$P_{\text{O_PUSCH},c,k}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is the power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is the total quantity of different measurement pilots configured in the serving cell, that is, parameters $P_{\text{O_PUSCH},c,k}(j)$ are different for user equipments with different measurement pilot configurations; and

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents the path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling, that is, parameters $\alpha_{c,k}(j)$ are different for user equipments with different measurement pilot configurations.

[0061] In the foregoing formula, m is specified in the 3GPP protocol, and m is related to a trigger type of SRS transmission. When the trigger type is 0, $m=0$, and when the trigger type is 1, $m=1$.

[0062] Each set of measurement pilot configurations is corresponding to one precoding matrix (corresponding to a beam in a particular direction and with a particular width), and different configured measurement pilots have different precoding matrixes. For example, in a 3D UMi scenario, a height of a base station is lower than a height of a high-rise building user. In this case, the base station configures, for a low-floor user, a measurement pilot set that point at a 12 degree downtilt angle (that is, the measurement pilot set is corresponding to a precoding matrix that points at 12 degrees), and configures, for a high-floor user whose height is higher than that of the base station, a measurement pilot set that point at a -6 degree up tilt angle (that is, the measurement pilot set is corresponding to a precoding matrix that points at -6 degrees).

[0063] In one possible implementation manner of grouping user equipments, user equipments configured with a same measurement pilot set are grouped into one group. For example, all user equipments configured with a measurement pilot that points at a 12 degree downtilt angle are grouped into one group, and all user equipments configured with a measurement pilot that points at a -6 degree up tilt angle are grouped into one group.

[0064] Generally, cell-specific parameters in transmit power of other uplink channels and signals such as a PUCCH, an SRS, and a physical random access channel (PhysicalRandom Access Channel, PRACH for short) can be similarly extended into parameters that are specific to a measurement pilot configuration or a user equipment group.

[0065] FIG. 3 is a flowchart of Embodiment 3 of an uplink power control method according to the present invention. This embodiment may be executed by user equipment, and the solution in this embodiment is used by a network device and the user equipment to perform uplink power control. As shown in FIG. 3, the method in this embodiment may include the following steps.

Step 301: The user equipment UE receives configuration information, sent by the network device, of a user-specific power control parameter, where a power control parameter configured by the network device includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

Step 302: The UE controls transmit power of the UE in a serving cell according to the power control parameter.

[0066] Specifically, the user equipment UE receives the configuration information, sent by the network device, of the user-specific power control parameter, where the power control parameter configured by the network device includes the target receive power, the path loss compensation factor, and the transmit format compensation term of the UE; and the UE controls the transmit power of the UE in the serving cell according to the power control parameter.

[0067] Further, to set large-scale power control parameters for different user equipment groups in each cell in a new 3D scenario or a high frequency, each user equipment may have an independent "cell"-level large-scale power control parameter, that is, a user-specific power control parameter. The "cell"-level large-scale power control parameter refers to all large-scale cell-specific power control parameters in a power control mechanism.

[0068] Optionally, the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10} (M_{\text{PUSCH},c}(i) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i)) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10} (M_{\text{PUSCH},c}(i) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i)) \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$ and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{\text{TF},c}(i) = 10 \log_{10} \left(\left(2^{\text{BPRES} \cdot K_s} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, where K_s is the UE-specific power control parameter and is semi-statically configured by using

higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and BPRES is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0069] Specifically, the UE controls, according to the power control parameter, the total physical uplink shared channel PUSCH transmit power of the UE to meet the following formula:

at the transmission moment i , if the UE only performs PUSCH transmission but does not perform PUCCH transmission in the serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10} (M_{\text{PUSCH},c}(i) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i)) \right\},$$

or

at the transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in the serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ \begin{array}{l} 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), \\ 10 \log_{10} (M_{\text{PUSCH},c}(i) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i)) \end{array} \right\},$$

where

the target receive power $P_{\text{O_PUSCH},c}(j)$, the path loss compensation factor $\alpha_c(j)$, and the transmit format compensation term $\Delta_{\text{TF},c}(i)$ of the UE are user-specific power control parameters, that is, parameter values are different for different user equipments;

$P_{\text{O_PUSCH},c}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$ and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents the path loss compensation factor parameter in the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling; and

$\Delta_{\text{TF},c}(i) = 10 \log_{10} \left(\left(2^{\text{BPRE} \cdot K_s} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is the power adjustment value for the different modulation and coding schemes, where K_s is the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is the parameter configured by the higher layer, and BPRE is obtained by calculating the quantity of bits carried in the data of the UE and the quantity of resource elements REs allocated to the data of the UE.

[0070] Optionally, the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{\text{O_PUCCH}} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TXD}}(F') + g(i) \end{array} \right\},$$

where

$P_{\text{O_PUCCH}}$ includes $P_{\text{O_NOMINAL_PUCCH}}$ and $P_{\text{O_UE_PUCCH}}$, where $P_{\text{O_NOMINAL_PUCCH}}$ represents the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\Delta_{\text{F_PUCCH}}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}})$ is a variable related to PUCCH transmission information;

$\Delta_{\text{TXD}}(F')$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0071] Specifically, the UE controls, according to the power control parameter, the total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at the transmission moment i , the total transmit power of the UE in the serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{0_ \text{PUCCH}} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TxD}}(F') + g(i) \end{array} \right\},$$

where

$P_{0_ \text{PUCCH}}$ is a user-specific power control parameter and includes $P_{0_ \text{NOMINAL_PUCCH}}$ and $P_{0_ \text{UE_PUCCH}}$, where $P_{0_ \text{NOMINAL_PUCCH}}$ represents the UE-specific power control parameter and is semi-statically configured by using RRC signaling, that is, parameter values are different for different user equipments.

[0072] Optionally, the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{\text{SRS_OFFSET},c}(m) + 10 \log_{10}(M_{\text{SRS},c}) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + f_c(i) \end{array} \right\},$$

where

$P_{\text{O_PUSCH},c}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the user-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

$P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

[0073] Specifically, the UE controls, according to the power control parameter, the total sounding reference signal SRS transmit power to meet the following:

at the transmission moment i , the total sounding reference signal SRS transmit power of the UE in the serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{\text{SRS_OFFSET},c}(m) + 10 \log_{10}(M_{\text{SRS},c}) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + f_c(i) \end{array} \right\},$$

where

the target receive power $P_{\text{O_PUSCH},c}(j)$ and the path loss compensation factor $\alpha_c(j)$ of the UE are user-specific power control parameters, that is, parameter values are different for different user equipments;

$P_{\text{O_PUSCH},c}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling; and

$\alpha_c(j)$ represents the path loss compensation factor parameter in the user-specific power control parameter and is semi-statically configured by using higher layer RRC signaling.

[0074] According to the uplink power control method and the apparatus provided in the embodiments of the present invention, user equipment UE receives configuration information, sent by a network device, of a user-specific power control parameter, where a power control parameter configured by the network device includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE; and the UE controls transmit power

of the UE in a serving cell according to the power control parameter. In this way, an uplink power control mechanism based on compensation for large-scale fading is implemented, and both a power control parameter and an adjustment value that are related to the large-scale fading are at a user equipment level, that is, different user equipments may be corresponding to different power control parameters, thereby improving accuracy of uplink power control, and resolving a prior-art problem of inaccuracy in a current uplink power control method used in a new 3D scenario.

[0075] FIG. 4 is a flowchart of Embodiment 4 of an uplink power control method according to the present invention. This embodiment may be executed by a network device, and the solution in this embodiment is used by the network device and user equipment to perform uplink power control. As shown in FIG. 4, the method in this embodiment may include the following steps.

Step 401: The network device sends a configured measurement pilot to the user equipment UE, where the measurement pilot is corresponding to information about a precoding matrix.

Step 402: The network device sends a configured power control parameter to the user equipment UE, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control transmit power of the UE in a serving cell.

[0076] Specifically, the network device sends the configured measurement pilot to the user equipment UE, where the measurement pilot is corresponding to the information about a precoding matrix; and sends the configured power control parameter to the user equipment UE, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control the transmit power of the UE in the serving cell.

[0077] Optionally, that the power control parameter is corresponding to the configured measurement pilot includes: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

[0078] Optionally, the power control parameter includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

[0079] Optionally, the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10}(M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10}(P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10}(M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c,k}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to

the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;
 PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{TF,c,k}(i) = 10 \log_{10} \left(\left(2^{BP_{RE} \cdot K_{s,k}} - 1 \right) \cdot \beta_{offset}^{PUSCH} \right)$ is a power adjustment value in different modulation and coding schemes, where when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $K_{s,k}$ is the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling, β_{offset}^{PUSCH} is a parameter configured by a higher layer, and BP_{RE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and
 $f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0080] Optionally, the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{PUCCH}(i) = \min \left\{ P_{CMAX,c}(i), P_{0_PUCCH,k} + PL_c + h(n_{CQI}, n_{HARQ}, n_{SR}) + \Delta_{F_PUCCH}(F) + \Delta_{TXD}(F) + g(i) \right\},$$

where

$P_{0_PUCCH,k}$ includes $P_{O_NOMINAL_PUCCH,k}$ and $P_{O_UE_PUCCH,k}$, and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUCCH,k}$ represents a power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using RRC signaling;
 $\Delta_{F_PUCCH}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;
 $h(n_{CQI}, n_{HARQ}, n_{SR})$ is a variable related to PUCCH transmission information;
 $\Delta_{TXD}(F)$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and
 $g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0081] Optionally, the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{SRS,c}(i) = \min \left\{ P_{CMAX,c}(i), P_{SRS_OFFSET,c}(m) + 10 \log_{10}(M_{SRS,c}) + P_{O_PUSCH,c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + f_c(i) \right\},$$

where

$P_{O_PUSCH,c,k}(j)$ includes $P_{O_NOMINAL_PUSCH,c,k}(j)$ and $P_{O_UE_PUSCH,c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUSCH,c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;
when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to

the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

$P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

[0082] In Embodiment 5 of an uplink power control method in the present invention, this embodiment may be executed by a network device, and the solution in this embodiment is used by the network device and user equipment to perform uplink power control. The method in this embodiment may include:

sending, by the network device, configuration information of a UE-specific power control parameter to the user equipment UE, where a power control parameter configured by the network device includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE, and the power control parameter is used by the UE to control transmit power of the UE in a serving cell according to the power control parameter.

[0083] Optionally, the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$ and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{\text{TF},c}(i) = 10 \log_{10} \left(\left(2^{BP_{\text{PRE}} \cdot K_s} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, where K_s is the UE-specific power control parameter and is semi-statically configured by using

higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and BPRE is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0084] Optionally, the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{0_PUCCH} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TxD}}(F') + g(i) \end{array} \right\},$$

where

P_{0_PUCCH} includes $P_{0_NOMINAL_PUCCH}$ and $P_{0_UE_PUCCH}$, where $P_{0_NOMINAL_PUCCH}$ represents the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\Delta_{\text{F_PUCCH}}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}})$ is a variable related to PUCCH transmission information;

$\Delta_{\text{TxD}}(F')$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0085] Optionally, the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{\text{SRS_OFFSET},c}(m) + 10\log_{10}(M_{\text{SRS},c}) + P_{0_PUSCH,c}(j) + \alpha_c(j) \cdot PL_c + f_c(i) \end{array} \right\},$$

where

$P_{0_PUSCH,c}(j)$ includes $P_{0_NOMINAL_PUSCH,c}(j)$ and $P_{0_UE_PUSCH,c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{0_NOMINAL_PUSCH,c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the user-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

$P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

[0086] FIG. 5 is a schematic structural diagram of Embodiment 1 of user equipment UE according to the present invention. As shown in FIG. 5, the user equipment UE in this embodiment may include a receiving module 501. The receiving module 501 is configured to receive a measurement pilot configured by a network device, where the measurement pilot is corresponding to information about a precoding matrix.

[0087] The receiving module 501 is further configured to receive a power control parameter configured by the network device, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control transmit power of the UE in a serving cell.

[0088] Specifically, the receiving module 501 of the user equipment UE receives the measurement pilot configured by the network device, where the measurement pilot is corresponding to the information about a precoding matrix; and receives the power control parameter configured by the network device, where the power control parameter is corresponding to the measurement pilot, and the power control parameter is used by the UE to control the transmit power of the UE in the serving cell according to the power control parameter.

[0089] Optionally, that the power control parameter is corresponding to the configured measurement pilot includes:

power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

[0090] Optionally, the power control parameter includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

[0091] Optionally, the user equipment UE in this embodiment further includes:

a control module 502, configured to control, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c,k}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{\text{TF},c,k}(i) = 10 \log_{10} \left(\left(2^{BP_{\text{PRE}} \cdot K_{s,k}} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation

and coding schemes, where when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $K_{s,k}$ is the power control parameter corresponding to the k^{th} measurement

pilot set and is semi-statically configured by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and BP_{PRE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0092] Optionally, the control module 502 is further configured to control, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ P_{\text{CMAX},c}(i), P_{0_PUCCH,k} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TXD}}(F) + g(i) \right\},$$

where

$P_{0_PUCCH,k}$ includes $P_{0_NOMINAL_PUCCH,k}$ and $P_{0_UE_PUCCH,k}$, and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{0_NOMINAL_PUCCH,k}$ represents a power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using RRC signaling;

$\Delta_{\text{F_PUCCH}}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}})$ is a variable related to PUCCH transmission information;

$\Delta_{\text{TXD}}(F)$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0093] Optionally, the control module 502 is further configured to control, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), P_{\text{SRS_OFFSET},c}(m) + 10 \log_{10}(M_{\text{SRS},c}) + P_{0_PUSCH,c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + f_c(i) \right\},$$

where

$P_{0_PUSCH,c,k}(j)$ includes $P_{0_NOMINAL_PUSCH,c,k}(j)$ and $P_{0_UE_PUSCH,c,k}(j)$ and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{0_NOMINAL_PUSCH,c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, where k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

$P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

[0094] The user equipment UE in this embodiment may be configured to execute the technical solution in the method embodiment shown in FIG. 2. Implementation principles and technical effects thereof are similar and are not repeatedly described herein.

[0095] In Embodiment 2 of user equipment UE in the present invention, the user equipment UE in this embodiment is based on the structure of the user equipment UE shown in FIG. 5. In this embodiment, the receiving module 501 is configured to receive configuration information, sent by a network device, of a user-specific power control parameter, where a power control parameter configured by the network device includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

[0096] The control module 502 is configured to control transmit power of the UE in a serving cell according to the power control parameter.

[0097] Specifically, the receiving module 501 of the user equipment UE receives the configuration information, sent by the network device, of the user-specific power control parameter, where the power control parameter configured by the network device includes the target receive power, the path loss compensation factor, and the transmit format com-

pensation term of the UE; and the control module 502 of the user equipment controls the transmit power of the UE in the serving cell according to the power control parameter.

[0098] Optionally, the control module 502 is specifically configured to control, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), \left[10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right] \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), \left[10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right] \right\},$$

where

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , where i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c}(j)$ includes $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_USCH},c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{\text{TF},c}(i) = 10 \log_{10} \left(\left(2^{BP_{\text{PRE}} \cdot K_s} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, where K_s is the UE-specific power control parameter and is semi-statically configured by using

higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and BP_{PRE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

[0099] Optionally, the control module 502 is specifically configured to control, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ P_{\text{CMAX},c}(i), \left[P_{\text{O_PUCCH}} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TxD}}(F') + g(i) \right] \right\},$$

where

P_{0_PUCCH} includes $P_{0_NOMINAL_PUCCH}$ and $P_{0_UE_PUCCH}$, where $P_{0_NOMINAL_PUCCH}$ represents the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\Delta_{F_PUCCH}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{CQI}, n_{HARQ}, n_{SR})$ is a variable related to PUCCH transmission information;

$\Delta_{TxD}(F)$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

[0100] Optionally, the control module 502 is specifically configured to control, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{SRS,c}(i) = \min \left\{ \begin{array}{l} P_{CMAX,c}(i), \\ P_{SRS_OFFSET,c}(m) + 10 \log_{10}(M_{SRS,c}) + P_{O_PUSCH,c}(j) + \alpha_c(j) \cdot PL_c + f_c(i) \end{array} \right\},$$

where

$P_{O_PUSCH,c}(j)$ includes $P_{O_NOMINAL_PUSCH,c}(j)$ and $P_{O_UE_PUSCH,c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, where $P_{O_NOMINAL_PUSCH,c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the user-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

$P_{SRS_OFFSET,c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{SRS,c}$ represents SRS transmission bandwidth of the UE.

[0101] The user equipment UE in this embodiment may be configured to execute the technical solution in the method embodiment shown in FIG. 3. Implementation principles and technical effects thereof are similar and are not repeatedly described herein.

[0102] FIG. 6 is a schematic structural diagram of Embodiment 1 of a network device according to the present invention. As shown in FIG. 6, the network device in this embodiment may include a sending module 601. The sending module 601 is configured to send a configured measurement pilot to user equipment UE, where the measurement pilot is corresponding to information about a precoding matrix.

[0103] The sending module 601 is further configured to send a configured power control parameter to the user equipment UE, where the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control transmit power of the UE in a serving cell.

[0104] Optionally, that the power control parameter is corresponding to the configured measurement pilot includes: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

[0105] Optionally, the power control parameter includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

[0106] The network device in this embodiment may be configured to execute the technical solution in the method embodiment shown in FIG. 4. Implementation principles and technical effects thereof are similar and are not repeatedly described herein.

[0107] In Embodiment 2 of a network device in the present invention, the network device in this embodiment is based on the structure of the network device shown in FIG. 6. In this embodiment, the sending module 601 is further configured to send configuration information of a user-specific power control parameter to user equipment UE, where a power control parameter configured by the network device includes target receive power, a path loss compensation factor, and a transmit format compensation term of the UE, and the power control parameter is used by the UE to control transmit power of the UE in a serving cell according to the power control parameter.

[0108] The network device in this embodiment may be configured to execute the technical solution in the fifth method embodiment. Implementation principles and technical effects thereof are similar and are not repeatedly described herein.

[0109] FIG. 7 is a schematic structural diagram of Embodiment 2 of user equipment UE according to the present

invention. As shown in FIG. 7, user equipment UE 70 provided in this embodiment includes a processor 701 and a memory 702. The user equipment UE 70 may further include a receiver 703. The receiver 703 may be connected to the processor 701. The receiver 704 is configured to receive data or information. The memory 702 stores an execution instruction. When the user equipment UE 70 runs, the processor 701 communicates with the memory 702, and the processor 701 invokes the execution instruction in the memory 702, so as to execute the technical solution of the uplink power control method provided in any one of Embodiment 1, Embodiment 2, or Embodiment 3 of the present invention. Implementation principles and technical effects thereof are similar and are not repeatedly described herein.

[0110] FIG. 8 is a schematic structural diagram of Embodiment 2 of a network device according to the present invention. As shown in FIG. 8, a network device 80 provided in this embodiment includes a processor 801 and a memory 802. The network device 80 may further include a transmitter 803. The transmitter 803 may be connected to the processor 801. The transmitter 803 is configured to transmit data or information. The memory 802 stores an execution instruction. When the network device 80 runs, the processor 801 communicates with the memory 802, and the processor 801 invokes the execution instruction in the memory 802, so as to execute the technical solution of the uplink power control method provided in either Embodiment 4 or Embodiment 5 of the present invention. Implementation principles and technical effects thereof are similar and are not repeatedly described herein.

[0111] In the several embodiments provided in this application, it should be understood that the disclosed device and method may be implemented in another manner. For example, the described device embodiment is merely an example. For example, the unit or module division is merely logical function division and may be other division in actual implementation. For example, multiple units or modules may be combined or integrated into another system, or some features may be ignored or not performed. In addition, the displayed or discussed mutual couplings or direct couplings or communication connections may be implemented by using some interfaces. The indirect couplings or communication connections between the devices or modules may be implemented in electronic, mechanical, or other forms.

[0112] The modules described as separate parts may or may not be physically separate, and parts displayed as modules may or may not be physical modules, may be located in one position, or may be distributed on multiple network units. Some or all the modules may be selected according to actual needs to achieve the objectives of the solutions of the embodiments.

[0113] Persons of ordinary skill in the art may understand that all or some of the steps of the method embodiments may be implemented by a program instructing relevant hardware. The program may be stored in a computer-readable storage medium. When the program runs, the steps of the method embodiments are performed. The storage medium includes: any medium that can store program code, such as a ROM, a RAM, a magnetic disk, or an optical disc.

[0114] Finally, it should be noted that the foregoing embodiments are merely intended for describing the technical solutions of the present invention, but not for limiting the present invention. Although the present invention is described in detail with reference to the foregoing embodiments, persons of ordinary skill in the art should understand that they may still make modifications to the technical solutions described in the foregoing embodiments or make equivalent replacements to some or all technical features thereof, without departing from the scope of the technical solutions of the embodiments of the present invention.

Claims

1. An uplink power control method, comprising:

receiving a measurement pilot configured by a network device, wherein the measurement pilot is corresponding to information about a precoding matrix; and

receiving a power control parameter configured by the network device, wherein the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by user equipment UE to control transmit power of the UE in a serving cell.

2. The method according to claim 1, wherein that the power control parameter is corresponding to the configured measurement pilot comprises: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

3. The method according to claim 1, wherein the power control parameter comprises target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

4. The method according to any one of claims 1 to 3, wherein the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power $P_{\text{PUSCH},c}(i)$ of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\};$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\};$$

wherein

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , wherein i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0; $P_{\text{O_PUSCH},c,k}(j)$ comprises $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the measurement pilot received by a UE is a k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, wherein k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell; when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling; PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal; $\Delta_{\text{TF},c,k}(i) = 10 \log_{10} \left(\left(2^{BP_{\text{PRE}} \cdot K_{s,k}} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, wherein when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $K_{s,k}$ is the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and BP_{PRE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and $f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

5. The method according to claim 4, wherein the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ P_{\text{CMAX},c}(i), P_{\text{O_PUCCH},k} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TXD}}(F') + g(i) \right\},$$

wherein

$P_{0_PUCCH,k}$ comprises $P_{0_NOMINAL_PUCCH,k}$ and $P_{0_UE_PUCCH,k}$, and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{0_NOMINAL_PUCCH,k}$ represents a power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using RRC signaling;

$\Delta_F_PUCCH(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{CQI}, n_{HARQ}, n_{SR})$ is a variable related to PUCCH transmission information;

$\Delta_{TXD}(F)$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

6. The method according to claim 4 or 5, wherein the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{SRS,c}(i) = \min \left\{ P_{C_{MAX,c}}(i), P_{SRS_OFFSET,c}(m) + 10 \log_{10}(M_{SRS,c}) + P_{O_PUSCH,c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + f_c(i) \right\},$$

wherein

$P_{O_PUSCH,c,k}(j)$ comprises $P_{O_NOMINAL_PUSCH,c,k}(j)$ and $P_{O_UE_PUSCH,c,k}(j)$ and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUSCH,c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, wherein k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

$P_{SRS_OFFSET,c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{SRS,c}$ represents SRS transmission bandwidth of the UE.

7. An uplink power control method, comprising:

receiving, by user equipment UE, configuration information, sent by a network device, of a user-specific power control parameter, wherein a power control parameter configured by the network device comprises target receive power, a path loss compensation factor, and a transmit format compensation term of the UE; and controlling, by the UE, transmit power of the UE in a serving cell according to the power control parameter.

8. The method according to claim 7, wherein the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform PUCCH transmission in a serving cell c ,

$$P_{PUSCH,c}(i) = \min \left\{ P_{C_{MAX,c}}(i), 10 \log_{10}(M_{PUSCH,c}(i)) + P_{O_PUSCH,c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{TF,c}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs physical uplink control

channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ \begin{array}{l} 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), \\ 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \end{array} \right\},$$

wherein

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , wherein i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0; $P_{\text{O_PUSCH},c}(j)$ comprises $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, wherein $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling; $\alpha_c(j)$ represents a path loss compensation factor parameter in the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling; PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal; $\Delta_{\text{TF},c}(i) = 10 \log_{10} \left(\left(2^{BP_{\text{PRE}} \cdot K_s} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, wherein K_s is the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and BP_{PRE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and $f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

9. The method according to claim 8, wherein the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{\text{O_PUCCH}} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TXD}}(F') + g(i) \end{array} \right\},$$

wherein

$P_{\text{O_PUCCH}}$ comprises $P_{\text{O_NOMINAL_PUCCH}}$ and $P_{\text{O_UE_PUCCH}}$, wherein $P_{\text{O_NOMINAL_PUCCH}}$ represents the UE-specific power control parameter and is semi-statically configured by using RRC signaling; $\Delta_{\text{F_PUCCH}}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer; $h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}})$ is a variable related to PUCCH transmission information; $\Delta_{\text{TXD}}(F')$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and $g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

10. The method according to claim 8 or 9, wherein the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), P_{\text{SRS_OFFSET},c}(m) + 10 \log_{10}(M_{\text{SRS},c}) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + f_c(i) \right\},$$

wherein

$P_{\text{O_PUSCH},c}(j)$ comprises $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, wherein $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;
 $\alpha_c(j)$ represents a path loss compensation factor parameter in the user-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;
 $P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and
 $M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

11. An uplink power control method, comprising:

sending, by a network device, a configured measurement pilot to user equipment UE, wherein the measurement pilot is corresponding to information about a precoding matrix; and
 sending, by the network device, a configured power control parameter to the user equipment UE, wherein the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control transmit power of the UE in a serving cell.

12. The method according to claim 11, wherein that the power control parameter is corresponding to the configured measurement pilot comprises: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

13. The method according to claim 11, wherein the power control parameter comprises target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

14. The method according to any one of claims 11 to 13, wherein the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10}(M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10}(P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10}(M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

wherein

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , wherein i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;
 $P_{\text{O_PUSCH},c,k}(j)$ comprises $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$, and is used to represent the

target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUSCH,c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, wherein k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{TF,c,k}(i) = 10 \log_{10} \left(\left(2^{BP_{RE} \cdot K_{s,k}} - 1 \right) \cdot \beta_{offset}^{PUSCH} \right)$ is a power adjustment value in different modulation

and coding schemes, wherein when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $K_{s,k}$ is the power control parameter corresponding to the k^{th} measurement

pilot set and is semi-statically configured by using higher layer RRC signaling, β_{offset}^{PUSCH} is a parameter configured by a higher layer, and BP_{RE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

15. The method according to claim 14, wherein the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{PUCCH}(i) = \min \left\{ \begin{array}{l} P_{C_{MAX,c}}(i), \\ P_{0_PUCCH,k} + PL_c + h(n_{CQI}, n_{HARQ}, n_{SR}) + \Delta_{F_PUCCH}(F) + \Delta_{TXD}(F') + g(i) \end{array} \right\},$$

wherein

$P_{0_PUCCH,k}$ comprises $P_{O_NOMINAL_PUCCH,k}$ and $P_{O_UE_PUCCH,k}$, and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUCCH,k}$ represents a power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using RRC signaling;

$\Delta_{F_PUCCH}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{CQI}, n_{HARQ}, n_{SR})$ is a variable related to PUCCH transmission information;

$\Delta_{TXD}(F')$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

16. The method according to claim 14 or 15, wherein the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{SRS,c}(i) = \min \left\{ \begin{array}{l} P_{C_{MAX,c}}(i), \\ P_{SRS_OFFSET,c}(m) + 10 \log_{10}(M_{SRS,c}) + P_{O_PUSCH,c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + f_c(i) \end{array} \right\},$$

wherein

$P_{O_PUSCH,c,k}(j)$ comprises $P_{O_NOMINAL_PUSCH,c,k}(j)$ and $P_{O_UE_PUSCH,c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUSCH,c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, wherein k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell; when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling; $P_{SRS_OFFSET,c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and $M_{SRS,c}$ represents SRS transmission bandwidth of the UE.

17. An uplink power control method, comprising:

sending, by a network device, configuration information of a UE-specific power control parameter to user equipment UE, wherein a power control parameter configured by the network device comprises target receive power, a path loss compensation factor, and a transmit format compensation term of the UE, and the power control parameter is used by the UE to control transmit power of the UE in a serving cell according to the power control parameter.

18. The method according to claim 17, wherein the UE controls, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{PUSCH,c}(i) = \min \left\{ P_{CMAX,c}(i), 10 \log_{10} (M_{PUSCH,c}(i)) + P_{O_PUSCH,c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{TF,c}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{PUSCH,c}(i) = \min \left\{ 10 \log_{10} (P_{CMAX,c}(i) - P_{PUCCH}(i)), 10 \log_{10} (M_{PUSCH,c}(i)) + P_{O_PUSCH,c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{TF,c}(i) + f_c(i) \right\},$$

wherein

$P_{CMAX,c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{PUSCH,c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , wherein i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0; $P_{O_PUSCH,c}(j)$ comprises $P_{O_NOMINAL_PUSCH,c}(j)$ and $P_{O_UE_PUSCH,c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, wherein $P_{O_NOMINAL_PUSCH,c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling; $\alpha_c(j)$ represents a path loss compensation factor parameter in the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling; PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal; $\Delta_{TF,c}(i) = 10 \log_{10} \left(\left(2^{BP_{PRE} \cdot K_s} - 1 \right) \cdot \beta_{offset}^{PUSCH} \right)$ is a power adjustment value in different modulation and

coding schemes, wherein K_s is the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling, β_{offset}^{PUSCH} is a parameter configured by a higher layer, and BPRES is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and
 $f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

19. The method according to claim 18, wherein the UE controls, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{PUCCH}(i) = \min \left\{ P_{CMAX,c}(i), P_{0_PUCCH} + PL_c + h(n_{CQI}, n_{HARQ}, n_{SR}) + \Delta_{F_PUCCH}(F) + \Delta_{TXD}(F') + g(i) \right\},$$

wherein

P_{0_PUCCH} comprises $P_{0_NOMINAL_PUCCH}$ and $P_{0_UE_PUCCH}$, wherein $P_{0_NOMINAL_PUCCH}$ represents the UE-specific power control parameter and is semi-statically configured by using RRC signaling;
 $\Delta_{F_PUCCH}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;
 $h(n_{CQI}, n_{HARQ}, n_{SR})$ is a variable related to PUCCH transmission information;
 $\Delta_{TXD}(F')$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and
 $g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

20. The method according to claim 18 or 19, wherein the UE controls, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{SRS,c}(i) = \min \left\{ P_{CMAX,c}(i), P_{SRS_OFFSET,c}(m) + 10 \log_{10}(M_{SRS,c}) + P_{O_PUSCH,c}(j) + \alpha_c(j) \cdot PL_c + f_c(i) \right\},$$

wherein

$P_{O_PUSCH,c}(j)$ comprises $P_{O_NOMINAL_PUSCH,c}(j)$ and $P_{O_UE_PUSCH,c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, wherein $P_{O_PUSCH,c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;
 $\alpha_c(j)$ represents a path loss compensation factor parameter in the user-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;
 $P_{SRS_OFFSET,c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and
 $M_{SRS,c}$ represents SRS transmission bandwidth of the UE.

21. User equipment UE, comprising:

a receiving module, configured to receive a measurement pilot configured by a network device, wherein the measurement pilot is corresponding to information about a precoding matrix; wherein the receiving module is further configured to receive a power control parameter configured by the network

device, wherein the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control transmit power of the UE in a serving cell.

22. The UE according to claim 21, wherein that the power control parameter is corresponding to the configured measurement pilot comprises: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

23. The UE according to claim 21, wherein the power control parameter comprises target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

24. The UE according to any one of claims 21 to 23, further comprising:

a control module, configured to control, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + \Delta_{\text{TF},c,k}(i) + f_c(i) \right\},$$

wherein

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , wherein i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0;

$P_{\text{O_PUSCH},c,k}(j)$ comprises $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ and $P_{\text{O_UE_PUSCH},c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{\text{O_NOMINAL_PUSCH},c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, wherein k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{\text{TF},c,k}(i) = 10 \log_{10} \left(\left(2^{BP_{\text{PRE}} \cdot K_{s,k}} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, wherein when the configured measurement pilot received by the UE is the

k^{th} measurement pilot set in the serving cell, $K_{s,k}$ is the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$

is a parameter configured by a higher layer, and BPRE is obtained by calculating a quantity of bits

carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and $f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

25. The UE according to claim 24, wherein the control module is further configured to control, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{0_PUCCH,k} + PL_c + h(n_{CQI}, n_{HARQ}, n_{SR}) + \Delta_{F_PUCCH}(F) + \Delta_{TXD}(F') + g(i) \end{array} \right\},$$

wherein

$P_{0_PUCCH,k}$ comprises $P_{O_NOMINAL_PUCCH,k}$ and $P_{O_UE_PUCCH,k}$, and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUCCH,k}$ represents a power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using RRC signaling;

$\Delta_{F_PUCCH}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer;

$h(n_{CQI}, n_{HARQ}, n_{SR})$ is a variable related to PUCCH transmission information;

$\Delta_{TXD}(F')$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and

$g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

26. The UE according to claim 24 or 25, wherein the control module is further configured to control, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ \begin{array}{l} P_{\text{CMAX},c}(i), \\ P_{\text{SRS_OFFSET},c}(m) + 10\log_{10}(M_{\text{SRS},c}) + P_{O_PUSCH,c,k}(j) + \alpha_{c,k}(j) \cdot PL_c + f_c(i) \end{array} \right\},$$

wherein

$P_{O_PUSCH,c,k}(j)$ comprises $P_{O_NOMINAL_PUSCH,c,k}(j)$ and $P_{O_UE_PUSCH,c,k}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling; and when the configured measurement pilot received by the UE is a k^{th} measurement pilot set in the serving cell, $P_{O_NOMINAL_PUSCH,c,k}(j)$ is a power control parameter corresponding to the k^{th} measurement pilot set, wherein k is an integer ranging from 1 to M , and M is a total quantity of different measurement pilots configured in the serving cell;

when the configured measurement pilot received by the UE is the k^{th} measurement pilot set in the serving cell, $\alpha_{c,k}(j)$ represents a path loss compensation factor parameter in the power control parameter corresponding to the k^{th} measurement pilot set and is semi-statically configured by using higher layer RRC signaling;

$P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and

$M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

27. User equipment UE, comprising:

a receiving module, configured to receive configuration information, sent by a network device, of a user-specific

power control parameter, wherein a power control parameter configured by the network device comprises target receive power, a path loss compensation factor, and a transmit format compensation term of the UE; and a control module, configured to control transmit power of the UE in a serving cell according to the power control parameter.

28. The UE according to claim 27, wherein the control module is specifically configured to control, according to the power control parameter, total physical uplink shared channel PUSCH transmit power of the UE to meet the following:

at a transmission moment i , if the UE only performs PUSCH transmission but does not perform physical uplink control channel PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right\},$$

or

at a transmission moment i , if the UE performs PUSCH transmission and also performs PUCCH transmission in a serving cell c ,

$$P_{\text{PUSCH},c}(i) = \min \left\{ 10 \log_{10} (P_{\text{CMAX},c}(i) - P_{\text{PUCCH}}(i)), 10 \log_{10} (M_{\text{PUSCH},c}(i)) + P_{\text{O_PUSCH},c}(j) + \alpha_c(j) \cdot PL_c + \Delta_{\text{TF},c}(i) + f_c(i) \right\},$$

wherein

$P_{\text{CMAX},c}(i)$ is maximum transmit power of the UE in the serving cell c ; and $M_{\text{PUSCH},c}(i)$ is a quantity, in a unit of physical resource block PRB, of PUSCH scheduling resource blocks of the UE at the transmission moment i , wherein i is an integer greater than or equal to 0, and c is an integer greater than or equal to 0; $P_{\text{O_PUSCH},c}(j)$ comprises $P_{\text{O_NOMINAL_PUSCH},c}(j)$ and $P_{\text{O_UE_PUSCH},c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, wherein $P_{\text{O_NOMINAL_PUSCH},c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling;

$\alpha_c(j)$ represents a path loss compensation factor parameter in the UE-specific power control parameter and is semi-statically configured by using higher layer RRC signaling;

PL_c is a path loss measurement value, based on reference signal received power RSRP, of a terminal;

$\Delta_{\text{TF},c}(i) = 10 \log_{10} \left(\left(2^{BP_{\text{PRE}} \cdot K_s} - 1 \right) \cdot \beta_{\text{offset}}^{\text{PUSCH}} \right)$ is a power adjustment value in different modulation and coding schemes, wherein K_s is the UE-specific power control parameter and is semi-statically configured

by using higher layer RRC signaling, $\beta_{\text{offset}}^{\text{PUSCH}}$ is a parameter configured by a higher layer, and BP_{PRE} is obtained by calculating a quantity of bits carried in data of the UE and a quantity of resource elements REs allocated to the data of the UE; and

$f_c(i)$ is a closed-loop power adjustment amount and is a feedback value that is quantized by a receive end according to a receive error or a measurement error.

29. The UE according to claim 28, wherein the control module is specifically configured to control, according to the power control parameter, total physical uplink control channel PUCCH transmit power of the UE to meet the following:

at a transmission moment i , total transmit power of the UE in a serving cell c is:

$$P_{\text{PUCCH}}(i) = \min \left\{ P_{\text{CMAX},c}(i), \right. \\ \left. P_{0_PUCCH} + PL_c + h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}}) + \Delta_{\text{F_PUCCH}}(F) + \Delta_{\text{TxD}}(F') + g(i) \right\},$$

wherein

P_{0_PUCCH} comprises $P_{0_NOMINAL_PUCCH}$ and $P_{0_UE_PUCCH}$, wherein $P_{0_NOMINAL_PUCCH}$ represents the UE-specific power control parameter and is semi-statically configured by using RRC signaling; $\Delta_{\text{F_PUCCH}}(F)$ is a power control adjustment parameter related to a PUCCH format and is determined according to a parameter configured by a higher layer; $h(n_{\text{CQI}}, n_{\text{HARQ}}, n_{\text{SR}})$ is a variable related to PUCCH transmission information; $\Delta_{\text{TxD}}(F')$ is a parameter related to a quantity of antenna ports for PUCCH sending and a PUCCH transmission mode; and $g(i)$ is a closed-loop power control adjustment value and is determined according to a power control command sent by the network device.

30. The UE according to claim 28 or 29, wherein the control module is specifically configured to control, according to the power control parameter, total sounding reference signal SRS transmit power to meet the following:

at a transmission moment i , total sounding reference signal SRS transmit power of the UE in a serving cell c is:

$$P_{\text{SRS},c}(i) = \min \left\{ P_{\text{CMAX},c}(i), \right. \\ \left. P_{\text{SRS_OFFSET},c}(m) + 10 \log_{10}(M_{\text{SRS},c}) + P_{0_PUSCH,c}(j) + \alpha_c(j) \cdot PL_c + f_c(i) \right\},$$

wherein

$P_{0_PUSCH,c}(j)$ comprises $P_{0_NOMINAL_PUSCH,c}(j)$ and $P_{0_UE_PUSCH,c}(j)$, and is used to represent the target receive power of the UE and is semi-statically configured by using higher layer RRC signaling, wherein $P_{0_NOMINAL_PUSCH,c}(j)$ is the UE-specific power control parameter and is semi-statically configured by using RRC signaling; $\alpha_c(j)$ represents a path loss compensation factor parameter in the user-specific power control parameter and is semi-statically configured by using higher layer RRC signaling; $P_{\text{SRS_OFFSET},c}(m)$ represents an offset, caused by different modulation and coding schemes, of SRS transmit power relative to PUSCH transmit power; and $M_{\text{SRS},c}$ represents SRS transmission bandwidth of the UE.

31. A network device, comprising:

a sending module, configured to send a configured measurement pilot to user equipment UE, wherein the measurement pilot is corresponding to information about a precoding matrix; wherein the sending module is further configured to send a configured power control parameter to the user equipment UE, wherein the power control parameter is corresponding to the configured measurement pilot, and the power control parameter is used by the user equipment UE to control transmit power of the UE in a serving cell.

32. The network device according to claim 31, wherein that the power control parameter is corresponding to the configured measurement pilot comprises: power control parameter configurations of UEs that receive a same measurement pilot configuration are the same.

33. The network device according to claim 31, wherein the power control parameter comprises target receive power, a path loss compensation factor, and a transmit format compensation term of the UE.

34. A network device, comprising:

a sending module, configured to send configuration information of a user-specific power control parameter to

user equipment UE, wherein a power control parameter configured by the network device comprises target receive power, a path loss compensation factor, and a transmit format compensation term of the UE, and the power control parameter is used by the UE to control transmit power of the UE in a serving cell according to the power control parameter.

5

35. User equipment UE, comprising:

a processor and a memory, wherein the memory stores an execution instruction; and when the user equipment runs, the processor communicates with the memory, and the processor executes the execution instruction to enable the user equipment to perform the method according to any one of claims 1 to 10.

10

36. A network device, comprising:

a processor and a memory, wherein the memory stores an execution instruction; and when the network device runs, the processor communicates with the memory, and the processor executes the execution instruction to enable the user equipment to perform the method according to any one of claims 11 to 20.

15

20

25

30

35

40

45

50

55

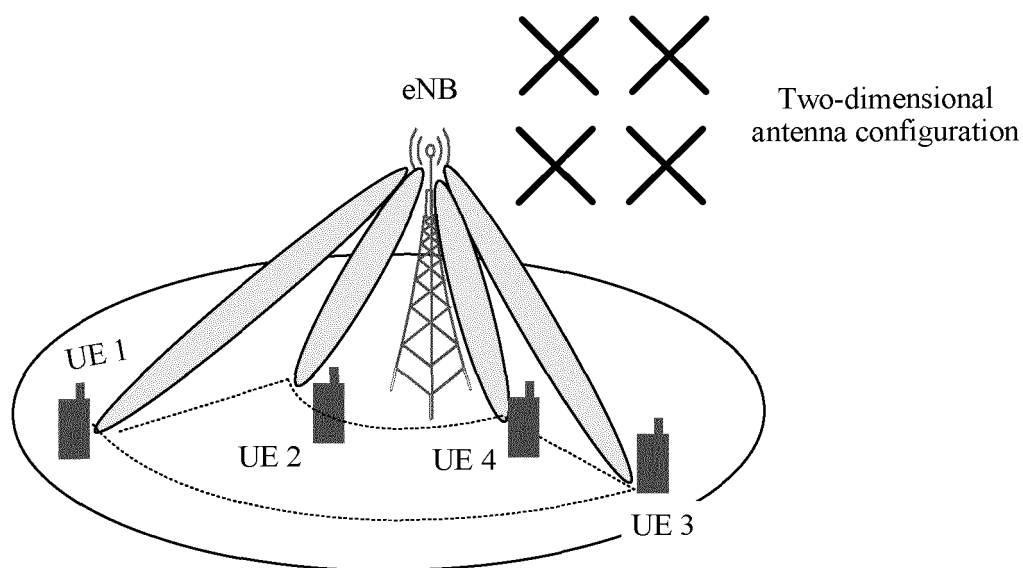


FIG. 1A

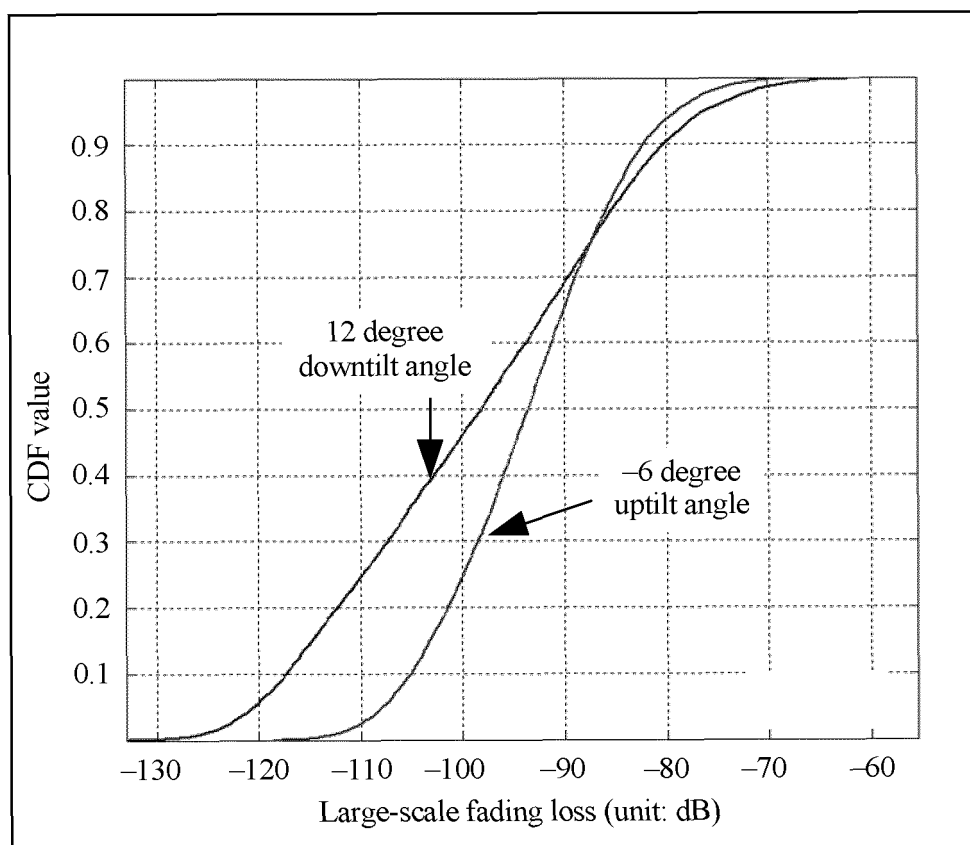


FIG. 1B

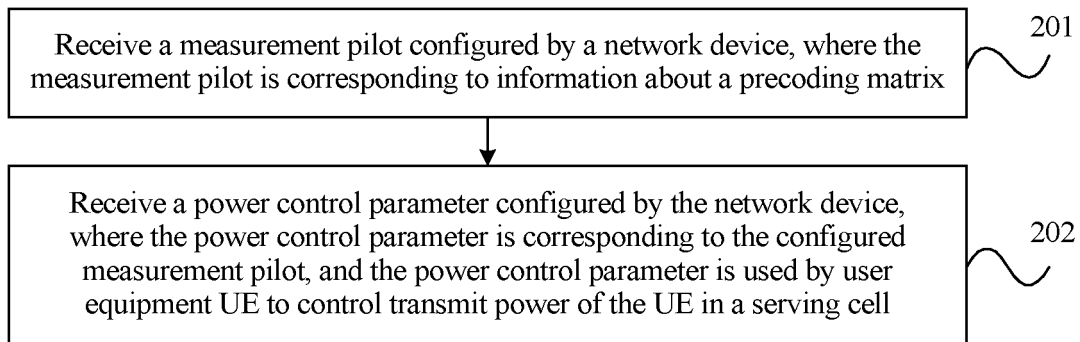


FIG. 2

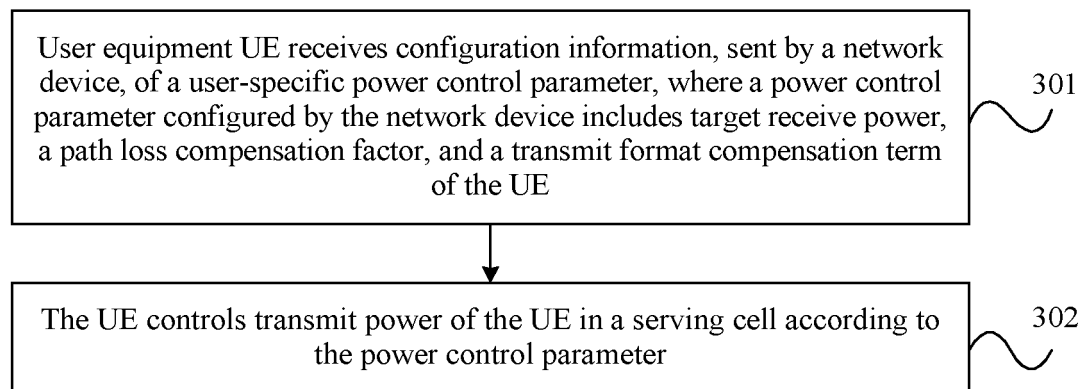


FIG. 3

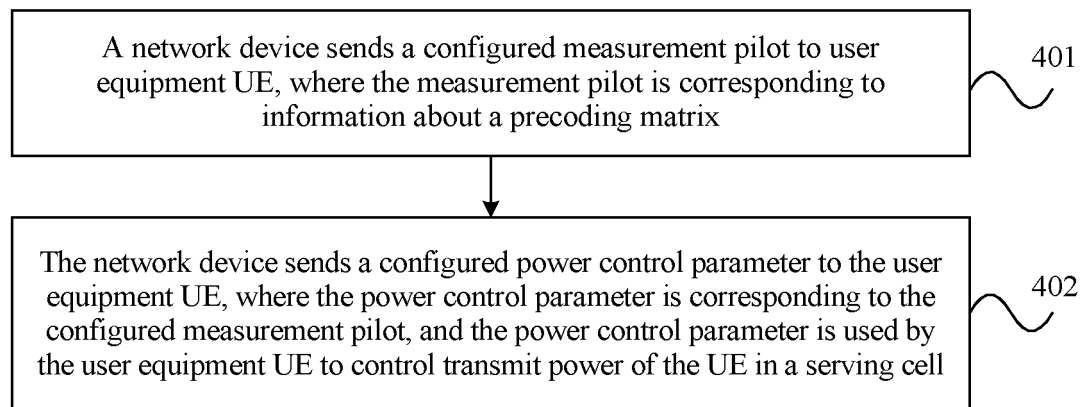


FIG. 4

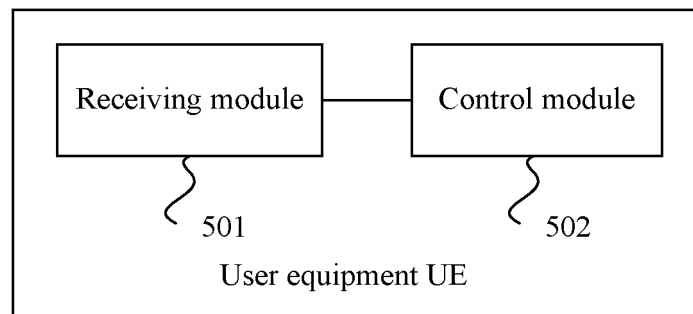


FIG. 5

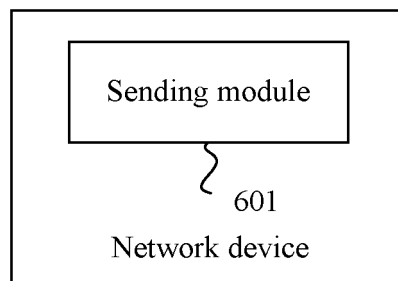


FIG. 6

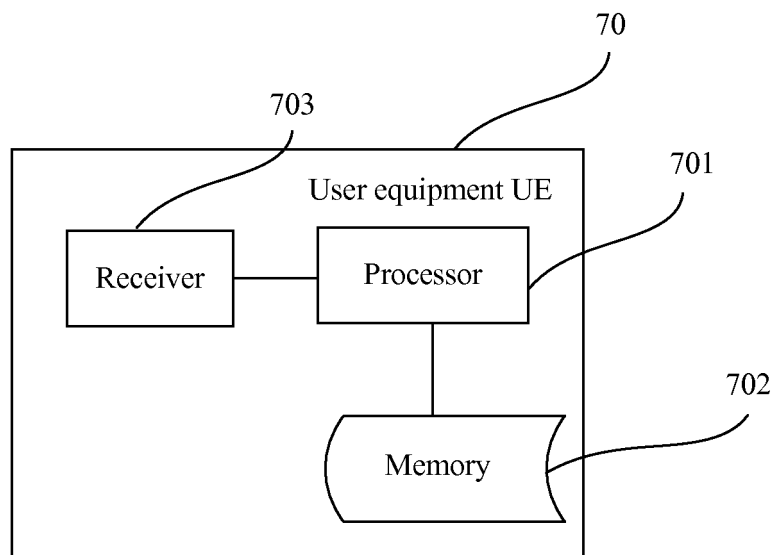


FIG. 7

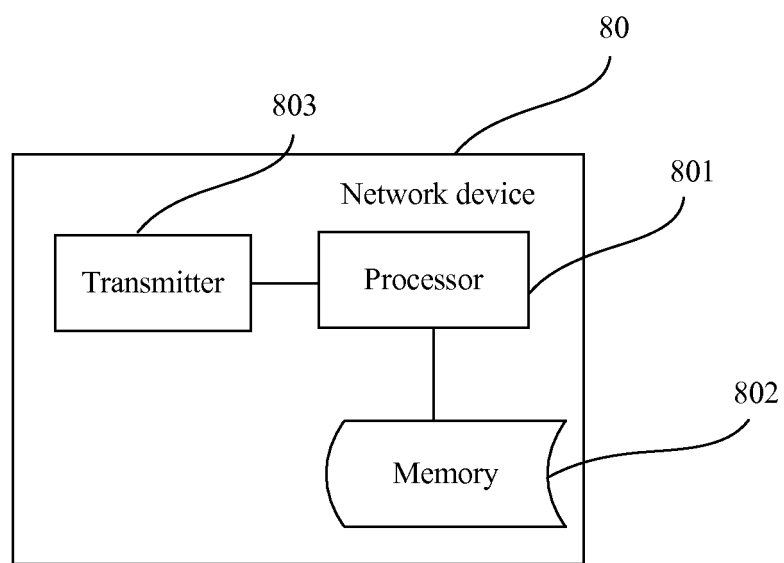


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2014/087700

A. CLASSIFICATION OF SUBJECT MATTER

H04W 52/14 (2009.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W; H04Q; H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI; EPODOC; CNKI; CNPAT: measure pilot, precode, matrix, share channel, uplink, power, SRS, configuration, PUSCH

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 102006657 A (HUAWEI TECHNOLOGIES CO., LTD.) 6 April 2011 (06.04.2011) description, paragraphs [0007]-[0020], and [0063]-[0068]	1-3, 11-13, 21-23, 31-33, 35, 36
A	CN 102006657 A (HUAWEI TECHNOLOGIES CO., LTD.) 6 April 2011 (06.04.2011) description, paragraphs [0007]-[0020], and [0063]-[0068]	4-6, 14-16, 24-26, 35, 36
X	CN 102271389 A (ZTE CORP.) 7 December 2011 (07.12.2011) description, paragraphs [0007] and [0008]	7, 17, 27, 34-36
A	CN 102271389 A (ZTE CORP.) 7 December 2011 (07.12.2011) description, paragraphs [0007] and [0008]	8-10, 18-20, 28-30, 35, 36
A	CN 102695261 A (CHINA MOBILE COMMUNICATION CORP.) 26 September 2012 (26.09.2012) the whole document	1-36

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

27 March 2015

Date of mailing of the international search report

28 April 2015

Name and mailing address of the ISA
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No. (86-10) 62019451

Authorized officer

LV, Yuan

Telephone No. (86-10) 62413388

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2014/087700

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2747495 A1 (HUAWEI TECHNOLOGIES CO., LTD.) 25 June 2014 (25.06.2014) the whole document	1-36

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
 Information on patent family members

 International application No.
 PCT/CN2014/087700

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 102006657 A	6 April 2011	None	
CN 102271389 A	7 December 2011	CN 102271389 B	19 March 2014
		US 2013065631 A1	14 March 2013
		EP 2566260 A1	6 March 2013
		WO 2011150628 A1	8 December 2011
		JP 2013527723 A	27 June 2013
		JP 5663660 B	4 February 2015
		CN 102695261 B	11 March 2015
CN 102695261 A	26 September 2012	CN 102938930 A	20 February 2013
EP 2747495 A1	25 June 2014	US 2014161078 A1	12 June 2014
		WO 2013023612 A1	21 February 2013
		EP 2747495 A4	25 June 2014