(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) **EP 3 291 364 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
07.03.2018 Bulletin 2018/10

(21) Application number: **16198054.5**

(22) Date of filing: **09.11.2016**

(51) Int Cl.:
H01Q 1/04 *(2006.01)* ***H01Q 3/22*** *(2006.01)*
H01Q 7/00 *(2006.01)* ***H01Q 9/20*** *(2006.01)*

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(30) Priority: **30.08.2016 EP 16186459**

(71) Applicant: **INESC TEC - Instituto de Engenharia de Sistemas e Computadores, Tecnologia e Ciencia**
4200-465 Porto (PT)

(72) Inventors:
- **de Sousa Pessoa, Luis Manuel**
  4200-465 Porto (PT)
- **Silveira Pereira, Mário Rui**
  4200-465 Porto (PT)
- **Aboderin, Oluyomi**
  4200-465 Porto (PT)
- **Castro Manuel Faria Salgado, Henrique**
  4200-465 Porto (PT)
- **Inácio, Sofia Isabel**
  4200-465 Porto (PT)

(74) Representative: **Patentree, Lda.**
Edificio Net
Rua de Salazares, 842
4149-002 Porto (PT)

(54) **ANTENNA FOR UNDERWATER RADIO COMMUNICATIONS**

(57) Method of operating under water an antenna device comprising a frequency-tunable circuit, comprising: tuning said circuit between a first frequency and a second frequency for obtaining a variable directional radiation pattern by the antenna device, to select a directional radiation pattern of the antenna device for improving the radio signal coupling between the antenna devices, in particular for maximizing the radio signal coupling between the two antenna devices, wherein said first frequency and a second frequency are predetermined according to the saltwater-freshwater content of the water such that the directional radiation pattern of the antenna device for one of the two frequencies is directional and the directional pattern of the antenna device for the other of the two frequencies is omnidirectional. Antenna device arranged to periodically tune said circuit to select a directional radiation pattern of the antenna device for improving the radio signal coupling with another antenna device, in particular for maximizing the radio signal coupling with another antenna device.

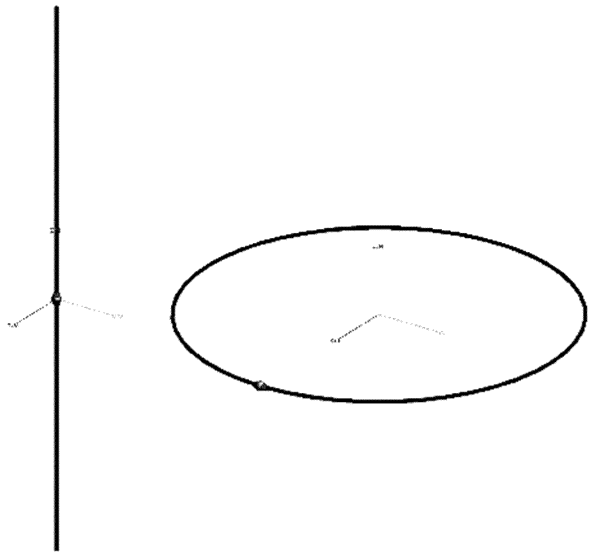


Fig. 4

EP 3 291 364 A1

Description

Technical field

[0001] The present disclosure relates to an antenna for underwater radio communications and respective operation method, in particular to an antenna device for underwater radio communications comprising a frequency-tunable circuit, said circuit being tunable between a first frequency and a second frequency for obtaining a variable directional radiation pattern by the antenna device, in order to select a directional radiation pattern of the antenna device for improving the radio signal coupling with another antenna device.

Background

[0002] The necessity of monitoring aqueous environments and the need for reliable communications between or with underwater vehicles has led to extensive research on underwater wireless communications. Acoustic and optical systems are the most frequently used in those applications, however, both technologies present limitations and disadvantages that radio frequency (RF) systems do not have. The biggest advantage of acoustic systems is the large range that can be achieved, but on the other hand they exhibit poor performance in shallow water, limited bandwidth due to the low frequencies used, may have an impact on marine life and the ambient noise level could be a limiting factor for communication performance.

[0003] Although optical systems allow ultra-high bandwidths (on the order of Gbit/s) at very close range, those systems are very susceptible to turbidity and particles fouling, and they require line-of-sight and thus tight alignment, which is a drawback. RF systems can overcome some of the limitations of both acoustic and optical systems. They have the advantage of not being affected by turbidity, operate in non-line-of-sight, are immune to acoustic noise and allow high bandwidths (up to 100 Mbit/s) at very close range.

General Description

[0004] It is disclosed how the main radiation parameters of an underwater antenna, such as the resonant frequency, the input impedance and the radiation pattern, change dramatically with the conductivity of the medium where the antenna is placed. Moreover, the radiation pattern changes with the resonance frequency, that is, in freshwater/seawater the same type of antenna can have different radiation patterns depending if the medium is dielectric or conductive at the antenna's resonant frequency. Therefore, this can be an advantage to achieve the control of the radiation diagram of an antenna placed in a certain type of underwater media, by adjusting the resonant frequency of the antenna, for example, with a simple electronic circuit. This can be exploited to improve underwater communications, for example, between a moving AUV (autonomous underwater vehicle) and a fixed platform, by continuously adjusting the radiation diagram to the most favourable as the AUV moves.

[0005] An important application that was investigated in connection with the present disclosure is the implementation of IEEE 802.11 networks in freshwater and seawater at VHF, UHF and SHF (Very, Ultra and Super High Frequency, respectively) bands with the help of software-defined radios. However few analyses of the impact of the antenna design have been presented for those media. In this disclosure, the design of an antenna, in particular dipole antenna, for a RF underwater communication system is described, as a better alternative to current acoustic systems, for short range communications. Moreover, the impact of the conductivity of the medium on the characteristics of the antenna is also assessed by means of simulation and experimental work.

[0006] The best media for electromagnetic waves propagation are insulators, where the conductivity is zero (σ= 0 S/m). In those media, electromagnetic waves are not attenuated and therefore they are known as lossless media. If the conductivity of the medium increases, the attenuation of radio waves also increases.

[0007] Freshwater conductivity can range from 0.005 to 0.05 S/m, the actual value increasing with salinity and temperature. Thus, seawater has a higher conductivity, with an average of 4 S/m.

[0008] In a medium with a conductivity σ and at the angular frequency ω, the permittivity becomes complex, with a value of:

$$\varepsilon = \varepsilon_r \varepsilon_0 - j\frac{\sigma}{\omega} \qquad (1)$$

where ε_0 is the vacuum permittivity.

[0009] The relative permittivity (ε_r) of water depends upon several factors like water temperature, salinity and propagation frequency and it can be described by the Debye model or by the Cole-Cole equation. In this disclosure we considered a relative permittivity value of 81 for both fresh and seawater, since according to the models presented above that is the value of the water permittivity in the frequency range of interest for this work.

[0010] Since water is not a magnetic medium the value of its relative permeability is μ_r = 1. So the permeability (μ) of water is the same as that of free space.

[0011] The propagation of electromagnetic waves, in any medium, is characterized by their propagation constant, γ, which is given by:

$$\gamma = \sqrt{j\omega\mu\,(\sigma + j\omega\varepsilon')} = \alpha + j\beta \qquad (2)$$

where α (Np/m) and β (rad/m) are the attenuation and phase constants, respectively, and ω is the angular fre-

quency.

[0012] Media where $\frac{\sigma}{\omega\varepsilon'} \ll 1$ are considered dielectric media, or insulators. On the other hand, media where $\frac{\sigma}{\omega\varepsilon'} \gg 1$ are considered conductors. In Fig. 1 the behaviour of $\frac{\sigma}{\omega\varepsilon'}$ is shown as a function of frequency for the two media considered in this work. It can be seen that freshwater becomes a conductor for frequencies below 11.1 MHz and in the case of seawater this transition occurs at 888 MHz.

[0013] When an electromagnetic wave propagates in a lossy medium it is attenuated. How it is shown in Fig. 2, that attenuation increases with the frequency and with the conductivity (σ) of the medium, so it is necessary to use low frequencies in order to achieve a reasonable range in RF underwater communication systems.

[0014] The wavelength is defined by:

$$\lambda = \frac{2\pi}{\beta} \qquad (3)$$

and is represented in Fig. 3 as a function of frequency for three media. It can be seen that the wavelength behaviour changes at the frequency at which the transition from conductive to dielectric medium occurs and from that point it becomes equal to the wavelength in a lossless medium (with the same permittivity).

[0015] It is disclosed a method of operating underwater an antenna device comprising a frequency-tunable circuit, said method comprising:

> tuning said circuit between a first frequency and a second frequency for obtaining a variable directional radiation pattern (i.e. a variable preferred operation direction) by the antenna device.

[0016] An embodiment of the frequency-tunable circuit is a circuit comprising an adjustable-capacity capacitor connected in series or parallel with the antenna such that the resonant frequency of the antenna is adjustable. This adjustment may be carried out by a microprocessor or microcontroller. Another embodiment of the frequency-tunable circuit is a circuit which is tunable by a data processing device executing computer program instructions embodying one of the disclosed methods.

[0017] An embodiment, for communicating with another antenna device, comprises tuning said circuit to select a directional radiation pattern of the antenna device for improving the radio signal coupling between the antenna devices, in particular for maximizing the radio signal coupling between the antenna devices.

[0018] In an embodiment, the directional radiation pattern of the antenna device for one of the two frequencies is directional and the directional pattern of the antenna device for the other of the two frequencies is omnidirectional.

[0019] In an embodiment, said first frequency and a second frequency are predetermined according to the saltwater-freshwater content of the water such that the directional radiation pattern of the antenna device for one of the two frequencies is directional and the directional pattern of the antenna device for the other of the two frequencies is omnidirectional.

[0020] In an embodiment, the directional radiation pattern of the antenna device has a 90° shift between the first frequency and the second frequency.

[0021] An embodiment comprises continuously tuning said circuit between the first frequency and the second frequency,
such that the directional pattern of the antenna device is continuously tuned between the first frequency and the second frequency.

[0022] An embodiment comprises tuning said circuit in discrete steps between the first frequency and the second frequency,
such that the directional pattern of the antenna device is tuned in discrete steps between the first frequency and the second frequency.

[0023] In an embodiment, submerged in fresh water, the first frequency is lower than 11.1 MHz and a second frequency is higher than 11.1 MHz,
such that the directional radiation pattern of the antenna device for first frequency is directional and the directional radiation pattern of the antenna device for the second frequency is omnidirectional.

[0024] In an embodiment, submerged in salt water, the first frequency is lower than 888 Mhz and the second frequency is higher than 888 MHz,
such that the directional radiation pattern of the antenna device for first frequency is directional and the directional radiation pattern of the antenna device for the second frequency is omnidirectional.

[0025] In an embodiment, the first frequency is lower than 11.1Mhz and the second frequency is higher than 888 MHz,
such that the directional radiation pattern of the antenna device for first frequency is directional and the directional radiation pattern for second frequency is omnidirectional, independently of the antenna device being submerged in fresh water or salt water.

[0026] In an embodiment, the antenna device is a dipole antenna or a loop antenna.

[0027] In an embodiment, the antenna device is used in an IEEE 802.11 protocol network.

[0028] It is also disclosed an antenna device for underwater radio communications comprising a frequency-tunable circuit, said circuit being tunable between a first frequency and a second frequency for obtaining a variable directional radiation pattern (i.e. a variable preferred operation direction) by the antenna device.

[0029] An embodiment is arranged to periodically tune

said circuit to select a directional radiation pattern of the antenna device for improving the radio signal coupling with another antenna device, in particular for maximizing the radio signal coupling with another antenna device.

[0030] The said periodic tuning can be performed using a sweep, for example, every 10 seconds (see fig. 8). The tuning must be performed simultaneously by the two antenna devices (emitter and receiver), so that both antenna devices always use the same frequency. In the beginning, a default communication frequency (fa) shall be known by both antenna devices. Periodically both antenna devices will tune their circuits with a frequency sweep (f1-f2) known by both antenna devices, either continuous or discrete. A discrete frequency step can be defined for example between 1 MHz and 5 MHz to be used in the frequency sweep. Using a discrete frequency step facilitates keeping the two antennas in sync during the frequency sweep.

[0031] The frequency sweep normally covers from the first frequency (f1) to the second frequency (f2), preferably with a total sweep duration much shorter than the period between said periodic tunings, for example, 100 ms, such that the communication throughout is not substantially affected by the time lost in this. While the tuning is performed, one or both of the antenna devices can register the received signal strength. At the end of the sweep, the results are analysed by one of the antenna devices (the master antenna device) and a decision is made on whether to tune the said circuit to another frequency.

[0032] The decision depends on whether a frequency was found where the received signal strength is higher than the received signal strength at the current frequency, or the average of the received signal strength between both antenna devices is higher than the received signal strength at the current frequency. The decision is then communicated by the master antenna device to the other antenna device (slave), normally through said default or currently used frequency, so that both antenna devices will change to the same new frequency (fb). The process is preferably repeated periodically and the new frequency (fb) may then change subsequently to another new frequency (fc), and so on.

[0033] According to a method of operating the antenna device, the antenna device is arranged to periodically tune said circuit to select a directional radiation pattern of the antenna device for improving the radio signal coupling with another antenna device, by periodically making a frequency sweep in synchronized frequency between both antennas and selecting a frequency from said frequency sweep that maximizes signal strength coupling between said two antennas. A discrete frequency step can be defined between 1 MHz and 5 MHz to be used in the frequency sweep.

[0034] In another possible embodiment, both antenna devices will periodically tune their circuits to the neighbouring frequencies immediately above (f2) and below (f1) the current frequency, by iterative improvements, considering a discrete frequency step that can be defined for example between 1 MHz and 5 MHz (see fig. 9). In the beginning, a default communication frequency (fa) shall be known by both antenna devices. The tuning period can be for example 10 seconds. The next frequency to be used shall be decided by the master antenna device.

[0035] The decision depends on whether the received signal strength at any of the tested frequencies (f1, f2) is higher than the received signal strength at the previous frequency (fa), or the average of the received signal strength between both antenna devices is higher at the tested frequencies than the received signal strength at the previous frequency. The decision is then communicated by the master antenna device to the other antenna device (slave), normally through said default or currently used frequency, so that both antenna devices will change to the same new frequency (fb=f1) which provides a better signal strength. The process is preferably repeated periodically and the new frequency (fb) may then change subsequently to another new frequency (fc), and so on.

[0036] According to an alternative method of operating the antenna device, the antenna device is arranged to periodically tune said circuit to select a directional radiation pattern of the antenna device for improving the radio signal coupling with another antenna device, by periodically making a frequency test, in synchronized frequency between both antennas, of a lower frequency than the frequency currently being used and an higher frequency than the frequency currently being used, and selecting a frequency from said lower and higher frequencies that maximizes signal strength coupling between said two antennas. The lower and higher frequencies may have a discrete frequency step that can be defined for example between 1 MHz and 5 MHz above and below the frequency currently being used.

[0037] In another embodiment, multiple antenna devices co-exist in a given underwater scenario. In such case, the master antenna device can send information specifically targeted to a given slave antenna device or group of slave antenna devices. Since the physical location of the slave antenna devices can be known to the master antenna device, the master antenna device will select the targeted slave antenna by switching to a frequency where the radiation is substantially directed in the targeted direction, a step that must be preceded with a communication at said default frequency indicating the next frequency to be used, in order to synchronize the transmission.

[0038] An embodiment is arranged to continuously tune said circuit between the first frequency and the second frequency, such that the directional pattern of the antenna device is continuously tuned between the first frequency and the second frequency.

[0039] An embodiment is arranged to tune said circuit in discrete steps between the first frequency and the second frequency, such that the directional pattern of the antenna device is tuned in discrete steps between the

first frequency and the second frequency.

[0040] In particular, for fresh water, the first frequency is 834 kHz or 1.68 MHz, and the second frequency is 19 MHz or 30 Mhz. In particular, for fresh water, the first frequency is between 834 kHz - 1.68 MHz, and the second frequency is between MHz - 30 Mhz.

[0041] In particular, for salt water, the first frequency is 286 MHz or 453 MHz, and the second frequency is 1 GHz or 2.16 GHz. In particular, for salt water, the first frequency is between 286 MHz - 453 MHz, and the second frequency is between 1 GHz - 2.16 GHz.

Brief Description of the Drawings

[0042] The following figures provide preferred embodiments for illustrating the description and should not be seen as limiting the scope of invention.

Figure 1: Behaviour of $\frac{\sigma}{\omega\varepsilon'}$ as a function of frequency for the two media considered in this work (σ= 0.05 S/m and σ = 4 S/m).

Figure 2: Attenuation of an electromagnetic wave propagating in two different media (σ= 0.05 S/m and σ = 4 S/m).

Figure 3: Wavelength of an electromagnetic wave propagating in three different media with ε' = 81 (σ= 0 S/m, σ = 0.05 S/m and σ = 4 S/m).

Figure 4: Analysed antennas: dipole and loop.

Figure 5: Dependency of resonance frequency on the water conductivity.

Figure 6: Dependency of real part of input impedance at resonance on the water conductivity.

Figure 7: Current distribution in antennas at the resonant frequency: dipole and loop.

Figure 8: Frequency adjustment method by periodic frequency sweep.

Figure 9: Frequency adjustment method by iterative frequency improvements.

Table I: Dimensions of the loop antenna for the three different types of media at three different frequencies.

Table II: Dimensions dipole antenna for the three different types of media at three different frequencies.

Table III: Radiation pattern for the dipole antenna for the three different media and for the three different frequencies.

Table IV: Radiation pattern for the loop antenna for the three different media and for the three different frequencies.

Table V: Radiation patterns for the loop antenna near the transition from conductive to dielectric media in freshwater.

Table VI: Radiation patterns for the loop antenna near the transition from conductive to dielectric media in seawater.

Detailed Description

[0043] We have assessed through simulation, in FEKO 3D electromagnetic simulator, the performance of two different antennas embodying the disclosure in terms of resonance frequency, input impedance and radiation pattern. The antennas are a loop antenna with a radius of 16 cm and a 50 cm length dipole antenna. The two antennas are depicted in Fig. 4 and consisted of a simple 3 mm thick cooper wire, covered with an insulator with a thickness of 50 μm and a relative permittivity of 3.

[0044] We performed an extensive analysis of this two antennas in terms of their radiation characteristics in underwater media, in particular an analysis of resonant frequency and input impedance. Fig. 6 and Fig. 7 show the dependency of two major antenna parameters as a function of water conductivity, namely the resonant frequency and the real part of the impedance at that frequency, respectively. From these figures it is clearly seen that both the resonant frequency and the input impedance of both antennas change dramatically with the conductivity of water. From these results we readily conclude that the same physical antenna, without further adaptations or circuits, will not normally be suitable for both fresh and seawater environments, as the resonance frequency is relatively different. Moreover, from Fig. 7 we can also conclude that depending on the conductivity of water, different matching networks must be designed, for an efficiently use of the antennas.

[0045] Fig. 7 shows the current distribution in both antennas at the resonant frequency. In this disclosure it is considered a λ/2 dipole and a large loop with a circumference length being λ.

[0046] In an embodiment, we analyse the near field of both antennas through simulations in FEKO. Simulations for the near field were obtained as far away from the antennas as possible, with the intention of determining the radiation pattern, since it is impossible to measure directly the far field pattern in lossy media.

[0047] The radiation pattern was obtained for three frequencies (600 kHz, 100 MHz, 1 GHz) and for three different media: σ=0S/m, σ= 0.05 S/m and σ = 4 S/m (with ε'=81). The frequencies were chosen in order for all the media to be dielectric at one frequency (f = 1 GHz), an-

other frequency in which only seawater was a conductive medium (f = 100 MHz) and finally a frequency at which both fresh and seawater were conductive (f = 600 kHz), as shown in Fig. 1.

[0048] The dimensions of both antennas were adjusted to make them resonant at the three frequencies, giving them a current distribution equal to Fig. 7. The dimensions are shown in TABLE I and in TABLE II for the loop and dipole, respectively, for the three media considered and for the three frequencies analysed.

[0049] TABLE III and TABLE IV show the radiation patterns for the loop antenna and for the dipole, respectively, with the antennas placed in the same orientation as in Fig. 4. Again we see the influence of the water conductivity on the performance of the antenna. In a dielectric medium the radiation pattern maximums are oriented in the z+ and z- directions, whereas in a conductive medium they are shifted by 90°, in the case of the loop antenna. A change in the radiation pattern can be observed also for the dipole when the medium becomes conductive. Other antenna types, and respective combinations, will have the corresponding radiation behaviours, such that the disclosure is not limited to dipole or loop antennas, these being illustrative embodiments.

[0050] To better understand the change of the radiation pattern, we made an analysis near the frequency of transition between a conductive/dielectric media. In Table V are shown the radiation patterns for the loop antenna in freshwater, close to 11 MHz. In Table VI are shown the radiation patterns for the same antenna in seawater near 888 MHz (according to Figure 1). It is easy to see that the evolution of the radiation pattern is very similar in both cases when the media is transitioning between conductive and dielectric.

[0051] In this disclosure, the performance of two antennas in underwater media was analysed. It was seen that the main radiation parameters, such as the resonant frequency, the input impedance and the radiation pattern, change dramatically with the conductivity of the medium where the antenna is placed. Moreover, the radiation pattern changes with the resonance frequency, that is, in freshwater/seawater the same type of antenna can have different radiation patterns depending if the medium is dielectric or conductive at the antenna's resonant frequency. Therefore, we can take advantage of this fact to achieve the control of the radiation diagram of an antenna placed in a certain type of underwater media, by adjusting the resonant frequency of the antenna with a simple electronic circuit. This can be exploited to improve underwater communications, for example, between a moving AUV and a fixed platform, by continuously adjusting the radiation diagram to the most favourable as the AUV moves.

[0052] The term "comprising" whenever used in this document is intended to indicate the presence of stated features, integers, steps, components, but not to preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

[0053] It is to be appreciated that certain embodiments of the disclosure as described herein may be incorporated as code (e.g., a software algorithm or program) residing in firmware and/or on computer useable medium having control logic for enabling execution on a computer system having a computer processor, such as any of the servers described herein. Such a computer system typically includes memory storage configured to provide output from execution of the code which configures a processor in accordance with the execution. The code can be arranged as firmware or software, and can be organized as a set of modules, including the various modules and algorithms described herein, such as discrete code modules, function calls, procedure calls or objects in an object-oriented programming environment. If implemented using modules, the code can comprise a single module or a plurality of modules that operate in cooperation with one another to configure the machine in which it is executed to perform the associated functions, as described herein.

[0054] The disclosure should not be seen in any way restricted to the embodiments described and a person with ordinary skill in the art will foresee many possibilities to modifications thereof. The above described embodiments are combinable. The following claims further set out particular embodiments of the disclosure.

[0055] The following references, should be considered herewith incorporated in their entirety:

[1] X. Che, I. Wells, G. Dickers, P. Kear, and X. Gong, "Re-evaluation of RF electromagnetic communication in underwater sensor networks," IEEE Communications Magazine, vol. 48, no. 12, pp. 143-151, 2010.

[2] F. Teixeira, P. Freitas, L. Pessoa, R. Campos, and M. Ricardo, "Evaluation of IEEE 802.11 Underwater Networks Operating at 700 MHz, 2.4 GHz and 5 GHz," in Proceedings of the 9th ACM International Conference on Underwater Networks & Systems, WUWNet'14, 2014.

[3] F. Teixeira, J. Santos, L. Pessoa, M. Pereira, R. Campos, and M. Ricardo, "Evaluation of Underwater IEEE 802.11 Networks at VHF and UHF Frequency Bands using Software Defined Radios," in Proceedings of the International Conference on Underwater Networks & Systems, WUWNET'15, 2015.

[4] S. Jiang and S. Georgakopoulos, "Electromagnetic wave propagation into fresh water," Journal of Electromagnetic Analysis and Applications, vol. 3, no. 07, p. 261, 2011.

Claims

1. Method of operating under water an antenna device comprising a frequency-tunable circuit, said method comprising:

tuning said circuit between a first frequency and a second frequency for obtaining a variable directional radiation pattern by the antenna device.

2. Method according to the previous claim, for communicating with another antenna device, comprising tuning said circuit to select a directional radiation pattern of the antenna device for improving the radio signal coupling between the antenna devices, in particular for maximizing the radio signal coupling between the two antenna devices.

3. Method, according to any of the previous claims, wherein the directional radiation pattern of the antenna device for one of the two frequencies is directional and the directional pattern of the antenna device for the other of the two frequencies is omnidirectional.

4. Method, according to any of the previous claims, wherein said first frequency and a second frequency are predetermined according to the saltwater-freshwater content of the water such that the directional radiation pattern of the antenna device for one of the two frequencies is directional and the directional pattern of the antenna device for the other of the two frequencies is omnidirectional.

5. Method, according to any of the previous claims, wherein the directional radiation pattern of the antenna device has a 90° shift between the first frequency and the second frequency.

6. Method according to any of the claims 1-5, comprising tuning said circuit in discrete steps between the first frequency and the second frequency, such that the directional pattern of the antenna device is tuned in discrete steps between the first frequency and the second frequency.

7. Method of operating an antenna device submerged in fresh water, according to any of the previous claims, wherein the first frequency is lower than 11.1 MHz and a second frequency is higher than 11.1 MHz, such that the directional radiation pattern of the antenna device for first frequency is directional and the directional radiation pattern of the antenna device for the second frequency is omnidirectional; in particular, the first frequency is 834 kHz or 1.68 MHz, and the second frequency is 19 MHz or 30 MHz.

8. Method of operating an antenna device submerged in salt water, according to any of the claims 1-6, wherein the first frequency is lower than 888 Mhz and the second frequency is higher than 888 MHz, such that the directional radiation pattern of the antenna device for first frequency is directional and the directional radiation pattern of the antenna device for the second frequency is omnidirectional; in particular, the first frequency is 286 MHz or 453 MHz, and the second frequency is 1 GHz or 2.16 GHz.

9. Method according to any of the previous claims, wherein the first frequency is lower than 11.1 MHz and the second frequency is higher than 888 MHz, such that the directional radiation pattern of the antenna device for first frequency is directional and the directional radiation pattern for second frequency is omnidirectional, independently of the antenna device being submerged in fresh water or salt water.

10. Method according to any of the previous claims, wherein the antenna device is a dipole antenna or a loop antenna, in particular wherein the antenna device is used in an IEEE 802.11 protocol network.

11. Antenna device for underwater radio communications comprising a frequency-tunable circuit, said circuit being tunable between a first frequency and a second frequency for obtaining a variable directional radiation pattern by the antenna device.

12. Antenna device according to the previous claim, arranged to periodically tune said circuit to select a directional radiation pattern of the antenna device for improving the radio signal coupling with another antenna device, in particular for maximizing the radio signal coupling with another antenna device.

13. Antenna device, according to claim 11 or 12, wherein the directional radiation pattern of the antenna device for one of the two frequencies is directional and the directional pattern for the other of the two frequencies is omnidirectional when the device is submerged in freshwater or saltwater.

14. Antenna device, according to any of the claims 11-13, wherein the directional radiation pattern of the antenna device has a 90° shift between the first frequency and the second frequency when the device is submerged in freshwater or saltwater.

15. Antenna device according to any of the claims 11-14, wherein the antenna device is a dipole antenna or a loop antenna, in particular the antenna device is an IEEE 802.11 protocol network antenna.

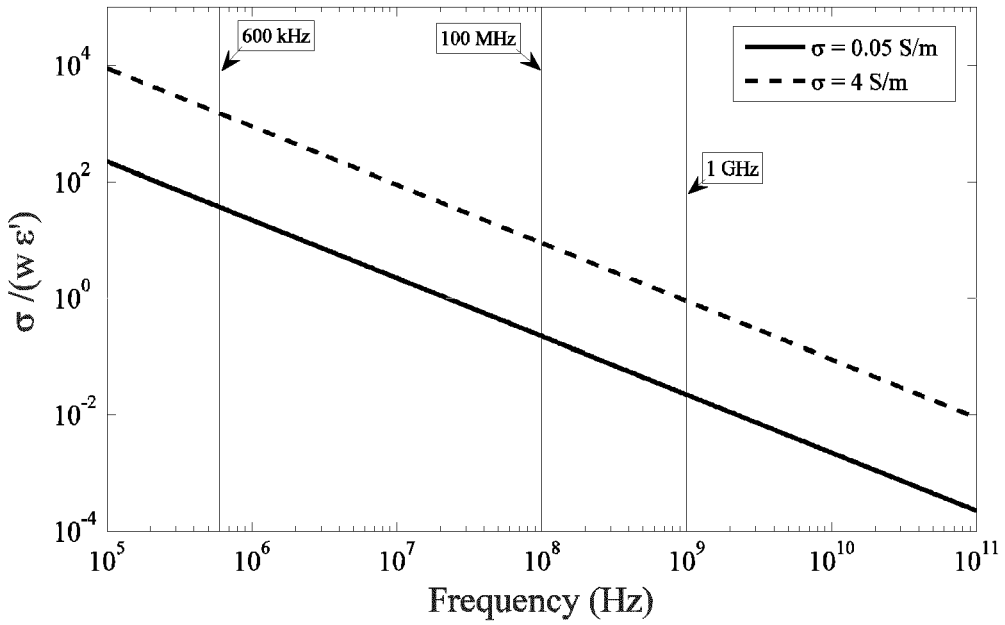

600 kHz
100 MHz
1 GHz
σ = 0.05 S/m
σ = 4 S/m
σ /(w ε')
Frequency (Hz)

Fig. 1

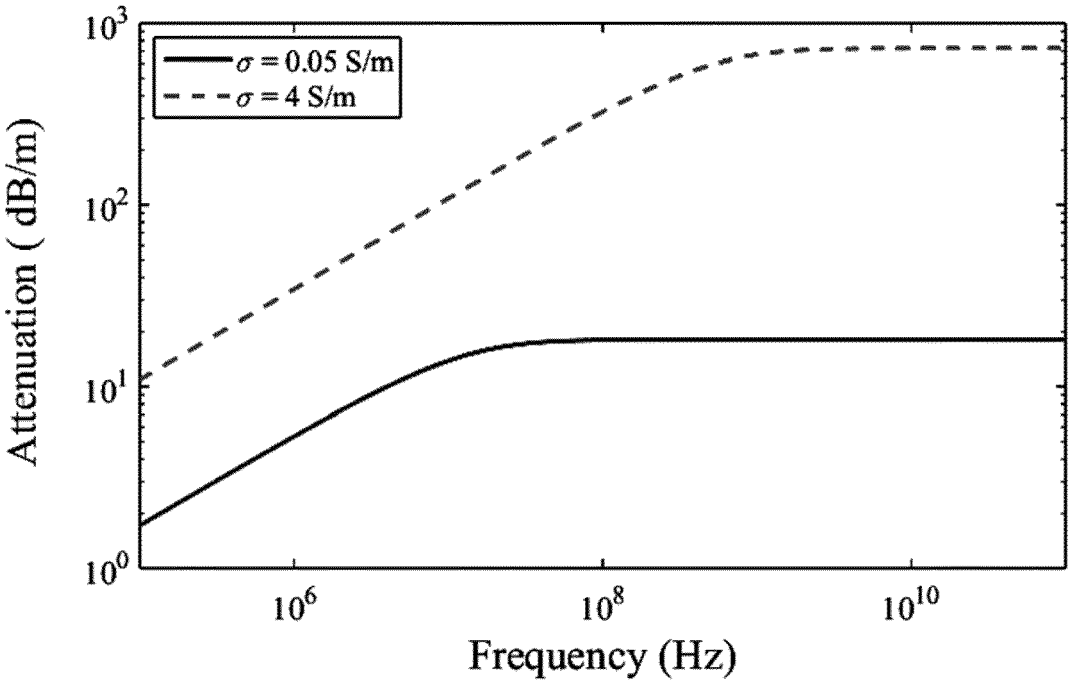

σ = 0.05 S/m
σ = 4 S/m
Attenuation (dB/m)
Frequency (Hz)

Fig. 2

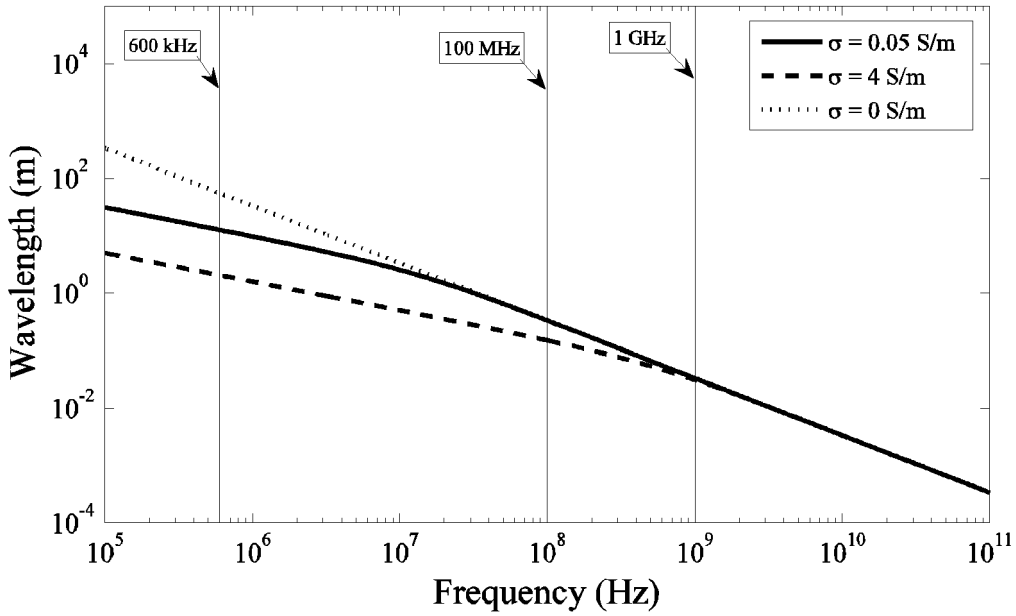

600 kHz
100 MHz
1 GHz
σ = 0.05 S/m
σ = 4 S/m
σ = 0 S/m
Wavelength (m)
Frequency (Hz)
10^4
10^2
10^0
10^-2
10^-4
10^5
10^6
10^7
10^8
10^9
10^10
10^11

Fig. 3

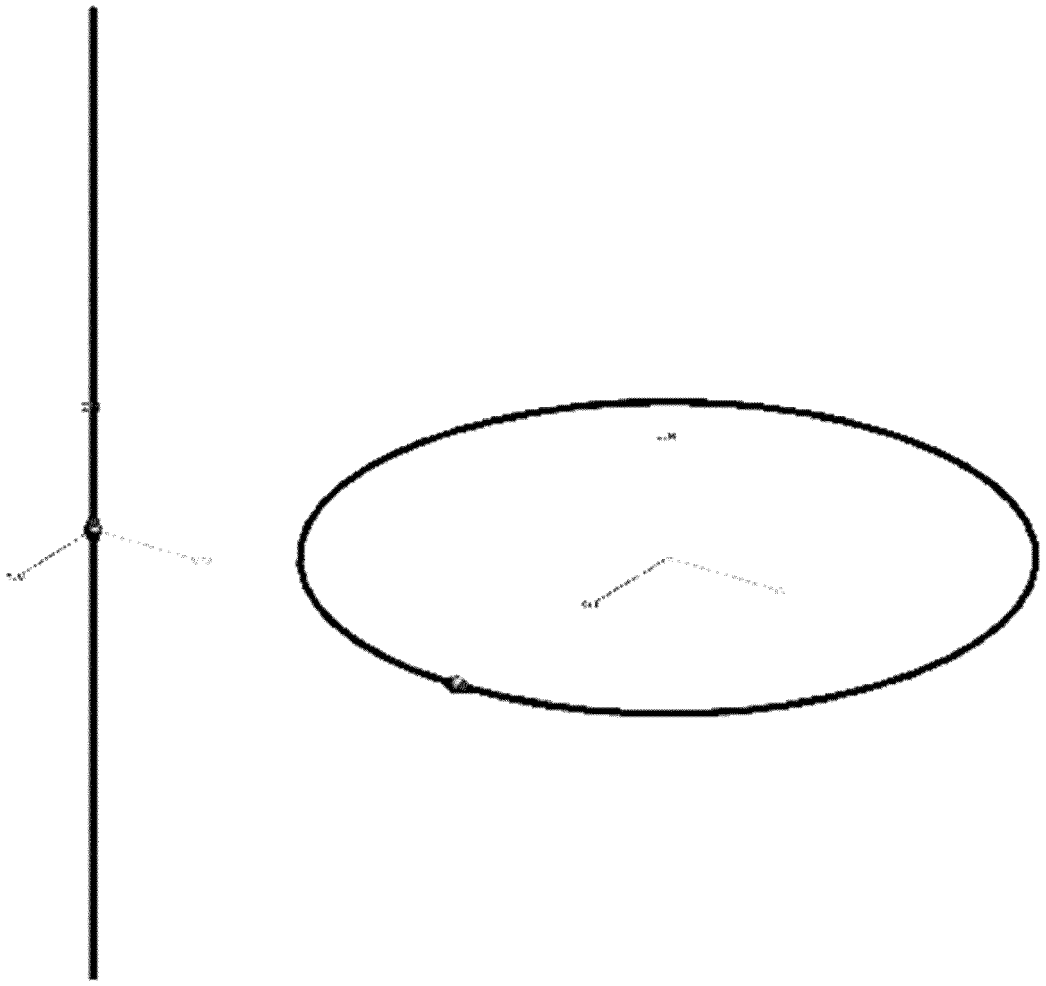


Fig. 4

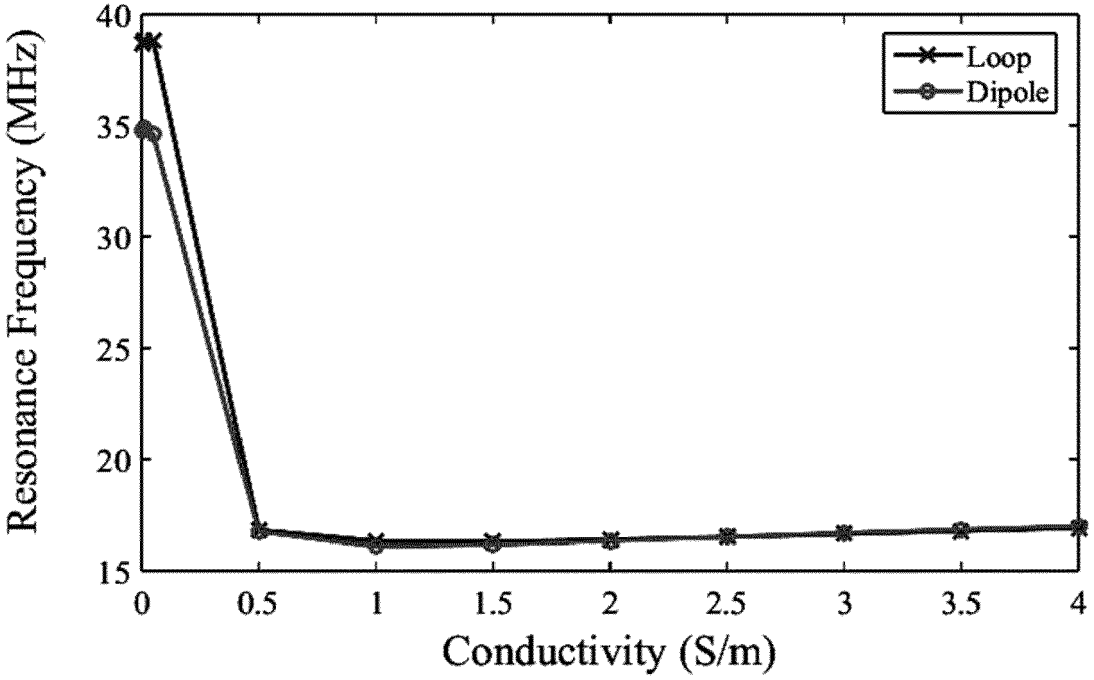

Resonance Frequency (MHz)
40
35
30
25
20
15
0
0.5
1
1.5
2
2.5
3
3.5
4
Conductivity (S/m)
Loop
Dipole

Fig. 5

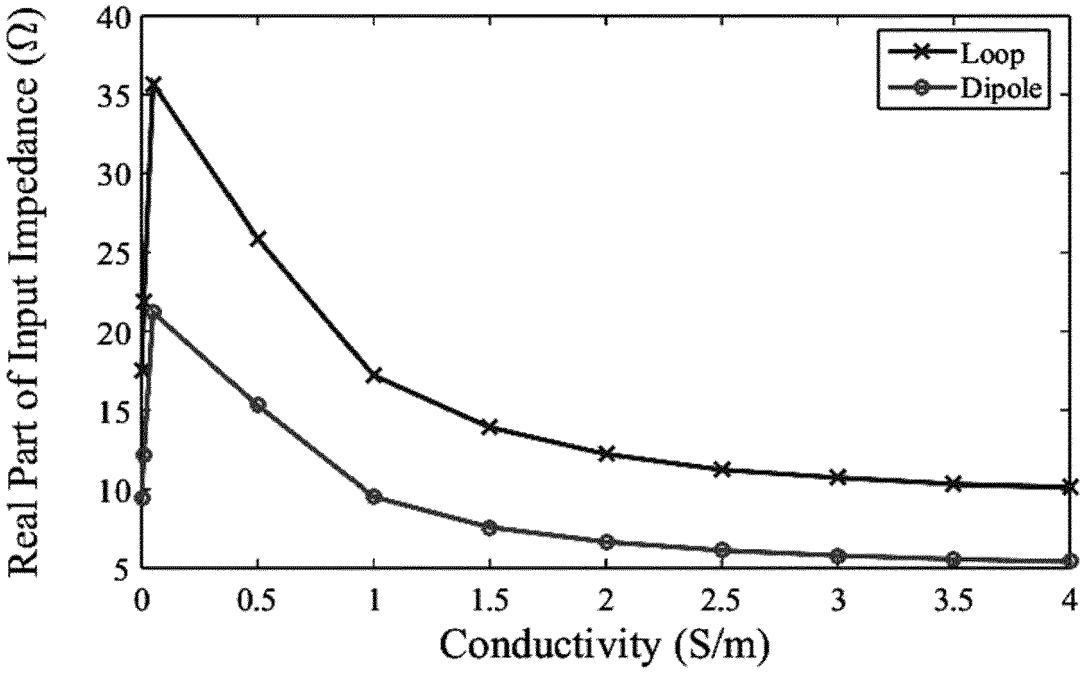

Real Part of Input Impedance (Ω)
40
35
30
25
20
15
10
5
0
0.5
1
1.5
2
2.5
3
3.5
4
Conductivity (S/m)
Loop
Dipole

Fig. 6

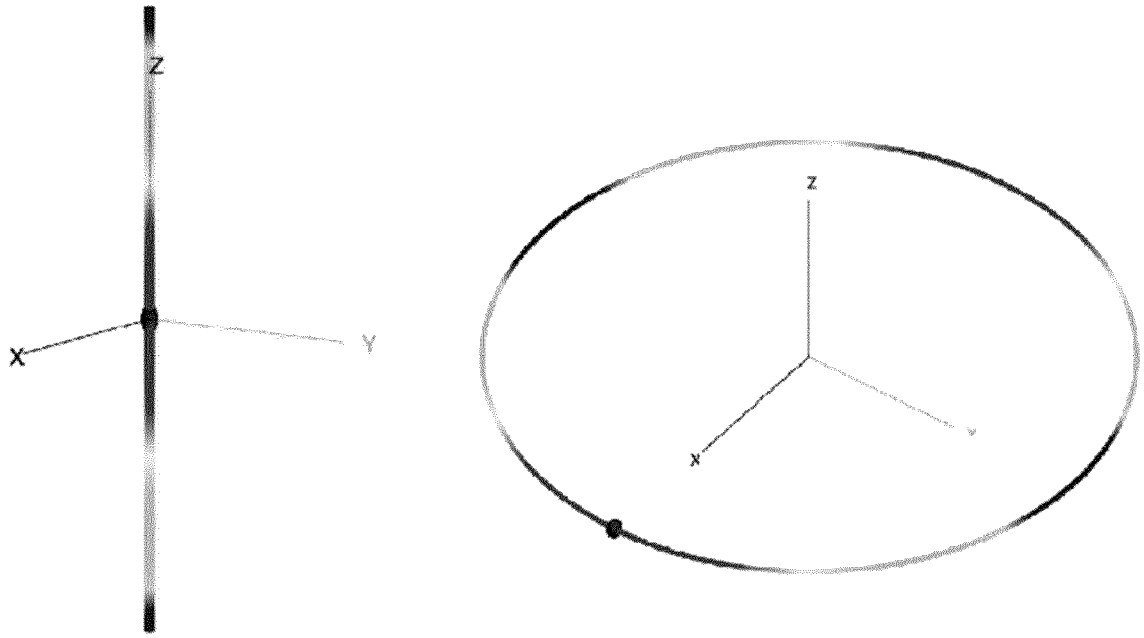


Fig. 7

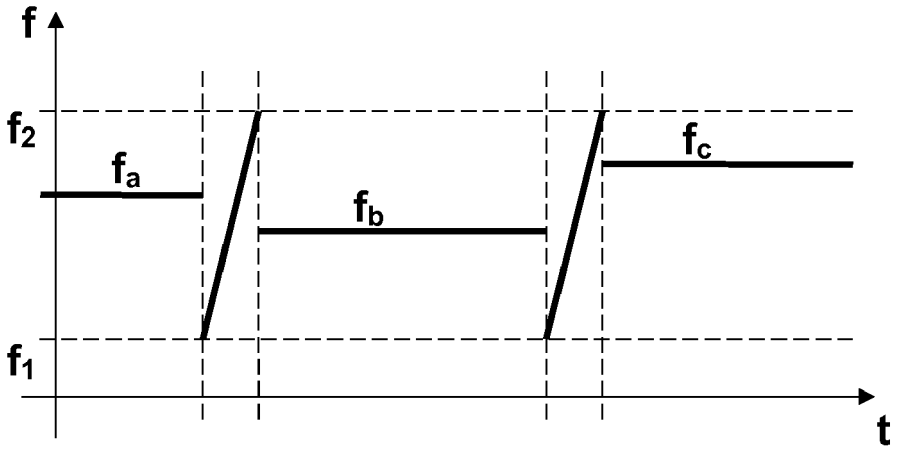


Fig. 8

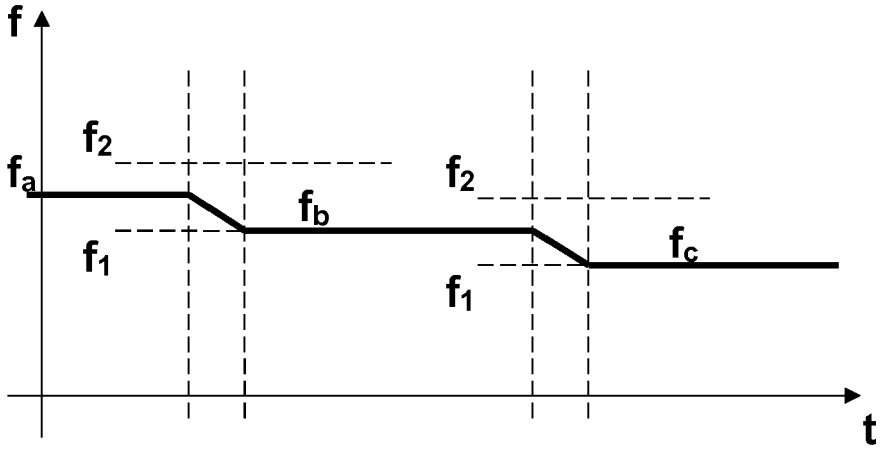


Fig. 9

TABLE I

Conductivity (S/m)	Loop Radius (m)		
	f = 600 kHz	f = 100 MHz	f = 1 GHz
0	9.50	0.070	0.008
0.05		0.070	0.008
4	3.65	0.046	0.008

TABLE II

Conductivity (S/m)	Dipole Length (m)		
	f = 600 kHz	f = 100 MHz	f = 1 GHz
0	28.40	0.176	0.0205
0.05	10.14	0.178	0.0205
4	11.50	0.104	0.0196

TABLE III










σ	f = 600 kHz	f = 100 MHz	f = 1 GHz
0			
0.05			
4			

TABLE IV










σ	f = 600 kHz	f = 100 MHz	f = 1 GHz
0			
0.05			
4			

TABLE V











f	Radiation Pattern
834 kHz	
1.68 MHz	
12.6 MHz	
19 MHz	
30 MHz	

TABLE VI

f	Radiation Pattern
286 MHz	
453 MHz	
648 MHz	
1 GHz	
2.16 GHz	

Europäisches Patentamt
European Patent Office
Office européen des brevets

EUROPEAN SEARCH REPORT

Application Number
EP 16 19 8054

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2016/012738 A1 (TOSHIBA KK [JP]; TOSHIBA RES EUROP LTD [GB]) 28 January 2016 (2016-01-28)	1-8, 11-14	INV. H01Q1/04 H01Q3/22
Y	* page 4, line 28 - page 5, line 23;	10,15	H01Q7/00
A	figure 1 * * page 7, line 22 - page 8, line 2; figure 4a/b *	9	H01Q9/20

Y	Constantine A. Balanis: "Chapter 4 - Linear Wire Antennas and Chapter 5 - Loop Antennas" In: "ANTENNA THEORY: ANALYSIS AND DESIGN", 1 January 2005 (2005-01-01), JOHN WILEY AND SONS, HOBOKEN, NEW JERSEY, XP055369936, ISBN: 978-0-471-66782-7 pages 151-281,	10,15	
A	* equation (4-64); page 173; figure 4.7 * * equation (5-57); page 249; figure 5.8 *	1-9, 11-14	
	-----		TECHNICAL FIELDS SEARCHED (IPC)
A	INACIO S I ET AL: "Antenna design for underwater radio communications", OCEANS 2016 - SHANGHAI, IEEE, 10 April 2016 (2016-04-10), pages 1-6, XP032909526, DOI: 10.1109/OCEANSAP.2016.7485705 [retrieved on 2016-06-03] * section IV.; page 2 - page 4; figures 3, 5, 8 *	10,15	H01Q

	-/--		

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
The Hague	8 May 2017	Blech, Marcel

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons

& : member of the same patent family, corresponding document

EPO FORM 1503 03.82 (P04C01)

Europäisches Patentamt
European Patent Office
Office européen des brevets

EUROPEAN SEARCH REPORT

Application Number
EP 16 19 8054

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	FILIPE TEIXEIRA ET AL: "Evaluation of IEEE 802.11 Underwater Networks Operating at 700 MHz, 2.4 GHz and 5 GHz", PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON UNDERWATER NETWORKS %SYSTEMS, WUWNET '14, 12 November 2014 (2014-11-12), pages 1-5, XP055369689, New York, New York, USA DOI: 10.1145/2671490.2674571 ISBN: 978-1-4503-3277-4 * section 5.; page 2 - page 3 * -----	10,15	

TECHNICAL FIELDS SEARCHED (IPC)

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
The Hague	8 May 2017	Blech, Marcel

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons

& : member of the same patent family, corresponding document

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO. EP 16 19 8054

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-05-2017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2016012738 A1	28-01-2016	US 2017018849 A1	19-01-2017
		US 2017125907 A1	04-05-2017
		WO 2016012738 A1	28-01-2016
		WO 2016012791 A1	28-01-2016

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Non-patent literature cited in the description

- **X. CHE ; I. WELLS ; G. DICKERS ; P. KEAR ; X. GONG.** Re-evaluation of RF electromagnetic communication in underwater sensor networks. *IEEE Communications Magazine,* 2010, vol. 48 (12), 143-151 **[0055]**
- **F. TEIXEIRA ; P. FREITAS ; L. PESSOA ; R. CAMPOS ; M. RICARDO.** Evaluation of IEEE 802.11 Underwater Networks Operating at 700 MHz, 2.4 GHz and 5 GHz. *Proceedings of the 9th ACM International Conference on Underwater Networks & Systems, WUWNet'14,* 2014 **[0055]**
- **F. TEIXEIRA ; J. SANTOS ; L. PESSOA ; M. PEREIRA ; R. CAMPOS ; M. RICARDO.** Evaluation of Underwater IEEE 802.11 Networks at VHF and UHF Frequency Bands using Software Defined Radios. *Proceedings of the International Conference on Underwater Networks & Systems, WUWNET'15,* 2015 **[0055]**
- **S. JIANG ; S. GEORGAKOPOULOS.** Electromagnetic wave propagation into fresh water. *Journal of Electromagnetic Analysis and Applications,* 2011, vol. 3 (07), 261 **[0055]**