



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
30.01.2019 Bulletin 2019/05

(51) Int Cl.:
H04L 1/06 (2006.01)

(21) Application number: **16896061.5**

(86) International application number:
PCT/CN2016/078298

(22) Date of filing: **01.04.2016**

(87) International publication number:
WO 2017/166281 (05.10.2017 Gazette 2017/40)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Huawei Technologies Co., Ltd.**
Longgang District
Shenzhen, Guangdong 518129 (CN)

(72) Inventors:
• **ZHANG, Ruiqi**
Shenzhen
Guangdong 518129 (CN)
• **LIU, Jianqin**
Shenzhen
Guangdong 518129 (CN)

(74) Representative: **Kreuz, Georg Maria**
Huawei Technologies Duesseldorf GmbH
Riesstraße 25
80992 München (DE)

(54) **FEEDBACK METHOD AND APPARATUS FOR PRECODING MATRIX INDICATION**

(57) A precoding matrix indicator feedback method, a precoding matrix indicator receiving method, and a terminal device are provided. The feedback method includes: determining a rank indication (101), determining a precoding matrix in a precoding matrix set corresponding to the rank indication (102), determining a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator that are used to indicate the precoding matrix (103), and sending, by UE, a rank, the first precoding matrix indicator, the sec-

ond precoding matrix indicator, and the third precoding matrix indicator to a base station (104). A quantity of to-be-selected vectors is greatly reduced by using first-stage feedback and second-stage feedback, thereby reducing calculation complexity of third-stage feedback, and reducing a quantity of bits in the third-stage feedback. A quantity of bits for feeding back a precoding matrix indicator is reduced while a system performance requirement is satisfied, thereby balancing system performance and feedback overheads of a terminal device.

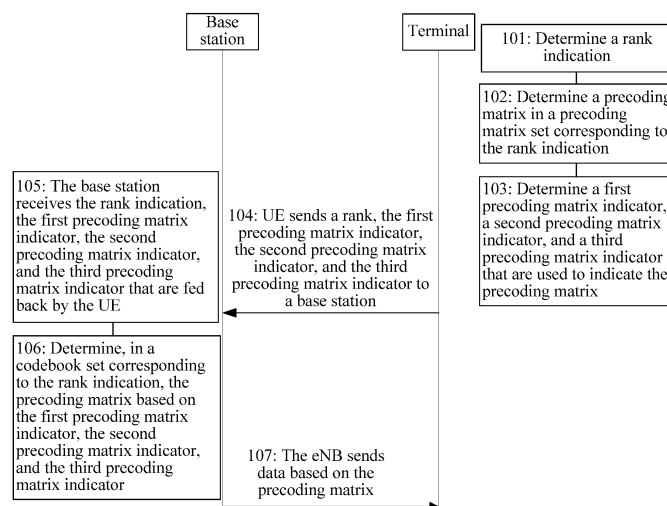


FIG. 3

Description**TECHNICAL FIELD**

5 [0001] This application relates to the mobile communications field, and in particular, to a multiple-antenna technology in a wireless communications system.

BACKGROUND

10 [0002] Multiple-input and multiple-output (multiple input and Multiple Output, MIMO) technologies are widely applied in a Long Term Evolution (long term evolution, LTE) system. A transmitting end may use a precoding (precoding) technology to process data, so as to improve signal transmission quality or a signal transmission rate. The transmitting end may be a base station or a terminal device.

15 [0003] In the LTE system, a base station obtains a precoding matrix usually in a manner in which a terminal device feeds back a precoding matrix indicator (precoding matrix indicator, PMI). A set of used precoding matrices is usually referred to as a codebook or a codebook set. Each precoding matrix in the codebook or the codebook set may also be referred to as a codeword.

20 [0004] The terminal device quantizes channel state information (channel state information, CSI) and feeds back the CSI to the base station. The base station determines a precoding matrix based on the CSI. CSI information fed back in an existing LTE system includes a rank indication (rank indication, RI), a PMI, and the like. The RI is used to indicate a quantity of data streams for spatial multiplexing. The PMI is used to indicate a precoding matrix.

25 [0005] An LTE standard supports 8 antenna ports and 16 antenna ports. Currently, a dual-stage codebook feedback mechanism is defined to reduce a quantity of bits of a PMI fed back by a terminal user, so as to reduce load. First-stage feedback indicates a vector group, including four vectors for subsequent processing. One of the four vectors is selected for second-stage feedback, and the selected vector may be used for data precoding. The first-stage feedback has a long period/a wide band characteristics, and the second-stage feedback has a short period/a sub-band characteristics.

[0006] FIG. 1 is a schematic diagram of a two-dimensional antenna array. In FIG. 1, an antenna port has 45 degrees polarization and -45 degrees polarization. For a polarization direction, there are N_1 antenna ports in a horizontal direction, and there are N_2 antenna ports in a vertical direction.

30 [0007] As a quantity of antenna ports increases, a beam width obtained after the base station performs precoding becomes increasingly narrow. To better cover an entire system bandwidth, the vector group in the first-stage feedback needs to include more vectors. For example, for 32 antenna ports, 16 antenna ports are included in each polarization direction. To enable a vector group in first-stage feedback in a system with 32 antenna ports and a vector group in first-stage feedback in a system with 16 antenna ports to have same coverage space, the vector group in the first-stage feedback in the system with the 32 antenna ports needs to include 16 column vectors, as shown in FIG. 2a and FIG. 2b.

35 [0008] In a case of the 32 antenna ports, if the current codebook feedback mechanism is still used, to be specific, the vector group in the first-stage feedback includes four vectors, a coverage bandwidth is inevitably affected, leading to performance degradation of a codebook.

40 [0009] If a quantity of vectors in the first-stage feedback is increased to 16, the 16 vectors need to be used for selection for the second-stage feedback. This increases a quantity of bits in the second-stage feedback, and consequently, increases system overheads of the terminal device.

SUMMARY

45 [0010] This application describes a precoding matrix indicator feedback method and an apparatus, so as to reduce system overheads of a terminal device as many as possible while satisfying a system performance requirement as much as possible.

[0011] According to a first aspect, a precoding matrix determining method is provided. The method includes:

50 determining, by a terminal device, a rank indication, and determining a precoding matrix W in a precoding matrix set corresponding to the rank indication, where W satisfies $W=W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R , W_1 is a matrix of N_t rows and $2M$ columns, W_2 is a matrix of $2M$ rows and $2K$ columns, W_3 is a matrix of $2K$ rows and R columns, K is less than M , N_t , R , M , and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the $2M$ columns in W_1 include every column in $W_1 \times W_2$; where

the precoding matrix W corresponds to a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator, the first precoding matrix indicator corresponds to the first precoding matrix W_1 ,

the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 ; and sending, by the terminal device, the rank indication, the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator.

[0012] A set of columns in W_1 include every column in $W_1 \times W_2$. This represents that $2K$ column vectors are selected from the columns in W_1 as a result of $W_1 \times W_2$. In this way, a quantity of vectors in a set of to-be-selected vectors is reduced subsequently, thereby reducing calculation complexity of subsequent processing, and reducing a quantity of bits for feeding back a PMI for selection from candidate vectors.

[0013] According to a second aspect, a precoding matrix indicator feedback method is provided. The method includes:

receiving, by a base station, a rank indication, a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator that are sent by a terminal device; and

determining, by the base station in a precoding matrix set corresponding to the rank indication, a precoding matrix W based on the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator, where

W satisfies $W = W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R , W_1 is a matrix of N_t rows and $2M$ columns, W_2 is a matrix of $2M$ rows and $2K$ columns, W_3 is a matrix of $2K$ rows and R columns, K is less than M , N_t , R , M , and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the $2M$ columns in W_1 include every column in $W_1 \times W_2$; and

the first precoding matrix indicator corresponds to the first precoding matrix W_1 , the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 .

[0014] According to a third aspect, an embodiment of the present invention provides a terminal device. The terminal device has a function of implementing behaviors of the terminal device in the foregoing method designs. The function may be implemented by hardware, or may be implemented by hardware executing corresponding software. The hardware or the software includes one or more modules corresponding to the foregoing functions. The modules may be software and/or hardware.

[0015] The terminal device includes:

a processing unit, configured to: determine a rank indication, and determine a precoding matrix W in a precoding matrix set corresponding to the rank indication, where W satisfies $W = W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R , W_1 is a matrix of N_t rows and $2M$ columns, W_2 is a matrix of $2M$ rows and $2K$ columns, W_3 is a matrix of $2K$ rows and R columns, K is less than M , N_t , R , M , and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the $2M$ columns in W_1 include every column in $W_1 \times W_2$; where

the precoding matrix W corresponds to a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator, the first precoding matrix indicator corresponds to the first precoding matrix W_1 , the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 ; and

a sending unit, configured to send the rank indication, the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator.

[0016] Optionally, the terminal device further includes a receiving unit, configured to receive a configuration parameter sent by a base station.

[0017] According to a fourth aspect, an embodiment of the present invention provides a base station. The base station has a function of implementing behaviors of the base station in the foregoing method designs. The function may be implemented by hardware, or may be implemented by hardware executing corresponding software. The hardware or the software includes one or more modules corresponding to the foregoing functions.

[0018] The base station includes:

a receiving unit, configured to receive a rank indication, a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator that are sent by a terminal device; and

a processing unit, configured to determine, in a precoding matrix set corresponding to the rank indication, a precoding matrix W based on the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding

matrix indicator, where

W satisfies $W=W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R, W_1 is a matrix of N_t rows and 2M columns, W_2 is a matrix of 2M rows and 2K columns, W_3 is a matrix of 2K rows and R columns, K is less than M, N_t , R, M, and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the 2M columns in W_1 include every column in $W_1 \times W_2$; and the first precoding matrix indicator corresponds to the first precoding matrix W_1 , the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 .

[0019] Optionally, the base station further includes a sending unit, configured to send a configuration parameter.

[0020] In the first to the fourth aspects, further, there may be the following optional designs:

[0021] Optionally, each precoding matrix W in the precoding matrix set corresponding to the rank indication satisfies $W=W_1 \times W_2 \times W_3$.

[0022] Optionally, W_2 satisfies $W_2 = \begin{bmatrix} X_2 & \mathbf{0} \\ \mathbf{0} & X_2 \end{bmatrix}$, X_2 is a matrix of M rows and K columns, any column in X_2 is

represented as e_p , e_p is an $M \times 1$ column vector, a p^{th} element in e_p is 1, remaining elements are 0, and p is an integer from 1 to M.

[0023] Optionally, W_1 satisfies $W_1 = \begin{bmatrix} X_1 & \mathbf{0} \\ \mathbf{0} & X_1 \end{bmatrix}$, X_1 is a matrix of $N_t/2$ rows and M columns, $X_1 = [v_0 \cdots v_{M-1}]$, v_o

is a column vector including $N_t/2$ elements, and o is an integer from 0 to M-1; and

[0024] Any column in W_3 is represented as $\begin{bmatrix} e_l \\ \phi_n e_l \end{bmatrix}$, ϕ_n is a complex number, e_l is a $K \times 1$ column vector, an l^{th} element in e_l is 1, remaining elements are 0, and l is an integer from 1 to K.

[0025] Optionally, a frequency domain resource corresponding to the first precoding matrix indicator is a downlink system bandwidth of the terminal device. The downlink system bandwidth includes A first sub-bands and B second sub-bands, A and B are positive integers greater than 1, and A is less than or equal to B.

[0026] A frequency domain resource corresponding to the second precoding matrix indicator is one of the A first sub-bands, and a frequency domain resource corresponding to the third precoding matrix indicator is one of the B second sub-bands.

[0027] A quantity of column vectors in a vector group corresponding to the first sub-band is less than a quantity of vectors in a vector group corresponding to the system bandwidth. Therefore, a quantity of vectors that need to be searched during vector selection on the second sub-band is reduced, and a quantity of bits required for feeding back an indicator of the selected vector on the second sub-band can be reduced.

[0028] Optionally, a frequency domain resource of at least one of the A first sub-bands is the same as frequency domain resources of at least two of the B second sub-bands.

[0029] Optionally, frequency domain resources corresponding to the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator are downlink system bandwidths of the terminal device.

[0030] Optionally, a transmission period of the first precoding matrix indicator is P_1 , a transmission period of the second precoding matrix indicator is P_2 , a transmission period of the third precoding matrix indicator is P_3 , P_1 is greater than or equal to P_2 , and P_2 is greater than or equal to P_3 .

[0031] Optionally, the transmission periods P_1 , P_2 , and P_3 are sent by the base station to the terminal device through Radio Resource Control (Radio Resource Control, RRC) signaling.

[0032] Different transmission periods are configured for different precoding matrix indicators, and are used to correspond to different features of a channel. Some precoding matrix indicators correspond to a part that is of the channel and that varies relatively fast over time, and some precoding matrix indicators correspond to a part that is of the channel and that varies relatively slowly over time. For example, the first precoding matrix indicator corresponds to a part that is of a channel and that varies most slowly over time, the second precoding matrix indicator corresponds to a part that is of the channel and that varies relatively slowly over time, and the third precoding matrix indicator corresponds to a part that is of the channel and that varies relatively fast over time. P_1 , P_2 , and P_3 are configured based on channel features, so as to reduce a quantity of bits for feeding back a PMI.

[0033] Optionally, T column vectors in 2K column vectors in W_2 are indicated by the first precoding matrix indicator, T is an integer greater than or equal to 2, and T is less than K; and

2K-T column vectors in W_2 except the T column vectors are indicated by the T column vectors and the second precoding

matrix indicator. In this way, a quantity of bits required for feeding back the second precoding matrix indicator is reduced.

[0034] Optionally, $2K$ column vectors in W_2 are indicated by a configuration parameter delivered by a base station and the second precoding matrix indicator. In this way, a quantity of bits required for feeding back the second precoding matrix indicator is reduced.

[0035] Optionally, the configuration parameter is used to indicate a selectable column vector set of W_1 , the selectable column vector set includes J column vectors, and J satisfies $2K < J < 2M$.

[0036] Optionally, the configuration parameter is a configuration parameter sent by the base station to the terminal device through RRC signaling.

[0037] Optionally, X_1 in W_1 satisfies $X_1 = \begin{bmatrix} v_0^1 & \cdots & v_{M_1-1}^1 \end{bmatrix} \otimes \begin{bmatrix} v_0^2 & \cdots & v_{M_2-1}^2 \end{bmatrix}$, where v_m^1 is a column vector

including N_1 elements, v_n^2 is a column vector including N_2 elements, $N_1 \times N_2 = N_t/2$, $M_1 \times M_2 = M$, and $\otimes$ represents a Kronecker product.

[0038] Optionally, X_2 in W_2 satisfies $X_2 = X_3 \otimes X_4$, where X_3 is a matrix of M_1 rows and K_1 columns, X_4 is a matrix of M_2 rows and K_2 columns, and $\otimes$ represents a Kronecker product.

[0039] Any column in X_3 is represented as e_i , e_i is an $M_1 \times 1$ column vector, an i^{th} element in e_i is 1, remaining elements are 0, and a value of i is an integer from 1 to M_1 .

[0040] any column in X_4 is represented as e_j , e_j is an $M_2 \times 1$ column vector, a j^{th} element in e_j is 1, remaining elements are 0, and a value of j is an integer from 1 to M_2 .

[0041] $K_1 \times K_2 = K$, and $M_1 \times M_2 = M$.

[0042] In the third and the fourth aspects, the sending unit may be a transmitter, the receiving unit may be a receiver, and the processing unit may be a processor.

[0043] An embodiment of the present invention further provides a system. The system includes the terminal device and the base station in the foregoing embodiments.

[0044] In this application, feedback (or sending) of the first precoding matrix indicator may be considered as first-stage feedback, feedback of the second precoding matrix indicator may be considered as second-stage feedback, and feedback of the third precoding matrix indicator may be considered as third-stage feedback.

[0045] Compared with the prior art, in the solutions provided in this application, feedback of a precoding matrix indicator is classified into three stages. The second-stage feedback is used to indicate some vectors in a vector group indicated by the first-stage feedback. Due to a reduction in a quantity of to-be-selected vectors, system overheads of calculating the third-stage feedback by the terminal are reduced, and a quantity of bits required for the third-stage feedback is reduced, thereby better balancing system performance and feedback overheads of the terminal device.

BRIEF DESCRIPTION OF DRAWINGS

[0046] To describe the technical solutions in the embodiments of the present invention or in the prior art more clearly, the following briefly describes the accompanying drawings required for describing the embodiments or the prior art. Apparently, the accompanying drawings in the following description merely show some embodiments of the present invention, and a person of ordinary skill in the art can derive other implementations from these accompanying drawings without creative efforts. All these embodiments or implementations shall fall within the protection scope of the present invention.

FIG. 1 is a schematic diagram of a two-dimensional antenna array;

FIG. 2a is a schematic diagram of coverage space of a beam group in a case of 8 antenna ports;

FIG. 2b is a schematic diagram of coverage space of a beam group in a case of 32 antenna ports;

FIG. 3 is a schematic flowchart of a precoding matrix indicator feedback method according to an embodiment of the present invention;

FIG. 4 is a schematic diagram of a correspondence between a multipath and a vector group;

FIG. 5 is a schematic diagram of a first sub-band and a second sub-band;

FIG. 6 is a schematic block diagram of a terminal device according to an embodiment of the present invention;

FIG. 7 is a schematic block diagram of a base station according to an embodiment of the present invention;

FIG. 8 is another schematic block diagram of a terminal device according to another embodiment of the present invention; and

FIG. 9 is another schematic block diagram of a base station according to another embodiment of the present invention.

DESCRIPTION OF EMBODIMENTS

[0047] The technical solutions according to embodiments of the present invention are clearly described in the following with reference to the accompanying drawings. Apparently, the described embodiments are merely some but not all of the embodiments of the present invention. All other embodiments obtained by a person of ordinary skill in the art based on the embodiments of the present invention without creative efforts shall fall within the protection scope of the present invention.

[0048] Network architectures and business scenarios described in the embodiments of the present invention aim to more clearly describe the technical solutions in the embodiments of the present invention, but are not intended to limit the technical solutions provided in the embodiments of the present invention. A person of ordinary skill in the art may know that as the network architectures evolve and a new business scenario emerges, the technical solutions provided in the embodiments of the present invention further apply to a similar technical problem.

[0049] It should be understood that the technical solutions in the embodiments of the present invention may be applied to various communications systems, for example, a Long Term Evolution (long term evolution, LTE) system, an LTE frequency division duplex (frequency division duplex, FDD) system, and an LTE time division duplex (Time Division Duplex, "TDD" for short) communications system. The technical solutions may also be applied to communication such as device to device (device to device, D2D) communication.

[0050] It should also be understood that in the embodiments of the present invention, the terminal device (terminal equipment) may be referred to as a terminal (terminal), or may be user equipment (user equipment, UE), a mobile station (mobile station, MS), a mobile terminal (mobile terminal), or the like. The terminal device may communicate with one or more core networks by using a radio access network (Radio Access Network, RAN). For example, the terminal device may be a mobile phone (or referred to as a "cellular" phone) or a computer with a mobile terminal. For example, the terminal device may also be a portable, pocket-sized, handheld, computer built-in, or in-vehicle mobile apparatus, which exchanges voice and/or data with the radio access network.

[0051] In the embodiments of the present invention, the base station may be an evolved base station (evolved node B, "eNB or e-NodeB" for short) in LTE, or may be another base station, or an access network device such as a relay (relay). For the D2D communication, the base station may also be a device in the D2D communication. This is not limited in the present invention. For convenience of description, the following embodiments are described by using the eNB as an example.

[0052] FIG. 3 is a schematic flowchart of a precoding matrix determining method according to an embodiment of the present invention. As shown in FIG. 3, the method includes the following steps.

[0053] Step 101: A terminal device determines a rank indication.

[0054] In step 101, one rank value corresponds to one rank indication. The terminal device sends the rank indication to a base station, to indicate a quantity of downlink data streams that the terminal device expects to use for spatial multiplexing. For example, the rank value ranges from 1 to 8, and the rank indication is represented by three bits. When the rank indication is 000, it represents that a rank is 1, when the rank indication is 001, it represents that a rank is 2, and by analog. In conclusion, when a value is taken for a rank, there is a value of a rank indication corresponding to the rank.

[0055] Optionally, the terminal device may determine, based on information such as a CSI and the like, a quantity of data streams for spatial multiplexing, namely, a rank. Optionally, the base station sends a cell-specific reference signal (cell-specific reference signal, CRS) or a channel state information reference signal (channel state information reference signal, CSI-RS) to the terminal device. The terminal device obtains downlink channel estimation and downlink interference estimation based on the CRS or the CSI-RS, and then determines, based on the downlink channel estimation and the downlink interference estimation, a quantity of transmitted downlink data streams that the terminal device expects to use for spatial multiplexing during downlink transmission, namely, a rank. It should be understood that the terminal device may determine the rank by using a method well-known to a person skilled in the art. For brevity, details are not described herein.

[0056] Step 102: Determine a precoding matrix in a precoding matrix set corresponding to the rank indication.

[0057] In step 102, the terminal device may determine, in a precoding matrix set corresponding to the rank indication and based on a reference signal such as the CSI-RS, a precoding matrix that the terminal device expects the base station eNB to use when the base station sends downlink data.

[0058] Step 103: Determine a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator that are used to indicate the precoding matrix.

[0059] For the base station and the terminal device, there is a precoding matrix set for each rank (or each rank indication). In addition, in a case of a given rank, each precoding matrix is indicated by a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator. There is a correspondence between a precoding matrix W and a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator. For example, for a rank 1, the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator each are represented by two bits, and there are a total of six bits to represent

the precoding matrix indicators. A precoding matrix set for the rank 1 includes $2^6=64$ precoding matrices. Each precoding matrix W corresponds to three precoding matrix indicators. For example, a value of the first precoding matrix indicator is 00, a value of the second precoding matrix indicator is 00, and a value of the third precoding matrix indicator is 00. This is equivalent to that a 6-bit precoding matrix indicator is 000000, and corresponds to one precoding matrix W . When

the 6-bit precoding matrix indicator is 000001, the 6-bit precoding matrix indicator corresponds to another precoding matrix W . By analog, each precoding matrix W has a one-to-one correspondence with a precoding matrix indicator. This is equivalent to that when a value of a precoding matrix indicator is known, a corresponding precoding matrix is determined.

[0060] Step 104: The terminal device sends the rank indication, the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator to a base station.

[0061] For example, on a physical uplink shared channel (physical uplink shared channel, PUSCH) or another channel, the terminal device sends, to the base station, the rank indication and a precoding matrix indicator (the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator) that is used to indicate the precoding matrix. The base station may configure the terminal device to feed back the precoding matrix indicator on the PUSCH, or to feed back the precoding matrix indicator on a physical uplink control channel (physical uplink control channel, PUCCH). For sending of the rank indication, the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator by the terminal device, the rank indication may be sent before the three precoding matrix indicators are sent, or may be sent together with a part of the three precoding indicators, or may be sent together with all of the three precoding indicators. There is no sequence limit on sending of the rank indication and the precoding matrix indicators.

[0062] On a side of the base station, in step 105, the base station receives the rank indication and the precoding matrix indicators sent by the terminal device. For receiving of the rank indication, the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator by the base station, the rank indication may be received before the three precoding matrix indicators are received, or may be received together with a part of the three precoding indicators, or may be received together with all of the three precoding indicators. There is no sequence limit on receiving of the rank indication and the precoding matrix indicators.

[0063] On the side of the base station, in step 106, in a codebook set corresponding to the rank indication, the precoding matrix is determined based on the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator.

[0064] On the side of the base station, in step 107, the base station sends data based on the precoding matrix.

[0065] Optionally, in step 107, the base station sends data to the terminal device based on the precoding matrix determined in step 106. The base station may send the data to the terminal device on a physical downlink shared channel (physical downlink shared channel, PDSCH). When the data is sent, the precoding matrix used by the base station may be a precoding matrix corresponding to a precoding matrix indicator fed back by the terminal device, or another precoding matrix obtained after this precoding matrix is transformed, for example, considering a zero-forcing algorithm at a transmitting end in multiuser MIMO.

[0066] W satisfies $W=W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R , W_1 is a matrix of N_t rows and $2M$ columns, W_2 is a matrix of $2M$ rows and $2K$ columns, W_3 is a matrix of $2K$ rows and R columns, K is less than M , N_t , R , M , and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the $2M$ columns in W_1 include every column in $W_1 \times W_2$.

[0067] The precoding matrix W corresponds to a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator, the first precoding matrix indicator corresponds to the first precoding matrix W_1 , the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 .

[0068] A set of columns in W_1 include every column in $W_1 \times W_2$. This represents that $2K$ column vectors are selected from the columns in W_1 as a result of $W_1 \times W_2$. In this way, a quantity of vectors in a set of to-be-selected vectors is reduced subsequently, thereby reducing calculation complexity of subsequent processing, and reducing a quantity of bits for feeding back a PMI for selection from candidate vectors. For example, W_2 is used to select a column vector from W_1 , so that a quantity of selectable vector sets in W_3 is reduced, thereby reducing a quantity of bits required for feeding back W_3 , and reducing calculation complexity.

[0069] In this embodiment of the present invention, in an optional implementation, each precoding matrix W in the precoding matrix set corresponding to the rank indication satisfies $W=W_1 \times W_2 \times W_3$.

[0070] As a quantity of antenna ports in a horizontal direction or a vertical direction increases, a formed beam becomes increasingly thinner, and it is even possible that one beam can cover only one path in a multipath channel. To capture more channel paths, that the terminal device selects and feeds back a plurality of vector groups for the base station to perform precoding is a good method. The vector group may include four or less vectors, for example, including two vectors. This method is described below by using an example in which there are 32 antenna ports with an antenna configuration $(N_1, N_2)=(16, 1)$ (as shown in FIG. 4). N_1 is a quantity of antenna ports in a polarization direction

degrees polarization or -45 degrees polarization) in a first direction, and N_2 is a quantity of antenna ports in a polarization direction in a second direction, where $N_1 \times N_2 = N_t/2$. The first direction may be a horizontal direction (or a vertical direction), and the second direction may be a vertical direction (or a horizontal direction).

[0071] In such an antenna form, an entire system bandwidth can be covered only when W_1 includes 16 vectors. For

example, $W_1 = \begin{bmatrix} X_1 & \mathbf{0} \\ \mathbf{0} & X_1 \end{bmatrix}$, where W_1 is a block diagonal matrix, and two diagonal matrices are the same in W_1 .

[0072] A quantity of vectors included in W_1 is a quantity of column vectors included in X_1 , and is not a quantity of column vectors in W_1 . A quantity of column vectors in W_1 is twice that of column vectors included in X_1 . Usually, when a column vector in X_1 acts on an antenna port in a polarization direction, a beamforming function can be played. For example, each column in X_1 is a DFT (DFT, Discrete Fourier Transform, discrete Fourier transform) vector. Therefore, each column vector in X_1 may be considered as a direction vector or a beam vector.

[0073] The DFT vector refers to a $T \times 1$ precoding matrix, and the DFT vector v usually has a form shown by the following equation:

$$v = \begin{bmatrix} 1 & e^{j2\pi m/N} & \dots & e^{j2\pi(T-2)m/N} & e^{j2\pi(T-1)m/N} \end{bmatrix}^T \quad (1)$$

where N and m are integers (N is not equal to 0), usually, $N=2^x$, x is a nonnegative integer, in other words, N is x powers of 2, and a t^{th} element in the DFT vector v is $e^{j2\pi(t-1)m/N}$ ($t=1, 2, \dots, T$). A superscript^T represents matrix transposing. One diagonal block X_1 in W_1 is used for one polarization direction, and another diagonal block X_1 is used for another polarization direction. In an example of FIG. 4, antenna ports are arranged in a horizontal direction, and there are 16 antenna ports in one polarization direction. In this case, a quantity of rows in a matrix X_1 is 16. W_1 includes 16 vectors. This is equivalent to that X_1 has 16 columns. For example, each column in X_1 may be a DFT vector. Every four vectors form one vector group in X_1 , and there are a total of four vector groups. For example, first to fourth columns in X_1 are used as a first vector group, fifth to eighth columns in X_1 are used as a second vector group, ninth to twelfth columns in X_1 are used as a third vector group, and thirteenth to sixteenth columns in X_1 are used as a fourth vector group.

[0074] The 16 vectors in W_1 include a vector that the terminal device expects, within a relatively long time, the base station to use during precoding. However, actually, at a moment, not each vector in the vector group can be used. For example, for a terminal device, there are two strong paths from the terminal device to an antenna port of the base station. For the first strong path, when the base station uses a vector in the first vector group to perform precoding, a generated beam can aim to the first strong path in a direction of a main lobe. When the base station uses a vector in the fourth vector group to perform precoding, a generated beam can aim to the second strong path in the direction of the main lobe, as shown in FIG. 4.

[0075] In this case, the terminal device needs to send the first precoding matrix indicator (including 16 beam vectors) corresponding to W_1 , and further feed back the second precoding matrix indicator of one or more vector groups selected from W_1 . For example, in this example, the terminal device sends indicators of the first vector group and the fourth vector group to the base station.

[0076] When the terminal device learns, through measurement, that a channel rank is greater than 2, the terminal device needs to select, for each reported vector group, one or more vector groups orthogonal to the reported vector group, and send numbers of the one or more selected orthogonal vector groups to the base station. For example, a rank determined by the terminal device is 4, and vector groups reported by the terminal device are numbered as 1 and 4. Vectors included in the vector group numbered 1 are $[v_1 \ v_2 \ v_3 \ v_4]$, and vectors included in the vector group numbered 2 are $[v_5 \ v_6 \ v_7 \ v_8]$. In addition, the terminal further needs to send, to the base station, a vector group $1+k$ orthogonal to the vector group 1 and a vector group $4+k'$ orthogonal to the vector group 4, where vectors in the vector group numbered $1+k$ are $[v_{1+k} \ v_{2+k} \ v_{3+k} \ v_{4+k}]$, and vectors in the vector group numbered $1+k'$ are $[v_{5+k'} \ v_{6+k'} \ v_{7+k'} \ v_{8+k'}]$. Based on the

foregoing descriptions, $W_1 \times W_2 = \begin{bmatrix} Y & \mathbf{0} \\ \mathbf{0} & Y \end{bmatrix}$ and $Y = [v_1 \ \dots \ v_8 \ v_{1+k} \ \dots \ v_{4+k} \ v_{5+k'} \ \dots \ v_{8+k'}]$ are obtained.

[0077] In this embodiment of the present invention, in an optional implementation, W_2 satisfies $W_2 = \begin{bmatrix} X_2 & \mathbf{0} \\ \mathbf{0} & X_2 \end{bmatrix}$,

X_2 is a matrix of M rows and K columns, any column in X_2 is represented as e_p , e_p is an $M \times 1$ column vector, a p^{th}

element in $\mathbf{W}_2 = \begin{bmatrix} X_2 & \mathbf{0} \\ \mathbf{0} & X_2 \end{bmatrix}$ is 1, remaining elements are 0, and p is an integer from 1 to M.

[0078] In this embodiment of the present invention, in an optional implementation, $\mathbf{W}_1$ satisfies $\mathbf{W}_1 = \begin{bmatrix} X_1 & \mathbf{0} \\ \mathbf{0} & X_1 \end{bmatrix}$, X_1 is a matrix of $N_t/2$ rows and M columns, $X_1 = [v_0 \cdots v_{M-1}]$, v_o is a column vector including $N_t/2$ elements, and o is an integer from 0 to M-1.

[0079] Any column in $\mathbf{W}_3$ is represented as $\begin{bmatrix} e_l \\ \phi_n e_l \end{bmatrix}$, ϕ_n is a complex number, ε_l is a $K \times 1$ column vector, an l^{th} element in ε_l is 1, remaining elements are 0, and l is an integer from 1 to K.

[0080] For example, $\mathbf{W}_1$ may be represented as $\mathbf{W}_1 = \begin{bmatrix} X_1 & \mathbf{0} \\ \mathbf{0} & X_1 \end{bmatrix}$,

$X_1 = [v_k^1 \cdots v_{k+L_1-1}^1] \otimes [v_l^2 \cdots v_{l+L_2-1}^2]$, where $v_{k+m}^1 = \begin{bmatrix} 1 & e^{j\frac{2\pi(k+m)}{N_1 O_1}} & \cdots & e^{j\frac{2\pi(N_1-1)(k+m)}{N_1 O_1}} \end{bmatrix}^T$ repre-

sents an m^{th} precoding vector in the first direction, $m=0,1,\cdots,L_1-1$, L_1 represents a quantity of column vectors in the first

direction in X_1 in $\mathbf{W}_1$, $v_{l+n}^2 = \begin{bmatrix} 1 & e^{j\frac{2\pi(l+n)}{N_2 O_2}} & \cdots & e^{j\frac{2\pi(N_2-1)(l+n)}{N_2 O_2}} \end{bmatrix}^T$ represents an n^{th} precoding vector in the second

direction, $n=0,1,\cdots,L_2-1$, L_2 represents a quantity of column vectors in the second direction in X_1 in $\mathbf{W}_1$, and both Q_1 and Q_2 are generation parameters for generating the foregoing column vectors, and are positive integers. The first direction may be a horizontal direction (or a vertical direction), and the second direction may be a vertical direction (or a horizontal direction).

[0081] $\mathbf{W}_2$ is used to further select K column vectors from vector groups in $\mathbf{W}_1$, and may be represented as

$\mathbf{W}_2 = \begin{bmatrix} X_2 & \mathbf{0} \\ \mathbf{0} & X_2 \end{bmatrix}$, where $X_2 = [e_i \cdots e_j]_{M \times K}$, X_2 is a matrix of M rows and K columns, ε_i represents an $M \times 1$ column vector, an i^{th} element in ε_i is 1, remaining elements are 0, and $M=L_1 \times L_2$.

[0082] A function of ε_l in $\mathbf{W}_3$ is to indicate a precoding vector, and a function of ϕ_n is to perform phase weighting on two groups of polarization antennas. Because first $N_t/2$ rows in the precoding matrix $\mathbf{W}$ correspond to a precoding weighting of an antenna port in one polarization direction, last $N_t/2$ rows correspond to a precoding weighting of an antenna port in another polarization direction.

[0083] In this embodiment of the present invention, in an optional implementation, a frequency domain resource corresponding to the first precoding matrix indicator is a downlink system bandwidth of the terminal device.

[0084] The downlink system bandwidth includes A first sub-bands and B second sub-bands, A and B are positive integers greater than 1, and A is less than or equal to B.

[0085] A frequency domain resource corresponding to the second precoding matrix indicator is one of the A first sub-bands, and a frequency domain resource corresponding to the third precoding matrix indicator is one of the B second sub-bands.

[0086] The downlink system bandwidth may be a downlink system bandwidth of a carrier. For example, if there is only one downlink carrier, the downlink system bandwidth is a downlink system bandwidth of the carrier. In a carrier aggregation scenario, if there are a plurality of downlink carriers, the downlink system bandwidth is a downlink system bandwidth of a carrier corresponding to a CSI fed back by the terminal device. For example, there are two downlink carriers: a carrier 1 and a carrier 2. If the terminal device currently feeds back a CSI of the carrier 1, the downlink system bandwidth is a downlink system bandwidth of the carrier 1.

[0087] Optionally, the terminal device reports one second precoding matrix indicator for each first sub-band, and reports one third precoding matrix indicator for each second sub-band.

[0088] In this embodiment of the present invention, in an optional implementation, a frequency domain resource of at least one of the A first sub-bands is the same as frequency domain resources of at least two of the B second sub-bands.

[0089] For example, the entire system bandwidth is divided into A first sub-bands, and each first sub-band includes S second sub-bands. The terminal device sends a second precoding matrix indicator to the base station for the entire

system bandwidth. The terminal device sends a first precoding indicator for the system bandwidth, sends a second precoding matrix indicator for each first sub-band, and sends a third precoding matrix indicator for each second sub-band.

[0090] The terminal device needs to select a second precoding matrix indicator for each first sub-band. The second precoding matrix indicator is used to select 2K column vectors from the first precoding matrix for the sub-band. In FIG. 5, each first sub-band has four second sub-bands.

[0091] For a rank (or rank indication), each precoding matrix W in a corresponding precoding matrix set may be

represented as $W=W_1 \times W_2 \times W_3$. It is assumed that W_1 includes 16 beam vectors. $W_1 = \begin{bmatrix} X_1 & \mathbf{0} \\ \mathbf{0} & X_1 \end{bmatrix}$, and X_1 has 16

columns, which correspond to the 16 beam vectors. The following gives an example of different antenna port configurations and different W_1 and W_2 .

[0092] For example, when an antenna port is configured as $(N_1, N_2)=(8, 2)$, where N_1 is a quantity of antenna ports in a horizontal direction, and N_2 is a quantity of antenna ports in a vertical direction, a diagonal matrix of W_1 is a Kronecker product of eight vectors in the horizontal direction and two vectors in the vertical direction, and there are a total of 16 beam vectors. When an antenna port is configured as $(N_1, N_2)=(4, 4)$, a beam vector in W_1 is a Kronecker product of four vectors in the horizontal direction and four vectors in the vertical direction, and there also are a total of 16 beam vectors. The vectors in W_1 are divided into several vector groups, and each vector group includes four or eight beam vectors.

[0093] Using $(N_1, N_2)=(8, 2)$ as an example, W_1 includes 16 beam vectors. The 16 beam vectors are numbered as 1, 2, ..., and 16. Using eight beams as one beam vector group, and there are four overlapped beam vectors between every two neighboring beam vector groups. Therefore, the 16 beam vectors may be divided into three beam vector groups. The first beam vector group includes beam vectors numbered 1 to 8, the second beam vector group includes beam vectors numbered 5 to 12, and the third beam vector group includes beam vectors numbered 9 to 16. The terminal device indicates a selected beam vector group by the second precoding matrix indicator. This is equivalent to that W_2 is determined. In this way, for the third precoding indicator, three bits may be used to select a beam vector for precoding.

[0094] This may alternatively be that W_1 includes 16 beam vectors, which are divided into four groups, and each group includes four beam vectors. The first beam vector group includes beam vectors numbered 1 to 4, the second beam vector group includes beam vectors numbered 5 to 8, the third beam vector group includes beam vectors numbered 9 to 12, and the fourth beam vector group includes beam vectors numbered 13 to 16. There is no overlapped beam vector between neighboring groups. The terminal device indicates a selected beam vector group by the second precoding matrix indicator.

[0095] In this embodiment of the present invention, in an optional implementation, frequency domain resources corresponding to the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator are downlink system bandwidths of the terminal device. This implementation corresponds to wideband feedback of a precoding matrix indicator. The wideband feedback of the precoding matrix indicator means that a frequency domain resource corresponding to a feedback precoding matrix indicator is an entire system bandwidth.

[0096] In this embodiment of the present invention, in an optional implementation, a transmission period of the first precoding matrix indicator is P_1 , a transmission period of the second precoding matrix indicator is P_2 , a transmission period of the third precoding matrix indicator is P_3 , P_1 is greater than or equal to P_2 , and P_2 is greater than or equal to P_3 .

[0097] In this embodiment of the present invention, in an optional implementation, the transmission periods P_1 , P_2 , and P_3 are sent by the base station to the terminal device through Radio Resource Control (Radio Resource Control, RRC) signaling.

[0098] Different transmission periods are configured for different precoding matrix indicators, and are used to correspond to different features of a channel. Some precoding matrix indicators correspond to a part that is of the channel and that varies relatively fast over time, and some precoding matrix indicators correspond to a part that is of the channel and that varies relatively slowly over time. For example, the first precoding matrix indicator corresponds to a part that is of a channel and that varies most slowly over time, the second precoding matrix indicator corresponds to a part that is of the channel and that varies relatively slowly over time, and the third precoding matrix indicator corresponds to a part that is of the channel and that varies relatively fast over time. P_1 , P_2 , and P_3 are configured based on channel features, so as to reduce a quantity of bits for feeding back a PMI.

[0099] For example, in an LTE system, a length of one subframe (subframe) is 1 millisecond, which is also a length of one transmission time interval (transmission time interval, TTI). The TTI refers to a transmission length for independent decoding on a radio link.

[0100] The terminal device feeds back the precoding matrix indicator on a PUCCH. In a first feedback mode, a channel quality indication (channel quality indication, CQI) and the third precoding matrix indicator are reported on the PUCCH in one subframe. The rank indication and the first precoding matrix indicator are reported on the PUCCH in one subframe.

[0101] A reporting period of the rank indication and the first precoding matrix indicator is P_1 , a reporting period of the

second precoding matrix indicator is P_2 , and a reporting period of the channel quality indication and the third precoding matrix indicator is P_3 , where $P_1=T_1P_2$, and $P_2=T_2P_3$. For example, $T_1=10$, and $T_2=4$.

[0102] In a second feedback mode of the PUCCH, the RI, a precoding type indication (precoding type indication, PTI), and the first precoding matrix indicator are reported together, and there also are three reporting periods: P_1 , P_2 , and P_3 .

[0103] At a reporting moment in the period P_1 , the terminal device reports the RI, the PTI, and the first precoding matrix indicator on the PUCCH.

[0104] At a reporting moment in the period P_2 , when $PTI=0$, the second precoding matrix indicator is reported. When $PTI=1$, a wideband CQI and wideband W_3 are reported. Wideband CQI reporting (wideband CQI feedback) means that a frequency domain resource corresponding to a feedback CQI is an entire system bandwidth.

[0105] At a reporting moment in the period P_3 , when $PTI=0$, a wideband CQI and wideband W_3 are reported. When $PTI=1$, a third precoding matrix indicator corresponding to a sub-band CQI and sub-band W_3 are reported, where $P_1=T_1P_2$, and $P_2=T_2P_3$. For example, $T_1=8$, and $T_2=5$.

[0106] In this embodiment of the present invention, in an optional implementation, T column vectors in $2K$ column vectors in W_2 are indicated by the first precoding matrix indicator, T is an integer greater than or equal to 2, and T is less than K . $2K-T$ column vectors in W_2 except the T column vectors are indicated by the T column vectors and the second precoding matrix indicator.

[0107] For example, based on the first precoding matrix indicator, 16 beam vectors are determined as $[v_1 \cdots v_{16}]$, where $[v_1 v_2 v_3 v_4]$ are mandatory beam vectors. The second precoding matrix indicator is not required, and the second precoding matrix indicator is only used to indicate another vector group. For example, l is used to indicate a relationship between a second vector group and a first vector group. For example, $W_1 \times W_2$ may also be represented as

$$W_1 W_2 = \begin{bmatrix} Y & 0 \\ 0 & Y \end{bmatrix}, \text{ where } Y=[v_1 v_2 v_3 v_4 v_{1+l} \cdots v_{4+l}], \text{ and } Y \text{ is a matrix of } N_t/2 \text{ rows and } K \text{ columns. The second vector}$$

group may alternatively be directly indicated. For example, the first precoding matrix indicator corresponds to four vector groups, where the first vector group is a mandatory vector. The second precoding matrix indicator indicates an another selected vector group. Compared with selecting a plurality of groups of vectors from W_1 by the second precoding matrix indicator, in the present invention, a vector group that needs to be indicated is reduced by using the second precoding matrix indicator, thereby reducing a quantity of bits in feedback. For example, the second precoding matrix changes from indicating two vector groups to indicating one vector group, reducing a quantity of bits required for indicating one vector group.

[0108] In this embodiment of the present invention, in an optional implementation, $2K$ column vectors in W_2 are indicated by a configuration parameter delivered by a base station and the second precoding matrix indicator.

[0109] For example, W_1 includes 16 beam vectors, which are divided into four groups, and each group includes four vectors. The first vector group includes beam vectors numbered 1 to 4, the second vector group includes beam vectors numbered 5 to 8, the third vector group includes beam vectors numbered 9 to 12, and the fourth vector group includes beam vectors numbered 13 to 16. As shown in this example, the terminal device sends indicators of the first vector group and the fourth vector group to the base station by using the second precoding matrix indicator, and there are a total of eight column vectors. To further reduce a quantity of bits of a precoding indicator sent by the terminal device, the selected vector group may further be downsampled based on the configuration parameter. For example, when the configuration parameter is 1, first to fourth vectors are selected from the eighth vectors. When the configuration parameter is 2, the first, second, fifth, and sixth column vectors are selected from the eighth vectors. When the configuration parameter is 3, the first, third, sixth, and eighth column vectors are selected from the eighth vectors. When the configuration parameter is 4, the first, fourth, fifth, and eighth column vectors are selected from the eighth vectors. For example, the terminal device indicates eight vectors, which are denoted as $v_1, v_2, \dots$, and v_8 by the second precoding matrix indicator.

If no configuration parameter is used to downsample the selected vector groups, $W_1 \times W_2 = \begin{bmatrix} Y & 0 \\ 0 & Y \end{bmatrix}$, $Y=[v_1 v_2 \dots v_8]$,

including eight vectors. Further, $W_1 \times W_2$ includes eight beam vectors. If there is a configuration parameter used to

downsample the selected vector groups, and the configuration parameter is 1, $W_1 \times W_2 = \begin{bmatrix} Y & 0 \\ 0 & Y \end{bmatrix}$, $Y=[v_1 v_2 v_3 v_4]$,

including four vectors. Further, $W_1 \times W_2$ includes four beam vectors. Because the configuration parameter is configured by the base station, the configuration parameter is fixed after configuration, and therefore does not occupy a feedback bit of the terminal device. In this way, for the third precoding indicator, only two bits may be used to select a beam vector for precoding. If there is no configuration parameter, 3 bits need to be used to select a beam vector for precoding. Therefore, in this implementation, a quantity of bits for feeding back the third precoding indicator can be reduced.

[0110] Optionally, the configuration parameter may be sent by the base station to the terminal device through RRC signaling.

[0111] In this embodiment of the present invention, in an optional implementation, the configuration parameter is used to indicate a selectable column vector set of W_1 , the selectable column vector set includes J column vectors, and J satisfies $2K < J < 2M$.

[0112] For example, the first precoding indicator indicates that W_1 includes 16 beam vectors. Using four beams as one beam vector group, there may be four beam groups after division. Two of the beam vector groups are determined by using the configuration parameter. For example, the first and the third beam vector groups are determined by using the configuration parameter. Because each vector group has four beam vectors, a total of eight beam vectors are selected by using the configuration parameter. This is equivalent to that in this implementation, $J=8 \times 2=16$. It is further determined, based on the second precoding indicator, whether to select the first beam vector group or the third beam vector group for subsequent processing. A quantity of bits for feeding back the second precoding indicator is reduced by using the configuration parameter.

[0113] In this embodiment of the present invention, in an optional implementation, X_1 in W_1 satisfies

$X_1 = \begin{bmatrix} v_0^1 & \cdots & v_{M_1-1}^1 \end{bmatrix} \otimes \begin{bmatrix} v_0^2 & \cdots & v_{M_2-1}^2 \end{bmatrix}$, where v_m^1 is a column vector including N_1 elements, v_n^2 is a column vector including N_2 elements, $N_1 \times N_2 = N_t/2$, $M_1 \times M_2 = M$, and $\otimes$ represents a Kronecker product.

[0114] In this embodiment of the present invention, in an optional implementation, X_2 in W_2 satisfies $X_2 = X_3 \otimes X_4$, where X_3 is a matrix of M_1 rows and K_1 columns, X_4 is a matrix of M_2 rows and K_2 columns, and $\otimes$ represents a Kronecker product.

[0115] Any column in X_3 is represented as ε_i , ε_i is an $M_1 \times 1$ column vector, an i^{th} element in ε_i is 1, remaining elements are 0, a value of i is an integer from 1 to M_1 .

[0116] Any column in X_4 is represented as ε_j , ε_j is an $M_2 \times 1$ column vector, a j^{th} element in ε_j is 1, remaining elements are 0, a value of j is an integer from 1 to M_2 .

[0117] $K_1 \times K_2 = K$, and $M_1 \times M_2 = M$.

[0118] In the foregoing embodiment, there may be no preference in order between step 102 and step 103, and determining in the two steps may be performed simultaneously. This is because when the precoding matrix that the terminal device expects the base station to use is determined, the corresponding precoding matrix indicator is determined.

[0119] Step 101 may be performed before steps 102 and 103. Alternatively, step 101 and steps 102 and 103 may be performed simultaneously.

[0120] For example, a received signal model of the UE is:

$$y = H W s + n \quad (2)$$

where y is a received signal vector, H is a channel matrix, W is a precoding matrix, s is a transmitted symbol vector, and n is interference plus noise.

[0121] The terminal device traverses all ranks and all precoding matrices corresponding to the ranks, and calculates a channel capacity obtained after precoding is performed on each precoding matrix. A channel capacity is obtained for each precoding matrix. The channel capacity may be a quantity of bits that can be correctly sent at the transmitting end. A precoding matrix corresponding to a maximum channel capacity and a rank corresponding to the precoding matrix are obtained. The terminal device sends, to the base station, a rank indication corresponding to the precoding matrix and a precoding matrix indicator corresponding to the precoding matrix.

[0122] When a rank is determined, for example, in a subframe, the terminal device needs to send a precoding matrix indicator. A rank indication has been sent before. In this case, the terminal device only needs to traverse a precoding matrix set corresponding to the rank indication. For example, a rank corresponding to the rank indication is 1, the terminal device needs to traverse only a precoding matrix set for which a rank is equal to 1, so as to obtain a precoding matrix allowing a maximum channel capacity; and sends a corresponding precoding matrix indicator to the base station.

[0123] When traversing a precoding matrix corresponding to a rank, the terminal device may obtain the precoding matrix by a precoding matrix indicator. For example, during precoding matrix indicator traversing, when a precoding matrix indicator is traversed, a precoding matrix is obtained based on the precoding matrix indicator, and a channel capacity is calculated based on the precoding matrix. Alternatively, a precoding matrix may be directly traversed. After a precoding matrix allowing a maximum channel capacity is selected, a precoding matrix indicator is obtained based on a correspondence between a precoding matrix and a precoding matrix indicator. The precoding matrix indicator is sent to the base station.

[0124] The method according to this embodiment of the present invention is described in detail in the foregoing with reference to FIG. 3. A terminal device and a base station according to embodiments of the present invention are described below with reference to FIG. 6 to FIG. 9.

[0125] FIG. 6 is a schematic block diagram of a terminal device according to an embodiment of the present invention. As shown in FIG. 6, the terminal device 600 includes:

a processing unit 601, configured to: determine a rank indication, and determine a precoding matrix W in a precoding matrix set corresponding to the rank indication, where W satisfies $W=W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R , W_1 is a matrix of N_t rows and $2M$ columns, W_2 is a matrix of $2M$ rows and $2K$ columns, W_3 is a matrix of $2K$ rows and R columns, K is less than M , N_t , R , M , and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the $2M$ columns in W_1 include every column in $W_1 \times W_2$; where

the precoding matrix W corresponds to a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator, the first precoding matrix indicator corresponds to the first precoding matrix W_1 , the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 ; and

a sending unit 602, configured to send the rank indication, the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator.

[0126] Optionally, the terminal device further includes a receiving unit 603, configured to receive a configuration parameter sent by a base station.

[0127] For further descriptions of the rank indication, the first precoding matrix indicator, the second precoding matrix indicator, the third precoding matrix indicator, and the precoding matrix W , refer to descriptions in the method embodiment of the present invention. For specific implementation of the processing unit of the terminal device, refer to specific implementation of the terminal device in the foregoing method embodiment.

[0128] Therefore, based on the terminal device sending the precoding matrix indicator in this embodiment of the present invention, a quantity of bits for feeding back the precoding matrix indicator is reduced while a system performance requirement is satisfied.

[0129] FIG. 7 is a schematic block diagram of a base station according to an embodiment of the present invention. As shown in FIG. 7, the base station 700 includes:

a receiving unit 701, configured to receive a rank indication, a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator that are sent by a terminal device; and

a processing unit 702, configured to determine, in a precoding matrix set corresponding to the rank indication, a precoding matrix W based on the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator.

[0130] W satisfies $W=W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R , W_1 is a matrix of N_t rows and $2M$ columns, W_2 is a matrix of $2M$ rows and $2K$ columns, W_3 is a matrix of $2K$ rows and R columns, K is less than M , N_t , R , M , and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the $2M$ columns in W_1 include every column in $W_1 \times W_2$.

[0131] The first precoding matrix indicator corresponds to the first precoding matrix W_1 , the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 .

[0132] Optionally, the base station further includes a sending unit 703, configured to send a configuration parameter.

[0133] For further descriptions of the rank indication, the first precoding matrix indicator, the second precoding matrix indicator, the third precoding matrix indicator, and the precoding matrix W , refer to descriptions in the method embodiment of the present invention. For specific implementation of the processing unit of the base station, refer to specific implementation of the base station in the foregoing method embodiment.

[0134] Therefore, based on the base station receiving the precoding matrix indicator in this embodiment of the present invention, a quantity of bits of the received precoding matrix indicator is reduced while a system performance requirement is satisfied.

[0135] The processing unit may be a processor, the receiving unit may be a receiver, and sending unit may be a transmitter. A terminal device including a processor 801, a transmitter 802, and a receiver 803 is shown in FIG. 8. A base station including a processor 902, a transmitter 903, and a receiver 901 is shown in FIG. 9.

[0136] It should be understood that in the embodiments of the present invention, the processor 801/901 may be a central processing unit (Central Processing Unit, "CPU" for short), or the processor 801/901 may be another general purpose processor, a digital signal processor (DSP), an application-specific integrated circuit (ASIC), a field programmable gate array (FPGA) or another programmable logical device, a discrete gate or a transistor logical device, a discrete

hardware component, or the like. The general purpose processor may be a microprocessor, or the processor may be any conventional processor or the like.

[0137] The objectives, technical solutions, and benefits of the present invention are further described in detail in the foregoing specific embodiments. It should be understood that the foregoing descriptions are merely specific embodiments of the present invention, but are not intended to limit the protection scope of the present invention. Any modification, equivalent replacement, or improvement made within the spirit and principle of the present invention shall fall within the protection scope of the present invention.

Claims

1. A precoding matrix indicator feedback method, wherein the method comprises:

determining, by a terminal device, a rank indication, and determining a precoding matrix W in a precoding matrix set corresponding to the rank indication, wherein W satisfies $W=W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R , W_1 is a matrix of N_t rows and $2M$ columns, W_2 is a matrix of $2M$ rows and $2K$ columns, W_3 is a matrix of $2K$ rows and R columns, K is less than M , N_t , R , M , and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the $2M$ columns in W_1 comprise every column in $W_1 \times W_2$; wherein

the precoding matrix W corresponds to a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator, the first precoding matrix indicator corresponds to the first precoding matrix W_1 , the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 ; and

sending, by the terminal device, the rank indication, the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator.

2. The method according to claim 1, wherein

W_2 satisfies $W_2 = \begin{bmatrix} X_2 & \mathbf{0} \\ \mathbf{0} & X_2 \end{bmatrix}$, X_2 is a matrix of M rows and K columns, any column in X_2 is represented as e_p , e_p is an $M \times 1$ column vector, a p^{th} element in e_p is 1, remaining elements are 0, and p is an integer from 1 to M .

3. The method according to claim 1 or 2, wherein

W_1 satisfies $W_1 = \begin{bmatrix} X_1 & \mathbf{0} \\ \mathbf{0} & X_1 \end{bmatrix}$, X_1 is a matrix of $N_t/2$ rows and M columns, $X_1 = [v_0 \cdots v_{M-1}]$, v_o is a column

vector comprising $N_t/2$ elements, and o is an integer from 0 to $M-1$; and any column in W_3 is represented as $\begin{bmatrix} e_l \\ \phi_n e_l \end{bmatrix}$, ϕ_n is a complex number, e_l is a $K \times 1$ column vector, an l^{th} element in e_l is 1, remaining elements are 0, and l is an integer from 1 to K .

4. The method according to claim 1, 2, or 3, wherein a frequency domain resource corresponding to the first precoding matrix indicator is a downlink system bandwidth of the terminal device; the downlink system bandwidth comprises A first sub-bands and B second sub-bands, A and B are positive integers greater than 1, and A is less than or equal to B ; and a frequency domain resource corresponding to the second precoding matrix indicator is one of the A first sub-bands, and a frequency domain resource corresponding to the third precoding matrix indicator is one of the B second sub-bands.

5. The method according to claim 4, wherein a frequency domain resource of at least one of the A first sub-bands is the same as frequency domain resources of at least two of the B second sub-bands.

6. The method according to claim 1, 2, or 3, wherein frequency domain resources corresponding to the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator are downlink system bandwidths of the terminal device.

7. The method according to any one of claims 1 to 6, wherein a transmission period of the first precoding matrix indicator is P_1 , a transmission period of the second precoding matrix indicator is P_2 , a transmission period of the third precoding matrix indicator is P_3 , P_1 is greater than or equal to P_2 , and P_2 is greater than or equal to P_3 .

8. The method according to any one of claims 1 to 7, wherein T column vectors in $2K$ column vectors in W_2 are indicated by the first precoding matrix indicator, T is an integer greater than or equal to 2, and T is less than K ; and $2K-T$ column vectors in W_2 except the T column vectors are indicated by the T column vectors and the second precoding matrix indicator.

9. The method according to any one of claims 1 to 7, wherein $2K$ column vectors in W_2 are indicated by a configuration parameter delivered by a base station and the second precoding matrix indicator.

10. The method according to claim 9, wherein the configuration parameter is used to indicate a selectable column vector set of W_1 , the selectable column vector set comprises J column vectors, and J satisfies $2K < J < 2M$.

11. A precoding matrix indicator receiving method, wherein the method comprises:

receiving, by a base station, a rank indication, a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator that are sent by a terminal device; and

determining, by the base station in a precoding matrix set corresponding to the rank indication, a precoding matrix W based on the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator, wherein

W satisfies $W = W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R , W_1 is a matrix of N_t rows and $2M$ columns, W_2 is a matrix of $2M$ rows and $2K$ columns, W_3 is a matrix of $2K$ rows and R columns, K is less than M , N_t , R , M , and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the $2M$ columns in W_1 comprise every column in $W_1 \times W_2$; and the first precoding matrix indicator corresponds to the first precoding matrix W_1 , the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 .

12. The method according to claim 11, wherein

W_2 satisfies $\mathbf{W}_2 = \begin{bmatrix} X_2 & \mathbf{0} \\ \mathbf{0} & X_2 \end{bmatrix}$, X_2 is a matrix of M rows and K columns, any column in X_2 is represented as e_p ,

e_p is an $M \times 1$ column vector, a p^{th} element in $\mathbf{W}_2 = \begin{bmatrix} X_2 & \mathbf{0} \\ \mathbf{0} & X_2 \end{bmatrix}$ is 1, remaining elements are 0, and p is an integer from 1 to M .

13. The method according to claim 11 or 12, wherein

W_1 satisfies $\mathbf{W}_1 = \begin{bmatrix} X_1 & \mathbf{0} \\ \mathbf{0} & X_1 \end{bmatrix}$, X_1 is a matrix of $N_t/2$ rows and M columns, $X_1 = [v_0 \cdots v_{M-1}]$, v_o is a column vector

comprising $N_t/2$ elements, and o is an integer from 0 to $M-1$; and any column in W_3 is represented as $\begin{bmatrix} e_l \\ \phi_n e_l \end{bmatrix}$, ϕ_n

is a complex number, e_l is a $K \times 1$ column vector, an l^{th} element in e_l is 1, remaining elements are 0, and l is an integer from 1 to K .

14. The method according to claim 11, 12, or 13, wherein a frequency domain resource corresponding to the first precoding matrix indicator is a downlink system bandwidth of the terminal device; the downlink system bandwidth comprises A first sub-bands and B second sub-bands, A and B are positive integers greater than 1, and A is less than or equal to B ; and a frequency domain resource corresponding to the second precoding matrix indicator is one of the A first sub-bands, and a frequency domain resource corresponding to the third precoding matrix indicator is one of the B second sub-bands.

15. The method according to claim 14, wherein a frequency domain resource of at least one of the A first sub-bands is the same as frequency domain resources of at least two of the B second sub-bands.

16. The method according to claim 11, 12, or 13, wherein frequency domain resources corresponding to the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator are downlink system bandwidths of the terminal device.

17. The method according to any one of claims 11 to 16, wherein a transmission period of the first precoding matrix indicator is P_1 , a transmission period of the second precoding matrix indicator is P_2 , a transmission period of the third precoding matrix indicator is P_3 , P_1 is greater than or equal to P_2 , and P_2 is greater than or equal to P_3 .

18. The method according to any one of claims 11 to 17, wherein T column vectors in $2K$ column vectors in W_2 are indicated by the first precoding matrix indicator, T is an integer greater than or equal to 2, and T is less than K; and $2K-T$ column vectors in W_2 except the T column vectors are indicated by the T column vectors and the second precoding matrix indicator.

19. The method according to any one of claims 11 to 17, wherein $2K$ column vectors in W_2 are indicated by a configuration parameter delivered by a base station and the second precoding matrix indicator.

20. The method according to claim 19, wherein the configuration parameter is used to indicate a selectable column vector set of W_1 , the selectable column vector set comprises J column vectors, and J satisfies $2K < J < 2M$.

21. A terminal device, comprising:

a processing unit, configured to: determine a rank indication, and determine a precoding matrix W in a precoding matrix set corresponding to the rank indication, wherein W satisfies $W = W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R , W_1 is a matrix of N_t rows and $2M$ columns, W_2 is a matrix of $2M$ rows and $2K$ columns, W_3 is a matrix of $2K$ rows and R columns, K is less than M , N_t , R , M , and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the $2M$ columns in W_1 comprise every column in $W_1 \times W_2$; wherein the precoding matrix W corresponds to a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator, the first precoding matrix indicator corresponds to the first precoding matrix W_1 , the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 ; and a sending unit, configured to send the rank indication, the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator.

22. The terminal device according to claim 21, wherein

W_2 satisfies $W_2 = \begin{bmatrix} X_2 & \mathbf{0} \\ \mathbf{0} & X_2 \end{bmatrix}$, X_2 is a matrix of M rows and K columns, any column in X_2 is represented as e_p , e_p is an $M \times 1$ column vector, a p^{th} element in e_p is 1, remaining elements are 0, and p is an integer from 1 to M .

23. The terminal device according to claim 21 or 22, wherein

W_1 satisfies $W_1 = \begin{bmatrix} X_1 & \mathbf{0} \\ \mathbf{0} & X_1 \end{bmatrix}$, X_1 is a matrix of $N_t/2$ rows and M columns, $X_1 = [v_0 \cdots v_{M-1}]$, v_o is a column vector

comprising $N_t/2$ elements, and o is an integer from 0 to $M-1$; and any column in W_3 is represented as $\begin{bmatrix} e_l \\ \phi_n e_l \end{bmatrix}$, ϕ_n is a complex number, e_l is a $K \times 1$ column vector, an l^{th} element in e_l is 1, remaining elements are 0, and l is an integer from 1 to K .

24. The terminal device according to claim 21, 22, or 23, wherein a frequency domain resource corresponding to the first precoding matrix indicator is a downlink system bandwidth of the terminal device; the downlink system bandwidth comprises A first sub-bands and B second sub-bands, A and B are positive integers

greater than 1, and A is less than or equal to B; and
a frequency domain resource corresponding to the second precoding matrix indicator is one of the A first sub-bands,
and a frequency domain resource corresponding to the third precoding matrix indicator is one of the B second sub-bands.

25. The terminal device according to claim 24, wherein a frequency domain resource of at least one of the A first sub-bands is the same as frequency domain resources of at least two of the B second sub-bands.

26. The terminal device according to claim 21, 22, or 23, wherein frequency domain resources corresponding to the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator are downlink system bandwidths of the terminal device.

27. The terminal device according to any one of claims 21 to 26, wherein a transmission period of the first precoding matrix indicator is P_1 , a transmission period of the second precoding matrix indicator is P_2 , a transmission period of the third precoding matrix indicator is P_3 , P_1 is greater than or equal to P_2 , and P_2 is greater than or equal to P_3 .

28. The terminal device according to any one of claims 21 to 27, wherein T column vectors in $2K$ column vectors in W_2 are indicated by the first precoding matrix indicator, T is an integer greater than or equal to 2, and T is less than K; and $2K-T$ column vectors in W_2 except the T column vectors are indicated by the T column vectors and the second precoding matrix indicator.

29. The terminal device according to any one of claims 21 to 27, wherein the terminal device further comprises a receiving unit, configured to receive a configuration parameter sent by a base station; and $2K$ column vectors in W_2 are indicated by the configuration parameter and the second precoding matrix indicator.

30. The terminal device according to claim 29, wherein the configuration parameter is used to indicate a selectable column vector set of W_1 , the selectable column vector set comprises J column vectors, and J satisfies $2K < J < 2M$.

31. A base station, comprising:

a receiving unit, configured to receive a rank indication, a first precoding matrix indicator, a second precoding matrix indicator, and a third precoding matrix indicator that are sent by a terminal device; and

a processing unit, configured to determine, in a precoding matrix set corresponding to the rank indication, a precoding matrix W based on the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator, wherein

W satisfies $W = W_1 \times W_2 \times W_3$, W is a matrix of N_t rows and R columns, N_t is a quantity of antenna ports, R is a rank value corresponding to the rank indication, N_t is greater than or equal to R, W_1 is a matrix of N_t rows and $2M$ columns, W_2 is a matrix of $2M$ rows and $2K$ columns, W_3 is a matrix of $2K$ rows and R columns, K is less than M, N_t , R, M, and K are all positive integers, M is greater than or equal to 2, N_t is an even number, none of W_1 , W_2 , and W_3 is an identity matrix, and the $2M$ columns in W_1 comprise every column in $W_1 \times W_2$; and the first precoding matrix indicator corresponds to the first precoding matrix W_1 , the second precoding matrix indicator corresponds to the second precoding matrix W_2 , and the third precoding matrix indicator corresponds to the third precoding matrix W_3 .

32. The base station according to claim 31, wherein

W_2 satisfies $\mathbf{W}_2 = \begin{bmatrix} X_2 & \mathbf{0} \\ \mathbf{0} & X_2 \end{bmatrix}$, X_2 is a matrix of M rows and K columns, any column in X_2 is represented as e_p ,

e_p is an $M \times 1$ column vector, a p^{th} element in $\mathbf{W}_2 = \begin{bmatrix} X_2 & \mathbf{0} \\ \mathbf{0} & X_2 \end{bmatrix}$ is 1, remaining elements are 0, and p is an integer from 1 to M.

33. The base station according to claim 31 or 32, wherein

W_1 satisfies $\mathbf{W}_1 = \begin{bmatrix} X_1 & \mathbf{0} \\ \mathbf{0} & X_1 \end{bmatrix}$, X_1 is a matrix of $N_t/2$ rows and M columns, $X_1 = [v_0 \cdots v_{M-1}]$, v_o is a column vector

comprising $N_t/2$ elements, and o is an integer from 0 to $M-1$; and any column in W_3 is represented as $\begin{bmatrix} e_l \\ \phi_n e_l \end{bmatrix}$, ϕ_n is a complex number, e_l is a $K \times 1$ column vector, an l^{th} element in e_l is 1, remaining elements are 0, and l is an integer from 1 to K .

34. The base station according to claim 31, 32, or 33, wherein a frequency domain resource corresponding to the first precoding matrix indicator is a downlink system bandwidth of the terminal device; the downlink system bandwidth comprises A first sub-bands and B second sub-bands, A and B are positive integers greater than 1, and A is less than or equal to B ; and a frequency domain resource corresponding to the second precoding matrix indicator is one of the A first sub-bands, and a frequency domain resource corresponding to the third precoding matrix indicator is one of the B second sub-bands.
35. The base station according to claim 34, wherein a frequency domain resource of at least one of the A first sub-bands is the same as frequency domain resources of at least two of the B second sub-bands.
36. The base station according to claim 31, 32, or 33, wherein frequency domain resources corresponding to the first precoding matrix indicator, the second precoding matrix indicator, and the third precoding matrix indicator are downlink system bandwidths of the terminal device.
37. The base station according to any one of claims 31 to 36, wherein a transmission period of the first precoding matrix indicator is P_1 , a transmission period of the second precoding matrix indicator is P_2 , a transmission period of the third precoding matrix indicator is P_3 , P_1 is greater than or equal to P_2 , and P_2 is greater than or equal to P_3 .
38. The base station according to any one of claims 31 to 37, wherein T column vectors in $2K$ column vectors in W_2 are indicated by the first precoding matrix indicator, T is an integer greater than or equal to 2, and T is less than K ; and $2K-T$ column vectors in W_2 except the T column vectors are indicated by the T column vectors and the second precoding matrix indicator.
39. The base station according to any one of claims 31 to 37, wherein the base station further comprises a sending unit, configured to send a configuration parameter; and $2K$ column vectors in W_2 are indicated by the configuration parameter and the second precoding matrix indicator.
40. The base station according to claim 39, wherein the configuration parameter is used to indicate a selectable column vector set of W_1 , the selectable column vector set comprises J column vectors, and J satisfies $2K < J < 2M$.

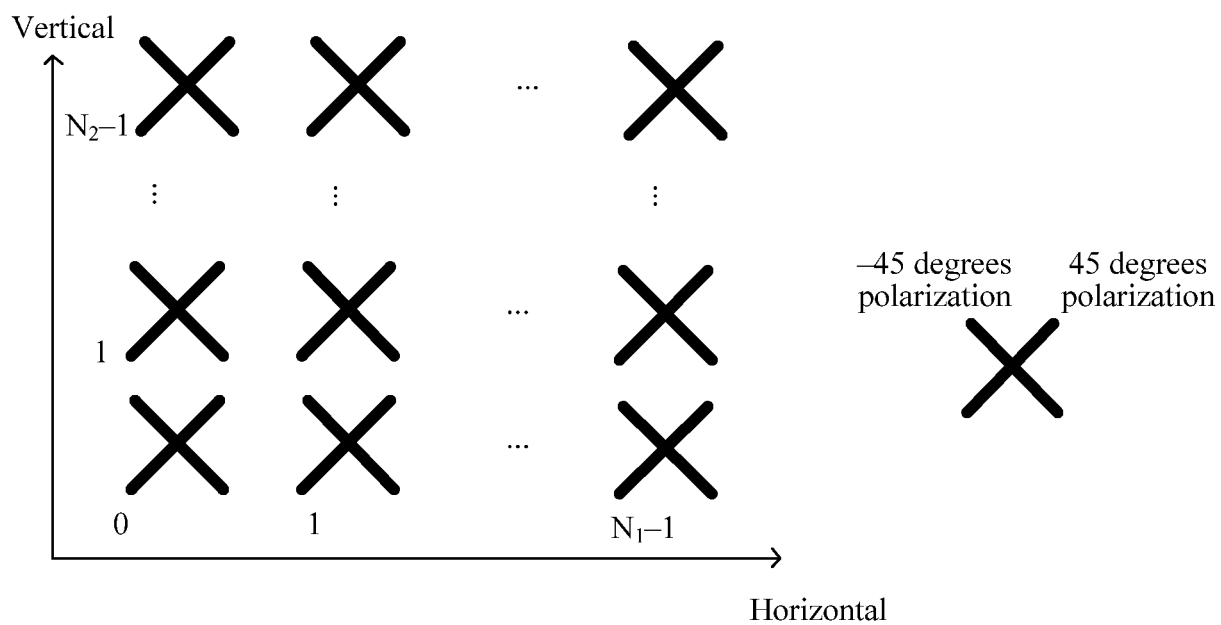


FIG. 1

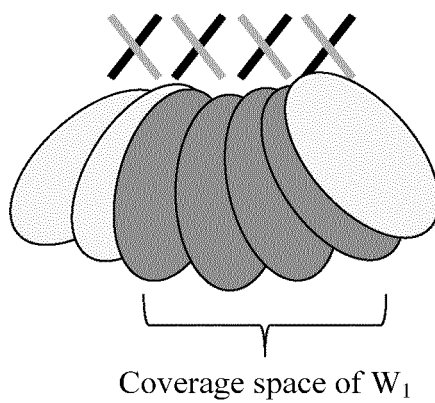


FIG. 2a

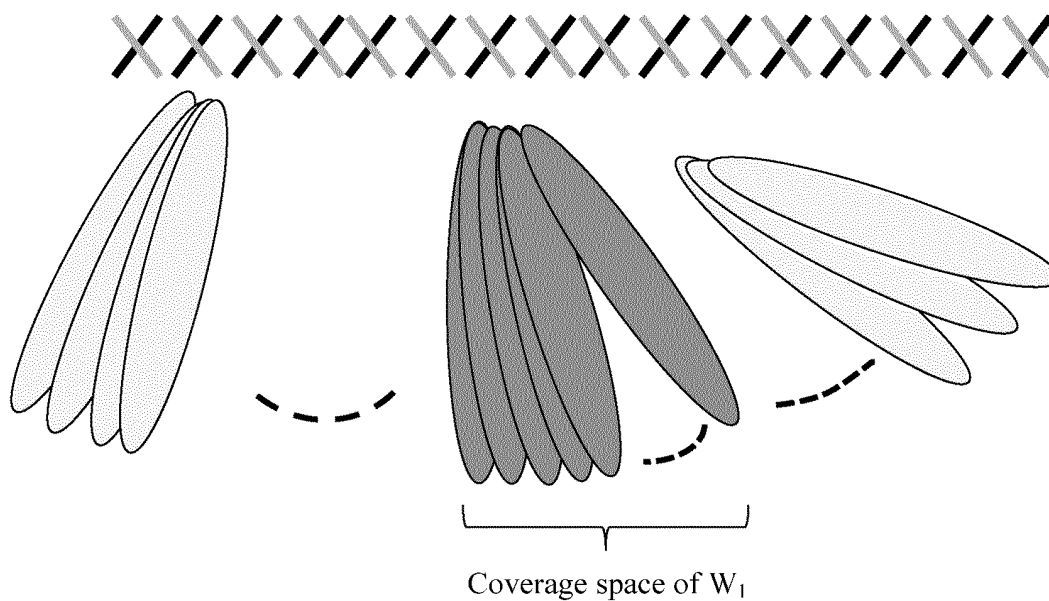


FIG. 2b

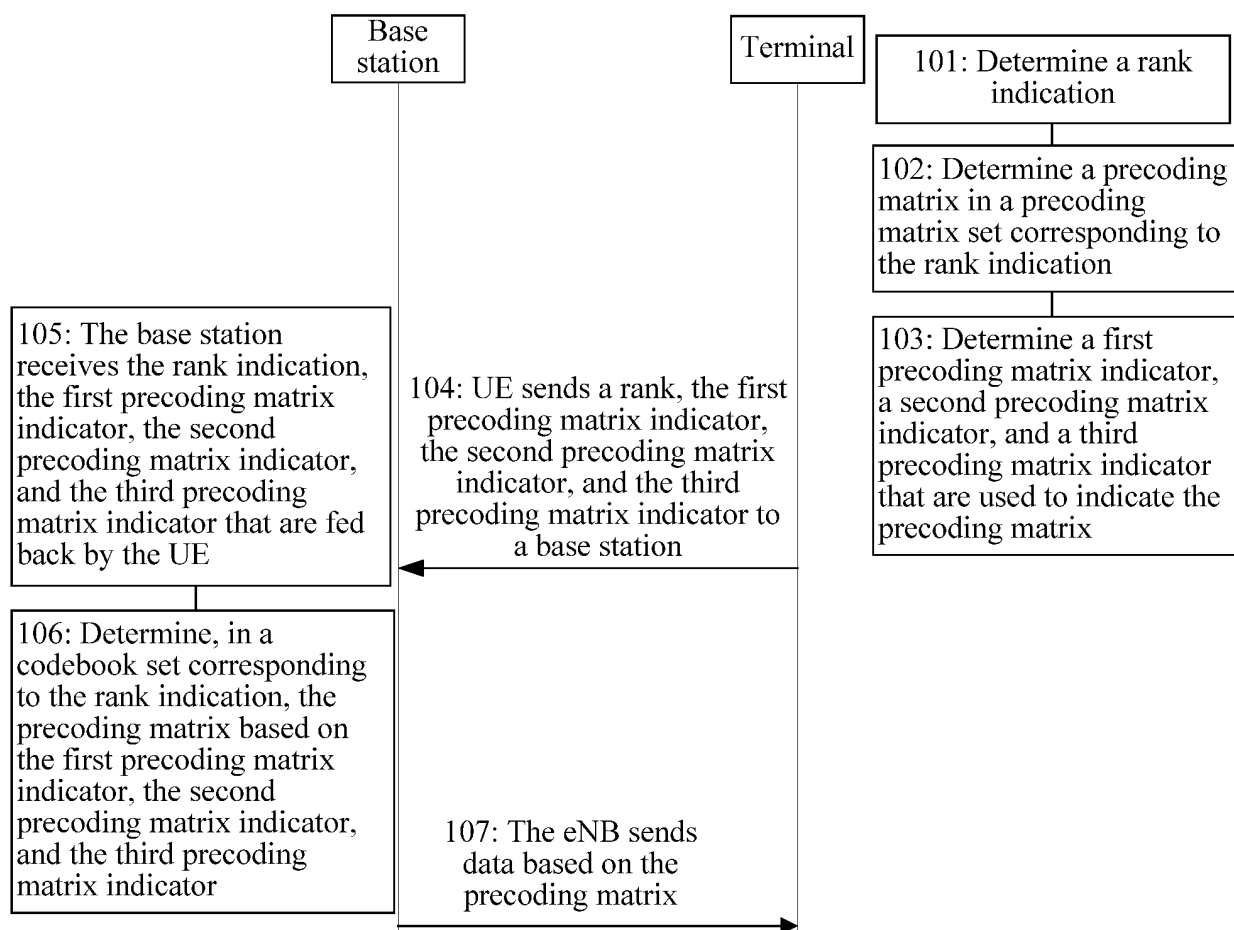


FIG. 3

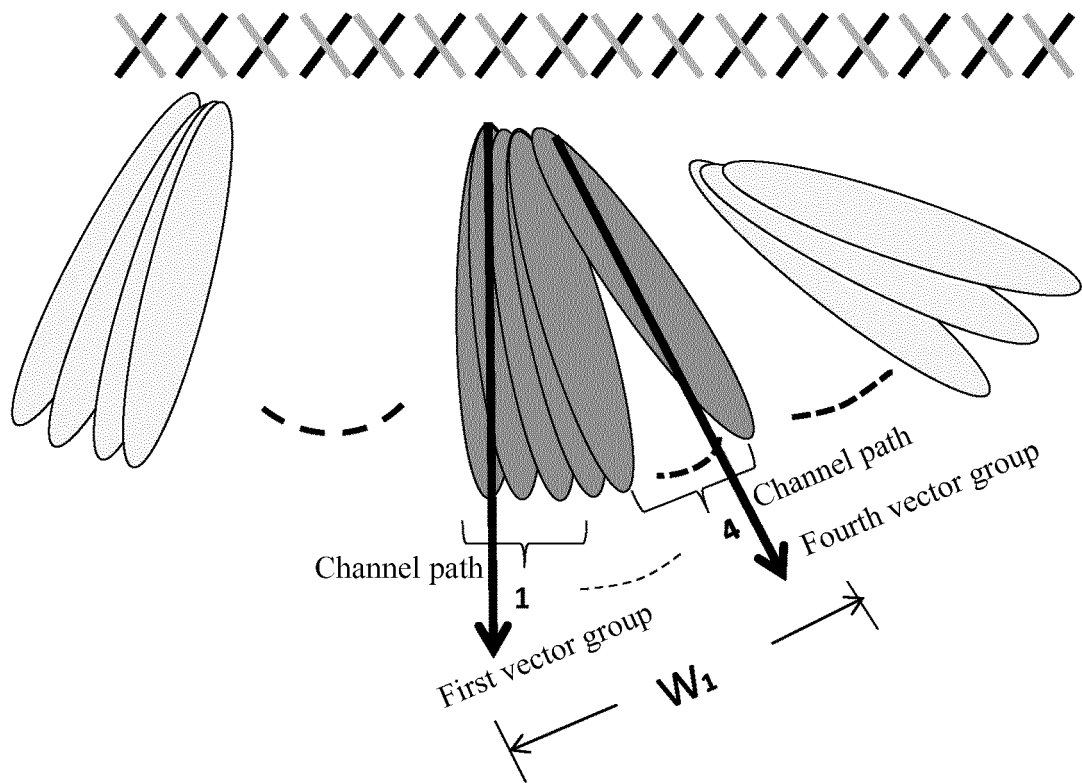


FIG. 4

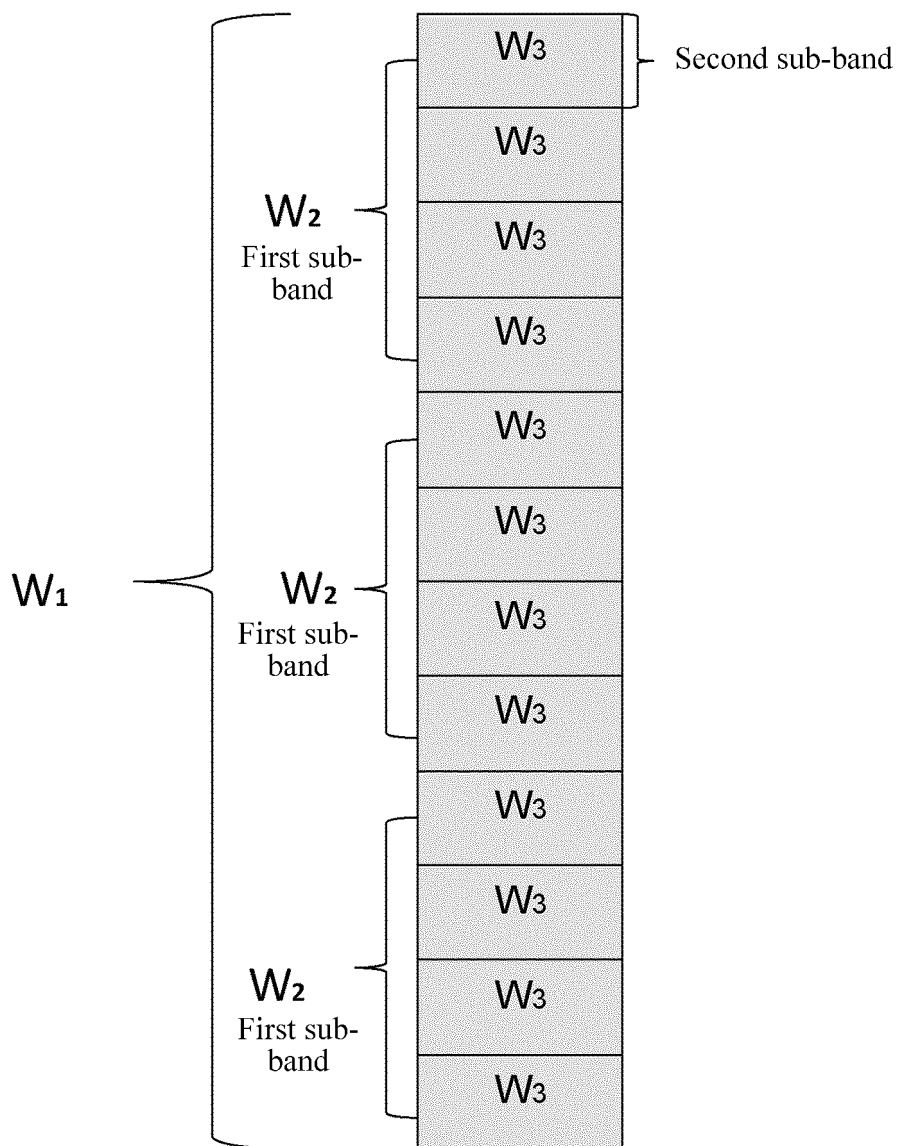


FIG. 5

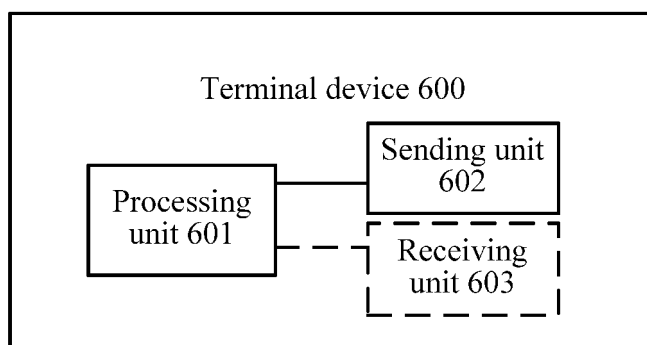


FIG. 6

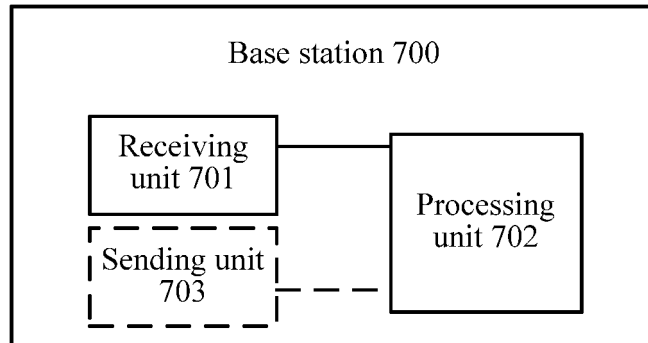


FIG. 7

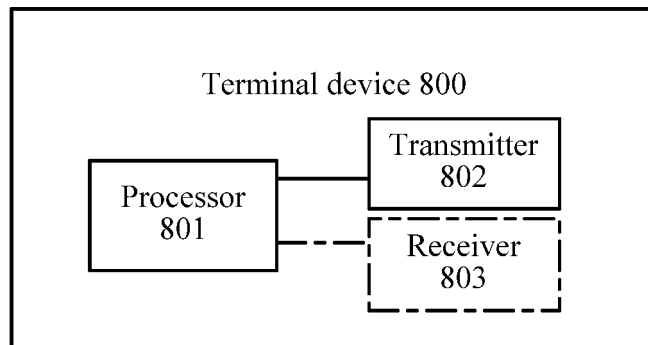


FIG. 8

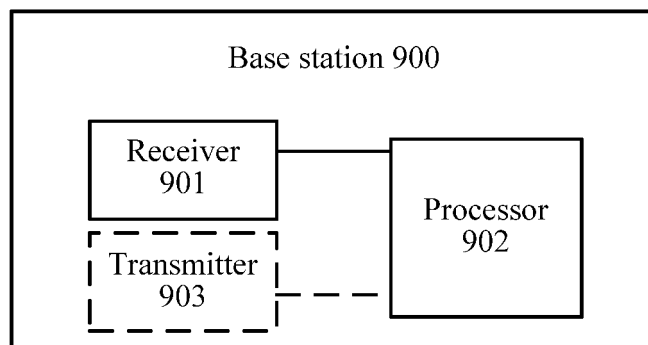


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/078298

A. CLASSIFICATION OF SUBJECT MATTER

H04L 1/06 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, CNPAT, CNKI: overhead, three-stage, column, lte, mimo, encod???, second, third, matrix, performance, line, list

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 103780331 A (CHINA ACADEMY OF TELECOMMUNICATIONS TECHNOLOGY), 07 May 2014 (07.05.2014), description, paragraphs [0036]-[0080] and [0144]-[0157]	1-40
A	CN 101877684 A (DATANG MOBILE COMMUNICATIONS EQUIPMENT CO., LTD.), 03 November 2010 (03.11.2010), the whole document	1-40
A	CN 103746779 A (SHANGHAI HUAWEI TECHNOLOGIES CO., LTD.), 23 April 2014 (23.04.2014), the whole document	1-40

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search
02 December 2016 (02.12.2016)Date of mailing of the international search report
04 January 2017 (04.01.2017)Name and mailing address of the ISA/CN:
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No.: (86-10) 62019451

Authorized officer

TIAN, Jing

Telephone No.: (86-10) 62413701

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2016/078298

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 103780331 A	07 May 2014	WO 2014059831 A1	24 April 2014
		EP 2911330 A1	26 August 2015
		US 2015263800 A1	17 September 2015
CN 101877684 A	03 November 2010	None	
CN 103746779 A	23 April 2014	WO 2015101109 A1	09 July 2015

Form PCT/ISA/210 (patent family annex) (July 2009)