



EUROPEAN PATENT APPLICATION

(43) Date of publication:
28.09.2022 Bulletin 2022/39

(51) International Patent Classification (IPC):
H04L 5/00 (2006.01) H04L 1/18 (2006.01)

(21) Application number: **22157504.6**

(52) Cooperative Patent Classification (CPC):
**H04L 1/1861; H04L 1/1854; H04L 1/1864;
H04L 5/001; H04L 5/0055**

(22) Date of filing: **10.08.2018**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **WANG, Fan**
Shenzhen, 518129 (CN)
- **TANG, Hao**
Shenzhen, 518129 (CN)
- **WANG, Yi**
Shenzhen, 518129 (CN)

(30) Priority: **11.08.2017 CN 201710686826**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
18843277.7 / 3 667 981

(74) Representative: **Epping - Hermann - Fischer**
Patentanwaltsgesellschaft mbH
Schloßschmidstraße 5
80639 München (DE)

(71) Applicant: **Huawei Technologies Co., Ltd.**
Longgang District
Shenzhen,
Guangdong 518129 (CN)

Remarks:

This application was filed on 18-02-2022 as a
divisional application to the application mentioned
under INID code 62.

(72) Inventors:
• **PENG, Jinlin**
Shenzhen, 518129 (CN)

(54) **METHOD FOR DETERMINING FEEDBACK INFORMATION, TERMINAL DEVICE AND NETWORK DEVICE**

(57) A method for determining feedback information, a terminal device, and a network device are disclosed. The method includes: obtaining, by a receive end device, time unit aggregation information and DAI indication information that are sent by a transmit end device; determining feedback information for at least one transport block based on the time unit aggregation information and the DAI indication information; and finally sending the feedback information for the at least one transport block to the transmit end device. This can improve a manner of determining HARQ feedback information in an NR system, so as to support a scenario with a flexible quantity of aggregated/scheduled time units, thereby avoiding understanding inconsistency and disorder of the HARQ feedback information between a terminal device and a base station on a premise of ensuring downlink control overheads and uplink feedback overheads.

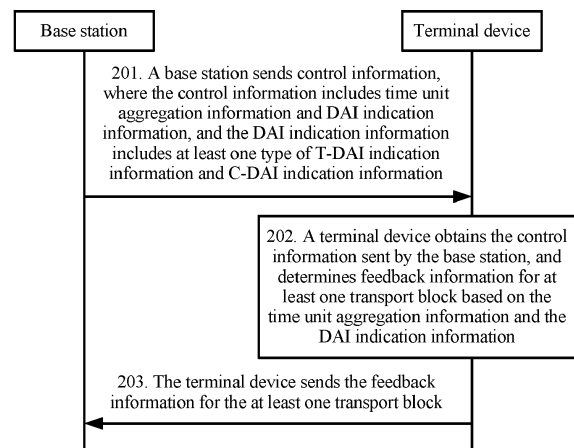


FIG. 2

Description

[0001] This application claims priority to Chinese Patent Application No. 201710686826.1 filed with the China National Intellectual Property Administration on August 11, 2017 and entitled "METHOD FOR DETERMINING FEEDBACK CODEBOOK, TERMINAL DEVICE, AND NETWORK DEVICE", which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] This application relates to the field of wireless communications technologies, and in particular, to a method for determining feedback information, a terminal device, and a network device.

BACKGROUND

[0003] To deal with different user requirements, the fifth generation mobile communications system (the fifth generation, 5G) proposes a concept of network slicing. In a long term evolution (long term evolution, LTE) system, downlink physical layer data is borne by a physical downlink shared channel (physical downlink shared channel, PDSCH). To ensure reliability of physical layer data transmission and transmission efficiency, LTE uses a hybrid automatic repeat request (hybrid automatic repeat request, HARQ) mechanism. According to a basic principle of the HARQ mechanism, a receive end feeds back, to a transmit end, a decoding result for data received from the transmit end; and when the data is correctly decoded, the decoding result that is fed back is an acknowledgement (acknowledgement, ACK), or otherwise, the decoding result that is fed back is a negative acknowledgement (negative acknowledgement, NACK). The transmit end may retransmit the transport block (transport block, TB) after receiving the NACK. In the prior art, the receive end may add, to one piece of uplink feedback information (uplink control information, UCI), decoding results for a plurality of TBs transmitted by the transmit end, and feed back the UCI to the base station. The plurality of TBs may come from different downlink subframes, different code words in multiple-input multiple-output (multiple-input multiple-output, MIMO), and different carriers in carrier aggregation. The decoding result included in the UCI is a HARQ feedback codebook, and a bit quantity of the decoding result is a size of the HARQ feedback codebook. In the decoding result, a correspondence between a bit and a TB is an indexing/orchestration manner of a codebook.

[0004] To better meet ever-increasing requirements of service types, in the new radio access technology (new radio access technology, NR), in addition to supporting LTE-supported enhanced mobile broadband (enhanced mobile broadband, eMBB) and broadcast services, two new service types: a massive machine-type communications (massive machine type communication, mMTC) service and an ultra-reliable and low-latency communications (ultra-reliable and low latency communications, URLLC) service are also introduced. Because service characteristics, reliability requirements, or latency requirements of different service types vary significantly, requirements on system parameters such as subcarrier spacings and symbol duration of services are different.

[0005] In the NR technology, a shorter time unit is used for data transmission. To reduce scheduling control overheads and uplink/downlink transmission switching overheads in time division duplex (time division duplexing, TDD), multi-time-unit scheduling, or referred to as time unit aggregation, may be introduced to the NR. To be specific, one piece of downlink control information (downlink control information, DCI) can schedule a plurality of time units, and each time unit may carry one TB or two TBs. Apparently, DCI control overheads can be lower than those in a case in which one time unit is scheduled by one piece of DCI. Because one piece of DCI schedules one time unit in a conventional downlink communications system, a scenario in which one piece of DCI schedules a plurality of time units is not considered in the prior-art technical solution. After multi-time-unit scheduling or time unit aggregation is introduced, the following problem needs to be urgently resolved: How to design HARQ feedback information to ensure understanding consistency (including consistency of bit quantities of feedback information and consistency of decoding results for data in time units corresponding to bit quantities) between the transmit end and the receive end in a scenario of supporting a flexible quantity of aggregated time units, thereby avoiding occurrence of disorder and ensuring communication reliability and robustness.

SUMMARY

[0006] This application provides a method for determining feedback information, a terminal device, and a network device, to improve a method for determining HARQ feedback information in an NR system, so as to support a scenario with a flexible quantity of aggregated or scheduled time units, thereby avoiding understanding inconsistency and disorder of the HARQ feedback information between a receive device and a transmit device on a premise of ensuring downlink control overheads and uplink feedback overheads.

[0007] According to a first aspect, a method for determining feedback information is provided, including: obtaining, by a receive end device, control information sent by a transmit end device, where the control information

includes time unit aggregation information and downlink assignment index (downlink assignment index, DAI) indication information, and the DAI indication information includes at least one type of total downlink assignment index (total DAI, T-DAI) indication information and counter downlink assignment index (counter DAI, C-DAI) indication information; determining, by the receive end device, feedback information for at least one transport block based on the time unit aggregation information and the DAI indication information; and sending, by the receive end device, the feedback information for the at least one transport block to the transmit end device.

[0008] The receive end device obtains the time unit aggregation information and the DAI indication information that are sent by the transmit end device, determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information, and finally sends the feedback information for the at least one transport block to the transmit end device. This can improve a manner of determining HARQ feedback information in an NR system, so as to support a scenario with a flexible quantity of aggregated/scheduled time units, thereby avoiding understanding inconsistency and disorder of the feedback information between the receive end device and the transmit end device on a premise of ensuring downlink control overheads and uplink feedback overheads.

[0009] In a possible design, the time unit aggregation information includes a maximum quantity of time units that can be scheduled by one piece of downlink control information DCI; and the determining, by the receive end device, feedback information for at least one transport block based on the time unit aggregation information and the DAI indication information includes: determining, by the receive end device, a bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information and the maximum quantity of time units that can be scheduled by one piece of DCI; and orchestrating, by the receive end device based on the C-DAI indication information, feedback information for a transport block in a time unit scheduled by the DCI, to a location corresponding to the C-DAI indication information.

[0010] Because the bit quantity of the feedback information is obtained based on the T-DAI indication information and the maximum quantity of time units that is configured for a carrier and that can be scheduled by one piece of DCI, regardless of how many bits scheduled by one piece of DCI, feedback information of the same bit quantity is fed back. Therefore, in a case of DCI loss, disorder of feedback information can be avoided.

[0011] In a possible design, the determining, by the receive end device, a bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information and the maximum quantity of time units that can be scheduled by one piece of DCI includes: determining, by the receive end device, that a product of the T-DAI indication information and the maximum quantity of time units that can be scheduled by the one piece of DCI is the bit quantity of the feedback information for the at least one transport block.

[0012] The receive end device obtains the bit quantity of the feedback information based on the product of the T-DAI indication information and the maximum quantity of time units that is configured for a carrier and that can be scheduled by one piece of DCI, so that DCI overheads can be reduced and disorder of feedback information is avoided through multi-time-unit scheduling.

[0013] In a possible design, the orchestrating, by the receive end device, feedback information for a transport block in a time unit scheduled by the DCI, to a location corresponding to the C-DAI indication information includes: when the maximum quantity of time units that can be scheduled by one piece of DCI is N, and a quantity of time units scheduled by one piece of DCI is X, where optionally, the quantity X of time units scheduled by each piece of DCI is variable, orchestrating, by the receive end device, the feedback information for the transport block in the time unit scheduled by the DCI, to first X bits at the location corresponding to the C-DAI indication information, and setting (N-X) bits following the first X bits to default values, where X is an integer greater than 1 and less than N.

[0014] The foregoing arrangement manner of the feedback information can ensure understanding consistency between a transmit end and a receive end in the scenario of supporting a flexible quantity of aggregated time units, thereby avoiding disorder of the feedback information, and reducing DCI indication overheads.

[0015] In a possible design, the orchestrating, by the receive end device, feedback information for a transport block in a time unit scheduled by the DCI, to a location corresponding to the C-DAI indication information is specifically: orchestrating, in an order of carriers, feedback information for a transport block in a time unit scheduled by DCI on each carrier in a first time unit. When a plurality of time units are scheduled by the DCI on a currently orchestrated carrier, feedback information for transport blocks in the plurality of time units is first orchestrated, and the plurality of time units include a time unit following the first time unit. Then, feedback information for a transport block in a time unit scheduled by the DCI on a subsequent carrier is orchestrated, the time unit scheduled by the DCI may include the first time unit, and the first time unit is a currently orchestrated time unit. After the feedback information for the transport blocks in the time units scheduled by the DCI on all the carriers in the first time unit is orchestrated, feedback information for a transport block in a time unit, scheduled by the DCI on each carrier, following the first time unit is orchestrated.

[0016] The foregoing arrangement manner of the feedback information can ensure understanding consistency between the transmit end and the receive end in the scenario of supporting a flexible quantity of aggregated time units, thereby avoiding disorder of the feedback information.

[0017] In a possible design, the time unit aggregation information includes a quantity of time units scheduled by the

DCI; and the determining, by the receive end device, feedback information for at least one transport block based on the time unit aggregation information and the DAI indication information is specifically: when the transmit end device configures that the receive end device determines the feedback information according to a dynamic codebook mechanism (in an implementation, determining the feedback information based on a DAI), if a plurality of time units are scheduled by one piece of DCI, performing, by the receive end device, an AND operation on feedback information for transport blocks in the plurality of time units to generate one-bit feedback information; orchestrating, by the receive end device, the one-bit feedback information to the location corresponding to a C-DAI in the DCI; and determining, by the receive end device, the bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information.

[0018] The foregoing arrangement manner of the feedback information can ensure understanding consistency between the transmit end and the receive end in the scenario of supporting a flexible quantity of aggregated time units, thereby avoiding disorder of the feedback information, and reducing DCI indication overheads and UCI feedback overheads.

[0019] In a possible design, the time unit aggregation information includes a quantity of time units scheduled by the DCI; and the determining, by the receive end device, feedback information for at least one transport block based on the time unit aggregation information and the DAI indication information is specifically: determining, by the receive end device, a bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information; and if a quantity of time units scheduled by one piece of DCI is Y, where Y is an integer greater than or equal to 1, orchestrating, by the receive end device based on the C-DAI indication information, feedback information for transport blocks in the Y time units scheduled by the DCI, to Y bits at the location corresponding to the C-DAI indication information.

[0020] The foregoing arrangement manner of the feedback information can ensure understanding consistency between the transmit end and the receive end in the scenario of supporting a flexible quantity of aggregated time units, thereby avoiding disorder of the feedback information, and reducing UCI feedback overheads.

[0021] In a possible design, the time unit aggregation information includes whether time unit aggregation is configured; and the determining, by the receive end device, feedback information for at least one transport block based on the time unit aggregation information and the DAI indication information is specifically: determining, by the receive end device based on a T-DAI corresponding to a carrier subset configured with time unit aggregation and a maximum quantity of time units configured for the carrier subset, a bit quantity of feedback information for the carrier subset configured with time unit aggregation; and orchestrating, by the receive end device based on C-DAI indication information in DCI in the carrier subset configured with time unit aggregation, feedback information for a transport block in a time unit scheduled by the DCI, to the feedback information for the carrier subset configured with time unit aggregation; and/or determining, by the receive end device based on a T-DAI corresponding to a carrier subset configured without time unit aggregation, a bit quantity of feedback information for the carrier subset configured without time unit aggregation; orchestrating, by the receive end device based on C-DAI indication information in DCI in the carrier subset configured without time unit aggregation, feedback information for a transport block in a time unit scheduled by the DCI, to the feedback information for the carrier subset configured without time unit aggregation; and combining the feedback information for the carrier subset configured with time unit aggregation and the feedback information for the carrier subset configured without time unit aggregation.

[0022] Whether a carrier is configured with time unit aggregation is considered during carrier grouping, and therefore feedback information may be separately determined based on a configuration status of time unit aggregation on each carrier, thereby saving unnecessary DCI indication overheads and UCI feedback overheads.

[0023] In a possible design, the time unit aggregation information includes a quantity of aggregated time units configured for a carrier; and the determining, by the receive end device, feedback information for at least one transport block based on the time unit aggregation information and the DAI indication information is specifically: grouping, by the receive end device, carriers into Z subsets based on the quantity of aggregated time units configured for a carrier, where quantities of aggregated time units configured for carriers in one subset are the same; for the i^{th} subset in the Z subsets, determining, by the receive end device, a bit quantity of feedback information for the i^{th} subset based on a T-DAI for the i^{th} subset and a quantity of time units configured for the i^{th} subset; orchestrating, by the receive end device based on C-DAI indication information in DCI in the i^{th} subset, feedback information for a transport block in a time unit scheduled by the DCI, to the feedback information for the i^{th} subset, where i is greater than or equal to 1 and less than or equal to Z; and combining Z pieces of feedback information for the Z subsets, where Z is greater than or equal to 1.

[0024] Carriers are grouped into subsets based on information about a quantity of aggregated time units configured on each carrier, and feedback information is separately determined, thereby saving unnecessary DCI indication overheads and UCI feedback overheads.

[0025] In a possible design, the time unit aggregation information includes whether a carrier is configured with or without time unit aggregation and/or includes a quantity of aggregated time units configured for a carrier; and the determining, by the receive end device, feedback information based on the time unit aggregation information, the T-DAI indication information, and the C-DAI indication information is specifically: separately determining, by the receive end

device, feedback information for a carrier that is configured without time unit aggregation or whose configured quantity of aggregated time units is 1 and for a carrier that is configured with time unit aggregation and/or whose quantity of aggregated time units configured for a carrier is greater than 1.

[0026] In a possible design, the receive end device determines, according to a dynamic codebook mechanism, feedback information for the carrier that is configured without time unit aggregation or whose time unit aggregation is disabled or whose configured quantity of aggregated time units is 1. In an implementation, the receive end device determines, based on the T-DAI indication information and the C-DAI indication information, the feedback information for the carrier that is configured without time unit aggregation or whose time unit aggregation is disabled or whose configured quantity of aggregated time units is 1.

[0027] In a possible design, the receive end device determines, according to a semi-persistent codebook mechanism, feedback information for the carrier that is configured with time unit aggregation and/or whose time unit aggregation is enabled and/or whose configured quantity of aggregated time units is greater than 1. In an implementation, the receive end device determines, based on the time window information, the feedback information for the carrier that is configured with time unit aggregation and/or whose time unit aggregation is enabled and/or whose configured quantity of aggregated time units is greater than 1.

[0028] The foregoing embodiment can ensure understanding consistency between the transmit end and the receive end, support a flexible time unit aggregation configuration, and save unnecessary DCI overheads and UCI feedback overheads.

[0029] According to a second aspect, a method for determining feedback information is provided, including: sending, by a transmit end device, control information to a receive end device, where the control information includes time unit aggregation information and/or DAI indication information, and the DAI indication information includes at least one type of T-DAI indication information and C-DAI indication information; and receiving, by the transmit end device, feedback information for at least one transport block sent by the receive end device, where the feedback information is feedback information generated by the receive end device based on the control information.

[0030] In a possible design, the time unit aggregation information includes a maximum quantity of time units that can be scheduled by one piece of downlink control information DCI.

[0031] In a possible design, the time unit aggregation information includes a quantity of time units scheduled by DCI.

[0032] In a possible design, the time unit aggregation information includes whether a carrier is configured with time unit aggregation and/or includes a quantity of aggregated time units configured for a carrier.

[0033] According to a third aspect, a method for determining feedback information is provided, including:

obtaining, by a receive end device, control information sent by a transmit end device, where the control information includes a monitoring period of a control channel or a control channel resource and DAI indication information, and the DAI information includes at least one type of T-DAI indication information and C-DAI indication information;

grouping, by the receive end device, carriers into M subsets based on the monitoring period of a control channel or a control channel resource, where monitoring periods of control channels or control channel resources of carriers in one subset are the same; for the i^{th} subset of the M subsets, determining, by the receive end device, a bit quantity of feedback information for the i^{th} subset based on a T-DAI for the i^{th} subset; orchestrating, by the receive end device based on C-DAI indication information in DCI in the i^{th} subset, feedback information for a transport block in a time unit scheduled by the DCI, to feedback information for each subset, where i is greater than or equal to 1 and less than or equal to M; and combining M pieces of feedback information for the M subsets, where M is greater than or equal to 1; and

sending, by the receive end device, the feedback information to the transmit end device.

[0034] According to a fourth aspect, a method for determining feedback information is provided, including:

obtaining, by a receive end device, control information sent by a transmit end device, where the control information includes T-DAI indication information and C-DAI indication information, and the T-DAI indication information and/or the C-DAI indication information are counted first in ascending order of carrier indexes, then in ascending order of bandwidth part indexes, and finally in ascending order of time unit indexes; and determining, by the receive end device, feedback information based on the T-DAI indication information and the C-DAI indication information; and sending, by the receive end device, the feedback information to the transmit end device.

[0035] In a possible design, the control information includes bandwidth part information and time window information, and the bandwidth part information is a quantity of bandwidth parts that are configured or activated or that can be simultaneously activated on a carrier.

[0036] In a possible design, the time window information includes a downlink time unit set that may bear a PDSCH (the feedback information for the PDSCH may be fed back through one piece of target uplink control information), or a

set of possible feedback time sequence K1 values.

[0037] In a possible design, the determining, by the receive end device, feedback information based on the bandwidth part information and the time window information includes: determining, by the receive end device, a bit quantity of the feedback information based on the quantity of bandwidth parts that are configured or activated or that can be simultaneously activated on a carrier and a time window size.

[0038] According to a fifth aspect, a method for determining feedback information is provided, including:

obtaining, by a receive end device, control information sent by a transmit end device, where the control information includes time window information and time unit format information;

determining, by the receive end device, feedback information based on the time window information and the time unit format information; and

sending, by the receive end device, the feedback information to the transmit end device.

[0039] In a possible design, the time window information includes a downlink time unit set that may bear a PDSCH (the feedback information for the PDSCH may be fed back through one piece of target uplink control information) or a set of possible feedback time sequence K1 values, and the time unit format information includes configured quantity and/or location information of time units for bearing uplink transmission in a time window; and the determining, by the receive end device, feedback information based on the time window information and the time unit format information includes: determining, by the receive end device, a bit quantity of the feedback information based on the time window size and a quantity of time units for bearing uplink transmission configured in the time window.

[0040] In the process of determining, by the receive end device, the feedback information based on the time window configured by the base station, a DL/UL transmission direction for a time unit also needs to be considered, thereby avoiding unnecessary feedback overheads.

[0041] According to a sixth aspect, a method for determining feedback information is provided, including:

obtaining, by a receive end device, T-DAI indication information and C-DAI indication information that are sent by a transmit end device, where statistics of the T-DAI indication information are collected based on a carrier group, the carrier group includes N subsets, and statistics of the C-DAI indication information are collected based on the subsets in the carrier group; and

determining, by the receive end device, a bit quantity of feedback information based on the T-DAI indication information; sequentially cascading feedback information for first (N-1) subsets of the N subsets; orchestrating the feedback information based on the C-DAI indication information in order starting from the first bit of the feedback information, and orchestrating feedback information for the Nth subset based on the C-DAI indication information in reverse order starting from the last bit of the feedback information.

[0042] According to a seventh aspect, a method for determining feedback information is provided, including:

obtaining, by a receive end device, control information sent by a transmit end device, where the control information includes a configuration parameter of each carrier or bandwidth part and time window information;

determining, by the receive end device, a bit quantity of feedback information based on a configuration parameter relationship of each carrier or bandwidth part and the time window information; and

sending, by the receive end device, the feedback information to the transmit end device.

[0043] According to an eighth aspect, a method for determining feedback information is provided, including:

obtaining, by a receive end device, first control information and second control information that are sent by a transmit end device, where the first control information includes DAI indication information and indication information of K2, and the second control information includes time window information or minimum value information of K1;

determining, by the receive end device, a bit quantity of feedback information based on the DAI indication information, the indication information of K2, and the time window information or the minimum value information of K1; and

sending, by the receive end device, the feedback information to the transmit end device.

[0044] In a possible design, the bit quantity of the feedback information is determined by DAI+X, where X is a quantity of remaining time units following a time unit bearing the first control information in the time window.

[0045] In a possible design, $X=K2-\text{Minimum value of } K1$.

[0046] According to a ninth aspect, a terminal device is provided, including:

a transceiver, configured to: obtain control information sent by a transmit end device, where the control information

includes time unit aggregation information and downlink assignment index DAI indication information, and the DAI information includes at least one type of total downlink assignment index T-DAI indication information and counter downlink assignment index C-DAI indication information; and send the feedback information to the transmit end device; and

a processor, configured to determine feedback information for at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver, where the transceiver is further configured to send the feedback information for the at least one transport block to the transmit end device.

[0047] In a possible design, the time unit aggregation information includes a maximum quantity of time units that can be scheduled by one piece of downlink control information DCI; and when the processor determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver, the processor is specifically configured to:

determine a bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information and the maximum quantity of time units that can be scheduled by one piece of DCI; and orchestrate, based on the C-DAI indication information, feedback information for a transport block in a time unit scheduled by the DCI, to a location corresponding to the C-DAI indication information.

[0048] In a possible design, when the processor determines the bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information and the maximum quantity of time units that can be scheduled by one piece of DCI, the processor is specifically configured to:

determine that a product of the T-DAI indication information and the maximum quantity of time units that can be scheduled by one piece of DCI is the bit quantity of the feedback information for the at least one transport block.

[0049] In a possible design, when the processor orchestrates the feedback information for the transport block in the time unit scheduled by the DCI, to the location corresponding to the C-DAI indication information, the processor is specifically configured to:

when the maximum quantity of time units that can be scheduled by one piece of DCI is N, and a quantity of time units scheduled by one piece of DCI is X, where X is an integer greater than or equal to 1 and less than or equal to N, orchestrate the feedback information for the transport block in the time unit scheduled by the DCI, to first X bits at the location corresponding to the C-DAI indication information, and set (N-X) bits following the first X bits to default values.

[0050] In a possible design, the time unit aggregation information includes a quantity of time units scheduled by DCI; and

when the processor determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver, the processor is specifically configured to:

when a plurality of time units are scheduled by one piece of DCI, perform, for the receive end device, an AND operation on feedback information for transport blocks in the plurality of time units to generate one-bit feedback information, and orchestrate the one-bit feedback information to a location corresponding to a C-DAI in the DCI; and determine the bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information.

[0051] In a possible design, the time unit aggregation information includes a quantity of time units scheduled by DCI; and when the processor determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver, the processor is specifically configured to:

determine the bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information; and

if a quantity of time units scheduled by one piece of DCI is Y, orchestrate, based on the C-DAI indication information, feedback information for transport blocks in the Y time units scheduled by the DCI, to Y bits at the location corresponding to the C-DAI indication information, where Y is an integer greater than or equal to 1.

[0052] In a possible design, the time unit aggregation information includes a carrier subset configured with time unit

aggregation and/or a carrier subset configured without time unit aggregation; and
 when the processor determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver, the processor is specifically configured to:

determine, based on a T-DAI corresponding to the carrier subset configured with time unit aggregation and a maximum quantity of time units configured for the carrier subset, a bit quantity of feedback information for the carrier subset configured with time unit aggregation; and
 orchestrate, based on C-DAI indication information in DCI in the carrier subset configured with time unit aggregation, feedback information for a transport block in a time unit scheduled by the DCI, to the feedback information for the carrier subset configured with time unit aggregation; and/or
 determine, based on a T-DAI corresponding to the carrier subset configured without time unit aggregation, a bit quantity of feedback information for the carrier subset configured without time unit aggregation; and
 orchestrate, based on C-DAI indication information in DCI in the carrier subset configured without time unit aggregation, feedback information for a transport block in a time unit scheduled by the DCI, to the feedback information for the carrier subset configured without time unit aggregation; and combine the feedback information for the carrier subset configured with time unit aggregation and the feedback information for the carrier subset configured without time unit aggregation.

[0053] In a possible design, the time unit aggregation information includes a quantity of aggregated time units configured for a carrier; and

when the processor determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver, the processor is specifically configured to:

group carriers into Z subsets based on the quantity of aggregated time units configured for a carrier, where configured quantities of aggregated time units on all carriers in one subset are the same; and
 for the i^{th} subset of the Z subsets, determine a bit quantity of feedback information for the i^{th} subset based on a T-DAI for the i^{th} subset and a quantity of time units configured for the i^{th} subset; orchestrate, based on C-DAI indication information in DCI in the i^{th} subset, feedback information for a transport block in a time unit scheduled by the DCI, to feedback information for each subset, where i is greater than or equal to 1 and less than or equal to Z; and combine Z pieces of feedback information for the Z subsets, where Z is greater than or equal to 1.

[0054] In a possible design, the time unit aggregation information includes whether a carrier is configured with or without time unit aggregation and/or includes a quantity of aggregated time units configured for a carrier; and
 when the processor determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver, the processor is specifically configured to:

determine, based on the T-DAI indication information and the C-DAI indication information, feedback information for a carrier that is configured without time unit aggregation or whose configured quantity of aggregated time units is 1; and
 determine, based on a time window size, feedback information for a carrier that is configured with time unit aggregation and/or whose quantity of aggregated time units configured for a carrier is greater than 1.

[0055] According to a tenth aspect, a network device is provided, including a transceiver and a processor, where

the processor is configured to control the transceiver to send control information to a receive end device, where the control information includes time unit aggregation information and/or downlink assignment index DAI indication information, and the DAI indication information includes at least one type of total downlink assignment index T-DAI indication information and counter downlink assignment index C-DAI indication information; and
 the processor is further configured to control the transceiver to receive feedback information sent by the receive end device for at least one transport block, where the feedback information is feedback information generated by the receive end device based on the control information.

[0056] In a possible design, the time unit aggregation information includes a maximum quantity of time units that can be scheduled by one piece of downlink control information DCI.

[0057] In a possible design, the time unit aggregation information includes a quantity of time units scheduled by DCI.

[0058] In a possible design, the time unit aggregation information includes whether a carrier is configured with or without time unit aggregation and/or includes a quantity of aggregated time units configured for a carrier.

[0059] According to an eleventh aspect, a communications system is provided, where the communications system includes the terminal device in the ninth aspect and the network device in the tenth aspect.

[0060] According to a twelfth aspect, a terminal device is provided, where the terminal device can implement a function of the receive end device in the foregoing method embodiment, the function may be implemented by hardware or by hardware executing corresponding software, and the hardware or the software includes one or more modules corresponding to the foregoing function.

[0061] In a possible design, the terminal device includes a processor, a memory, a bus, and a communications interface, where the memory stores a computer-executable instruction; the processor is connected to the memory by using the bus; and when the device runs, the processor executes the computer-executable instruction stored in the memory, so that the device executes the method for determining feedback information in any possible implementation of the first aspect.

[0062] In a possible design, the terminal device may be a chip, and the chip includes a processing unit. Optionally, the chip further includes a storage unit, and the chip may be configured to perform the method for determining feedback information in any possible implementation of the first aspect.

[0063] According to a thirteenth aspect, a network device is provided, where the network device can implement a function of the receive end device in the foregoing method embodiment, the function may be implemented by hardware or by hardware executing corresponding software, and the hardware or the software includes one or more modules corresponding to the foregoing function.

[0064] In a possible design, the network device includes a processor, a memory, a bus, and a communications interface, where the memory stores a computer-executable instruction; the processor is connected to the memory by using the bus; and when the device runs, the processor executes the computer-executable instruction stored in the memory, so that the device executes the method for determining feedback information in any possible implementation of the second aspect.

[0065] In a possible design, the network device may be a chip, and the chip includes a processing unit. Optionally, the chip further includes a storage unit, and the chip may be configured to perform the method for determining feedback information in any possible implementation of the second aspect.

[0066] According to a fourteenth aspect, a terminal device is provided, where the terminal device can implement a function of the receive end device in the foregoing method embodiment, the function may be implemented by hardware or by hardware executing corresponding software, and the hardware or the software includes one or more modules corresponding to the foregoing function.

[0067] In a possible design, the terminal device includes a processor, a memory, a bus, and a communications interface, where the memory stores a computer-executable instruction; the processor is connected to the memory by using the bus; and when the device runs, the processor executes the computer-executable instruction stored in the memory, so that the device executes the method for determining feedback information in any possible implementation of the third aspect.

[0068] In a possible design, the terminal device may be a chip, and the chip includes a processing unit. Optionally, the chip further includes a storage unit, and the chip may be configured to perform the method for determining feedback information in any possible implementation of the third aspect.

[0069] According to a fifteenth aspect, a terminal device is provided, where the terminal device can implement a function of the receive end device in the foregoing method embodiment, the function may be implemented by hardware or by hardware executing corresponding software, and the hardware or the software includes one or more modules corresponding to the foregoing function.

[0070] In a possible design, the terminal device includes a processor, a memory, a bus, and a communications interface, where the memory stores a computer-executable instruction; the processor is connected to the memory by using the bus; and when the device runs, the processor executes the computer-executable instruction stored in the memory, so that the device executes the method for determining feedback information in any possible implementation of the fourth aspect.

[0071] In a possible design, the terminal device may be a chip, and the chip includes a processing unit. Optionally, the chip further includes a storage unit, and the chip may be configured to perform the method for determining feedback information in any possible implementation of the fourth aspect.

[0072] According to a sixteenth aspect, a terminal device is provided, where the terminal device can implement a function of the receive end device in the foregoing method embodiment, the function may be implemented by hardware or by hardware executing corresponding software, and the hardware or the software includes one or more modules corresponding to the foregoing function.

[0073] In a possible design, the terminal device includes a processor, a memory, a bus, and a communications interface, where the memory stores a computer-executable instruction; the processor is connected to the memory by using the

bus; and when the device runs, the processor executes the computer-executable instruction stored in the memory, so that the device executes the method for determining feedback information in any possible implementation of the fifth aspect.

[0074] In a possible design, the terminal device may be a chip, and the chip includes a processing unit. Optionally, the chip further includes a storage unit, and the chip may be configured to perform the method for determining feedback information in any possible implementation of the fifth aspect.

[0075] According to a seventeenth aspect, a terminal device is provided, where the terminal device can implement a function of the receive end device in the foregoing method embodiment, the function may be implemented by hardware or by hardware executing corresponding software, and the hardware or the software includes one or more modules corresponding to the foregoing function.

[0076] In a possible design, the terminal device includes a processor, a memory, a bus, and a communications interface, where the memory stores a computer-executable instruction; the processor is connected to the memory by using the bus; and when the device runs, the processor executes the computer-executable instruction stored in the memory, so that the device executes the method for determining feedback information in any possible implementation of the sixth aspect.

[0077] In a possible design, the terminal device may be a chip, and the chip includes a processing unit. Optionally, the chip further includes a storage unit, and the chip may be configured to perform the method for determining feedback information in any possible implementation of the sixth aspect.

[0078] According to an eighteenth aspect, a terminal device is provided, where the terminal device can implement a function of the receive end device in the foregoing method embodiment, the function may be implemented by hardware or by hardware executing corresponding software, and the hardware or the software includes one or more modules corresponding to the foregoing function.

[0079] In a possible design, the terminal device includes a processor, a memory, a bus, and a communications interface, where the memory stores a computer-executable instruction; the processor is connected to the memory by using the bus; and when the device runs, the processor executes the computer-executable instruction stored in the memory, so that the device executes the method for determining feedback information in any possible implementation of the seventh aspect.

[0080] In a possible design, the terminal device may be a chip, and the chip includes a processing unit. Optionally, the chip further includes a storage unit, and the chip may be configured to perform the method for determining feedback information in any possible implementation of the seventh aspect.

[0081] According to a nineteenth aspect, a terminal device is provided, where the terminal device can implement a function of the receive end device in the foregoing method embodiment, the function may be implemented by hardware or by hardware executing corresponding software, and the hardware or the software includes one or more modules corresponding to the foregoing function.

[0082] In a possible design, the terminal device includes a processor, a memory, a bus, and a communications interface, where the memory stores a computer-executable instruction; the processor is connected to the memory by using the bus; and when the device runs, the processor executes the computer-executable instruction stored in the memory, so that the device executes the method for determining feedback information in any possible implementation of the eighth aspect.

[0083] In a possible design, the terminal device may be a chip, and the chip includes a processing unit. Optionally, the chip further includes a storage unit, and the chip may be configured to perform the method for determining feedback information in any possible implementation of the eighth aspect.

[0084] According to a twentieth aspect, a computer-readable storage medium is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the first aspect.

[0085] According to a twenty-first aspect, a computer-readable storage medium is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the second aspect.

[0086] According to a twenty-second aspect, a computer-readable storage medium is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the third aspect.

[0087] According to a twenty-third aspect, a computer-readable storage medium is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the fourth aspect.

[0088] According to a twenty-fourth aspect, a computer-readable storage medium is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the fifth aspect.

[0089] According to a twenty-fifth aspect, a computer-readable storage medium is provided, including a computer-

readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the sixth aspect.

[0090] According to a twenty-sixth aspect, a computer-readable storage medium is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the seventh aspect.

[0091] According to a twenty-seventh aspect, a computer-readable storage medium is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the eighth aspect.

[0092] According to a twenty-eighth aspect, a computer program product is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the first aspect.

[0093] According to a twenty-ninth aspect, a computer program product is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the second aspect.

[0094] According to a thirtieth aspect, a computer program product is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the third aspect.

[0095] According to a thirty-first aspect, a computer program product is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the fourth aspect.

[0096] According to a thirty-second aspect, a computer program product is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the fifth aspect.

[0097] According to a thirty-third aspect, a computer program product is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the sixth aspect.

[0098] According to a thirty-fourth aspect, a computer program product is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the seventh aspect.

[0099] According to a thirty-fifth aspect, a computer program product is provided, including a computer-readable instruction, where when a computer reads and executes the computer-readable instruction, the computer performs the method in any implementation of the eighth aspect.

BRIEF DESCRIPTION OF DRAWINGS

[0100]

FIG. 1 is a schematic structural diagram of a system architecture according to this application;

FIG. 2 is a schematic flowchart of a method for determining feedback information according to this application;

FIG. 3 is a schematic diagram of arrangement of time units according to this application;

FIG. 4 is a schematic diagram of arrangement of time units according to this application;

FIG. 5a is a schematic diagram of arrangement of time units according to this application;

FIG. 5b is a schematic diagram of arrangement of time units according to this application;

FIG. 5c is a schematic diagram of arrangement of time units according to this application;

FIG. 6a is a schematic diagram of arrangement of feedback information according to this application;

FIG. 6b is a schematic diagram of arrangement of feedback information according to this application;

FIG. 7a is a schematic diagram of arrangement of feedback information according to this application;

FIG. 7b is a schematic diagram of arrangement of feedback information according to this application;

FIG. 8a is a schematic diagram of arrangement of time units according to this application;

FIG. 8b is a schematic diagram of arrangement of time units according to this application;

FIG. 9a is a schematic diagram of arrangement of feedback information according to this application;

FIG. 9b is a schematic diagram of arrangement of feedback information according to this application;

FIG. 10 is a schematic flowchart of determining feedback information according to this application;

FIG. 11 is a schematic diagram of arrangement of feedback information according to this application;

FIG. 12 is a schematic diagram of arrangement of feedback information according to this application;

FIG. 13 is a schematic diagram of arrangement of feedback information according to this application;

FIG. 14 is a schematic diagram of arrangement of time units according to this application;

FIG. 15 is a schematic diagram of arrangement of time units according to this application;

FIG. 16 is a schematic diagram of arrangement of time units according to this application;
 FIG. 17 is a schematic diagram of arrangement of time units according to this application;
 FIG. 18 is a schematic diagram of arrangement of time units according to this application;
 FIG. 19 is a schematic diagram of arrangement of time units according to this application;
 FIG. 20 is a schematic diagram of arrangement of time units according to this application;
 FIG. 21 is a schematic structural diagram of a terminal device according to this application; and
 FIG. 22 is a schematic structural diagram of a network device according to this application.

DESCRIPTION OF EMBODIMENTS

[0101] The following describes the technical solutions of this application with reference to the accompanying drawings in this application. A specific operation method in method embodiments may also be applied to an apparatus embodiment or a system embodiment. In the descriptions of this application, unless otherwise specified, "plurality" indicates at least two.

[0102] Architectures and service scenarios described in this application are intended to more clearly describe the technical solutions in this application, but are not intended to limit the technical solutions provided in this application. A person of ordinary skill in the art may know that as the network architectures evolve and a new service scenario emerges, the technical solutions provided in this application are further applied to a similar technical problem.

[0103] FIG. 1 is a schematic diagram of a possible network architecture applicable to this application. The network architecture includes at least one receive end device 10, and the receive end device 10 communicates with a transmit end device 20 through a radio interface. For clarity, FIG. 1 shows only one receive end device and one transmit end device. In the network architecture, the receive end device may be a terminal device, and the transmit end device may be a base station. For ease of description, "terminal device" and "base station" are used in descriptions of subsequent operation method procedures.

[0104] The terminal device is a device that has a wireless transmission/reception function, and the terminal device may be deployed on land, for example, an indoor device, an outdoor device, a handheld device, or an in-vehicle device, or may be deployed in the water (for example, on a ship), or may be deployed in the sky (for example, on a plane, a balloon, or a satellite). The terminal may be a mobile phone (mobile phone), a tablet computer (pad), a computer with a wireless transmission/reception function, a virtual reality (virtual reality, VR) terminal, an augmented reality (augmented reality, AR) terminal, a wireless terminal in industrial control (industrial control), a wireless terminal in self-driving (self driving), a wireless terminal in telemedicine (remote medical), a wireless terminal in a smart grid (smart grid), a wireless terminal in transportation safety (transportation safety), a wireless terminal in a smart city (smart city), a wireless terminal in a smart home (smart home), or the like.

[0105] The base station is a device that connects a terminal to a wireless network. The base station includes but is not limited to an evolved NodeB, (evolved Node B, eNB), a home evolved NodeB (for example, home evolved nodeB or home node B, HNB), a baseband unit (baseband unit, BBU), a gNodeB (g nodeB, gNB), a transmission/reception point (transmitting and receiving point, TRP), a transmission point (transmitting point, TP), or the like. In addition, the base station may further include a Wi-Fi access point (access point, AP) or the like.

[0106] At present, an LTE system includes two transmission modes: frequency division duplex (frequency division duplexing, FDD) and time division duplex (time division duplexing, TDD). In an FDD manner of determining feedback information, in a time unit (an LTE time unit is a subframe) n , the base station sends downlink data to the terminal device; and the terminal device feeds back, in a time unit ($n+4$), whether the feedback information is correctly received. If the data includes only one transport block (transport block, TB), the terminal device feeds back one-bit feedback information; or if there are two TB blocks (two code words) in multiple-input multiple-output (multiple-input multiple-output, MIMO), the terminal device feeds back two-bit feedback information.

[0107] However, in a TDD manner of determining feedback information, the terminal device detects downlink data transmission in a downlink time unit ($n-k$), and the terminal device sends feedback information in an uplink time unit n , where $k \in K$ (whether data in a plurality of downlink time units is correctly received needs to be fed back in one uplink time unit because a quantity of uplink time units is relatively small), as shown in Table 1.

Table 1

Uplink-downlink configuration	Time unit n									
	0	1	2	3	4	5	6	7	8	9
0	-	-	6	-	4	-	-	6	-	4
1	-	-	7,6	4	-	-	-	7,6	4	-

(continued)

Uplink-downlink configuration	Time unit n									
	0	1	2	3	4	5	6	7	8	9
2	-	-	8, 7, 4, 6	-	-	-	-	8, 7, 4, 6	-	-
3	-	-	7, 6, 11	6, 5	5, 4	-	-	-	-	-
4	-	-	12, 8, 7, 11	6, 5, 4, 7	-	-	-	-	-	-
5	-	-	13, 12, 9, 8, 7, 5, 4, 11, 6	-	-	-	-	-	-	-
6	-	-	7	7	5	-	-	7	7	-

[0108] In a case of a TDD configuration of 1, a time unit 7 is an uplink time unit ($n=7$), and feedback information of whether downlink data in a time unit ($n-k$) (it may be learned that k is 7 or 6 according to Table 1) is correctly received, that is, feedback information for downlink data in a time unit 0 and a time unit 1, possibly need to be fed back in the time unit 7. If data transmitted to the terminal device includes only one TB, two-bit feedback information is fed back in the time unit 7; or if there are two TB blocks (two code words) in MIMO, four-bit feedback information is fed back.

[0109] In conclusion, in TDD, feedback information for transmission in one or more downlink time units need to be fed back in each uplink time unit, a downlink time unit set whose reception status needs to be fed back is referred to as a time window (also referred to as a bundling window or an associated set (associated sets) in this application), and a quantity of time units included in the set is referred to as a time window size.

[0110] In addition, the time window in this application may have the following two interpretations.

1. The time window is a set of downlink time units that possibly bear physical downlink shared channels (physical downlink shared channel, PDSCH). Hybrid automatic repeat request acknowledgements (hybrid automatic repeat request acknowledgement, HARQ-ACK) for decoding result of the PDSCHs may be borne in one piece of target uplink UCI. In this case, the time window may be determined in relation to $K1$. For example, for target UCI in a time unit n , a possibly earliest or foremost time unit in a time window corresponding to the time unit n is n -" $\text{Maximum value of } K1$ ", and a possibly latest or last time unit in the time window corresponding to the time unit n is n -" $\text{Minimum value of } K1$ ". For example, for an uplink time unit n , if the minimum value of $K1$ is 2 and the maximum value of $K1$ is 6, an earliest time unit of a time window corresponding to the uplink time unit n is $n-6$, and a last time unit of the time window may be $n-2$. $K1$ is a time relationship between a time unit for transmitting a PDSCH and a time unit for transmitting a physical uplink control channel (physical uplink control channel, PUCCH) or a physical uplink shared channel (physical uplink shared channel, PUSCH). The PUCCH or PUSCH is used to transmit feedback information or UCI for the data. Specifically, if downlink data is sent in the n^{th} time unit on a physical downlink shared channel (physical downlink shared channel, PDSCH), a time unit used to transmit acknowledgement information corresponding to the downlink data on a physical uplink shared channel PUSCH or a physical uplink control channel PUCCH is the $(n+K1)^{\text{th}}$ time unit.

2. The time window is a set of downlink time units that possibly bear PDCCHs. HARQ-ACKs for decoding result of PDSCHs scheduled by the PDCCHs may be borne in one piece of target uplink UCI. In this case, the time window may be determined in relation to $K1$ and $K0$. For example, for target UCI in a time unit n , a possibly earliest or foremost time unit in a time window corresponding to the time unit n is n -" $\text{Maximum value of } K1$ "-" $\text{Maximum value of } K0$ ", and a possibly latest or last time unit in the time window corresponding to the time unit n is n -" $\text{Minimum value of } K1$ "-" $\text{Minimum value of } K0$ ". For example, for an uplink time unit n , if the minimum value of $K1$ is 2, the maximum value of $K1$ is 6, the minimum value of $K0$ is 0, and the maximum value of $K0$ is 4, an earliest time unit of a time window corresponding to the uplink time unit n is $n-6-4$, and a last time unit of the time window may be $n-2$. $K0$ may be a time relationship between a time unit for transmitting a PDCCH and a time unit for transmitting a physical downlink shared channel PDSCH. Specifically, if scheduling information is sent on the PDCCH in the n^{th} time unit, a time unit used by the PDSCH scheduled by the PDCCH is the $(n+K0)^{\text{th}}$ time unit.

[0111] An LTE time window is fixed. In other words, the time window is determined based on a TDD uplink-downlink time unit configuration. However, an NR-system time window may be dynamic and configurable. Specifically, $K1$ and $K0$ are configured through a combination of radio resource control (radio resource control, RRC) and DCI. In other words, a set of possible values of $K1$ and/or $K0$ is configured through semi-persistent RRC signaling, and then specific value

information of K1 and/or K0 is notified through DCI signaling.

[0112] During carrier aggregation, a terminal device may determine feedback information based on a configured carrier quantity. For example, the terminal device may determine HARQ feedback information based on a total downlink assignment index (total downlink assignment index, T-DAI) and a counter downlink assignment index (counter downlink assignment index, C-DAI).

[0113] The T-DAI may be, in a time window, a total quantity of {carrier, time unit} pairs scheduled by a PDCCH until a current time unit (and may further include a quantity of PDCCHs used to indicate semi-persistent scheduling release); or a total quantity of PDSCH transmissions until a current time unit; or a total quantity of PDCCH-related PDSCH transmissions (for example, a PDSCH transmission scheduled by a PDCCH) in a current serving cell and/or until a current time unit, and/or, a total quantity of {carrier, time unit} pairs of PDCCHs used to indicate semi-persistent scheduling (SPS) release in a current serving cell and/or until a current time unit; or a total quantity of PDSCHs scheduled by a base station and having corresponding PDCCHs in a current serving cell and/or until a current time unit, and/or, a total quantity of PDCCHs used to indicate semi-persistent scheduling (semi-persistent scheduling, SPS) release in a current serving cell and/or until a current time unit; or a total quantity of PDSCHs scheduled by a base station in a current serving cell and/or until a current time unit (where the PDSCH is a PDSCH that has a corresponding PDCCH and/or that has a PDCCH used to indicate SPS release); or a total quantity of time units that are scheduled by a base station in a current serving cell and/or until a current time unit and in which PDSCH transmission is performed (where the PDSCH is a PDSCH that has a corresponding PDCCH and/or a PDCCH that indicates SPS release). It should be noted that a carrier in this application may also be referred to as a cell.

[0114] The C-DAI is, in a time window, an accumulated quantity of {carrier, time unit} pairs scheduled by a PDCCH until a current time unit (and may further include a quantity of PDCCHs used to indicate SPS release); or an accumulated quantity of PDCCHs until a current time unit; or an accumulated quantity of PDSCH transmissions until a current time unit; or an accumulated quantity of PDCCH-related PDSCH transmissions (for example, a PDSCH transmission scheduled by a PDCCH) in a current serving cell and/or until a current time unit, and/or, an accumulated quantity of {carrier, time unit} pairs of PDCCHs used to indicate semi-persistent scheduling (SPS) release; or an accumulated quantity of PDSCHs scheduled by a base station and having corresponding PDCCHs in a current serving cell and/or until a current time unit, and/or, an accumulated quantity of PDCCHs used to indicate SPS release in a current serving cell and/or until a current time unit; or an accumulated quantity of PDSCHs scheduled by a base station in a current serving cell and/or until a current time unit (where the PDSCH is a PDSCH that has a corresponding PDCCH and/or that has a PDCCH used to indicate SPS release); or an accumulated quantity of time units that are scheduled by a base station in a current serving cell and/or until a current time unit and in which PDSCH transmission is performed (where the PDSCH is a PDSCH that has a corresponding PDCCH and/or a PDCCH that is used to indicate SPS release).

[0115] As shown in Table 2, a base station configures five carriers, and each grid represents one time unit. It is assumed that a HARQ time window includes four time units, and a grid filled with D(m,n) represents a time unit in which PDSCH transmission is performed. The PDSCH or the time unit is scheduled by DCI D(m,n), where m represents a value of a total-DAI in DCI that schedules the time unit or the PDSCH, and n represents a value of a counter-DAI in the DCI that schedules the time unit or the PDSCH. It is assumed that PDSCHs or data scheduled by DCI D(1,1), D(3,2), D(4,4), and D(6,6) are correctly received at a receive end, that a PDSCH or data scheduled by DCI D(3,3) is incorrectly received at the receive end, and that the receive end does not detect DCI D(6,5). In the 1st time unit in the time window, data is scheduled on only a carrier 1, and therefore T-DAI=1 and C-DAI=1. In the 2nd time unit in the time window, data is transmitted on both a carrier 0 and a carrier 3, plus the data transmission in the 1st time unit, T-DAI=3, the C-DAI is 2 on the carrier 0, and the C-DAI is 3 on the carrier 2. T-DAIs and C-DAIs in the 3rd time unit and the 4th time unit can be sequentially obtained. Therefore, final HARQ feedback information includes six bits (which is determined by a finally detected T-DAI in the time window, that is, 6), that is, 110101. For example, 1 represents an ACK, and 0 represents a NACK. Because the receive device does not detect the DCI D(6,5), the receive device first maps feedback information for PDSCHs in detected DCI onto locations corresponding to the C-DAIs (for example, maps data scheduled by the DCI D(1,1) onto the 1st bit, that is, an ACK(1)), and a remaining location filled with no information (a location corresponding to C-DAI=5, namely, the 5th bit) is filled with NACK. This is an advantage of a DAI mechanism, that is, a data packet loss can be detected, thereby avoiding understanding inconsistency of feedback information between the base station and the UE. A corresponding PD SCH or TB is counted first in frequency domain and then in time domain. In other words, the T-DAI and the C-DAI are counted first in frequency domain and then in time domain. A HARQ-ACK of a TB corresponding to DCI whose DAI value is D(1,1) is the 1st bit, a HARQ-ACK of a TB corresponding to DCI whose DAI value is D(3,2) is the 2nd bit, and so on. It should be noted that DAI is counted first in frequency domain and then in time domain.

[0116] It should be noted that the values 1, 2, 3, 4, 5, and 6 of the T-DAI and the C-DAI in the example of this application are merely used for ease of description herein. In a protocol, indication information in DCI depends on bit quantities of T-DAI and C-DAI fields in the DCI. For example, in LTE, it is assumed that the T-DAI field and the C-DAI field each include two bits, where 1 is represented by 00, 2 is represented by 01, 3 is represented by 10, 4 is represented by 11,

5 is represented by 00, 6 is represented by 01, and so on. Therefore, when a specific value of the T-DAI is calculated, a quantity of repetition times needs to be considered. For example, if the T-DAI field is repeated once and the T-DAI field is 01, it indicates that the value of the T-DAI is 6; or if the T-DAI field is repeated twice and the T-DAI field is 10, it indicates that the value of the T-DAI is 11. The same holds true for the C-DAI, and details are not repeated. For details, refer to Table 3.

Table 2

CC0		D(3,2) Correct		
CC1	D(1,1) Correct		D(4,4) Correct	D(6,5) Lost
CC2		D(3,3) Incorrect		D(6,6) Correct
CC3				
CC4				

Table 3

DAI field information	C-DAI/T-DAI value corresponding to a DAI field	Actual C-DAI/T-DAI value Y (a quantity of PDCCH-related PDSCH transmissions (for example, a PDSCH transmission scheduled by a PDCCH), and/or, a quantity of {carrier, time unit} pairs of a PDCCH that is used to indicate semi-persistent scheduling (SPS) release)
0,0	1	$\text{mod}(Y-1,4)+1=1$
0,1	2	$\text{mod}(Y-1,4)+1=2$
1,0	3	$\text{mod}(Y-1,4)+1=3$
1,1	4	$\text{mod}(Y-1,4)+1=4$

[0117] To reduce scheduling control overheads and TDD uplink/downlink transmission switching overheads, use of a shorter time unit is considered, and therefore multi-time-unit scheduling, or referred to as time unit aggregation, may be introduced in NR. To be specific, one piece of DCI may schedule a plurality of time units, and each time unit may bear one TB or two TBs. Apparently, DCI control overheads can be lower than those in a case in which one time unit is scheduled by one piece of DCI. Because one piece of DCI schedules one time unit in a conventional downlink communications system, a scenario in which one piece of DCI schedules a plurality of time units is not considered in the prior art technical solution. After multi-time-unit scheduling or time unit aggregation is introduced, the following problem needs to be urgently resolved: How to design HARQ feedback information to ensure understanding consistency (including consistency of bit quantities of feedback information and consistency of decoding results for data in time units corresponding to bit quantities) between a transmit end and a receive end in a scenario of supporting a flexible quantity of aggregated time units, thereby avoiding occurrence of disorder and ensuring communication reliability and robustness. For example, it is assumed that the receive device receives two pieces of DCI in a time window, that a T-DAI is 3 and a C-DAI is 1 in one piece of DCI, and that a T-DAI is 3 and a C-DAI is 3 in the other piece of DCI. According to the prior art, the receive device may determine that one piece of DCI may be lost, and that a T-DAI is 3 and a C-DAI is 2 in the lost DCI. However, the receive device does not know a specific carrier that corresponds to the lost DCI and a quantity of time units/PDSCHs/TBs that are scheduled by the lost DCI. Consequently, the receive device does not know a quantity of bits that actually need to be fed back, and does not know which corresponding bit information needs to be filled with NACK or discontinuous transmission (Discontinuous transmission) DTX. This results in understanding inconsistency between the transmit end and the receive end, occurrence of disorder, and poor robustness of communication.

[0118] Based on the foregoing descriptions, the following details the method for determining feedback information provided in this application.

[0119] Feedback information in this application may be understood as or represented as a HARQ-ACK bit sequence

$\tilde{o}_0^{ACK}, \tilde{o}_1^{ACK}, \dots, \tilde{o}_{O^{ACK}-1}^{ACK}$, where O^{ACK} represents a bit quantity of the feedback information, and $\tilde{o}_i^{ACK}$ represents HARQ-ACK bit information at a location of the i^{th} bit.

Embodiment 1

[0120] FIG. 2 shows a method for determining feedback information provided in this application. The method is applicable to the system architecture shown in FIG. 1, and includes the following steps.

[0121] Step 201: A base station sends control information, where the control information includes time unit aggregation information and downlink assignment index DAI indication information, and the DAI indication information includes at least one type of total downlink assignment index T-DAI indication information and counter downlink assignment index C-DAI indication information.

[0122] In this embodiment of this application, the time unit aggregation information and the downlink assignment index DAI indication information that are included in the control information sent by the base station to a terminal device may be delivered by using one piece of control information. For example, both the time unit aggregation information and the DAI indication information are delivered by using DCI. Alternatively, the time unit aggregation information and the downlink assignment index DAI indication information may be separately included in two pieces of control information. For example, the base station sends RRC signaling or common DCI (group common DCI) to the terminal device, where the RRC signaling or the common DCI (group common DCI) includes the time unit aggregation information; and the base station sends UE-dedicated DCI to the terminal device, where the UE-dedicated DCI includes the DAI indication information. Specifically, there may be two cases for the DAI indication information. Case 1: The DAI indication information includes only a DAI field, and this is applicable to a scenario of determining one piece of carrier feedback information (for example, a scenario of only one carrier configured, or a scenario of determining feedback information for each carrier). A physical meaning of the DAI indication information in this case is similar to that of the C-DAI described above. Case 2: The DAI indication information includes the T-DAI indication information and C-DAI indication information described above. The second case prevails by default in examples of the embodiments of this application, unless otherwise specified, but this is not limited. For the first case, the concept of this application may be directly used. Time unit aggregation may be understood as that a plurality of time units are scheduled by one piece of DCI. In an existing LTE system, one piece of DCI schedules only one downlink time unit. With evolution of communications systems, for various services (for example, short-time services) or working at a higher frequency band, a shorter time unit and/or a wider subcarrier spacing are introduced. To reduce overheads (for example, DCI overheads, or TDD uplink/downlink switching guard interval gap overheads), the base station may configure that one piece of DCI schedules a plurality of time units. A quantity of time units scheduled by the DCI may be referred to as a quantity of aggregated time units, and each time unit may bear one TB (configuring one code word, for example, in a scenario of MIMO with 1 to 4 layers) or two TBs (configuring two code words, for example, in a scenario of MIMO with 5 to 8 layers), as shown in FIG. 3. Alternatively, the plurality of scheduled time units may bear only one TB (configuring one code word, for example, in a scenario of MIMO with 1 to 4 layers) or two TBs (configuring two code words, for example, a scenario of MIMO with 5 to 8 layers), as shown in FIG. 4. This application mainly focuses on the first case, that is, each time unit may bear one TB or two TBs. Therefore, if a system supports the two cases, the first case is used by default (for example, a signaling configuration is that considered in the first case), unless otherwise specified.

[0123] In this application, a time unit may be a subframe, a transmission time interval (one transmission time interval equals a sum of duration of several subframes or a sum of several transmission time intervals equals duration of one subframe), one time-domain symbol, a plurality of time-domain symbols, one slot (slot), a plurality of slots, one mini-slot (mini-slot), a plurality of mini-slots, a combination of a mini-slot and a slot, a combination of a symbol and a slot, a combination of a mini-slot and a slot, or the like. Symbol quantities or duration of all time units does not need to be the same. If one time unit bears a PDSCH/PDCCH/UCI or the like, the PDSCH/PDCCH/UCI may not need to fully occupy all time-domain symbols and/or frequency-domain resources of the time unit. In this embodiment of this application, for physical meanings of the T-DAI indication information and the C-DAI indication information, refer to the foregoing descriptions. Details are not described again.

[0124] It should be noted that, the description that control information may include T-DAI indication information and C-DAI indication information is used. In a specific application, names may not be limited to "T-DAI" and "C-DAI" provided that a quantity of time units can be indexed. In addition, in a specific implementation solution, the T-DAI and the C-DAI may not coexist. Only one DAI may be required, which is referred to as "DAI". This manner is especially applicable to an application scenario of determining feedback information for each carrier or an application scenario of only one carrier configured. Unless otherwise specified, the description "control information includes T-DAI indication information and C-DAI indication information" is used in this application, which is not limited thereto. For example, the description "control information includes DAI indication information" and the like may also be used.

[0125] Step 202: The terminal device obtains the control information sent by the base station, and determines feedback information for at least one transport block based on the time unit aggregation information and the DAI indication information.

[0126] The feedback information for the at least one transport block is a hybrid automatic repeat request HARQ-ACK,

that is, a HARQ-ACK bit sequence $\tilde{o}_0^{ACK}, \tilde{o}_1^{ACK}, \dots, \tilde{o}_{O^{ACK}-1}^{ACK}$, for the transport block.

[0127] In this embodiment of this application, based on different time unit aggregation information, the following details a procedure of determining the feedback information for the at least one transport block in a plurality of manners.

Manner 1

[0128] In this manner, the time unit aggregation information includes a maximum quantity of time units that can be scheduled by one piece of DCI. A size of the feedback information is related to a maximum quantity of aggregated time units configured by the base station. Therefore, when obtaining the maximum quantity of time units that can be scheduled by one piece of DCI, the terminal device may determine a bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information and the maximum quantity of time units that can be scheduled by one piece of DCI. Specifically, the terminal device may determine the bit quantity of the feedback information for the at least one transport block based on a product of the T-DAI indication information and the maximum quantity of time units that can be scheduled by one piece of DCI. Examples are described as follows:

(1) In a case of two TBs or two code words configured on at least one carrier or in at least one time unit (spatial bundling is disabled if spatial bundling needs to be considered, for example, in LTE, spatialBundling (spatialBundling) is set to false or a control message sent by the terminal device to the base station does not exceed one threshold (for example, a capacity of the uplink control message)), the final bit quantity O^{ACK} of the feedback information is $2 \times T\text{-DAI} \times N$.

(2) In a case of two TBs or two code words configured on at least one carrier or in at least one time unit and spatial bundling enabled (for example, in LTE, spatialBundlingPUCCH is set to true or a control message sent by the terminal device to the base station exceeds one threshold (for example, a capacity of the uplink control message)), the final bit quantity O^{ACK} of the feedback information is $T\text{-DAI} \times N$.

(3) In case of one TB or one code word configured on each carrier or in each time unit, the final bit quantity O^{ACK} of the feedback information is $T\text{-DAI} \times N$.

[0129] It should be noted: 1. In the foregoing cases, a code block group (code block group, CBG) feedback is not considered, that is, it is assumed that only one bit is fed back for one TB or that one TB includes only one CBG. In a case in which a CBG feedback is configured, a feedback bit quantity or a CBG quantity for each TB needs to be additionally considered on the basis of this application. 2. If SPS PDSCH transmission is activated and the receive device needs to receive an SPS PDSCH in a time window, decoding result information may be further fed back for the SPS PDSCH. 3. For ease of description, it is assumed that one code word or one TB is configured, CBG feedback is disabled, no SPS PDSCH transmission is performed, configuration parameters (numerology) of all carriers are the same, and duration of time units is the same, unless otherwise specified. 4. If a restriction on an actual bit quantity of a T-DAI field is considered,

an actual value of a T-DAI is $Lj + V_{T\text{-DAI}}^{DL}$, where $V_{T\text{-DAI}}^{DL}$ represents a value of the T-DAI field in DCI, j represents j times of repetition of the T-DAI field, and L depends on a bit quantity of the T-DAI field. For example, in LTE, in a case of two bits, the corresponding L is 4, or in a case of four bits, the corresponding L is 16 (counting for L times is a cycle). The same holds true for all the embodiments in this specification, and details are not described again.

[0130] In addition, the description "a maximum quantity of time units that can be scheduled by one piece of DCI" in this application has the following interpretations:

(1) After a quantity of aggregated time units is configured through higher layer signaling (for example, RRC signaling), a quantity of time units scheduled by each piece of DCI is fixedly the quantity of aggregated time units configured through the higher layer signaling. Therefore, "a maximum quantity of time units that can be scheduled by one piece of DCI" may be understood as "a quantity of time units that can be scheduled by one piece of DCI".

(2) After a quantity of aggregated time units is configured through higher layer signaling (for example, RRC signaling), a quantity of time units scheduled by each piece of DCI is variable, for example, each piece of DCI may indicate value information of the time units scheduled by the DCI, provided that the value is less than or equal to the quantity of aggregated time units configured through the higher layer signaling. Therefore, "a maximum quantity of time units that can be scheduled by one piece of DCI" may be understood as "a maximum quantity of time units that can be scheduled by one piece of DCI".

(3) In this application, the time unit aggregation information may be not only indicated through explicit signaling, but also obtained implicitly. In other words, the quantity of time units may be not only indicated through explicit signaling but also implicitly indicated. For example, a bitmap (bitmap) in DCI may be used to represent a scheduled time unit

(1110 represents that the first three time units are scheduled, so that time unit quantity information and/or scheduled time unit information can be implicitly obtained). For another example, DCI and/or RRC may configure an offset between a start time unit for data transmission and a PDCCH and an offset between an end time unit and the PDCCH (time unit quantity information and/or scheduled time unit information can be implicitly obtained based on the start and end information).

(4) The maximum quantity of time units that can be scheduled by one piece of DCI may be configured for each carrier. For example, the maximum quantity of time units that can be scheduled by one piece of DCI configured for the i^{th} carrier is N_i ; or only a maximum quantity N of time units that can be scheduled by one piece of DCI is configured and applied to all carriers. In a case of configuring N_i for each carrier, the maximum quantity N of time units that can be scheduled by one piece of DCI is a maximum value of N_i in this application. In a case of configuring only the maximum quantity of time units that can be scheduled by one piece of DCI for all the carriers, the maximum quantity of time units that can be scheduled by one piece of DCI is N in this application.

(5) The maximum quantity of time units that can be scheduled by one piece of DCI may be alternatively system-defined, in other words, the maximum quantity does not need to be notified through signaling, but only whether to enable time unit aggregation needs to be configured through signaling.

[0131] If whether to enable time unit aggregation is configured through signaling, the following solution is considered when time unit aggregation is set to be enabled. Other embodiments of this application are similar, and details are not described again.

[0132] The terminal device orchestrates, based on the C-DAI indication information, HARQ-ACK information for a transport block in a time unit scheduled by DCI, to a location corresponding to the C-DAI indication information. In other words, one piece of DCI includes the C-DAI indication information, and information at a location corresponding to the C-DAI indication information is HARQ-ACK information for a transport block in a time unit scheduled by the DCI (the orchestration action is optional). During orchestration of feedback information, if the maximum quantity of time units that can be scheduled by one piece of DCI is N , and the quantity of time units scheduled by one piece of DCI is X , where X is an integer greater than or equal to 1 and less than or equal to N , the terminal device may orchestrate the HARQ-ACK information for the transport block in the time unit scheduled by the DCI to first X bits at the location corresponding to the C-DAI indication information, and set $(N-X)$ bits following the X bits to default values. In other words, the terminal device orchestrates the HARQ-ACK information for the transport block in the time unit scheduled by the DCI to the first X bits of the N -bit feedback information that is fed back, and sets a location following the X bits to a default value. Alternatively, in other words, the first X bits at the location corresponding to the C-DAI indication information is the HARQ-ACK information for the transport block in the X time units scheduled by the DCI that includes the C-DAI, and $(N-X)$ bits following the first X bits are default values. The HARQ-ACK information is a decoding result for data transmitted on the transport block. For example, correct reception or an ACK is represented by 1, and incorrect reception or a NACK is represented by 0 (this is merely an example, and is not limited in this specification. For example, the ACK may be represented by 0 and the NACK may be represented by 1).

[0133] The location corresponding to the C-DAI indication information may be determined in the following possible manners.

[0134] A case with one code word or one TB configured and CBG feedback disabled is considered. It is assumed that $V_{C-DAI,c,m}$ is a value of a C-DAI field in the DCI, and that the DCI is DCI that schedules a carrier c and that corresponds to data transmission (PDSCH) in the m^{th} time unit in a time window, or DCI that is borne in the m^{th} time unit in a time window and that schedules a carrier c , or DCI that is borne on a carrier c in the m^{th} time unit in a time window. Therefore,

the corresponding location determined based on the C-DAI indication information is $N * (Lj + V_{C-DAI,c,m}^{DL} - 1)$, where j represents j times of repetition of the C-DAI, and L depends on a bit quantity of the C-DAI field. For example, in LTE, in a case of two bits, the corresponding L is 4, or in a case of four bits, the corresponding L is 16 (counting for L times is a cycle). N is the maximum quantity, determined in this manner, of time units that can be scheduled by one piece of DCI.

[0135] A case with CBG feedback disabled and two TBs or two code words configured on at least one carrier or in at least one time unit (spatial bundling is disabled if spatial bundling needs to be considered, for example, in LTE, spatial-BundlingPUCCH is set to false or a control message sent by the terminal device to the base station does not exceed one threshold (for example, a capacity of the uplink control message)) is considered. It is assumed that $V_{C-DAI,c,m}$ is a value of a C-DAI in the DCI, and that the DCI is DCI that schedules a carrier c and that corresponds to data transmission in the m^{th} time unit in a time window, or DCI that is borne in the m^{th} time unit in a time window and that schedules a carrier c , or DCI that is borne on a carrier c in the m^{th} time unit in a time window. Therefore, the corresponding location

determined based on the C-DAI indication information is $2N * (Lj + V_{C-DAI,c,m}^{DL} - 1)$, where j represents j times of repetition

of the C-DAI, and L depends on a bit quantity of the C-DAI field. For example, in LTE, in a case of two bits, the corresponding L is 4, or in a case of four bits, the corresponding L is 16 (counting for L times is a cycle). N is the maximum quantity, determined in this manner, of time units that can be scheduled by one piece of DCI.

[0136] It should be noted that the foregoing formulas merely represent calculation results, and a specific calculation process may not be strictly performed according to the foregoing formulas. For example, a calculation result may be

represented as $N * Lj + N * V_{C-DAI,c,m}^{DL} - N$ or another form. This is not limited in this application.

[0137] To more clearly describe a location, in feedback information, of HARQ-ACK information for a transport block in each time unit, the following details manners of orchestrating feedback information.

[0138] The terminal device orchestrates, in an order of carriers, HARQ-ACK information for a transport block in a time unit scheduled by DCI on each carrier in a first time unit. When a plurality of time units are scheduled by the DCI on a currently orchestrated carrier, HARQ-ACK information for transport blocks in the plurality of time units is first orchestrated, and the plurality of time units include a time unit following the first time unit. Then, HARQ-ACK information for a transport block in a time unit scheduled by the DCI on a subsequent carrier is orchestrated, the time unit scheduled by the DCI may include the first time unit, and the first time unit is a currently orchestrated time unit. After the HARQ-ACK information for the transport blocks in the time units scheduled by the DCI on all the carriers in the first time unit is orchestrated, HARQ-ACK information for a transport block in a time unit, scheduled by the DCI on each carrier, following the first time unit is orchestrated, where previously orchestrated HARQ-ACK information is skipped.

[0139] For example, FIG. 5a and FIG. 5b show two schematic arrangement diagrams of time units scheduled by DCI. Different time units are configured for a CC1, a CC2, a CC3, a CC4, a CC5, and a CC6 shown in FIG. 5a. A same short time unit is configured for all CCs shown in FIG. 5b. As shown in FIG. 5a or FIG. 5b, it is assumed that the maximum quantity N of time units that can be scheduled by one piece of DCI is 4. In a time window, the receive device detects that a value of the last T-DAI is 6, and therefore determines that the feedback bit quantity is $6*4=24$.

[0140] In FIG. 5a or FIG. 5b, a time unit in the first column is a first time unit, that is, a currently orchestrated time unit. Based on the C-DAI indication information, HARQ-ACK information for a transport block in a current time unit D(4,1) on the CC1 is first orchestrated, and the HARQ-ACK information is located in the 0th bit of feedback information (a location

corresponding to a C-DAI is $N * (Lj + V_{C-DAI,c,m}^{DL} - 1) = 4*0=0$, where $V_{C-DAI,c,m}=1$, $L=4$, and $j=0$). Because the DCI schedules only one time unit, the first bit of N bits starting from the 0th bit corresponds to the feedback information for the TB in the time unit scheduled by the DCI, and the remaining three bits may be filled with default values (for example, ACK, NACK, DTX, 1, or 0). Then, HARQ-ACK information for a transport block in a current time unit D(4,2) on the CC3 is orchestrated, and the HARQ-ACK information is located in the 4th bit of the feedback information (a location corresponding to a C-

DAI is $N * (Lj + V_{C-DAI,c,m}^{DL} - 1) = 4*1=4$, where $V_{C-DAI,c,m}=2$, $L=4$, and $j=0$). Because the DCI schedules only one time unit, the first bit of N bits starting from the 4th bit corresponds to the feedback information for the TB in the time unit scheduled by the DCI, and the remaining three bits may be filled with default values (for example, ACK, NACK, DTX, 1, or 0). When the CC5 is orchestrated, DCI on the CC5 schedules four time units. After HARQ-ACK information for a transport block in a current time unit scheduled by the DCI is orchestrated, HARQ-ACK information for transport blocks in three time units following the current time unit on the CC5 is continuously orchestrated, and then HARQ-ACK information for a transport block in a time unit in the first piece of DCI on the CC6 is orchestrated. Specifically, HARQ-ACK information for a transport block in a current time unit D(4,3) on the CC5 is orchestrated, and the HARQ-ACK information is located

in the 8th bit of the feedback information (a location corresponding to a C-DAI is $N * (Lj + V_{C-DAI,c,m}^{DL} - 1) = 4*2=8$, where $V_{C-DAI,c,m}=3$, $L=4$, and $j=0$). Because the DCI schedules four time units, N bits starting from the 8th bit are feedback information for data in the four time units scheduled by the DCI. On the CC4, a time unit in the first column is not scheduled, but a time unit in the second column is scheduled. Therefore, the terminal device needs to skip the CC4, and first orchestrates HARQ-ACK information for a transport block in a time unit in the first piece of DCI on the CC6. After orchestrating the time unit in the first piece of DCI on the CC6, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit scheduled by DCI on the CC4. Finally, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit in the second piece of DCI on the CC6. Specific location information is shown in FIG. 6a.

[0141] In this application, feedback information for data in a later time unit may be arranged before feedback information for data in an early time unit. For example, feedback information in the 2nd time unit on the CC5 is arranged before feedback information in the 1st time unit on the CC6 for ease of organization and management, thereby avoiding understanding inconsistency between a transmit device and a receive device. It should be noted: 1. In a case of DCI loss, a

location corresponding to a C-DAI of the DCI is filled with no information (because the DCI and the C-DAI are lost). The location filled with no feedback information may be filled with NACK or DTX (data packet or DCI loss is mainly considered herein). 2. In a case with two TBs or two code words configured, a 2N-bit feedback message needs to be arranged at a location corresponding to a C-DAI. First N bits may be organized to correspond to the first TB or N bits of the first code word (if only X time units are scheduled, the first X bits are corresponding feedback information, and the following (N-X) bits are default values); and the following N bits are organized to correspond to the second TB or N bits of the second code word (if only X time units are scheduled, the first X bits are corresponding feedback information, and the following (N-X) bits are default values). Alternatively, the 2N bits of the feedback information may be alternately arranged. For example, N bits at odd-numbered locations correspond to the first TB or N bits of the first code word, and N bits at even-numbered locations correspond to the second TB or N bits of the second code word; or N bits at even-numbered locations correspond to the first TB or N bits of the first code word, and N bits at odd-numbered locations correspond to the second TB or N bits of the second code word. 3. In the foregoing examples, the values 5 and 6 for the T-DAI and the C-TDAI may be used for ease of description. In a protocol, indication information in DCI depends on bit quantities of T-DAI and the C-TDAI fields in the DCI. For example, in LTE, it is assumed that both the T-DAI field and the C-TDAI field include two bits, and therefore 5 should be corrected to 1, representing the C-DAI field is repeated once ($i=1$ and $V_{C-DAI,c,m}=1$); and 6 may be corrected to 2, representing the C-DAI field is repeated twice ($j=1$ and $V_{C-DAI,c,m}=2$). 4. In the foregoing examples, a start bit is set to the 0th bit, but this is not limited during implementation. For example, the start bit may be set to the first bit (if so, the corresponding formula or calculation result needs to be adjusted, and details are not described). [0142] For example, as shown in FIG. 5a or FIG. 5b, after DCI D(4,2) is lost (the receive device does not detect the DCI), HARQ-ACK information for a transport block in a current time unit D(4,1) on the CC1 is first orchestrated based on the C-DAI indication information, and the HARQ-ACK information is located in the 0th bit of the feedback information

(a location corresponding to a C-DAI is $N * (L_j + V_{C-DAI,c,m}^{DL} - 1) = 4 * 0 = 0$, where $V_{C-DAI,c,m} = 1$, $L=4$, and $j=0$). Because the DCI schedules only one time unit, the first bit of N bits starting from the 0th bit corresponds to feedback information for the TB in the time unit scheduled by the DCI, and the remaining three bits may be filled with default values (for example, ACK, NACK, DTX, 1, or 0). When the CC5 is orchestrated, DCI on the CC5 schedules four time units. After HARQ-ACK information for a transport block in a current time unit scheduled by the DCI is orchestrated, HARQ-ACK information for transport blocks in three time units following the current time unit on the CC5 is continuously orchestrated, and then HARQ-ACK information for a transport block in a time unit in the first piece of DCI on the CC6 is orchestrated. Specifically, HARQ-ACK information for a transport block in a current time unit D(4,3) on the CC5 is orchestrated, and the HARQ-ACK information is located in the 8th bit of the feedback information (a location corresponding to a C-DAI is

$N * (L_j + V_{C-DAI,c,m}^{DL} - 1) = 4 * 2 = 8$, where $V_{C-DAI,c,m} = 3$, $L=4$, and $j=0$). Because the DCI schedules four time units, N bits starting from the 8th bit are feedback information for data in the four time units scheduled by the DCI. On the CC4, a time unit in the first column is not scheduled, but a time unit in the second column is scheduled. Therefore, the terminal device needs to skip the CC4, and first orchestrates HARQ-ACK information for a transport block in a time unit in the first piece of DCI on the CC6. After orchestrating the time unit in the first piece of DCI on the CC6, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit scheduled by DCI on the CC4. Finally, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit in the second piece of DCI on the CC6. Then, in 24 bits, locations filled with no HARQ-ACK bits are filled with NACK. To be specific, locations (four bits starting with the 4th bit) corresponding to a C-DAI in the DCI D(4,2) are filled with NACK because the DCI is not detected. Therefore, a location corresponding to a C-DAI (the location corresponding to the C-DAI is

$N * (L_j + V_{C-DAI,c,m}^{DL} - 1) = 4 * 1 = 4$, where $V_{C-DAI,c,m} = 2$, $L=4$, and $j=0$) is filled with no HARQ-ACK bit. Specific location information is shown in FIG. 6b.

[0143] Beneficial effects of this application are that indication overheads of a C-DAI and a T-DAI in DCI are reduced in a scenario of supporting a flexible quantity of aggregated/scheduled time units. In the foregoing examples, the C-DAI/T-DAI field requires only two bits; otherwise, the bit quantity of the C-DAI/T-DAI field should be at least greater than $\log_2(N)$, as described in Manner 3. In addition, in this manner, for a carrier that is configured without time aggregation or DCI that schedules only one time unit, feedback information also needs to be determined based on N. Therefore, in a case of DCI loss, this can avoid understanding inconsistency between a receive device and a transmit device (it is determined that N bits need to be fed back regardless of the DCI lost on any carrier).

Manner 2

[0144] In this manner, the time unit aggregation information may include a quantity of time units scheduled by DCI or

a time unit scheduled by DCI.

[0145] A size of feedback information is unrelated to a quantity of aggregated time units. Similar to the case of one code word configured in an LTE system, a bit quantity 0 of the feedback information is a value of a T-DAI.

[0146] When a base station configures a dynamic codebook (or referred to as determining HARQ-ACK information in a dynamic manner; and in a manner, for example, determines HARQ-ACK information based on a DAI) for a terminal device, optionally, when at least two carriers are configured, if one piece of DCI schedules a plurality of time units, the terminal device performs an AND operation on HARQ-ACK information for transport blocks in the plurality of time units, to generate one-bit HARQ-ACK information; and then orchestrates the one-bit HARQ-ACK information to a location corresponding to a C-DAI in the DCI. In other words, information at the location corresponding to the C-DAI in the DCI is the one-bit HARQ-ACK information (the orchestration action is optional). The terminal device determines a bit quantity of the feedback information based on T-DAI indication information.

[0147] A process of determining the location corresponding to the C-DAI indication information may be as follows.

[0148] A case with one code word or one TB configured and CBG feedback disabled is considered. It is assumed that $V_{C-DAI,c,m}$ is a value of a C-DAI in the DCI, and that the DCI is DCI that schedules a carrier c and that corresponds to data transmission in the m^{th} time unit in a time window, or DCI that is borne in the m^{th} time unit in a time window and that schedules a carrier c, or DCI that is borne on a carrier c in the m^{th} time unit in a time window. Therefore, the

corresponding location determined based on the C-DAI indication information is $Lj + V_{C-DAI,c,m}^{DL} - 1$, where j represents j times of repetition of the C-DAI, and L depends on a bit quantity of the C-DAI field. For example, in LTE, in a case of two bits, the corresponding L is 4, or in a case of four bits, the corresponding L is 16 (counting for L times is a cycle).

[0149] A case with CBG feedback disabled and two TBs or two code words configured on at least one carrier or in at least one time unit (spatial bundling is disabled if spatial bundling needs to be considered, for example, in LTE, spatial-BundlingPUCCH is set to false or a control message sent by the terminal device to the base station does not exceed one threshold (for example, a capacity of the uplink control message)) is considered. It is assumed that $V_{C-DAI,c,m}$ is a value of a C-DAI in the DCI, and that the DCI is DCI that schedules a carrier c and that corresponds to data transmission in the m^{th} time unit in a time window, or DCI that is borne in the m^{th} time unit in a time window and that schedules a carrier c, or DCI that is borne on a carrier c in the m^{th} time unit in a time window. Therefore, the corresponding location

determined based on the C-DAI indication information is $Lj + V_{C-DAI,c,m}^{DL} - 1$, where j represents j times of repetition of the C-DAI, and L depends on a bit quantity of the C-DAI field. For example, in LTE, in a case of two bits, the corresponding L is 4, or in a case of four bits, the corresponding L is 16 (counting for L times is a cycle).

[0150] It should be noted that the foregoing formulas merely represent calculation results, and a specific calculation process may not be strictly performed according to the foregoing formulas. This is not limited in this application.

[0151] In Manner 2, the manner of determining the bit quantity of the feedback information is similar to that in the LTE system. To be specific, in a case with one code word configured, the bit quantity of the feedback information is a value of a T-DAI, in other words, only one bit is fed back for a plurality of time units scheduled by each piece of DCI. A difference lies in that the one bit is a result of an "AND" operation performed on HARQ-ACK information for transport blocks in the plurality of time units scheduled by the DCI. For example, one piece of DCI schedules three time units, and when decoding results for transport blocks in the three time units are an ACK(1), an ACK(1), and an ACK(1), after an "AND" operation is performed on the decoding results, a decoding result is still an ACK(1). However, when time units for transport blocks in the three time units are an ACK(0), an ACK(1), and an ACK(1), after an "AND" operation is performed on the decoding results, a decoding result is a NACK(0).

[0152] For example, as shown in FIG. 5a or FIG. 5b, in the time window, the receive device detects that a value of the last T-DAI is 6, and therefore the receive device determines that the feedback bit quantity O^{ACK} is 6.

[0153] In FIG. 5a or FIG. 5b, a time unit in the first column is a first time unit, that is, a currently orchestrated time unit. HARQ-ACK information for a transport block in a current time unit D(4,1) on the CC1 is first orchestrated based on the C-DAI indication information, and the HARQ-ACK information is located in the 0th bit of feedback information (a location

corresponding to a C-DAI is $Lj + V_{C-DAI,c,m}^{DL} - 1 = 0$, where $V_{C-DAI,c,m} = 1$, $L=4$, and $j=0$). Because the DCI schedules only one time unit, the 0th bit corresponds to the feedback information for the TB in the time unit scheduled by the DCI. Then, HARQ-ACK information for a transport block in a current time unit D(4,2) on the CC3 is orchestrated, and the HARQ-ACK information is located in the 1st bit of the feedback information (a location corresponding to a C-DAI is

$Lj + V_{C-DAI,c,m}^{DL} - 1 = 0$, where $V_{C-DAI,c,m} = 2$, $L=4$, and $j=0$). Because the DCI schedules only one time unit, the first bit corresponds to the feedback information for the TB in the time unit scheduled by the DCI. When the CC5 is orchestrated,

DCI on the CC5 schedules four time units. Specifically, the HARQ-ACK information for the transport block in a current time unit D(4,3) on the CC5 is orchestrated, and the HARQ-ACK information is located in the 2nd bit of the feedback

information (a location corresponding to a C-DAI is $Lj + V_{C-DAI,c,m}^{DL} - 1 = 0$, where $V_{C-DAI,c,m} = 3$, $L=4$, and $j=0$). Because the DCI schedules four time units, the 3rd bit is a result of an "AND" operation performed on feedback information for data in the four time units scheduled by the DCI. On the CC4, a time unit in the first column is not scheduled, but a time unit in the second column is scheduled. Therefore, the terminal device needs to skip the CC4, and first orchestrates HARQ-ACK information for a transport block in a time unit in the first piece of DCI on the CC6. After orchestrating the time unit in the first piece of DCI on the CC6, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit scheduled by DCI on the CC4. Finally, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit in the second piece of DCI on the CC6. Specific location information is shown in FIG. 7a.

[0154] In a case of DCI loss, a location corresponding to a C-DAI in the DCI is filled with no information (because the DCI and the C-DAI are lost), and the location filled with no feedback information may be filled with NACK or DTX.

[0155] For example, as shown in FIG. 5a or FIG. 5b, after the DCI D(4,2) is lost, HARQ-ACK information for a transport block in a current time unit D(4,1) on the CC1 is first orchestrated based on the C-DAI indication information, and the HARQ-ACK information is located in the 0th bit of the feedback information (a location corresponding to a C-DAI is

$Lj + V_{C-DAI,c,m}^{DL} - 1 = 0$, where $V_{C-DAI,c,m} = 1$, $L=4$, and $j=0$). Because the DCI schedules only one time unit, the 0th bit corresponds to feedback information for the TB in the time unit scheduled by the DCI. When the CC5 is orchestrated, DCI on the CC5 schedules four time units. Specifically, HARQ-ACK information for a transport block in a current time unit D(4,3) on the CC5 is orchestrated, and the HARQ-ACK information is located in the 2nd bit of the feedback information

(a location corresponding to a C-DAI is $Lj + V_{C-DAI,c,m}^{DL} - 1 = 0$, where $V_{C-DAI,c,m} = 3$, $L=4$, and $j=0$). Because the DCI schedules four time units, the 3rd bit is a result of an "AND" operation performed on feedback information for data in the four time units scheduled by the DCI. On the CC4, a time unit in the first column is not scheduled, but a time unit in the second column is scheduled. Therefore, the terminal device needs to skip the CC4, and first orchestrates HARQ-ACK information for a transport block in a time unit in the first piece of DCI on the CC6. After orchestrating the time unit in the first piece of DCI on the CC6, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit scheduled by DCI on the CC4. Finally, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit in the second piece of DCI on the CC6. Then, in six bits, a location filled with no HARQ-ACK bit is set to NACK. To be specific, a location (the 1st bit) corresponding to a C-DAI in the DCI D(4,2) is a NACK because the DCI is not detected. Therefore, a location corresponding to a C-DAI (the location corresponding to the C-DAI is

$Lj + V_{C-DAI,c,m}^{DL} - 1 = 2$, where $V_{C-DAI,c,m} = 2$, $L=4$, and $j=0$) is filled with no HARQ-ACK bit. Specific location information is shown in FIG. 7b.

[0156] In this manner, it may be understood that an "AND" operation is a default operation that is performed in a configuration in which feedback information is determined according to a dynamic codebook (for example, according to a DAI mechanism) and optionally, in a configuration of at least two carriers. This means that, for example, the "AND" operation is performed without requiring an additional signaling notification. To be specific, when the dynamic codebook is configured (for example, according to the DAI mechanism) to determine feedback information, and optionally, at least two carriers are configured, if one piece of DCI schedules a plurality of time units, the transmit end and the receive end both know to perform the "AND" operation to determine feedback information. Certainly, signaling may be additionally introduced to notify whether to enable the "AND" operation.

[0157] In this manner, similar to Manner 1, indication overheads of a C-DAI and a T-DAI in DCI can be reduced in a scenario of supporting a flexible quantity of aggregated/scheduled time units. In the foregoing examples, the C-DAI/T-DAI field requires only two bits; otherwise, the bit quantity of the C-DAI/T-DAI field should be at least greater than $\log_2(N)$, as described in Manner 3. In addition, feedback overheads can be further reduced, for example, feedback overheads can be reduced by three times. In a case of DCI loss, this manner can also avoid understanding inconsistency between a receive device and a transmit device (it is determined that one bit needs to be fed back regardless of the DCI lost on any carrier).

Manner 3

[0158] In this manner, the time unit aggregation information includes a quantity of time units scheduled by DCI or a time unit scheduled by DCI. The terminal device determines a bit quantity of feedback information based on T-DAI

indication information. Different from Manner 1 in which N bits are fixedly fed back, in Manner 3, a quantity of time units scheduled by one piece of DCI is equal to the feedback bit quantity of feedback information.

[0159] If the quantity of time units scheduled by one piece of DCI is Y, where Y is an integer greater than or equal to 1; and the receive end device orchestrates, based on the C-DAI indication information, HARQ-ACK information for transport blocks in the Y time units scheduled by the DCI, to Y bits at a location corresponding to the C-DAI indication information. In other words, the Y bits at the location corresponding to the C-DAI indication information are the HARQ-ACK information for the transport blocks in the Y time units scheduled by the DCI.

[0160] A process of determining the location corresponding to the C-DAI indication information may be as follows.

[0161] A case with one code word or one TB configured and CBG feedback disabled is considered. It is assumed that $V_{C-DAI,c,m}$ is a value of a C-DAI in the DCI, and that the DCI is DCI that schedules a carrier c and that corresponds to data transmission in the m^{th} time unit in a time window, or DCI that is borne in the m^{th} time unit in a time window and that schedules a carrier c, or DCI that is borne on a carrier c in the m^{th} time unit in a time window. Therefore, the

corresponding location determined based on the C-DAI indication information is $L_j + V_{C-DAI,c,m}^{DL} - N_{c,m}$ or $L_j + V_{C-DAI,c,m}^{DL}$ (which depends on whether a quantity $N_{c,m}$ of time units scheduled by current DCI is included during DAI statistics collection, and if included, the location is a result of the former formula; otherwise, the location is a result of the latter formula), where $N_{c,m}$ represents the quantity of time units scheduled by the DCI, j represents j times of repetition of the C-DAI, and L depends on a bit quantity of the C-DAI field. For example, in LTE, in a case of two bits, the corresponding L is 4, or in a case of four bits, the corresponding L is 16 (counting for L times is a cycle).

[0162] A case with CBG feedback disabled and two TBs or two code words configured on at least one carrier or in at least one time unit (spatial bundling is disabled if spatial bundling needs to be considered, for example, in LTE, spatial-BundlingPUCCH is set to false or a control message sent by the terminal device to the base station does not exceed one threshold (for example, a capacity of the uplink control message)) is considered. It is assumed that $V_{C-DAI,c,m}$ is a value of a C-DAI in the DCI, and that the DCI is DCI that schedules a carrier c and that corresponds to data transmission in the m^{th} time unit in a time window, or DCI that is borne in the m^{th} time unit in a time window and that schedules a carrier c, or DCI that is borne on a carrier c in the m^{th} time unit in a time window. Therefore, the corresponding location

determined based on the C-DAI indication information is $2 * (L_j + V_{C-DAI,c,m}^{DL} - N_{c,m})$ or $2 * (L_j + V_{C-DAI,c,m}^{DL})$ (which depends on whether a quantity of currently scheduled time units is included during DAI statistics collection, and if included, the location is a result of the former formula; otherwise, the location is a result of the latter formula), where $N_{c,m}$ represents the quantity of time units scheduled by the DCI, j represents j times of repetition of the C-DAI, and L depends on a bit quantity of the C-DAI field. For example, in LTE, in a case of two bits, the corresponding L is 4, or in a case of four bits, the corresponding L is 16 (counting for L times is a cycle). In this application, a same bit quantity of the T-DAI field and a same bit quantity of the C-TDAI field may be configured for DCI that schedules all carriers, provided that the quantities are greater than $\log_2$ (the maximum quantity of time units). This can unify and simplify a design. Alternatively, the T-DAI field and the C-TDAI field in the DCI on each carrier may be related to the time unit aggregation information on the carrier, provided that both the values of the T-DAI field and the C-TDAI field are greater than $\log_2(N_i)$. In this way, DCI overheads can be reduced.

[0163] It should be noted that the foregoing formulas merely represent calculation results, and a specific calculation process may not be strictly performed according to the foregoing formulas. This is not limited in this application. During DAI statistics collection, a quantity of actually scheduled time units needs to be considered, and indicating a quantity of pieces of DCI or a quantity of PDCCHs (the C-DAI in the DCI increases by 1 each time) is not enough.

[0164] To more clearly describe a location, in feedback information, of HARQ-ACK information for a transport block in each time unit, the following details manners of orchestrating feedback information.

[0165] The terminal device orchestrates, in an order of carriers, HARQ-ACK information for a transport block in a time unit scheduled by DCI on each carrier in a first time unit. When a plurality of time units are scheduled by the DCI on a currently orchestrated carrier, HARQ-ACK information for transport blocks in the plurality of time units is first orchestrated, and the plurality of time units include a time unit following the first time unit. Then, HARQ-ACK information for a transport block in a time unit scheduled by the DCI on a subsequent carrier is orchestrated, the time unit scheduled by the DCI may include the first time unit, and the first time unit is a currently orchestrated time unit. After the HARQ-ACK information for the transport blocks in the time units scheduled by the DCI on all the carriers in the first time unit is orchestrated, HARQ-ACK information for a transport block in a time unit, scheduled by the DCI on each carrier, following the first time unit is orchestrated, where previously orchestrated HARQ-ACK information is skipped.

[0166] For example, FIG. 8a and FIG. 8b show two schematic arrangement diagrams of time units scheduled by DCI on carriers. As shown in FIG. 8a, different time units are configured for a CC1, a CC2, a CC3, a CC4, a CC5, and a

CC6. A same time unit is configured for all CCs shown in FIG. 8b. As shown in FIG. 8a or FIG. 8b, the receive device detects that a value of the last T-DAI is 11 in a time window, and therefore the receive device determines that the feedback bit quantity is 11.

[0167] In FIG. 8a or FIG. 8b, a time unit in the first column is a first time unit, that is, a currently orchestrated time unit. Based on the C-DAI indication information, HARQ-ACK information for a transport block in a current time unit D(8,1) on the CC1 is first orchestrated, and the HARQ-ACK information is located in the 0th bit of feedback information (it is assumed that a quantity of time units scheduled by current DCI is included during DAI statistics collection, and a location

corresponding to a C-DAI is $Lj + V_{C-DAI,c,m}^{DL} - N_{c,m} = 0$, where $V_{C-DAI,c,m} = 1$, $N_{c,m} = 1$, $L = 16$, and $j = 0$). Because the DCI schedules only one time unit, the first bit starting from the 0th bit corresponds to the feedback information for the TB in the time unit scheduled by the DCI. Then, HARQ-ACK information for a transport block in a current time unit D(8,2) on the CC3 is orchestrated, and the HARQ-ACK information is located in the 1st bit of the feedback information (a location

corresponding to a C-DAI is $Lj + V_{C-DAI,c,m}^{DL} - N_{c,m} = 1$, where $V_{C-DAI,c,m} = 2$, $N_{c,m} = 1$, $L = 16$, and $j = 0$). Because the DCI schedules only one time unit, the first bit starting from the 1st bit corresponds to the feedback information for the TB in the time unit scheduled by the DCI. When the CC5 is orchestrated, DCI on the CC5 schedules four time units. After HARQ-ACK information for a transport block in a current time unit is orchestrated, HARQ-ACK information for transport blocks in three time units following the current time unit on the CC5 is continuously orchestrated, and then HARQ-ACK information for a transport block in a time unit in the first piece of DCI on the CC6 is orchestrated. Specifically, HARQ-ACK information for a transport block in a current time unit D(8,6) on the CC5 is orchestrated, and the HARQ-ACK information is located in the 2nd bit of the feedback information (a location corresponding to a C-DAI is

$Lj + V_{C-DAI,c,m}^{DL} - N_{c,m} = 2$, where $V_{C-DAI,c,m} = 6$, $N_{c,m} = 4$, $L = 16$, and $j = 0$). Because the DCI schedules four time units, four bits starting from the 2nd bit are feedback information for data in the four time units scheduled by the DCI. On the CC4, a time unit in the first column is not scheduled, but a time unit in the second column is scheduled. Therefore, the terminal device needs to skip the CC4, and first orchestrates HARQ-ACK information for a transport block in a time unit in the first piece of DCI on the CC6. After orchestrating the time unit in the first piece of DCI on the CC6, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit scheduled by DCI on the CC4. Finally, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit in the second piece of DCI on the CC6. Specific location information is shown in FIG. 9a.

[0168] In a case of DCI loss, a location corresponding to a C-DAI in the DCI is filled with no information (because the DCI and the C-DAI are lost), and the location filled with no feedback information may be filled with NACK or DTX.

[0169] For example, as shown in FIG. 8a or FIG. 8b, after DCI D(8,2) is lost, based on the C-DAI indication information, HARQ-ACK information for a transport block in a current time unit D(8,1) on the CC1 is first orchestrated, and the HARQ-ACK information is located in the 0th bit of feedback information (it is assumed that a quantity of time units scheduled by current DCI is included during DAI statistics collection, and a location corresponding to a C-DAI is

$Lj + V_{C-DAI,c,m}^{DL} - N_{c,m} = 0$, where $V_{C-DAI,c,m} = 1$, $N_{c,m} = 1$, $L = 16$, and $j = 0$). Because the DCI schedules only one time unit, the first bit starting from the 0th bit corresponds to the feedback information for the TB in the time unit scheduled by the DCI. When the CC5 is orchestrated, DCI on the CC5 schedules four time units. After HARQ-ACK information for a transport block in a current time unit is orchestrated, HARQ-ACK information for transport blocks in three time units following the current time unit on the CC5 is continuously orchestrated, and then HARQ-ACK information for a transport block in a time unit in the first piece of DCI on the CC6 is orchestrated. Specifically, HARQ-ACK information for a transport block in a current time unit D(8,6) on the CC5 is orchestrated, and the HARQ-ACK information is located in the 2nd bit

of the feedback information (a location corresponding to a C-DAI is $Lj + V_{C-DAI,c,m}^{DL} - N_{c,m} = 2$, where $V_{C-DAI,c,m} = 6$, $N_{c,m} = 4$, $L = 16$, and $j = 0$). Because the DCI schedules four time units, four bits starting from the 2nd bit are feedback information for data in the four time units scheduled by the DCI. On the CC4, a time unit in the first column is not scheduled, but a time unit in the second column is scheduled. Therefore, the terminal device needs to skip the CC4, and first orchestrates HARQ-ACK information for a transport block in a time unit in the first piece of DCI on the CC6. After orchestrating the time unit in the first piece of DCI on the CC6, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit scheduled by DCI on the CC4. Finally, the terminal device orchestrates HARQ-ACK information for a transport block in a time unit in the second piece of DCI on the CC6. Then, in 11 bits, a location filled with no HARQ-

ACK bit is set to NACK. To be specific, a location (the 1st bit) corresponding to a C-DAI in the DCI D(8.2) is a NACK because the DCI is not detected. Therefore, a location corresponding to a C-DAI (the location corresponding to the C-

DAI is $Lj + V_{C-DAI,c,m}^{DL} - N_{c,m} = 1$, where $V_{C-DAI,c,m} = 2$, $L=16$, $j=0$ and $N_{c,m}=1$) is filled with no HARQ-ACK bit. Specific location information is shown in FIG. 9b.

[0170] In this manner, a variable quantity of time units actually scheduled by DCI needs to be considered during DAI statistics collection. To avoid understanding inconsistency between the transmit end and the receive end, a bit quantity of the C-DAI/T-DAI field should be at least greater than $\log_2(N)$. For example, in the foregoing examples, it is assumed that the bit quantities of the C-DAI field and the T-DAI field are four bits, and therefore $L=16$. Otherwise, understanding inconsistency may be caused between the transmit end and the receive end. For example, it is assumed that the C-DAI includes two bits, that a maximum quantity of time units scheduled by one piece of DCI is 8, that a C-DAI in the first piece of DCI is 1 (00), and that a C-DAI in the second piece of DCI is 2 (01). Therefore, there are at least two possible cases: Case 1, only one time unit is scheduled by each of the two pieces of DCI, and no packet loss occurs. Case 2, the first piece of DCI schedules one packet, the second piece of DCI schedules one time unit, and one piece of DCI is lost, where the lost DCI schedules four time units. This manner can save unnecessary feedback overheads, for example, a default value does not need to be fed back in Manner 1.

Manner 4

[0171] In this manner, the time unit aggregation information includes whether time unit aggregation is configured (or whether time aggregation is enabled). Based on whether carriers are configured with time unit aggregation, carriers in a carrier group (for example, a PUCCH carrier group) are grouped into a carrier subset configured with time unit aggregation and a carrier subset configured without time unit aggregation. In other words, carriers configured with time unit aggregation are grouped into one subset, and carriers configured without time unit aggregation are grouped into another subset. Alternatively, the time unit aggregation information directly includes a carrier subset configured with time unit aggregation and/or a carrier subset configured without time unit aggregation.

[0172] For the carrier subset configured with time unit aggregation, the terminal device determines, based on a T-DAI corresponding to the carrier subset configured with time unit aggregation and a maximum quantity of time units configured for the carrier subset, a bit quantity of feedback information for the carrier subset configured with time unit aggregation; and determines one piece of feedback information. Methods for determining the bit quantity and the feedback information have been described in the foregoing manners (refer to any one of Manners 1 to 3 or other possible manners, and this is not limited in this application), and details are not described again.

[0173] For the carrier subset configured without time unit aggregation, the terminal device determines, based on a T-DAI corresponding to the carrier subset configured without time unit aggregation, a bit quantity of feedback information for the carrier subset configured without time unit aggregation; and determines one piece of feedback information. Methods for determining the bit quantity and the feedback information may be similar to those in an LTE system (refer to the determining manner in the example shown in Table 2 or other possible manners, and this is not limited in this application), and details are not described again.

[0174] The terminal device combines the feedback information for the carrier subset configured with time unit aggregation and the feedback information for the carrier subset configured without time unit aggregation, to obtain final feedback information.

[0175] For example, as shown in FIG. 5c, it is assumed that for a carrier 1 to a carrier 6, multi-time-unit aggregation is enabled and/or a configured quantity of time units scheduled by one piece of DCI is greater than 1, while for a carrier 7 to a carrier 10, multi-time-unit aggregation is disabled and/or a configured quantity of time units scheduled by one piece of DCI is equal to 1. Therefore, the CC1 to the CC6 are grouped into one subset. It is assumed that the feedback information for this subset, determined in Manner 1, includes 24 bits (for details, refer to Manner 1), or that the feedback information for this subset, determined in Manner 2, includes six bits (for details, refer to Manner 2), or that the feedback information for this subset, determined in Manner 3, includes 11 bits (for details, refer to Manner 3); or the bit quantity of the feedback information may be determined in another possible manner. In addition, the CC7 to the CC10 are grouped into another subset, and the feedback information determined in an LTE manner includes six bits (refer to the determining manner in the example shown in Table 2), or the bit quantity of the feedback information is determined in another possible manner. Then, the feedback information for the subset 1 and the feedback information for the subset 2 are cascaded to obtain final feedback information. The feedback information for the subset 1 may be placed before the feedback information for the subset 2, or the feedback information for the subset 1 may be placed after the feedback information for the subset 2.

[0176] In this manner, feedback information may be separately determined based on a status of time unit aggregation configured on each carrier, to save unnecessary DCI indication overheads and UCI feedback overheads.

[0177] It should be noted: 1. In this embodiment, only time unit aggregation information is discussed in subset grouping. In addition, other factors may also be considered, for example, whether CBG transmission/feedback is configured, and/or, whether numerology or time unit duration is configured. Specifically, a carrier "configured with CBG feedback and configured with time unit aggregation" may be determined into one subset, and a carrier "configured without CBG feedback and configured with time unit aggregation" may be determined into one subset, and a carrier "configured with CBG feedback and configured without time unit aggregation" may be determined into one subset; and a carrier "configured without CBG feedback and configured without time unit aggregation" may be determined into one subset. By way of example but not limitation, for the subset "configured with CBG feedback and configured with time unit aggregation", the bit quantity of the feedback information is determined based on a maximum quantity of time units and a maximum CBG quantity; for the subset "configured without CBG feedback and configured with time unit aggregation", the bit quantity of the feedback information is determined based on a maximum quantity of time units; and for the subset "configured with CBG feedback and configured without time unit aggregation", the bit quantity of feedback information is determined based on a maximum CBG quantity. 2. The subsets may be directly and implicitly determined based on the time unit aggregation information, and therefore no additional signaling overheads are required. Certainly, for the purpose of flexibility, the transmit device may notify the receive device of a subset division result through signaling, that is, which carriers are determined into one subset. Signaling in this specification may be radio resource control (radio resource control, RRC) signaling, a master information block (master information block, MIB) message, a system information block (system information block, SIB) message, radio resource control (radio resource control, RRC) signaling, media access control control element (media access control control element, MAC CE) signaling, or one or more types of physical layer signaling. Details are not described.

Manner 5

[0178] In this manner, the time unit aggregation information includes a quantity of aggregated time units configured for a carrier. The terminal device groups carriers in a carrier group (for example, a PUCCH carrier group) into Z subsets based on the quantity of aggregated time units configured for a carrier, where configured quantities of aggregated time units on all carriers in one subset are the same. For example, carriers each configured with four aggregated time units are grouped into one subset, carriers each configured with two aggregated time units are grouped into another subset, and carriers each configured with one aggregated time unit are grouped into still another subset.

[0179] For the i^{th} subset of the Z subsets, the terminal device determines, based on a T-DAI for the i^{th} subset and a quantity of time units configured for the i^{th} subset, a bit quantity of feedback information for the i^{th} subset, that is, determines that a product of the T-DAI for the i^{th} subset and the quantity of time units configured for the i^{th} subset is the bit quantity of the feedback information for the i^{th} subset (refer to any one of Manners 1 to 4 described above or other possible manners different from those in this application). The terminal device orchestrates, based on C-DAI indication information in DCI in the i^{th} subset, HARQ-ACK information for a transport block in a time unit scheduled by the DCI, to the feedback information for the i^{th} subset (refer to any one of Manners 1 to 4 described above or other possible manners different from those in this application). In other words, a location corresponding to the C-DAI indication information in the feedback information for the i^{th} subset corresponds to the HARQ-ACK information for the transport block in the time unit scheduled by the DCI in the i^{th} subset, so as to obtain the feedback information for the i^{th} subset. Finally, the terminal device combines feedback information for the Z subsets to obtain final feedback information. It should be noted that, a carrier or a subset that is configured without time unit aggregation or whose time unit aggregation is disabled may be understood as a carrier or a subset whose configured quantity of time units is 1.

Manner 6

[0180] In this manner, the time unit aggregation information includes whether time unit aggregation is configured, or whether a carrier is configured with or without time unit aggregation, and/or a quantity of aggregated time units configured for a carrier.

[0181] The receive end device determines, according to a dynamic codebook mechanism, feedback information for a carrier that is configured without time unit aggregation or whose configured quantity of aggregated time units is 1. In an implementation, the receive end device determines, based on the T-DAI indication information and the C-DAI indication information, the feedback information for the carrier that is configured without time unit aggregation or whose configured quantity of aggregated time units is 1. For details, refer to an LTE determining manner (for details, refer to the determining manner in the example shown in Table 2) or another possible manner.

[0182] The receive end device determines, according to a semi-persistent codebook mechanism, feedback information for a carrier that is configured with time unit aggregation and/or whose quantity of aggregated time units configured for a carrier is greater than 1 (one piece of feedback information may be determined for each carrier, and then the feedback information for all carriers is combined; or one piece of feedback information may be jointly determined). In an imple-

mentation, the receive end device determines, based on time window information and in a semi-persistent manner, the feedback information for the carrier that is configured with time unit aggregation and/or whose quantity of aggregated time units configured for a carrier is greater than 1. The time window information may be determined based on a configured HARQ time sequence K1 set. Specifically, a size of the semi-persistent codebook equals a size of the configured HARQ time sequence K1 set (or a time window size). It is assumed that a K1 set semi-persistently configured through RRC is {3,4,5,6}, and it may be determined that the time window size is also 4. In other words, a size of feedback information for one carrier that is configured with time unit aggregation and/or whose quantity of aggregated time units configured for a carrier is greater than 1 is four bits. During orchestration, optionally, the feedback information is orchestrated to a corresponding location in a chronological order. Determining feedback information in a semi-persistent manner (or referred to as a semi-persistent codebook mechanism) means that, the size of the determined feedback information does not depend on a quantity of pieces of actually scheduled/transmitted data. Specifically, a location corresponding to a time unit in which a PDSCH (where a decoding result for the PDSCH is borne in the feedback information) is transmitted in the time window is the decoding result for the corresponding PDSCH; and a location corresponding to a time unit in which no PDSCH is transmitted may be a default value, for example, a NACK or DTX. It should be noted that the foregoing manner is merely a possible semi-persistent manner of determining feedback information, and another semi-persistent codebook determining manner is also applicable to this application. For example, refer to other embodiments hereinafter or other possible manners different from those in this application.

[0183] Then, the receive end device combines the two parts of feedback information to obtain final feedback information.

[0184] It should be noted that the concept of the foregoing manner is also applicable to CBG transmission. To be specific, the receive end device determines, according to the dynamic codebook mechanism, feedback information for a carrier that is configured without CBG feedback or whose configured CBG quantity is 1. In an implementation, the receive end device determines, based on the T-DAI indication information and the C-DAI indication information, the feedback information for the carrier that is configured without CBG feedback or whose configured CBG quantity is 1. For details, refer to an LTE determining manner (for details, refer to the determining manner in the example shown in Table 2) or another possible manner.

[0185] The receive end device determines, according to the semi-persistent codebook mechanism, feedback information for a carrier that is configured with CBG feedback or whose configured CBG quantity is greater than 1. In an implementation, the receive end device determines, based on the time window size and a configured CBG quantity, the feedback information for the carrier that is configured with CBG feedback or whose configured CBG quantity is greater than 1.

[0186] This manner can also ensure understanding consistency between the transmit end and the receive end, support a flexible time unit aggregation configuration, and save unnecessary DCI overheads and UCI feedback overheads.

[0187] It should be noted that, in all the embodiments of this application, the time unit aggregation information may be borne through higher layer signaling (for example, RRC signaling or MAC CE), through physical layer signaling (for example (group) common DCI or UE-specific DCI), or through a combination of higher layer signaling and physical layer signaling (for example, one set is configured through RRC signaling, and a specific value or whether to enable/disable is indicated through DCI).

[0188] In another possible manner of this manner, signaling for configuring CBG feedback/transmission and signaling for configuring time unit aggregation information are not the same one. Therefore, a carrier may be configured with both CBG feedback/transmission and time unit aggregation information. In this case, all the configuration signaling can be valid.

(1) In Manner 1, L bits (L is a configured maximum CBG quantity) are fed back for all TBs, that is, a feedback bit quantity is determined by $T\text{-DAI} \times N \times L$. An orchestration manner is similar. L bits for TBs scheduled by one piece of DCI may be sequentially arranged to locations corresponding to a C-DAI or alternately arranged to locations corresponding to a C-DAI. In other words, the L bits at the locations corresponding to the C-DAI are sequentially arranged as the TBs scheduled by the one piece of DCI, and the L bits at the locations corresponding to the C-DAI are alternately arranged as the TBs scheduled by the one piece of DCI. Certainly, feedback information of the maximum CBG quantity does not need to be fed back for every TB. This may be similar to Manner 3, that is, a quantity of scheduled CBGs is equal to a bit quantity of feedback information that needs to be fed back. However, in this case, the bit quantity of the C-DAI/T-DAI field should be at least greater than $\log_2(NL)$.

(2) In Manner 2, L bits are fed back for a code word scheduled by each piece of DCI. To be specific, an AND operation is performed on feedback information for all CBGs in a plurality of time units to generate one-bit feedback information. For example, the DCI schedules one code word, which corresponds to X time units, and therefore one bit is generated by performing an AND operation on feedback information for the first CBG in the X time units, one bit is generated by performing an AND operation on feedback information for the second CBG in the X time units, and by analogy, L bits are generated. Alternatively, N bits are fed back for a code word scheduled by each piece of DCI. To be specific, one bit is generated by performing an AND operation on feedback information for a plurality of CBGs in each of a plurality of time units. For example, the DCI schedules one code word, which corresponds to X time units,

and therefore one bit is generated by performing an AND operation on feedback information for a plurality of CBGs in the 1st time unit of the X time units, one bit is generated by performing an AND operation on feedback information for a plurality of CBGs in the 2nd time unit of the X time units, and by analogy, N bits are generated.

(3) In Manner 3, L bits (L is a configured maximum CBG quantity) are fed back for all TBs, that is, a feedback bit quantity is determined by T-DAI*L. An orchestration manner is similar. L bits for TBs scheduled by one piece of DCI may be sequentially arranged to locations corresponding to a C-DAI or alternately arranged to locations corresponding to a C-DAI. In other words, the L bits at the locations corresponding to the C-DAI are sequentially arranged as the TBs scheduled by the one piece of DCI, and the L bits at the locations corresponding to the C-DAI are alternately arranged as the TBs scheduled by the one piece of DCI.

[0189] Excessively high UCI or DCI overheads may be avoided in the following manners. 1. If a quantity of aggregated time units is set to be greater than 1 (or time unit aggregation is enabled), TB-level feedback is used by default, instead of using/enabling CBG feedback/transmission, although signaling is used to configure the CBG feedback/transmission. In this manner, it may be understood that time unit aggregation has a higher priority than CBG feedback/transmission.

2. If CBG transmission is configured, a quantity of aggregated time units is set to 1 by default (or time unit aggregation is disabled), although signaling is used to configure the quantity of aggregated time units to be greater than 1 (or time unit aggregation is enabled). In this manner, it may be understood that time unit aggregation has a lower priority than CBG feedback/transmission.

[0190] In a case of CBG transmission configured, if one piece of DCI schedules a plurality of time units, the DCI may include the following content:

1. One CBG indication (indication) (a bit quantity depends on a quantity of CBG configured through RRC signaling). The one CBG indication is used to indicate which CBG transmission is scheduled. A plurality of time units scheduled by the DCI share one CBG indication indication. For example, a four-bit CBG indication is 1101. This means that the 1st time unit schedules a CBG1, a CBG2, and a CBG4; the 2nd time unit schedules the CBG1, the CBG2, and the CBG4; and by analogy, the Xth time unit schedules the CBG1, the CBG2, and the CBG4. Certainly, the DCI may include two CBG indications, which correspond to indications of two code words. DCI overheads can be lower than those in a case of X or N CBG indications.

2. One flush indication (flush indication) (for example, one bit). The one flush indication is used to indicate that a currently scheduled CBG or data buffer requires special processing (for example, receiving a data buffer before flushing and/or not participating in HARQ combination). A plurality of time units scheduled by the DCI share one flush indication indication. For example, a one-bit flush indication is 1. This means that a CBG/data buffer (buffer) scheduled by the 1st time unit is flushed and does not participate in HARQ combination, a CBG/data buffer scheduled by the 2nd time unit is flushed and does not participate in HARQ combination, and by analogy, a CBG/data buffer (buffer) scheduled by the Xth time unit is flushed and does not participate in HARQ combination. Certainly, the DCI may include two flush indications, which correspond to indications of two code words, or the DCI still includes one flush indication (for example, one bit), and the one flush indication is used to indicate processing of two code words. DCI overheads can be lower than those in a case of X or N CBG indications.

[0191] Step 203: The terminal device sends the feedback information for the at least one transport block.

[0192] According to the foregoing embodiment, the terminal device obtains the time unit aggregation information and the DAI indication information that are sent by the base station, determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information, and finally sends the feedback information for the at least one transport block to the base station. This can improve a manner of determining HARQ feedback information in an NR system, so as to support a scenario with a flexible quantity of aggregated/scheduled time units, thereby avoiding understanding inconsistency and disorder of the HARQ feedback information between the terminal device and the base station on a premise of ensuring downlink control overheads and uplink feedback overheads.

[0193] Based on the same technical concept, the following further provides other embodiments to describe the procedure of determining feedback information in this application.

Embodiment 2

[0194] Because a base station may further configure, for a terminal device, one or more bandwidth parts (bandwidth part, BWP) on one carrier, each BWP corresponds to one type of numerology, for example, a subcarrier spacing, a cyclic prefix (Cyclic Prefix, CP), or another parameter. Therefore, in a possible implementation of this application, feedback information may be determined based on BWPs that are configured or activated or that can be simultaneously activated on the carrier.

[0195] Specifically, there may be two manners: a dynamic codebook manner and a semi-persistent codebook manner.

[0196] For the dynamic codebook manner, refer to a procedure shown in FIG. 10. The procedure may specifically include the following steps.

[0197] Step 1001: A receive end device obtains control information sent by a transmit end device, where the control information includes BWP information and DAI information, and the DAI information includes at least one type of T-DAI indication information and C-DAI indication information.

[0198] In a possible implementation of this application, the control information may include the BWP information (for example, BWPs that are configured or activated or that can be simultaneously activated, or activation/deactivation signaling for the BWP and/or BWP configuration information). Second control information may include the T-DAI indication information and the C-DAI indication information. For definitions of a T-DAI and a C-DAI, refer to the foregoing descriptions. A difference lies in that the T-DAI/C-DAI is counted in the following order: CCs, BWPs, and time units. For example, refer to Table 4.

Table 4

CC1,BWP1	D(4,1)							
CC2,BWP1								
CC2,BWP2	D(4,2)							
CC2,BWP3	D(4,3)							
CC3,BWP1		D(5,5)						
CC3,BWP2	D(4,4)		D(6,6)					

[0199] Step 1002: The receive end device determines feedback information based on the T-DAI indication information and the C-DAI indication information.

[0200] In the process of determining the feedback information, time unit aggregation information may be considered. For details, refer to Manners 1 to 6. If no time unit aggregation is configured, refer to the descriptions of the determining manner in the example shown in Table 2. Details are not described herein again.

[0201] Step 1003: The receive end device sends the feedback information to the transmit end device.

[0202] In the semi-persistent codebook manner, the BWP aggregation information may be a quantity of BWPs that are configured or activated or that can be simultaneously activated on the carrier. The terminal determines a bit quantity of the feedback information based on the BWP aggregation information and a time window size.

[0203] For example, it is assumed that there are three carriers, a quantity of BWPs on a first carrier is 2, a quantity of BWPs on a second carrier is 1, and a quantity of BWPs on a third carrier is 3. The time window size is 2. Therefore, the feedback bit quantity is $(2+1+3)*2=12$ bits. An arrangement order of feedback information for all carriers may be as follows:

Arrangement manner 1: Feedback information for all carriers is sequentially arranged, as shown in FIG. 11.

Arrangement manner 2: Feedback information for all BWPs is sequentially arranged, as shown in FIG. 12.

Arrangement manner 3: Feedback information is arranged first in frequency domain and then in time domain, as shown in FIG. 13.

Embodiment 3

[0204] In this embodiment, feedback information is determined based on time window information and time unit format information (slot format information, SFI). In an implementation, the time window information may be determined based on a set of configured possible values of K1, and the SFI is borne in higher layer signaling (for example, RRC signaling) and/or physical layer signaling (for example, group common DCI).

[0205] In an NR system, to support flexible and dynamic TDD, a DL/UL transmission direction of each time unit (a slot, a symbol, and the like) may be configured through higher layer signaling and/or physical layer group common DCI. In a possible implementation, one period is configured, for example, a time duration for the period is 5 ms or 10 ms. Within this period, some fixed resources/time units may be configured for UL transmission, other fixed resources/time units may be configured for DL transmission, and some reserved resources may be configured; and the remaining resources/time units within the period may be flexibly and dynamically designated as DL or UL or reserved/blank resources.

[0206] For example, as shown in FIG. 14, time units 0 to 2 are fixedly used for DL transmission, time units 7 to 9 are fixedly used for UL transmission, and time units 3 to 6 may be flexibly and dynamically designated as DL or UL or reserved/blank resources. The period includes 10 time units. FIG. 14 clearly shows that the time units fixedly configured for UL should not be present in a time window or feedback information. Therefore, when the terminal device determines the feedback information based on the time window configured by a base station, a DL/UL transmission direction for a time unit further needs to be considered, thereby avoiding unnecessary feedback overheads.

[0207] It is assumed that a K1 set semi-persistently configured through RRC is {3,4,5,6}. A TB that is possibly fed back in an uplink time unit #7 comes from a downlink time unit #1 (n+6), a downlink time unit #2 (n+5), a downlink time unit #3 (n+4), and a downlink time unit #4 (n+3). Therefore, the time window includes the time units #1 to #4, and it may be determined that a bit quantity of feedback information is four bits. A TB that is possibly fed back in an uplink time unit #9 comes from a downlink time unit #3 (n+6), a downlink time unit #4 (n+5), a downlink time unit #5 (n+4), and a downlink time unit #6 (n+3). Therefore, the time window includes the time units #3 to #6, and it may be determined that a bit quantity of feedback information is four bits. It should be noted that, if K1 indication information in DCI that schedules a PDSCH transmitted in a specific time unit is not fed back in the time unit #7, a corresponding bit may be optionally set to NACK or DTX. For example, it is assumed that K1 indication information in DCI that schedules a PDSCH in the time unit #2 is not 5 (not fed back in the time unit #7), and a corresponding bit may be optionally set to NACK or DTX in the feedback information.

[0208] If the time unit #3 is fixedly configured for uplink transmission, feedback information fed back in the uplink time unit #7 does not need to include the time unit #3, and correspondingly the terminal device may determine that the bit quantity of the feedback information is three bits. Feedback information fed back in the uplink time unit #9 does not need to include the time unit #3, and correspondingly the terminal device may determine that the bit quantity of the feedback information is three bits. In other words, in the process of determining the bit quantity of the feedback information, whether a time unit in the time window is configured for uplink transmission or downlink transmission needs to be detected. If uplink transmission is included (which may be fixed uplink transmission semi-persistently configured through higher layer signaling and/or uplink transmission dynamically indicated by physical layer signaling), the uplink transmission (which may be fixed uplink transmission semi-persistently configured through higher layer signaling and/or uplink transmission dynamically indicated by physical layer signaling) needs to be excluded, and only feedback information for a transport block in a corresponding time unit configured for downlink transmission needs to be fed back. In this manner, a feedback corresponding to an uplink transmission time unit is excluded, thereby saving unnecessary feedback overheads.

[0209] In the foregoing example, only the uplink transmission time unit is considered. Similarly optionally, a feedback corresponding to a reserved/blank time unit may be further excluded.

[0210] In the foregoing example, the time window is determined by the configured set of possible values of K1. In addition, the time window may be directly configured through signaling. In an implementation, RRC configuration signaling may be used to configure a time window size and/or a minimum value of K1; a distance between the last time unit in the time window and a time unit of a PUCCH/PUSCH bearing the feedback information and/or a maximum value of K1; and a distance between the 1st time unit in the time window and a time unit of a PUCCH/PUSCH bearing the feedback information. In this manner, the time window can be flexibly managed/configured.

[0211] As shown in FIG. 15, a time window size is set to 4, a minimum value of a time window K1 is set to 2, and therefore a codebook size fed back in a time unit 10 is 4, which corresponds to transmission in time units 4 to 7. The foregoing configuration may be configured for each time unit and/or may be configured for each carrier, or only one configuration (all time units and all carriers share the one configuration) may be configured for UE.

[0212] In addition, other manners of determining a time window are also applicable, and this is not limited in this application.

Embodiment 4

[0213] In a possible implementation, in 5G, a period of a control channel resource or a PDCCH for DCI that schedules a PDSCH of each carrier is configurable. Therefore, a monitoring period may be considered as follows: For example, monitoring is performed once at intervals of one time-domain symbol or a plurality of time-domain symbols or at intervals of one time unit or a plurality of time units. It is assumed that a same quantity of symbols or time units is configured, if a subcarrier spacing configuration or a numerology configuration is different, periods may also be considered to be different.

[0214] To simplify a design of a DAI borne in DCI (for example, to make counting simpler, or otherwise time misalignment and complex counting may be caused), in the foregoing process of grouping carrier subsets, a terminal device may further obtain subsets through grouping based on the monitoring period of the control channel or the control channel resource. Specifically, the terminal device groups carriers into M subsets based on the monitoring period of the control channel or the control channel resource, and monitoring periods of control channels or control channel resources of

carriers in one subset are the same. For example, some carriers are grouped into a subset 1, and a monitoring period of a control channel or a control channel resource or a control resource set (control resource set, CORESET) bearing DCI that schedules a PDSCH on the carrier is 1; and some carriers are grouped into a subset 2, and a monitoring period of a control channel or a control channel resource or a CORESET bearing DCI that schedules a PDSCH on the carrier is 2.

[0215] For the i^{th} subset of the M subsets, the terminal device may determine one piece of feedback information based on the foregoing embodiments or other possible embodiments different from those in this application, and then the terminal device combines feedback information for the M subsets to obtain final feedback information. Details are not described.

Embodiment 5

[0216] In a possible implementation, in a manner of collecting statistics of a T-DAI and a C-DAI based on subsets (for example, as described in the foregoing embodiments) or carriers, if DCI on a specific carrier is lost, understanding inconsistency may be caused between a base station and a terminal device, causing poor robustness of a system. As shown in FIG. 16, if DCI D(3,3) is lost, the last received T-DAI is 2 for a first subset, and the last received T-DAI is 7 for a second subset. In a case with only one code word configured and CBG unconfigured, the UE feeds back nine (2+7) bits. However, the base station requires the terminal device to feed back 10 (3+7) bits. Consequently, understanding inconsistency is caused between the base station and the terminal device, and the base station cannot receive HARQ information fed back by the terminal device.

[0217] In view of this, this embodiment provides a manner of carrier-group-based T-DAI statistics collection and subset-based C-DAI statistics collection. Refer to FIG. 17 (the left diagram of FIG. 17 shows that the T-DAI indicates a total quantity of scheduled PDSCHs counted in a current shortest time unit; and the right diagram of FIG. 17 shows that the T-DAI indicates a total quantity of scheduled PDSCHs within a current longest time unit). The T-DAI is specific to statistics collection of all six carriers in a carrier group (for example, a PUCCH carrier group). For a physical meaning, refer to the foregoing descriptions. The C-DAI is specific to statistics collection of carriers included in a subset in a carrier group (for example, a PUCCH carrier group). For a physical meaning, refer to the foregoing descriptions.

[0218] As shown in FIG. 17, statistics show that a total T-DAI of all scheduled subsets in a carrier group is 10, where a C-DAI for a first subset is 3, and a C-DAI for a second subset is 7. In a case with one code word configured and CBG feedback unconfigured, the terminal device knows that 10-bit feedback information needs to be generated, where three bits thereof are placed as feedback information for the first subset, and seven bits thereof are placed as feedback information for the second subset.

[0219] In addition, in this application, it is assumed that there are N subsets, and feedback information for first ($N-1$) subsets is sequentially cascaded and is orchestrated in order starting from the first bit of total feedback information, while feedback information for the N^{th} subset is orchestrated in reverse order starting from the last bit of the total feedback information. As shown in Table 5, three bits of the first subset are sequentially orchestrated to first three bits of the total feedback information (10 bits) (HARQ-ACK information for a TB corresponding to D(4,1) is the 1st bit, HARQ-ACK information for a TB corresponding to D(4,2) is the 2nd bit, and so on). The seven bits of the second subset are orchestrated to the end of the total feedback information in reverse order (HARQ-ACK information for a TB corresponding to D(4,1) is the 10th bit, HARQ-ACK information for a TB corresponding to D(4,2) is the 9th bit, and so on).

Table 5

A/N	A/N	A/N	A/N	A/N	A/N	A/N	A/N	A/N	A/N
D(4,1)	D(4,2)	D(9,3)	D(10,7)	D(9,6)	D(7,5)	D(6,4)	D(5,3)	D(4,2)	D(4,1)

[0220] Alternatively, as shown in Table 6, three bits of the first subset are sequentially orchestrated to first three bits of the total feedback information (10 bits) (HARQ-ACK information for a TB corresponding to D(7,1) is the 1st bit, HARQ-ACK information for a TB corresponding to D(7,2) is the 2nd bit, and so on). The seven bits of the second subset are orchestrated to the end of the total feedback information in reverse order (HARQ-ACK information for a TB corresponding to D(7,1) is the 10th bit, HARQ-ACK information for a TB corresponding to D(7,2) is the 9th bit, and so on).

Table 6

A/N D	A/N D	A/N D	A/N D	A/N D	A/N D	A/N D	A/N D	A/N D	A/N D
(7,1)	(7,2)	(10,3)	(10,7)	(10,6)	(7,5)	(7,4)	(7,3)	(7,2)	(7,1)

[0221] It should be noted that, feedback information for the first subset may be alternatively orchestrated in order

starting from the 1st bit of the total feedback information, and feedback information for last (N-1) subsets is orchestrated in reverse order starting from the last bit of the total feedback information. This embodiment is merely an example, and an orchestration order of feedback information for each subset is not limited.

[0222] Therefore, in FIG. 17, it is assumed that DCI D(9,3) is lost, the terminal device still generates 10-bit feedback information, and the base station can correctly extract 10-bit feedback information from the 10-bit feedback information fed back by the terminal device. However, in the prior art, only nine bits are generated, incorrect mapping occurs from the 3rd bit. The 3rd bit should correspond to HARQ-ACK information for the last one TB of the first subset. However, the 3rd bit fed back by the terminal device is HARQ-ACK information for the first TB of the second subset. Therefore, this embodiment can enhance robustness of the feedback information.

[0223] Similarly, in this embodiment, a manner of carrier-group-based C-DAI statistics collection and subset-based T-DAI statistics collection may be alternatively used, and details are not described.

Embodiment 6

[0224] Feedback information is determined based on numerology (or time unit duration) of each carrier or BWP and based on a time window size. Specifically, if HARQ feedback information on a first carrier is borne on an uplink control channel on a second carrier for transmission, a size of the HARQ feedback information on the first carrier is the time window size (for example, a quantity of values in an RRC-configured time window K1 set)*N, where N=Time unit duration of the second carrier/Time unit duration of the first carrier (or N=Subcarrier spacing of the first carrier/Subcarrier spacing of the second carrier, or time units of N first carriers are aligned with a time unit of one second carrier).

[0225] For example, if an RRC-configured K1 set is {1,2}, a size of the RRC-configured time window K1 set is 2. As shown in FIG. 18, Time unit duration of a second carrier/Time unit duration of a first carrier=2 (or Subcarrier spacing of the first carrier/Subcarrier spacing of the second carrier=2, or time units of two first carriers are aligned with a time unit of one second carrier), and therefore, a size of HARQ feedback information for the first carrier is $2*2=4$.

[0226] As shown in FIG. 19, Time unit duration of a second carrier/Time unit duration of a first carrier= 1/2 (or Subcarrier spacing of the first carrier/Subcarrier spacing of the second carrier= 1/2, or a time unit of one first carrier is aligned with time units of two second carriers), and therefore, a size of HARQ feedback information for the first carrier is $2*1/2=1$.

[0227] It should be noted that if $N < 1$, the result may be obtained through round up.

[0228] If time unit aggregation is considered, after one TB is mapped into a plurality of aggregated time units, it may be understood that time unit duration increases, in other words, Time unit duration=Duration of one time unit*Quantity of time units.

[0229] Certainly, with reference to the foregoing embodiments, a quantity of fixed uplink time units on the carrier in a time window may be further excluded.

[0230] Another possible implementation is as follows:

Feedback information is determined based on a DAI, K2, and a time window. K2 represents a time relationship between a time unit for transmitting a PDCCH and a time unit for transmitting a PUSCH, where the PDCCH is used for scheduling the PUSCH. Specifically, if scheduling information is sent on the PDCCH in the nth time unit, correspondingly, a time unit used by the PUSCH is the (n+K2)th time unit.

[0231] For a semi-persistent codebook, a codebook size is the time window size. For example, the time window size is M time units, and in a case of one carrier, a single code word configured, and a CBG unconfigured, the size of the semi-persistent codebook is M bits (not depending on a quantity of actually scheduled PDSCHs). To save feedback overheads, there may be DCI that schedules a PUSCH in the last time unit in the time window, where the DCI may carry a DAI indication, to indicate the quantity of actually scheduled PDSCHs in the time window. Therefore, the codebook size fed back by UE may be less than M, and the feedback information may be borne on the scheduled PUSCH to be fed back to the base station. In LTE, an interval between a time unit for scheduling DCI and a time unit for transmitting a PUSCH is fixed (for example, 4). In addition, the interval equals an interval between a time unit of the last PDSCH time unit and a time unit for feeding back HARQ-ACK for the last PDSCH. Therefore, a time unit of DCI that schedules a PUSCH bearing a HARQ-ACK is definitely the last time unit in the time window.

[0232] Due to introduction of a flexible time sequence, to be specific, an interval between a time unit for scheduling the DCI and a time unit for transmitting a PUSCH is K2, which is flexible and variable (for example, for K0 and K1 as described in background, a set of possible values are first configured through RRC signaling, and then specific value information is notified by using DCI). Therefore, the time unit of the DCI that schedules the PUSCH bearing the HARQ-ACK is not necessary the last time unit in the time window. As shown in FIG. 20, in this case, the DAI of the time unit of the DCI that schedules the PUSCH bearing the HARQ-ACK indicates a quantity of scheduled PDSCHs/time units that end at a current location. Therefore, the codebook size should be determined by DAI+X, where the DAI is the quantity of scheduled PDSCHs/time units that end at the current location, and X is a size of a sub-window 2 in FIG. 20 or a quantity of remaining time units in the time window (which is related to K2, and may be understood that Quantity of remaining time units=Value of K2-Configured minimal value of K1).

[0233] Such a manner can support a flexible K2 time sequence, thereby avoiding unnecessary feedback overheads.

[0234] It may be understood that, some technical descriptions, technical hypotheses, and technical terms in the foregoing embodiments may be shared by all the foregoing embodiments, and technical solutions may also be combined, unless otherwise specified or the logic does not make sense. Details are not described.

[0235] Based on a same technical concept, an embodiment of this application further provides a terminal device. For a location of the terminal device in a communications system, refer to the terminal device shown in FIG. 1. The terminal device may be a mobile phone, a tablet computer, a computer with a wireless transmission/reception function, a virtual reality terminal device, an augmented reality terminal device, a wireless terminal in industrial control, a wireless terminal in self-driving, a wireless terminal in telemedicine, a wireless terminal in a smart grid, a wireless terminal in transportation safety, a wireless terminal in a smart city, a wireless terminal in a smart home, or the like.

[0236] Specifically, FIG. 21 shows a terminal device 21 according to an embodiment of this application. The terminal device 21 includes a transceiver 2108 and a processor 2104.

[0237] The terminal device 21 may further include a memory 2119, and the memory 2119 stores a computer-executable instruction.

[0238] The transceiver 2108 is configured to: obtain control information sent by a transmit end device, where the control information includes time unit aggregation information and downlink assignment index DAI indication information, and the DAI information includes at least one type of total downlink assignment index T-DAI indication information and counter downlink assignment index C-DAI indication information; and send the feedback information to the transmit end device;

the processor 2104 is configured to determine feedback information for at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver 2108; and the transceiver 2108 is further configured to send the feedback information for the at least one transport block to the transmit end device.

[0239] Further, the time unit aggregation information includes a maximum quantity of time units that can be scheduled by one piece of downlink control information DCI; and

when the processor 2104 determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver 2108, the processor 2104 is specifically configured to:

determine a bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information and the maximum quantity of time units that can be scheduled by one piece of DCI; and

orchestrate, based on the C-DAI indication information, feedback information for a transport block in a time unit scheduled by the DCI, to a location corresponding to the C-DAI indication information.

[0240] Further, the time unit aggregation information includes a quantity of time units scheduled by the DCI; and when the processor 2104 determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver 2108, the processor 2104 is specifically configured to:

when a plurality of time units are scheduled by one piece of DCI, perform an AND operation on feedback information for transport blocks in the plurality of time units to generate one-bit feedback information, and orchestrate the one-bit feedback information to a location corresponding to a C-DAI in the DCI; and

determine the bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information.

[0241] The processor 2104 may be configured to execute actions internally implemented by the terminal device described in the foregoing method embodiments, and the transceiver 2108 may be configured to execute a transmission or sending action from the terminal device to a base station described in the foregoing method embodiments. For details, refer to the descriptions in the foregoing method embodiments. Details are not described herein again.

[0242] The processor 2104 and the memory 2119 may be integrated into one processing apparatus. The processor 2104 is configured to execute program code stored in the memory 2119 to implement the foregoing functions. During specific implementation, the memory 2119 may be alternatively integrated into the processor 2104.

[0243] The terminal device may further include a power supply 2112, configured to supply power to various components or circuits of the terminal device. The terminal device may include an antenna 2110, configured to send, through a radio signal, uplink data or uplink control signaling that is output by the transceiver 2108.

[0244] In addition, to improve functions of the terminal device, the terminal device may further include one or more of

an input unit 2114, a display unit 2116, an audio circuit 2118, a camera 2120, and a sensor 2122. The audio circuit may further include a speaker 21182, a microphone 21184, and the like.

[0245] The terminal device provided in this embodiment of this application obtains the time unit aggregation information and the DAI indication information that are sent by the base station, determines the feedback information based on the time unit aggregation information and the DAI indication information, and finally sends the feedback information to the base station. This can improve a manner of determining HARQ feedback information in an NR system, so as to support a scenario with a flexible quantity of aggregated/scheduled time units, thereby avoiding understanding inconsistency and disorder of the HARQ feedback information between the terminal device and the base station on a premise of ensuring downlink control overheads and uplink feedback overheads.

[0246] Optionally, when the processor 2104 determines the bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information and the maximum quantity of time units that can be scheduled by one piece of DCI, the processor 2104 is specifically configured to:

determine that a product of the T-DAI indication information and the maximum quantity of time units that can be scheduled by one piece of DCI is the bit quantity of the feedback information for the at least one transport block.

[0247] The terminal device obtains the bit quantity of the feedback information based on the product of the T-DAI indication information and the maximum quantity of time units that is configured for a carrier and that can be scheduled by one piece of DCI, so that DCI overheads can be reduced and disorder of feedback information is avoided through multi-time-unit scheduling.

[0248] Optionally, when the processor 2104 orchestrates the feedback information for the transport block in the time unit scheduled by the DCI, to the location corresponding to the C-DAI indication information, the processor 2104 is specifically configured to:

when the maximum quantity of time units that can be scheduled by one piece of DCI is N, and a quantity of time units scheduled by one piece of DCI is X, where X is an integer greater than or equal to 1 and less than or equal to N, orchestrate the feedback information for the transport block in the time unit scheduled by the DCI, to first X bits at the location corresponding to the C-DAI indication information, and set (N-X) bits following the first X bits to default values.

[0249] The foregoing arrangement manner of the feedback information can ensure understanding consistency between the terminal device and the base station in the scenario of supporting a flexible quantity of aggregated time units, thereby avoiding disorder of the feedback information.

[0250] Optionally, the time unit aggregation information includes a quantity of time units scheduled by the DCI; and when the processor 2104 determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver 2108, the processor 2104 is specifically configured to:

determine the bit quantity of the feedback information for the at least one transport block based on the T-DAI indication information; and

if a quantity of time units scheduled by one piece of DCI is Y, orchestrate, based on the C-DAI indication information, feedback information for transport blocks in the Y time units scheduled by the DCI, to Y bits at the location corresponding to the C-DAI indication information, where Y is an integer greater than or equal to 1.

[0251] The foregoing arrangement manner of the feedback information can further ensure understanding consistency between the transmit end and the receive end in the scenario of supporting a flexible quantity of aggregated time units, thereby avoiding disorder of the feedback information.

[0252] Optionally, the time unit aggregation information includes a carrier subset configured with time unit aggregation and/or a carrier subset configured without time unit aggregation; and

when the processor 2104 determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver 2108, the processor 2104 is specifically configured to:

determine, based on a T-DAI corresponding to the carrier subset configured with time unit aggregation and a maximum quantity of time units configured for the carrier subset, a bit quantity of feedback information for the carrier subset configured with time unit aggregation;

orchestrate, based on C-DAI indication information in DCI in the carrier subset configured with time unit aggregation, feedback information for a transport block in a time unit scheduled by the DCI, to the feedback information for the carrier subset configured with time unit aggregation; and/or

determine, based on a T-DAI corresponding to the carrier subset configured without time unit aggregation, a bit

quantity of feedback information for the carrier subset configured without time unit aggregation; and orchestrate, based on C-DAI indication information in DCI in the carrier subset configured without time unit aggregation, feedback information for a transport block in a time unit scheduled by the DCI, to the feedback information for the carrier subset configured without time unit aggregation; and cascade the feedback information for the carrier subset configured with time unit aggregation and the feedback information for the carrier subset configured without time unit aggregation.

[0253] Whether a carrier is configured with time unit aggregation is considered during carrier grouping, and therefore feedback information may be separately determined based on a configuration status of time unit aggregation on each carrier, thereby saving unnecessary DCI indication overheads and UCI feedback overheads.

[0254] Optionally, the time unit aggregation information includes a quantity of aggregated time units configured for a carrier; and

when the processor 2104 determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver 2108, the processor 2104 is specifically configured to:

group carriers into Z subsets based on the quantity of aggregated time units configured for a carrier, where configured quantities of aggregated time units on all carriers in one subset are the same; and

for the i^{th} subset of the Z subsets, determine a bit quantity of feedback information for the i^{th} subset based on a T-DAI for the i^{th} subset and a quantity of time units configured for the i^{th} subset; orchestrate, based on C-DAI indication information in DCI in the i^{th} subset, feedback information for a transport block in a time unit scheduled by the DCI, to feedback information for each subset, where i is greater than or equal to 1 and less than or equal to Z; and combine Z pieces of feedback information for the Z subsets, where Z is greater than or equal to 1.

[0255] Carriers are grouped into subsets based on information about a quantity of aggregated time units configured on each carrier, and feedback information is separately determined, thereby saving unnecessary DCI indication overheads and UCI feedback overheads.

[0256] Optionally, the time unit aggregation information includes whether a carrier is configured with or without time unit aggregation and/or includes a quantity of aggregated time units configured for a carrier; and

when the processor 2104 determines the feedback information for the at least one transport block based on the time unit aggregation information and the DAI indication information that are obtained by the transceiver 2108, the processor 2104 is specifically configured to:

determine, based on the T-DAI indication information and the C-DAI indication information, feedback information for a carrier that is configured without time unit aggregation or whose configured quantity of aggregated time units is 1; and

determine, based on a time window size, feedback information for a carrier that is configured with time unit aggregation and/or whose quantity of aggregated time units configured for a carrier is greater than 1.

[0257] The foregoing embodiment can ensure understanding consistency between the terminal device and the base station, support a flexible time unit aggregation configuration, and save unnecessary DCI overheads and UCI feedback overheads.

[0258] An embodiment of this application further provides a network device. For a location of the network device in a communications system, refer to the base station in FIG. 1. The network device may be a device configured to communicate with a terminal device. The network device may be a base station or may be a wireless controller in a cloud wireless access network scenario, or the network device may be a relay station, an access point, an in-vehicle device, a wearable device, a network device in a future 5G network, a network device in a future evolved PLMN network, or the like.

[0259] FIG. 22 shows a network device 22 according to an embodiment of this application. The network device 22 includes at least a transceiver 2208 and a processor 2204.

[0260] The network device 22 may further include a memory 2203, and the memory 2203 stores a computer-executable instruction;

the processor 2204 is configured to control the transceiver 2208 to send control information to a receive end device, where the control information includes time unit aggregation information and/or downlink assignment index DAI indication information, and the DAI indication information includes at least one type of total downlink assignment index T-DAI indication information and counter downlink assignment index C-DAI indication information; and the processor 2204 is further configured to control the transceiver 2208 to receive feedback information sent by the receive end device for at least one transport block, where the feedback information is feedback information generated

by the receive end device based on the control information.

[0261] The processor 2204 and the memory 2203 may be integrated into one processing apparatus. The processor 2204 is configured to execute program code stored in the memory 2203 to implement the foregoing functions.

[0262] The network device may further include an antenna 2210, configured to send, through a radio signal, downlink data or downlink control signaling that is output by the transceiver 2208.

[0263] It should be noted that each of the processor 2104 of the terminal device and the processor 2204 of the network device may be a central processing unit (central processing unit, CPU for short), a network processor (network processor, NP for short), or a combination of a CPU and an NP. The processor may further include a hardware chip. The hardware chip may be an application-specific integrated circuit (application-specific integrated circuit, ASIC for short), a programmable logic device (programmable logic device, PLD for short), or a combination thereof. The PLD may be a complex programmable logic device (complex programmable logic device, CPLD for short), a field-programmable logic gate array (field-programmable gate array, FPGA for short), a generic array logic (generic array logic, GAL for short), or any combination thereof.

[0264] Each of the memory 2119 of the terminal device and the memory 2203 of the network device may include a volatile memory (volatile memory), for example, a random access memory (random access memory, RAM); and may further include a non-volatile memory (non-volatile memory), for example, a flash memory (flash memory), a hard disk drive (hard disk drive, HDD for short), or a solid-state drive (solid-state drive, SSD for short). The memory may further include a combination of the foregoing types of memories.

[0265] The solutions described in the embodiments of the terminal device in FIG. 21 and the network device in FIG. 22 can resolve the foregoing technical problem, thereby avoiding disorder and understanding inconsistency of HARQ feedback information between a receive end device and a transmit end device. This embodiment of this application further provides other implementations. For example, any one of implementations in Embodiment 2 to Embodiment 6 can be applied to the base station and the terminal device. For specific descriptions herein, refer to the descriptions in Embodiment 2 to Embodiment 6. Details are not described again.

[0266] This application further provides a communications system. As shown in FIG. 1, the communications system includes any terminal device as shown in FIG. 21 and described in detailed descriptions in the corresponding embodiment, and any network device as shown in FIG. 22 and described in detailed descriptions in the corresponding embodiment.

[0267] The network device in this apparatus embodiment of this application may be corresponding to the base stations in method Embodiment 1 to Embodiment 6 of this application, and the terminal device may be corresponding to the terminal devices in method Embodiment 1 to Embodiment 6 of this application. In addition, the foregoing and other operations and/or functions of the modules of the network device and the terminal device are respectively used to implement corresponding procedures in Embodiment 1 to Embodiment 6. For brevity, the descriptions of the method embodiments of this application are applicable to the apparatus embodiment. Details are not described herein again.

[0268] A person of ordinary skill in the art may be aware that, the units and algorithm steps in the examples described with reference to the embodiments disclosed in this specification may be implemented by electronic hardware or a combination of computer software and electronic hardware. Whether the functions are performed by hardware or software depends on particular applications and design constraints of the technical solutions. A person skilled in the art may use different methods to implement the described functions for each particular application, but it should not be considered that the implementation goes beyond the scope of this application.

[0269] It may be clearly understood by a person skilled in the art that, for convenience and brevity, for a detailed working process of the system, apparatus, and unit, reference may be made to a corresponding process in the method embodiments. Details are not described herein again.

[0270] In the several embodiments provided in this application, it should be understood that the disclosed system, apparatus, and method may be implemented in other manners. For example, the described apparatus embodiment is merely an example. For example, the unit division is merely logical function division and may be other division in actual implementation. For example, a plurality of units or components may be combined or integrated into another system, or some features may be ignored or not performed. In addition, the displayed or discussed mutual couplings or direct couplings or communication connections may be implemented through some interfaces. The indirect couplings or communication connections between the apparatuses or units may be implemented in electrical, mechanical, or other forms.

[0271] The units described as separate parts may or may not be physically separate, and parts displayed as units may or may not be physical units, may be located in one position, or may be distributed on a plurality of network units. Some or all of the units may be selected based on actual requirements to achieve the objectives of the solutions of the embodiments.

[0272] In addition, functional units in the embodiments of this application may be integrated into one processing unit, or each of the units may exist alone physically, or two or more units may be integrated into one unit.

[0273] When the functions are implemented in a form of a software functional unit and sold or used as an independent product, the functions may be stored in a computer-readable storage medium. Based on such an understanding, the

technical solutions of this application essentially, or the part contributing to the prior art, or some of the technical solutions may be implemented in a form of a software product. The computer software product is stored in a storage medium, and includes several instructions for instructing a computer device (which may be a personal computer, a server, a network device, or the like) to perform all or some of the steps of the methods described in the embodiments of this application. The foregoing storage medium includes any medium that can store program code, such as a USB flash drive, a removable hard disk, a read-only memory (ROM, Read-Only Memory), a random access memory (RAM, Random Access Memory), a magnetic disk, or an optical disc.

[0274] Further embodiments of the present invention are provided in the following. It should be noted that the numbering used in the following section does not necessarily need to comply with the numbering used in the previous sections.

[0275] Embodiment 1. A method for processing feedback information, comprising:

receiving, by a receive end device, radio resource control RRC signaling, wherein the RRC signaling comprises time window information and time unit format information, wherein
the time window information comprises a hybrid automatic repeat request HARQ time sequence K1 set, wherein K1 is a time relationship between a time unit for transmitting and bearing a physical downlink shared channel PDSCH and a time unit for transmitting a physical uplink control channel PUCCH, or K1 is a time relationship between a time unit of a PDSCH and a time unit of a physical uplink shared channel PUSCH;
determining, by the receive end device, HARQ feedback information based on the time window information and the time unit format information; and
sending, by the receive end device, the HARQ feedback information.

[0276] Embodiment 2. The method according to embodiment 1, wherein the time unit format information comprises a quantity of time units configured for bearing uplink transmission in one configuration period and/or a quantity of time units configured for bearing downlink transmission in one configuration period.

[0277] Embodiment 3. The method according to embodiment 2, wherein the determining, by the receive end device, HARQ feedback information based on the time window information and the time unit format information specifically comprises:

determining, by the receive end device, a bit quantity of the HARQ feedback information based on a size of the HARQ time sequence K1 set and the quantity of time units configured for bearing uplink transmission in the time window.

[0278] Embodiment 4. The method according to embodiment 3, wherein the determining a bit quantity of the HARQ feedback information specifically comprises:

determining a time unit set based on the size of the HARQ time sequence K1 set;
when the time unit set comprises a time unit used to bear uplink transmission, deducting the time unit used to bear uplink transmission from the time unit set; and
determining the bit quantity of the HARQ feedback information based on the time unit set obtained after deduction.

[0279] Embodiment 5. The method according to embodiment 3, wherein the method further comprises:

obtaining a first uplink time unit used to feed back the HARQ information;
obtaining a second uplink time unit indicated by K1 in DCI corresponding to a PDSCH in a time window corresponding to the first uplink time unit; and
when the first uplink time unit is not the second uplink time unit, setting a corresponding bit in the HARQ feedback information in the first uplink time unit to NACK.

[0280] Embodiment 6. A receive end device, comprising:

a transceiver, configured to receive radio resource control RRC signaling, wherein the RRC signaling comprises time window information and time unit format information, wherein
the time window information comprises a hybrid automatic repeat request HARQ time sequence K1 set, wherein K1 is a time relationship between a time unit for transmitting and bearing a physical downlink shared channel PDSCH and a time unit for transmitting a physical uplink control channel PUCCH, or K1 is a time relationship between a time unit of a PDSCH and a time unit of a physical uplink shared channel PUSCH; and
a processor, configured to determine HARQ feedback information based on the time window information and the time unit format information, wherein
the transceiver is further configured to send the HARQ feedback information to the transmit end device.

[0281] Embodiment 7. The receive end device according to embodiment 6, wherein the time unit format information

comprises a quantity of time units configured for bearing uplink transmission in one configuration period and/or a quantity of time units configured for bearing downlink transmission in one configuration period.

[0282] Embodiment 8. The receive end device according to embodiment 7, wherein the processor is specifically configured to determine, for the receive end device, a bit quantity of the HARQ feedback information based on a size of the HARQ time sequence K1 set and the quantity of time units configured for bearing uplink transmission in the time window.

[0283] Embodiment 9. The receive end device according to embodiment 8, wherein the processor is specifically configured to: determine a time unit set based on the size of the HARQ time sequence K1 set; when the time unit set comprises a time unit used to bear uplink transmission, deduct the time unit used to bear uplink transmission from the time unit set; and determine the bit quantity of the HARQ feedback information based on the time unit set obtained after deduction.

[0284] Embodiment 10. The receive end device according to embodiment 8, wherein

the transceiver is further configured to: obtain a first uplink time unit used to feed back the HARQ information; and obtain a second uplink time unit indicated by K1 in DCI corresponding to a PDSCH in a time window corresponding to the first uplink time unit; and

the processor is further configured to: when the first uplink time unit is not the second uplink time unit, set a corresponding bit in the HARQ feedback information in the first uplink time unit to NACK.

[0285] Embodiment 11. A receive end device, configured to perform the method according to any one of embodiments 1 to 5.

[0286] Embodiment 12. A computer-readable storage medium, wherein the computer-readable storage medium comprises a computer-readable instruction, and when a computer reads and executes the computer-readable instruction, the computer performs the method according to any one of embodiments 1 to 5.

[0287] Embodiment 13. A computer program product, comprising a computer-readable instruction, wherein when a computer reads and executes the computer-readable instruction, the computer performs the method according to any one of embodiments 1 to 5.

[0288] Embodiment 14. A chip, comprising a memory and a processor, wherein the memory is configured to store a computer program, and the processor is configured to invoke the computer program from the memory and run the computer program, so that the processor performs the method according to any one of embodiments 1 to 5.

[0289] Embodiment 15. A method for processing feedback information, comprising:

sending, by a transmit end device, radio resource control RRC signaling, wherein the RRC signaling comprises time window information and time unit format information, wherein

the time window information comprises a hybrid automatic repeat request HARQ time sequence K1 set, wherein K1 is a time relationship between a time unit for transmitting and bearing a physical downlink shared channel PDSCH and a time unit for transmitting a physical uplink control channel PUCCH, or K1 is a time relationship between a time unit of a PDSCH and a time unit of a physical uplink shared channel PUSCH; and

receiving, by the transmit end, HARQ feedback information, wherein the HARQ feedback information is determined based on the time window information and the time unit format information.

[0290] Embodiment 16. The method according to embodiment 15, wherein the time unit format information comprises a quantity of time units configured for bearing uplink transmission in one configuration period and/or a quantity of time units configured for bearing downlink transmission in one configuration period.

[0291] Embodiment 17. The method according to embodiment 16, wherein the HARQ feedback information comprises a bit quantity of the HARQ feedback information, and the bit quantity of the HARQ feedback information is determined based on a size of the HARQ time sequence K1 set and the quantity of time units configured for bearing uplink transmission in the time window.

[0292] Embodiment 18. A transmit end device, configured to perform the method according to any one of embodiments 15 to 17.

[0293] Embodiment 19. A computer-readable storage medium, wherein the computer-readable storage medium comprises a computer-readable instruction, and when a computer reads and executes the computer-readable instruction, the computer performs the method according to any one of embodiments 15 to 17.

[0294] Embodiment 20. A computer program product, comprising a computer-readable instruction, wherein when a computer reads and executes the computer-readable instruction, the computer performs the method according to any one of embodiments 15 to 17.

[0295] Embodiment 21. A chip, comprising a memory and a processor, wherein the memory is configured to store a computer program, and the processor is configured to invoke the computer program from the memory and run the

computer program, so that the processor performs the method according to any one of embodiments 15 to 17.

[0296] The foregoing descriptions are merely specific implementations of this application, but are not intended to limit the protection scope of this application. Any variation or replacement readily figured out by a person skilled in the art within the technical scope disclosed in this application shall fall within the protection scope of this application. Therefore, the protection scope of this application shall be subject to the protection scope of the claims.

Claims

1. A method for processing feedback information, comprising:

sending, by a transmit end device, time unit format information and a set of hybrid automatic repeat request, HARQ, timing K1 values via one or more radio resource control (RRC) signalings to a terminal device, wherein each HARQ timing K1 value of the set of HARQ timing K1 values represents a time relationship between a time unit of a physical downlink shared channel (PDSCH) and a time unit of a physical uplink control channel (PUCCH), or each HARQ timing K1 value of the set of HARQ timing K1 values represents a time relationship between a time unit of a PDSCH and a time unit of a physical uplink shared channel (PUSCH), and wherein the time unit format information comprises a quantity of time units for uplink transmission in one configuration period and/or a quantity of time units for downlink transmission in one configuration period; and receiving, by the transmit end device, HARQ feedback information from the terminal device, wherein a quantity of HARQ feedback information bits is associated with the set of HARQ timing K1 values and the time unit format information.

2. The method according to claim 1, wherein the quantity of the HARQ feedback information bits is associated with a size of the set of HARQ timing K1 values and the quantity of time units for uplink transmission in a time window determined based on the set of HARQ timing K1 values.

3. The method according to claim 1 or 2, wherein the quantity of the HARQ feedback information bits is associated with a first time unit set, the first time unit set is obtained by excluding the time unit for uplink transmission from a time unit set, according to the time unit format information, the time unit set is determined based on the set of the HARQ timing K1 values.

4. A device in a wireless communication network, comprising:

a transmitter, configured to send time unit format information and a set of hybrid automatic repeat request, HARQ, timing K1 values via one or more radio resource control (RRC) signalings to a terminal device, wherein each HARQ timing K1 value of the set of HARQ timing K1 values represents a time relationship between a time unit of a physical downlink shared channel (PDSCH) and a time unit of a physical uplink control channel (PUCCH), or each HARQ timing K1 value of the set of HARQ timing K1 values represents a time relationship between a time unit of a PDSCH and a time unit of a physical uplink shared channel (PUSCH), and wherein the time unit format information comprises a quantity of time units for uplink transmission in one configuration period and/or a quantity of time units for downlink transmission in one configuration period; and a receiver, configured to receive HARQ feedback information from the terminal device, wherein a quantity of HARQ feedback information bits is associated with the set of HARQ timing K1 values and the time unit format information.

5. The device according to claim 4, wherein the quantity of the HARQ feedback information bits is associated with a size of the set of HARQ timing K1 values and the quantity of time units for uplink transmission in a time window determined based on the set of HARQ timing K1 values.

6. The device according to claim 4 or 5, wherein the quantity of the HARQ feedback information bits is associated with a first time unit set, the first time unit set is obtained by excluding the time unit for uplink transmission from a time unit set, according to the time unit format information, the time unit set is determined based on the set of the HARQ timing K1 values.

7. A method for processing feedback information, comprising:

receiving, by a receive end device, time unit format information and a set of hybrid automatic repeat request,

HARQ, timing K1 values via radio resource control, RRC, signalings, wherein each HARQ timing K1 value of the set of HARQ timing K1 values represents a time difference between a time unit for transmitting and bearing a physical downlink shared channel, PDSCH, and a time unit for transmitting a physical uplink control channel, PUCCH, or wherein each HARQ timing K1 value of the set of HARQ timing K1 values represents a time difference between a time unit of a PDSCH and a time unit of a physical uplink shared channel, PUSCH, where PUCCH/PUSCH are used to transmit HARQ feedback information corresponding to the PDSCH;

the time unit format information comprises a quantity of time units configured for bearing uplink transmission in a configuration period and/or a quantity of time units configured for bearing downlink transmission in a configuration period;

determining, by the receive end device, HARQ feedback information, wherein a quantity of HARQ feedback information bits is determined based on the set of HARQ timing K1 values and the time unit format information; and sending, by the receive end device, the HARQ feedback information.

8. The method according to claim 7, wherein the quantity of HARQ feedback information bits corresponds to a first time unit set, the first time unit set is obtained by excluding the time unit for uplink transmission from a time unit set, according to the time unit format information, the time unit set is determined based on the set of the HARQ timing K1 values.

9. The method according to claim 7 or 8, wherein the quantity of the HARQ feedback information bits is determined by the following:

determining a time window based on the size of the set of HARQ timing K1 values, the time window including one or more time unit;

when the time window comprises a time unit for uplink transmission according to the time unit format information, removing the time unit for uplink transmission from the time window; and

determining the quantity of the HARQ feedback information bits based on a time unit set obtained after removing the time unit for uplink transmission.

10. The method according to any one of claims 7-9, wherein the method further comprises:

obtaining a first uplink time unit for the HARQ feedback information;

obtaining a second uplink time unit indicated by a K1 in a downlink control information, DCI, corresponding to a PDSCH in a time window corresponding to the first uplink time unit; and

when the first uplink time unit is not the second uplink time unit, setting a corresponding bit in the HARQ feedback information in the first uplink time unit to NACK.

11. A receive end device, comprising:

a transceiver, configured to receive time unit format information and a set of hybrid automatic repeat request, HARQ, timing K1 values via radio resource control (RRC) signalings, wherein

each HARQ timing K1 value of the set of HARQ timing K1 values represents a time difference between a time unit for transmitting and bearing a physical downlink shared channel, PDSCH, and a time unit for transmitting a physical uplink control channel, PUCCH, or wherein each HARQ timing K1 value of the set of HARQ timing K1 values represents a time difference between a time unit of a PDSCH and a time unit of a physical uplink shared channel PUSCH, where PUCCH/PUSCH are used to transmit HARQ feedback information corresponding to the PDSCH;

the time unit format information comprises a quantity of time units configured for bearing uplink transmission in a configuration period and/or a quantity of time units configured for bearing downlink transmission in a configuration period; and

a processor, configured to determine HARQ feedback information, wherein a quantity of HARQ feedback information bits is determined based on the set of HARQ timing K1 values and the time unit format information, wherein the transceiver is further configured to send the HARQ feedback information to the transmit end device.

12. The receive end device according to claim 11, wherein the quantity of HARQ feedback information bits corresponds to a first time unit set, the first time unit set is obtained by excluding the time unit for uplink transmission from a time unit set, according to the time unit format information, the time unit set is determined based on the set of the HARQ timing K1 values.

13. The receive end device according to claim 11 or 12, wherein the processor is specifically configured to:
determine a time window based on the size of the set of HARQ timing K1 values, the time window including one or
more time unit; when the time window comprises a time unit for uplink transmission according to the time unit format
information, remove the time unit for uplink transmission from the time window; and determine the quantity of the
HARQ feedback information bits based on a time unit set obtained after removing the time unit for uplink transmission.

14. The receive end device according to any one of claims 11 to 13, wherein

the transceiver is further configured to: obtain a first uplink time unit for the HARQ feed back information; and
obtain a second uplink time unit indicated by a K1 in a downlink control information, DCI, corresponding to a
PDSCH in a time window corresponding to the first uplink time unit; and
the processor is further configured to: when the first uplink time unit is not the second uplink time unit, set a
corresponding bit in the HARQ feedback information in the first uplink time unit to NACK.

15. A computer program product, comprising computer-readable instructions, wherein when a computer reads and
executes the computer-readable instructions, the computer performs the method according to any one of claims 1
to 3 or 7 to 10.

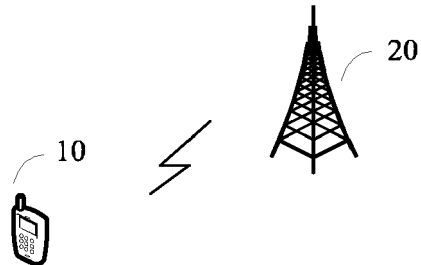


FIG. 1

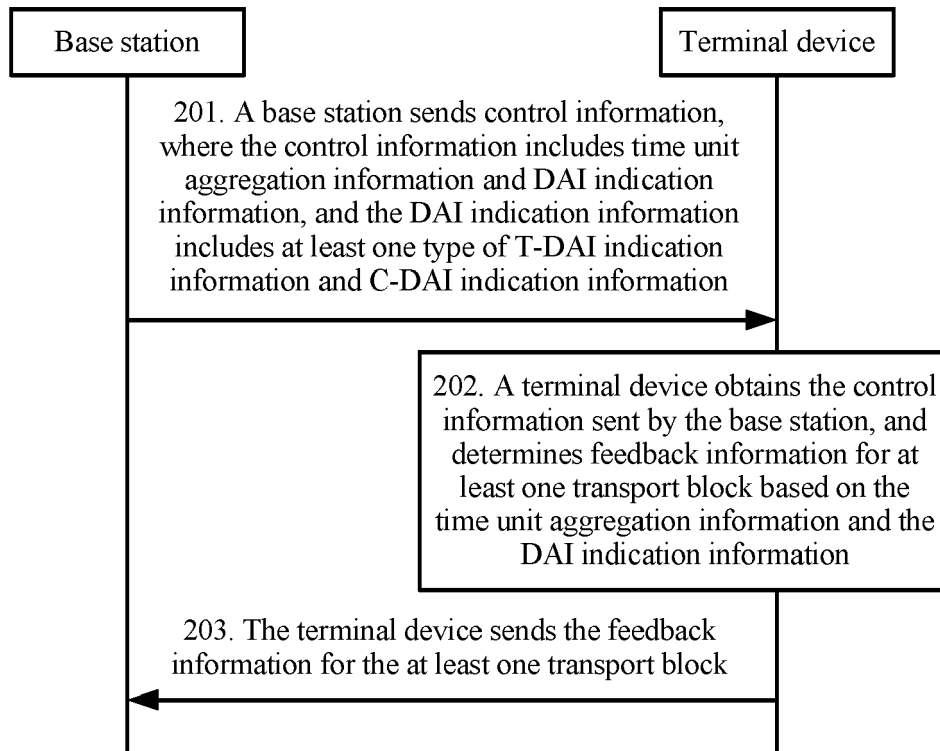


FIG. 2

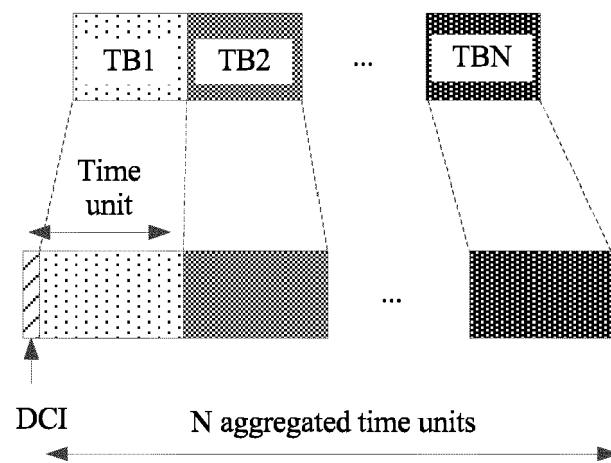


FIG. 3

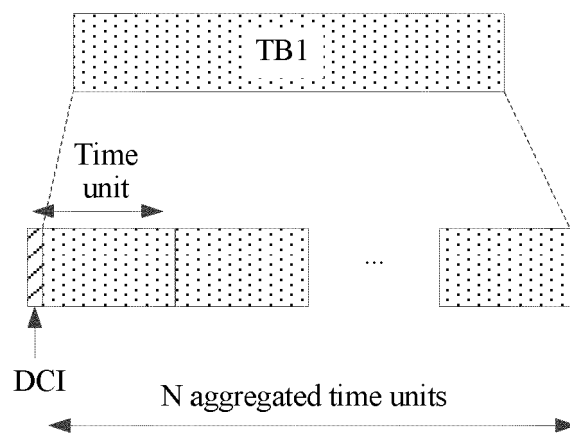


FIG. 4

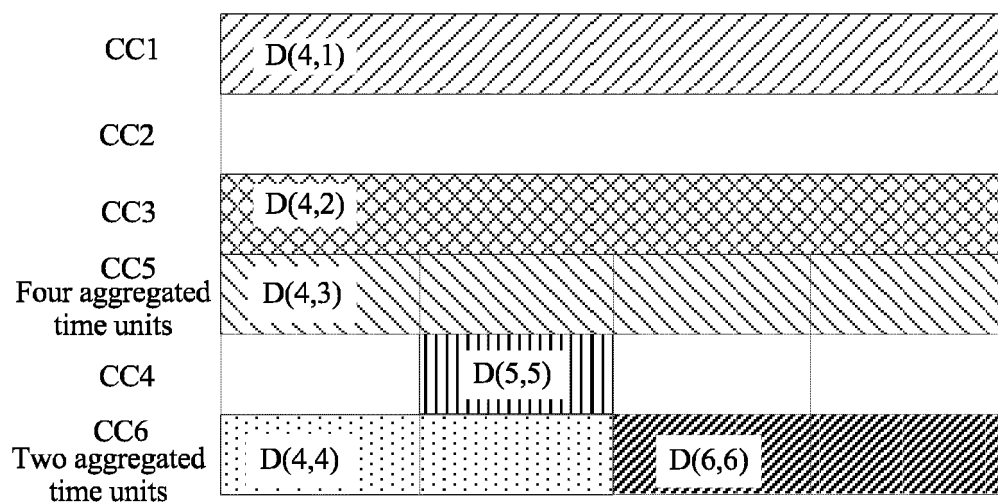


FIG. 5a

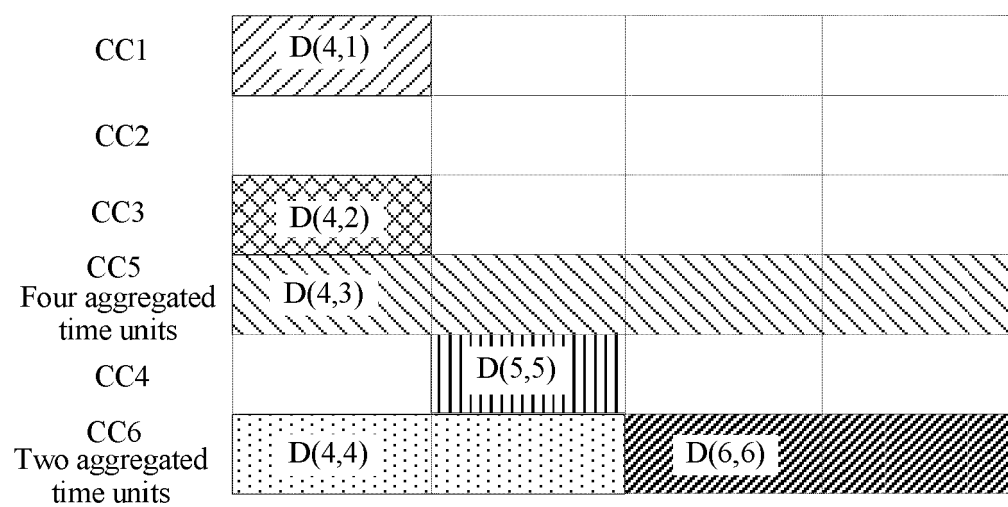


FIG. 5b

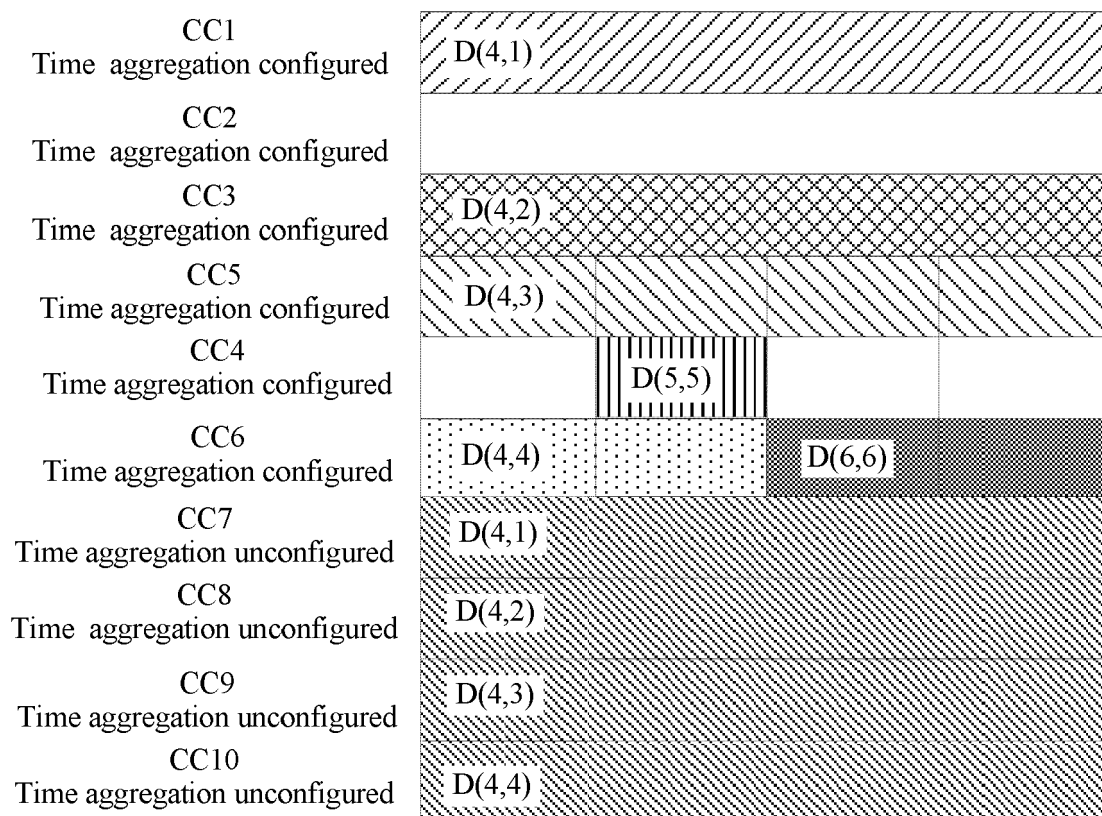


FIG. 5c

Decoding result for a TB in a time unit scheduled by D(4,1)	0
Default value	1
Default value	2
Default value	3
Decoding result for a TB in a time unit scheduled by D(4,2)	4
Default value	5
Default value	6
Default value	7
Decoding result for a TB in the 1 st time unit scheduled by D(4,3)	8
Decoding result for a TB in the 2 nd time unit scheduled by D(4,3)	9
Decoding result for a TB in the 3 rd time unit scheduled by D(4,3)	10
Decoding result for a TB in the 4 th time unit scheduled by D(4,3)	11
Decoding result for a TB in the 1 st time unit scheduled by D(4,4)	12
Decoding result for a TB in the 2 nd time unit scheduled by D(4,4)	13
Default value	14
Default value	15
Decoding result for a TB in a time unit scheduled by D(5,5)	16
Default value	17
Default value	18
Default value	19
Decoding result for a TB in the 1 st time unit scheduled by D(6,6)	22
Decoding result for a TB in the 2 nd time unit scheduled by D(6,6)	21
Default value	22
Default value	23

FIG. 6a

Decoding result for a TB in a time unit scheduled by D(4,1)	0
Default value	1
Default value	2
Default value	3
NACK	4
NACK	5
NACK	6
NACK	7
Decoding result for a TB in the 1 st time unit scheduled by D(4,3)	8
Decoding result for a TB in the 2 nd time unit scheduled by D(4,3)	9
Decoding result for a TB in the 3 rd time unit scheduled by D(4,3)	10
Decoding result for a TB in the 4 th time unit scheduled by D(4,3)	11
Decoding result in the 1 st time unit scheduled by D(4,4)	12
Decoding result for a TB in the 2 nd time unit scheduled by D(4,4)	13
Default value	14
Default value	15
Decoding result for a TB in a time unit scheduled by D(5,5)	16
Default value	17
Default value	18
Default value	19
Decoding result for a TB in the 1 st time unit scheduled by D(6,6)	22
Decoding result for a TB in the 2 nd time unit scheduled by D(6,6)	21
Default value	22
Default value	23

FIG. 6b

0	1	2	3	4	5
Decoding result for a TB in a time unit scheduled by D(4,1)	Decoding result for a TB in a time unit scheduled by D(4,2)	Result of an AND operation performed on decoding results for TBs in four time units scheduled by D(4,3)	Result of an AND operation performed on decoding results for TBs in two time units scheduled by D(4,4)	Decoding result for a TB in a time unit scheduled by D(5,5)	Result of an AND operation performed on decoding results for TBs in two time units scheduled by D(6,6)

FIG. 7a

0	1	2	3	4	5
Decoding result for a TB in a time unit scheduled by D(4,1)	NACK	Result of an AND operation performed on decoding results for TBs in four time units scheduled by D(4,3)	Result of an AND operation performed on decoding results for TBs in two time units scheduled by D(4,4)	Decoding result for a TB in a time unit scheduled by D(5,5)	Result of an AND operation performed on decoding results for TBs in two time units scheduled by D(6,6)

FIG. 7b

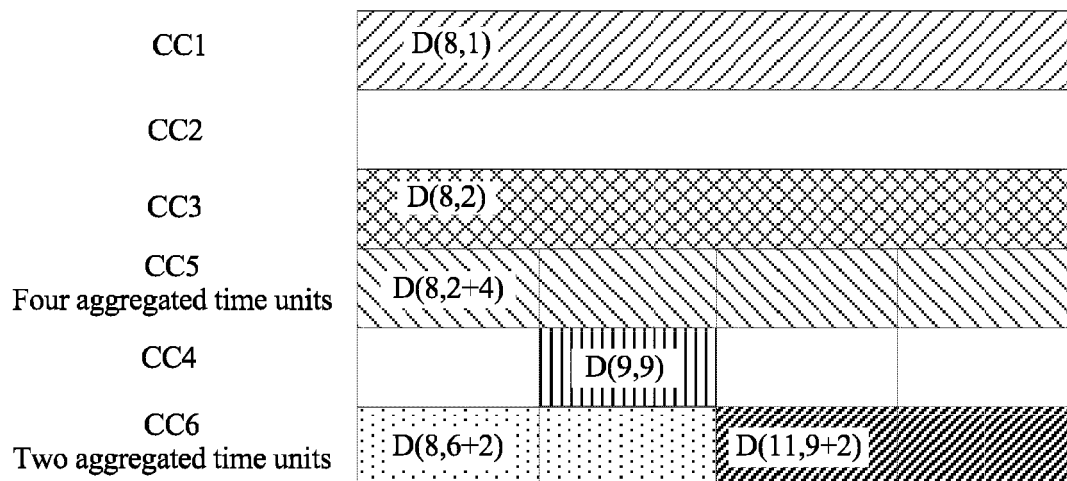


FIG. 8a

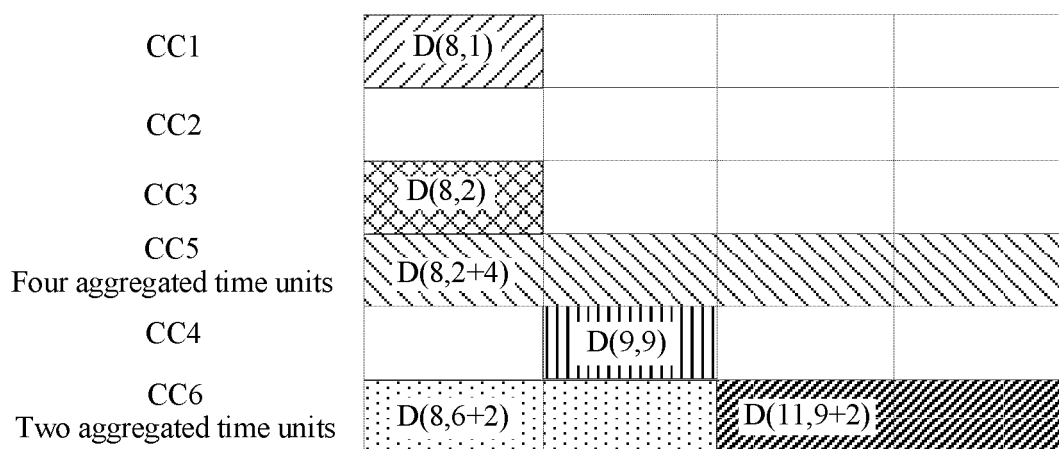


FIG. 8b

Decoding result for a TB in one time unit scheduled by D(8,1)	0
Decoding result for a TB in one time unit scheduled by D(8,2)	1
Decoding result for a TB in the 1 st time unit scheduled by D(8,6)	2
Decoding result for a TB in the 2 nd time unit scheduled by D(8,6)	3
Decoding result for a TB in the 3 rd time unit scheduled by D(8,6)	4
Decoding result for a TB in the 4 th time unit scheduled by D(8,6)	5
Decoding result for a TB in the 1 st time unit scheduled by D(8,8)	6
Decoding result for a TB in the 2 nd time unit scheduled by D(8,8)	7
Decoding result for a TB in one time unit scheduled by D(9,9)	8
Decoding result for a TB in the 1 st time unit scheduled by D(11,11)	9
Decoding result for a TB in the 2 nd time unit scheduled by D(11,11)	10

FIG. 9a

Decoding result for a TB in one time unit scheduled by D(8,1)	0
NACK	1
Decoding result for a TB in the 1 st time unit scheduled by D(8,6)	2
Decoding result for a TB in the 2 nd time unit scheduled by D(8,6)	3
Decoding result for a TB in the 3 rd time unit scheduled by D(8,6)	4
Decoding result for a TB in the 4 th time unit scheduled by D(8,6)	5
Decoding result for a TB in the 1 st time unit scheduled by D(8,8)	6
Decoding result for a TB in the 2 nd time unit scheduled by D(8,8)	7
Decoding result for a TB in one time unit scheduled by D(9,9)	8
Decoding result for a TB in the 1 st time unit scheduled by D(11,11)	9
Decoding result for a TB in the 2 nd time unit scheduled by D(11,11)	10

FIG. 9b

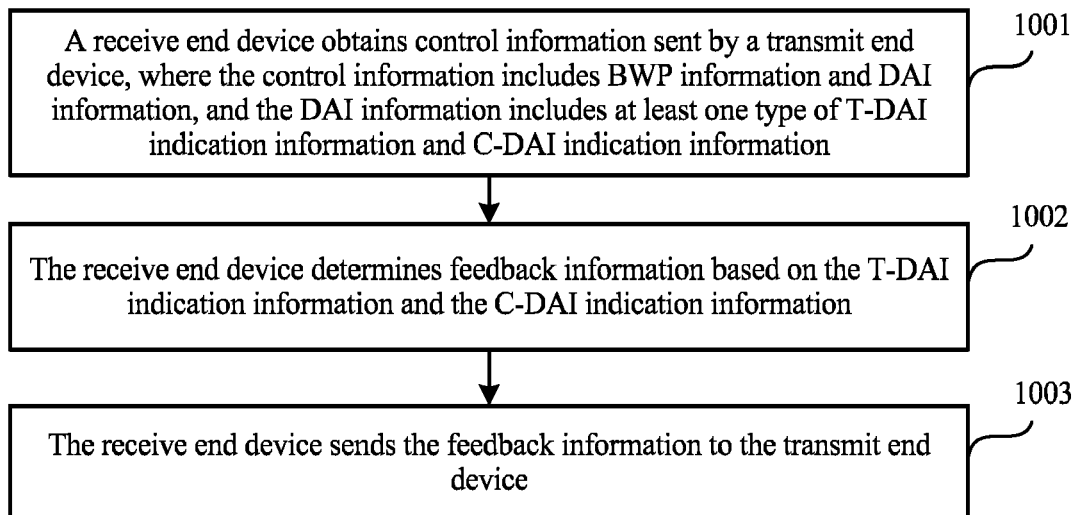


FIG. 10

Decoding result for a TB in the 1 st time unit scheduled by CC1 BWP1	0
Decoding result for a TB in the 1 st time unit scheduled by CC1 BWP2	1
Decoding result for a TB in the 2 nd time unit scheduled by CC1 BWP1	2
Decoding result for a TB in the 2 nd time unit scheduled by CC1 BWP2	3
Decoding result for a TB in the 1 st time unit scheduled by CC2 BWP1	4
Decoding result for a TB in the 2 nd time unit scheduled by CC2 BWP1	5
Decoding result for a TB in the 1 st time unit scheduled by CC3 BWP1	6
Decoding result for a TB in the 1 st time unit scheduled by CC3 BWP2	7
Decoding result for a TB in the 1 st time unit scheduled by CC3 BWP3	8
Decoding result for a TB in the 2 nd time unit scheduled by CC3 BWP1	9
Decoding result for a TB in the 2 nd time unit scheduled by CC3 BWP2	10
Decoding result for a TB in the 2 nd time unit scheduled by CC3 BWP3	11

FIG. 11

Decoding result for a TB in the 1 st time unit scheduled by CC1 BWP1	0
Decoding result for a TB in the 2 nd time unit scheduled by CC1 BWP1	1
Decoding result for a TB in the 1 st time unit scheduled by CC1 BWP2	2
Decoding result for a TB in the 2 nd time unit scheduled by CC1 BWP2	3
Decoding result for a TB in the 1 st time unit scheduled by CC2 BWP1	4
Decoding result for a TB in the 2 nd time unit scheduled by CC2 BWP1	5
Decoding result for a TB in the 1 st time unit scheduled by CC3 BWP1	6
Decoding result for a TB in the 2 nd time unit scheduled by CC3 BWP1	7
Decoding result for a TB in the 1 st time unit scheduled by CC3 BWP2	8
Decoding result for a TB in the 2 nd time unit scheduled by CC3 BWP2	9
Decoding result for a TB in the 1 st time unit scheduled by CC3 BWP3	10
Decoding result for a TB in the 2 nd time unit scheduled by CC3 BWP3	11

FIG. 12

Decoding result for a TB in the 1 st time unit scheduled by CC1 BWP1	0
Decoding result for a TB in the 1 st time unit scheduled by CC1 BWP2	1
Decoding result for a TB in the 1 st time unit scheduled by CC2 BWP1	2
Decoding result for a TB in the 1 st time unit scheduled by CC3 BWP1	3
Decoding result for a TB in the 1 st time unit scheduled by CC3 BWP2	4
Decoding result for a TB in the 1 st time unit scheduled by CC3 BWP3	5
Decoding result for a TB in the 2 nd time unit scheduled by CC1 BWP1	6
Decoding result for a TB in the 2 nd time unit scheduled by CC1 BWP2	7
Decoding result for a TB in the 2 nd time unit scheduled by CC2 BWP1	8
Decoding result for a TB in the 2 nd time unit scheduled by CC3 BWP1	9
Decoding result for a TB in the 2 nd time unit scheduled by CC3 BWP2	10
Decoding result for a TB in the 2 nd time unit scheduled by CC3 BWP3	11

FIG. 13

#0	#1	#2	#3	#4	#5	#6	#7	#8	#9
DL	DL	DL	Dynamic	Dynamic	Dynamic	Dynamic	UL	UL	UL

FIG. 14

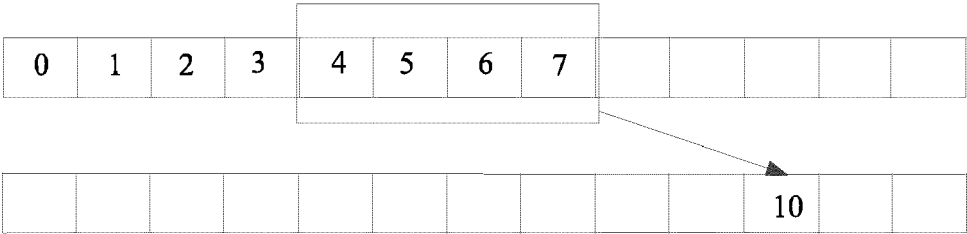


FIG. 15

CC1	D(2,1)				D(3,3)			
CC2								
CC3	D(2,2)							
CC4	D(2,1)				D(6,6)			
CC5		D(3,3)						
CC6	D(2,1)		D(4,4)	D(5,5)			D(7,7)	

FIG. 16

CC1	D(4,1)	D(9,3)	D(7,1)	D(10,3)	
CC2					
CC3	D(4,2)		D(7,2)		
CC4	D(4,1)	D(9,6)	D(7,1)	D(10,6)	
CC5	D(5,3)		D(7,3)		
CC6	D(4,2)	D(6,4) D(7,5)	D(7,2)	D(7,4) D(7,5)	D(10,7)

FIG. 17

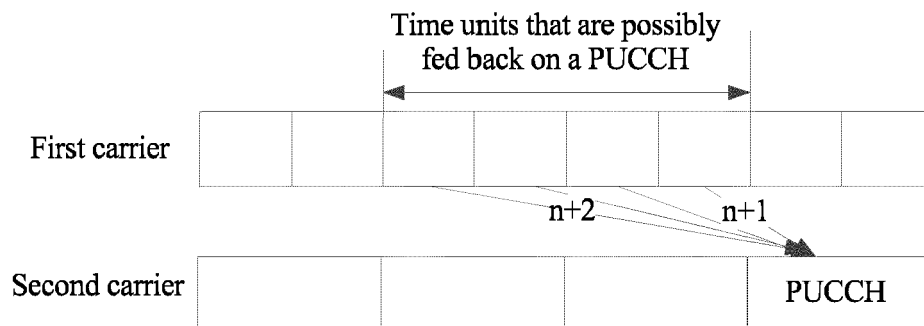


FIG. 18

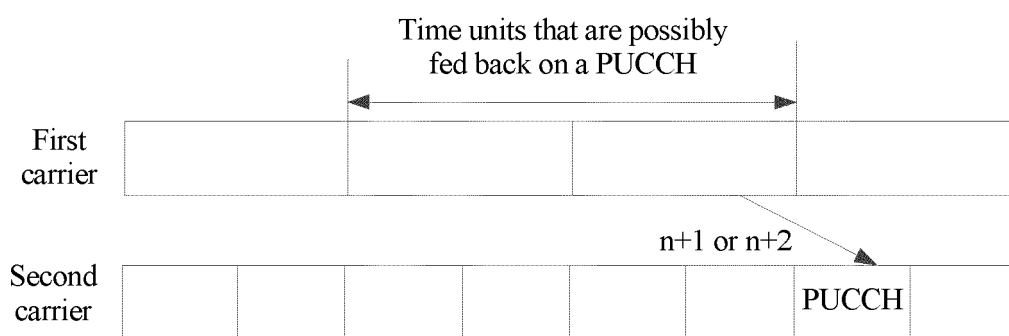


FIG. 19

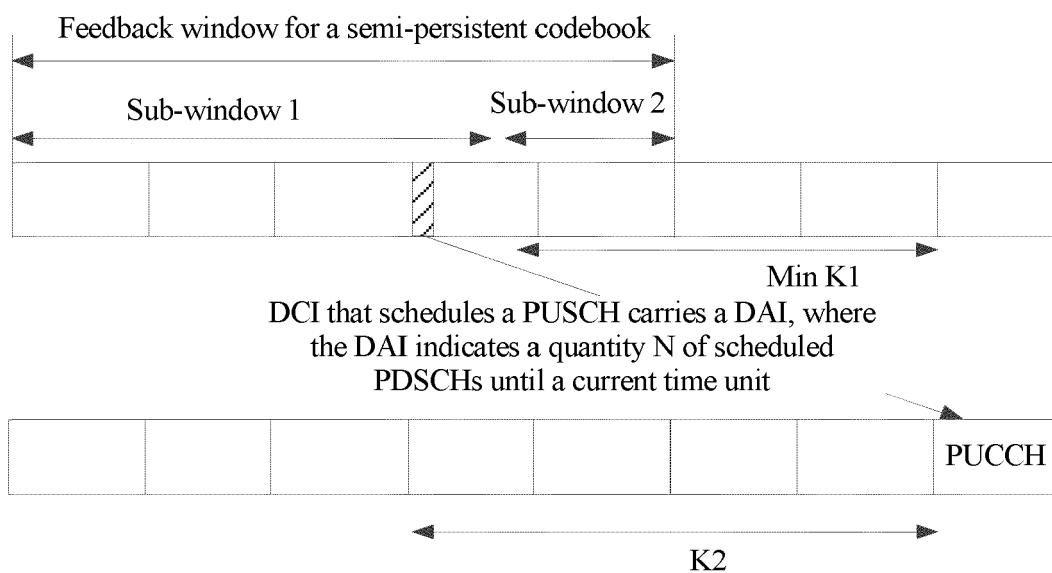


FIG. 20

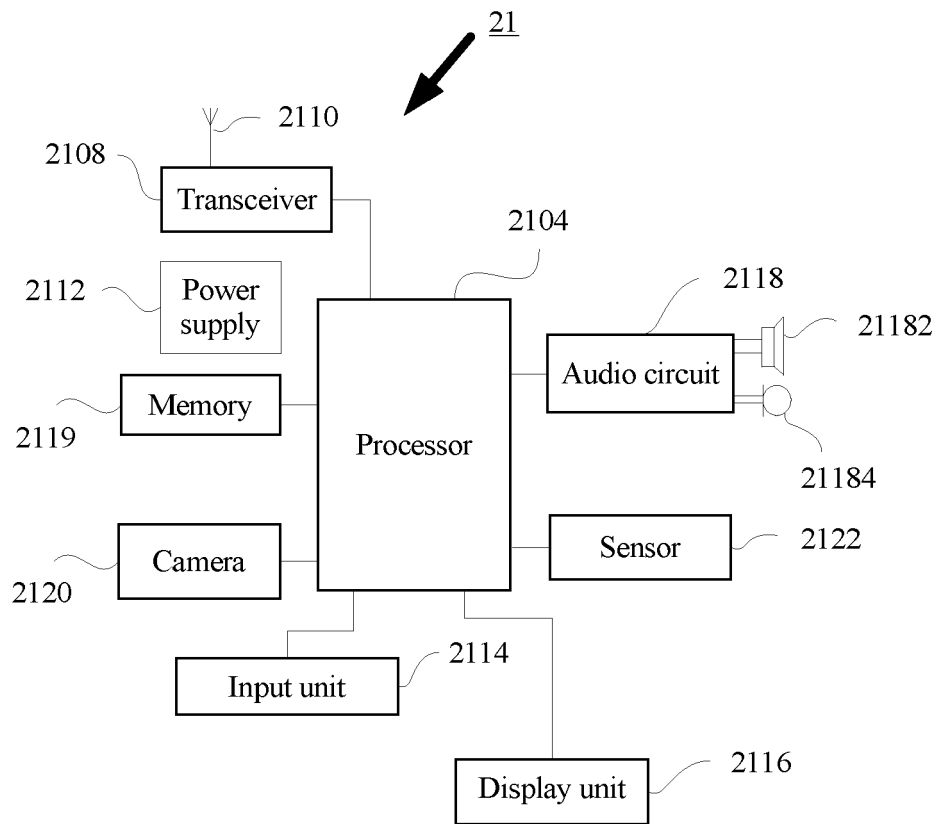


FIG. 21

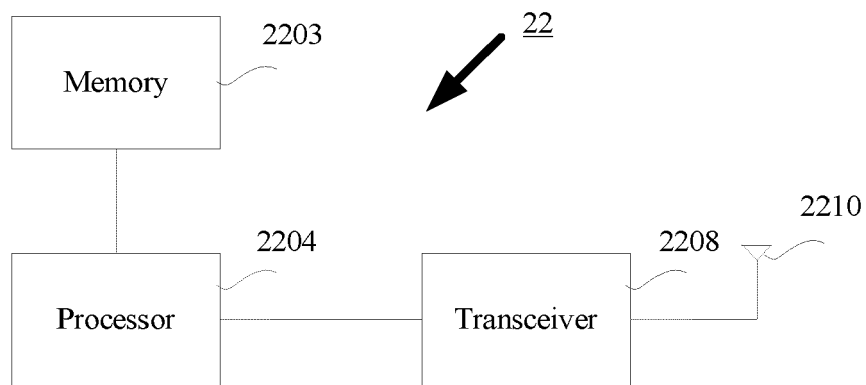


FIG. 22



EUROPEAN SEARCH REPORT

Application Number

EP 22 15 7504

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2016/212734 A1 (HE HONG [CN] ET AL) 21 July 2016 (2016-07-21) * paragraph [0037] - paragraph [0040] * * paragraph [0055] * * paragraph [0057] * * paragraph [0066] * * paragraph [0070] - paragraph [0072] * * paragraph [0080] * -----	1-15	INV. H04L5/00 H04L1/18
A	WO 2013/138021 A1 (INTEL CORP [US]; HE HONG [CN]; FWU JONG-KAE [US]) 19 September 2013 (2013-09-19) * page 1, line 9 - line 11 * * page 2, line 1 - page 3, line 12 * * page 6, line 5 - line 13 * * page 8, line 8 - page 10, line 16 * * page 16, line 4 - line 8 * -----	1-15	
A	US 9 301 183 B2 (INTEL CORP [US]) 29 March 2016 (2016-03-29) * column 5, line 42 - column 7, line 21 * -----	1-15	TECHNICAL FIELDS SEARCHED (IPC) H04L
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		8 August 2022	Marongiu, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 22 15 7504

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2016212734 A1	21-07-2016	EP	3248316	A1		29-11-2017
		US	2016212734	A1		21-07-2016
		US	2018034610	A1		01-02-2018
		US	2020036494	A1		30-01-2020
		US	2022077989	A1		10-03-2022
		WO	2016118240	A1		28-07-2016

WO 2013138021 A1	19-09-2013	AU	2013232287	A1		25-09-2014
		AU	2013232616	A1		21-08-2014
		AU	2013232618	A1		25-09-2014
		AU	2013232628	A1		25-09-2014
		AU	2016200440	A1		18-02-2016
		AU	2016203351	A1		16-06-2016
		AU	2016204107	A1		14-07-2016
		BE	1021235	B1		08-09-2015
		BE	1022184	B1		24-02-2016
		BR	112014020867	A2		20-06-2017
		CA	2861503	A1		19-09-2013
		CA	2866352	A1		19-09-2013
		CA	2866953	A1		19-09-2013
		CA	2867017	A1		19-09-2013
		CN	104170270	A		26-11-2014
		CN	104170277	A		26-11-2014
		CN	104170279	A		26-11-2014
		CN	104170280	A		26-11-2014
		CN	104170294	A		26-11-2014
		CN	104170295	A		26-11-2014
		CN	104170296	A		26-11-2014
		CN	104170304	A		26-11-2014
		CN	104170436	A		26-11-2014
		CN	104205682	A		10-12-2014
		CN	104205689	A		10-12-2014
		CN	104205884	A		10-12-2014
		CN	104205934	A		10-12-2014
		CN	104320226	A		28-01-2015
		CN	104350798	A		11-02-2015
		CN	104396303	A		04-03-2015
		CN	107181574	A		19-09-2017
		CN	107257268	A		17-10-2017
		CN	108270524	A		10-07-2018
		CN	108282271	A		13-07-2018
		EP	2826160	A1		21-01-2015
		EP	2826165	A1		21-01-2015
		EP	2826166	A1		21-01-2015
		EP	2826167	A1		21-01-2015
		EP	2826171	A1		21-01-2015

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 22 15 7504

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

10	Patent document cited in search report	Publication date	Patent family member(s)	Publication date
			EP 2826173 A1	21-01-2015
			EP 2826174 A1	21-01-2015
			EP 2826176 A1	21-01-2015
15			EP 2826177 A1	21-01-2015
			EP 2826189 A1	21-01-2015
			EP 2826190 A1	21-01-2015
			EP 2826267 A1	21-01-2015
			EP 2826275 A1	21-01-2015
			EP 2826278 A1	21-01-2015
20			EP 2826291 A1	21-01-2015
			EP 2826298 A1	21-01-2015
			EP 2826326 A1	21-01-2015
			EP 2863686 A2	22-04-2015
			EP 3133857 A1	22-02-2017
25			EP 3145239 A1	22-03-2017
			EP 3282726 A1	14-02-2018
			EP 3754877 A1	23-12-2020
			ES 2439623 A2	23-01-2014
			ES 2453448 A2	07-04-2014
			ES 2611935 T3	11-05-2017
30			ES 2612553 T3	17-05-2017
			ES 2639773 T3	30-10-2017
			ES 2643229 T3	21-11-2017
			ES 2647151 T3	19-12-2017
			ES 2656895 T3	28-02-2018
35			ES 2668901 T3	23-05-2018
			ES 2684223 T3	01-10-2018
			ES 2689431 T3	14-11-2018
			ES 2693325 T3	11-12-2018
			ES 2729923 T3	07-11-2019
			FI 20135235 A	17-09-2013
40			FI 20135242 A	17-09-2013
			FR 3055080 A1	16-02-2018
			HK 1204399 A1	13-11-2015
			HK 1244128 A1	27-07-2018
			HK 1249810 A1	09-11-2018
45			HK 1251733 A1	01-02-2019
			HK 1251812 A1	29-03-2019
			HU E030599 T2	29-05-2017
			HU E032865 T2	28-11-2017
			HU E034720 T2	28-02-2018
			HU E036111 T2	28-06-2018
50			HU E036770 T2	28-08-2018
			HU E037650 T2	28-09-2018
			HU E037723 T2	28-09-2018
			HU E038863 T2	28-12-2018

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 22 15 7504

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		HU E039491 T2	28-01-2019
		HU E043282 T2	28-08-2019
		JP 5861219 B2	16-02-2016
		JP 5879642 B2	08-03-2016
		JP 5886449 B2	16-03-2016
		JP 5905637 B2	20-04-2016
		JP 5922261 B2	24-05-2016
		JP 5951876 B2	13-07-2016
		JP 5967286 B2	10-08-2016
		JP 5985036 B2	06-09-2016
		JP 5987231 B2	07-09-2016
		JP 6022019 B2	09-11-2016
		JP 6022610 B2	09-11-2016
		JP 6064248 B2	25-01-2017
		JP 6141477 B2	07-06-2017
		JP 6156957 B2	05-07-2017
		JP 6285521 B2	28-02-2018
		JP 6350601 B2	04-07-2018
		JP 6354098 B2	11-07-2018
		JP 2015509690 A	30-03-2015
		JP 2015510377 A	02-04-2015
		JP 2015510378 A	02-04-2015
		JP 2015510379 A	02-04-2015
		JP 2015511091 A	13-04-2015
		JP 2015512211 A	23-04-2015
		JP 2015513270 A	30-04-2015
		JP 2015513273 A	30-04-2015
		JP 2015514338 A	18-05-2015
		JP 2015515786 A	28-05-2015
		JP 2015515789 A	28-05-2015
		JP 2015515790 A	28-05-2015
		JP 2015520531 A	16-07-2015
		JP 2016042726 A	31-03-2016
		JP 2016106502 A	16-06-2016
		JP 2016174371 A	29-09-2016
		JP 2016192786 A	10-11-2016
		JP 2017005761 A	05-01-2017
		JP 2017184240 A	05-10-2017
		KR 20140120368 A	13-10-2014
		KR 20140124006 A	23-10-2014
		KR 20140124007 A	23-10-2014
		KR 20140134676 A	24-11-2014
		KR 20140134677 A	24-11-2014
		KR 20140136472 A	28-11-2014
		KR 20140142712 A	12-12-2014
		KR 20160040300 A	12-04-2016

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 22 15 7504

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		KR 20160104082 A	02-09-2016
		KR 20160136457 A	29-11-2016
		KR 20170010094 A	25-01-2017
15		KR 20170122853 A	06-11-2017
		MX 347863 B	17-05-2017
		MX 348729 B	27-06-2017
		MX 355521 B	20-04-2018
		MY 167452 A	28-08-2018
		MY 170744 A	27-08-2019
20		MY 178014 A	29-09-2020
		NL 2010448 C2	07-04-2015
		NL 2010449 C2	12-02-2015
		RU 2643783 C1	06-02-2018
		RU 2645303 C1	20-02-2018
25		RU 2690505 C1	04-06-2019
		RU 2014137294 A	10-04-2016
		RU 2014139284 A	20-04-2016
		RU 2014139406 A	20-04-2016
		RU 2014139414 A	20-04-2016
		RU 2016131671 A	07-02-2018
30		SE 1350307 A1	17-09-2013
		SE 1350308 A1	17-09-2013
		SE 1850150 A1	12-02-2018
		TW 201342841 A	16-10-2013
		TW 201352020 A	16-12-2013
35		TW 201513601 A	01-04-2015
		TW 201536070 A	16-09-2015
		US 2013242720 A1	19-09-2013
		US 2013242726 A1	19-09-2013
		US 2013242735 A1	19-09-2013
		US 2013242770 A1	19-09-2013
40		US 2013242812 A1	19-09-2013
		US 2013242816 A1	19-09-2013
		US 2013242817 A1	19-09-2013
		US 2013242818 A1	19-09-2013
		US 2013242819 A1	19-09-2013
45		US 2013242831 A1	19-09-2013
		US 2013242832 A1	19-09-2013
		US 2013242885 A1	19-09-2013
		US 2013242886 A1	19-09-2013
		US 2013242887 A1	19-09-2013
		US 2013242889 A1	19-09-2013
50		US 2013242890 A1	19-09-2013
		US 2013244656 A1	19-09-2013
		US 2013244709 A1	19-09-2013
		US 2013247118 A1	19-09-2013

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 22 15 7504

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

	Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
10			US 2013265928 A1	10-10-2013	
			US 2014056200 A1	27-02-2014	
			US 2014140278 A1	22-05-2014	
15			US 2014307596 A1	16-10-2014	
			US 2014376440 A1	25-12-2014	
			US 2015063104 A1	05-03-2015	
			US 2016164656 A1	09-06-2016	
			US 2016270104 A1	15-09-2016	
			US 2017019263 A1	19-01-2017	
20			US 2017250790 A1	31-08-2017	
			US 2019372744 A1	05-12-2019	
			WO 2013138019 A1	19-09-2013	
			WO 2013138020 A1	19-09-2013	
			WO 2013138021 A1	19-09-2013	
			WO 2013138031 A1	19-09-2013	
25			WO 2013138043 A1	19-09-2013	
			WO 2013138047 A1	19-09-2013	
			WO 2013138048 A1	19-09-2013	
			WO 2013138065 A1	19-09-2013	
			WO 2013138332 A1	19-09-2013	
30			WO 2013138648 A1	19-09-2013	
			WO 2013138659 A1	19-09-2013	
			WO 2013138669 A1	19-09-2013	
			WO 2013138758 A1	19-09-2013	
			WO 2013138773 A1	19-09-2013	
			WO 2013138779 A1	19-09-2013	
35			WO 2013138782 A1	19-09-2013	
			WO 2013138792 A1	19-09-2013	

	US 9301183	B2	29-03-2016	AU 2013323321 A1	05-02-2015
				AU 2013323978 A1	05-02-2015
40				AU 2016203284 A1	09-06-2016
				AU 2017200813 A1	02-03-2017
				AU 2017203569 A1	15-06-2017
				BR 112015004006 A2	19-11-2019
				BR 112015004036 A2	01-10-2019
				BR 112015004107 A2	04-07-2017
45				BR 112015004583 A2	24-07-2018
				BR 112015004586 A2	04-07-2017
				BR 122016013802 A2	27-08-2019
				BR 122016021571 A2	27-08-2019
				CA 2879201 A1	03-04-2014
				CA 2879206 A1	03-04-2014
50				CN 104584464 A	29-04-2015
				CN 104584475 A	29-04-2015
				CN 104584482 A	29-04-2015

FORM P0459

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 22 15 7504

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 104584620 A	29-04-2015
		CN 104584623 A	29-04-2015
		CN 104584672 A	29-04-2015
		CN 104604165 A	06-05-2015
		CN 104604167 A	06-05-2015
		CN 104604175 A	06-05-2015
		CN 104604263 A	06-05-2015
		CN 104604282 A	06-05-2015
		CN 104604284 A	06-05-2015
		CN 104604286 A	06-05-2015
		CN 104604299 A	06-05-2015
		CN 104604301 A	06-05-2015
		CN 104620640 A	13-05-2015
		CN 104662814 A	27-05-2015
		CN 104662997 A	27-05-2015
		CN 104704767 A	10-06-2015
		CN 104737485 A	24-06-2015
		CN 104737619 A	24-06-2015
		CN 104813693 A	29-07-2015
		CN 104823394 A	05-08-2015
		CN 104904303 A	09-09-2015
		CN 105103590 A	25-11-2015
		CN 105635949 A	01-06-2016
		CN 106028471 A	12-10-2016
		CN 106535338 A	22-03-2017
		CN 108112064 A	01-06-2018
		CN 108365941 A	03-08-2018
		CN 108471322 A	31-08-2018
		CN 108566267 A	21-09-2018
		CN 110311714 A	08-10-2019
		EP 2901574 A1	05-08-2015
		EP 2901577 A1	05-08-2015
		EP 2901584 A1	05-08-2015
		EP 2901588 A1	05-08-2015
		EP 2901589 A1	05-08-2015
		EP 2901590 A1	05-08-2015
		EP 2901601 A1	05-08-2015
		EP 2901602 A1	05-08-2015
		EP 2901603 A1	05-08-2015
		EP 2901619 A1	05-08-2015
		EP 2901725 A1	05-08-2015
		EP 2901729 A1	05-08-2015
		EP 2901740 A1	05-08-2015
		EP 2901741 A1	05-08-2015
		EP 2901748 A1	05-08-2015
		EP 2901749 A1	05-08-2015

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 22 15 7504

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 2901751 A1	05-08-2015
		EP 2901767 A1	05-08-2015
		EP 2901768 A1	05-08-2015
		EP 2901770 A1	05-08-2015
		EP 2901804 A1	05-08-2015
		EP 2901810 A1	05-08-2015
		EP 2901811 A1	05-08-2015
		EP 2910050 A1	26-08-2015
		EP 2918136 A1	16-09-2015
		EP 3051710 A1	03-08-2016
		EP 3122149 A1	25-01-2017
		EP 3226434 A1	04-10-2017
		EP 3247050 A1	22-11-2017
		EP 3300261 A1	28-03-2018
		EP 3370344 A1	05-09-2018
		ES 2640623 T3	03-11-2017
		ES 2651691 T3	29-01-2018
		ES 2655991 T3	22-02-2018
		ES 2660031 T3	20-03-2018
		ES 2660053 T3	20-03-2018
		ES 2681978 T3	17-09-2018
		ES 2688732 T3	06-11-2018
		ES 2708125 T3	08-04-2019
		ES 2717711 T3	24-06-2019
		ES 2718664 T3	03-07-2019
		ES 2720423 T3	22-07-2019
		ES 2726610 T3	08-10-2019
		ES 2728468 T3	24-10-2019
		ES 2733062 T3	27-11-2019
		ES 2735623 T3	19-12-2019
		ES 2743038 T3	18-02-2020
		ES 2745328 T3	28-02-2020
		ES 2748143 T3	13-03-2020
		ES 2763370 T3	28-05-2020
		HK 1207490 A1	29-01-2016
		HK 1209922 A1	08-04-2016
		HK 1210331 A1	15-04-2016
		HK 1210354 A1	15-04-2016
		HK 1211397 A1	20-05-2016
		HK 1217263 A1	30-12-2016
		HK 1219608 A1	07-04-2017
		HK 1252973 A1	06-06-2019
		HK 1253216 A1	14-06-2019
		HK 1254332 A1	19-07-2019
		HK 1255305 A1	16-08-2019
		HU E034753 T2	28-02-2018

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 22 15 7504

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		HU E036060 T2	28-06-2018
		HU E036607 T2	30-07-2018
		HU E038173 T2	28-09-2018
		HU E038544 T2	29-10-2018
		HU E038887 T2	28-12-2018
		HU E039309 T2	28-12-2018
		HU E042258 T2	28-06-2019
		HU E042952 T2	29-07-2019
		HU E043187 T2	28-08-2019
		HU E043311 T2	28-08-2019
		HU E043657 T2	28-08-2019
		HU E043710 T2	30-09-2019
		HU E043717 T2	30-09-2019
		HU E044777 T2	28-11-2019
		HU E044875 T2	28-11-2019
		HU E045674 T2	28-01-2020
		HU E046369 T2	30-03-2020
		JP 5912003 B2	27-04-2016
		JP 5956689 B2	27-07-2016
		JP 5973666 B2	23-08-2016
		JP 5984277 B2	06-09-2016
		JP 5996805 B2	21-09-2016
		JP 6001788 B2	05-10-2016
		JP 6044858 B2	14-12-2016
		JP 6129974 B2	17-05-2017
		JP 6263827 B2	24-01-2018
		JP 6283382 B2	21-02-2018
		JP 6312746 B2	18-04-2018
		JP 6316361 B2	25-04-2018
		JP 6452139 B2	16-01-2019
		JP 2015527015 A	10-09-2015
		JP 2015529418 A	05-10-2015
		JP 2015530031 A	08-10-2015
		JP 2015530044 A	08-10-2015
		JP 2015530833 A	15-10-2015
		JP 2015532047 A	05-11-2015
		JP 2015532072 A	05-11-2015
		JP 2015534394 A	26-11-2015
		JP 2015536096 A	17-12-2015
		JP 2016119709 A	30-06-2016
		JP 2016197876 A	24-11-2016
		JP 2016201825 A	01-12-2016
		JP 2016226041 A	28-12-2016
		JP 2016500209 A	07-01-2016
		JP 2017050884 A	09-03-2017
		JP 2018125880 A	09-08-2018

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 22 15 7504

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		KR 20150032747 A	27-03-2015
		KR 20150036546 A	07-04-2015
		KR 20150036737 A	07-04-2015
		KR 20150038336 A	08-04-2015
		KR 20150038361 A	08-04-2015
		KR 20150038371 A	08-04-2015
		KR 20150038423 A	08-04-2015
		KR 20150038532 A	08-04-2015
		KR 20150039805 A	13-04-2015
		KR 20150040989 A	15-04-2015
		KR 20150040993 A	15-04-2015
		KR 20150040995 A	15-04-2015
		KR 20150054779 A	20-05-2015
		KR 20150064016 A	10-06-2015
		KR 20160066056 A	09-06-2016
		KR 20160101205 A	24-08-2016
		KR 20160105939 A	07-09-2016
		KR 20160135856 A	28-11-2016
		KR 20160142893 A	13-12-2016
		KR 20170007551 A	18-01-2017
		KR 20170024157 A	06-03-2017
		KR 20170060166 A	31-05-2017
		KR 20170078849 A	07-07-2017
		KR 20170087964 A	31-07-2017
		KR 20180008888 A	24-01-2018
		MX 342952 B	18-10-2016
		MX 343208 B	27-10-2016
		MX 357472 B	09-07-2018
		MY 175517 A	01-07-2020
		US 2014092731 A1	03-04-2014
		US 2014092742 A1	03-04-2014
		US 2014092786 A1	03-04-2014
		US 2014092787 A1	03-04-2014
		US 2014092799 A1	03-04-2014
		US 2014092808 A1	03-04-2014
		US 2014092821 A1	03-04-2014
		US 2014092824 A1	03-04-2014
		US 2014092828 A1	03-04-2014
		US 2014092833 A1	03-04-2014
		US 2014092865 A1	03-04-2014
		US 2014092878 A1	03-04-2014
		US 2014092886 A1	03-04-2014
		US 2014094119 A1	03-04-2014
		US 2014094162 A1	03-04-2014
		US 2014094185 A1	03-04-2014
		US 2014095668 A1	03-04-2014

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 22 15 7504

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2014095670 A1	03-04-2014
		US 2014095730 A1	03-04-2014
		US 2014369244 A1	18-12-2014
		US 2015092641 A1	02-04-2015
		US 2015195822 A1	09-07-2015
		US 2015215801 A1	30-07-2015
		US 2015223050 A1	06-08-2015
		US 2015223284 A1	06-08-2015
		US 2015289240 A1	08-10-2015
		US 2015305083 A1	22-10-2015
		US 2016029262 A1	28-01-2016
		US 2016080134 A1	17-03-2016
		US 2016088509 A1	24-03-2016
		US 2016128127 A1	05-05-2016
		US 2016157178 A1	02-06-2016
		US 2016212638 A1	21-07-2016
		US 2016278060 A1	22-09-2016
		US 2016366722 A1	15-12-2016
		US 2016374097 A1	22-12-2016
		US 2016381730 A1	29-12-2016
		US 2017026868 A1	26-01-2017
		US 2017041827 A1	09-02-2017
		US 2017150484 A1	25-05-2017
		US 2017347286 A1	30-11-2017
		US 2017374577 A1	28-12-2017
		US 2018027442 A1	25-01-2018
		US 2018192318 A1	05-07-2018
		US 2018302820 A1	18-10-2018
		US 2020137613 A1	30-04-2020
		US 2020314679 A1	01-10-2020
		WO 2014051951 A1	03-04-2014
		WO 2014052048 A1	03-04-2014
		WO 2014052083 A1	03-04-2014
		WO 2014052084 A1	03-04-2014
		WO 2014052088 A1	03-04-2014
		WO 2014052096 A1	03-04-2014
		WO 2014052129 A1	03-04-2014
		WO 2014052155 A1	03-04-2014
		WO 2014052156 A1	03-04-2014
		WO 2014052175 A1	03-04-2014
		WO 2014052258 A1	03-04-2014
		WO 2014052268 A1	03-04-2014
		WO 2014052303 A1	03-04-2014
		WO 2014052338 A1	03-04-2014
		WO 2014052339 A1	03-04-2014
		WO 2014052375 A1	03-04-2014

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 22 15 7504

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-08-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		WO 2014052381 A1	03-04-2014
		WO 2014052730 A1	03-04-2014
		WO 2014052751 A1	03-04-2014
		WO 2014052774 A1	03-04-2014
		WO 2014052850 A1	03-04-2014
		WO 2014052877 A1	03-04-2014
		WO 2014052905 A1	03-04-2014
		WO 2014052955 A1	03-04-2014
		WO 2014052956 A1	03-04-2014

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201710686826 [0001]