



(11)

EP 4 089 655 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.07.2024 Bulletin 2024/28

(51) International Patent Classification (IPC):
G10K 9/122 ^(2006.01) **G10K 9/18** ^(2006.01)
G08B 3/10 ^(2006.01) **B06B 1/02** ^(2006.01)

(21) Application number: **22169570.3**

(52) Cooperative Patent Classification (CPC):
G10K 9/122; G08B 3/10; G10K 9/18; B06B 1/0215

(22) Date of filing: **22.04.2022**

(54) **AN ACOUSTIC INTERFACE FOR AN ALARM DEVICE**

AKUSTISCHE SCHNITTSTELLE FÜR EINE ALARMVORRICHTUNG

INTERFACE ACOUSTIQUE POUR UN DISPOSITIF D'ALARME

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **10.05.2021 EP 21173146**

(43) Date of publication of application:
16.11.2022 Bulletin 2022/46

(73) Proprietor: **E.I. Technology Unlimited Company
Shannon, V14 H020 County Clare (IE)**

(72) Inventor: **LINNANE, Shane
V14 H020 County Clare (IE)**

(74) Representative: **Weldon O'Brien Ltd.
Shannon Lodge
Casement Road
Bandon
County Cork, P72 TN24 (IE)**

(56) References cited:
**EP-A2- 2 461 299 EP-A2- 3 502 741
US-A1- 2013 197 320 US-A1- 2016 119 168**

EP 4 089 655 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Introduction

[0001] The present invention relates to acoustic communication of information by an alarm device or other device for which status information in coded form can be advantageously communicated for pick-up and decoding by a digital processor.

[0002] Our prior patent publication EP2461299A describes an alarm device with an interface to generate encoded binary data status information concerning status of the device. US2013/0197320 (Albert *et al*) describes ultrasonic digital communication of biological parameters from a medical device.

[0003] In a piezoelectric sounder or horn disc oscillation takes a certain time to build up to maximum resonance, typically more than 10 periods of the natural frequency. For a disc having a natural frequency of 3kHz, the period is 330 μ s, and so it may take more than 3ms before the output sound reaches a maximum. If driving the disc at resonance the disc will continue to ring even after the circuit has de-energized. This 'ring-down' time can be significant and limits the data rate since the audio output must decrease sufficiently before the next data bit can be sent. If the data rate is pushed too high it becomes difficult to discriminate where one bit ends and the next one starts, leading to decoding errors. This may limit the useful data rate to less than 25 bits per second.

[0004] The present invention is directed towards providing an improved acoustic transmitter with a lower sound intensity requirement and higher data rate.

Summary of the Invention

[0005] The invention provides an acoustic interface as set out in claim 1 and optional features are set out in dependent claims 2 to 9, an alarm device as set out in claim 10 and optional features are set out in dependent claims 11 and 12, and a system as set out in claim 13 and optional features are set out in dependent claims 14 and 15.

Detailed Description of the Invention

[0006] The invention will be more clearly understood from the following description of some embodiments thereof, given by way of example only with reference to the accompanying drawings in which:

Figs. 1(a) and 1(b) are diagrams showing the audio components of an alarm device of the invention,

Fig. 2 is a plot of microprocessor control signals for driving a piezoelectric disc sounder, indicating parameters of these signals in one example,

Fig. 3 is a set of further control signals, with specific

detail of control signals for generating sound for a binary "0" and a binary "1",

Fig. 4 represents the audio output frequency spectrum, with output intensity in dB over the audible range of frequencies, demonstrating that the output is dominated by a high amplitude 3kHz tone when driven conventionally, such that resonance at 3kHz is established,

Fig. 5 is another plot of the audio output spectrum, showing decibel level vs. sound (disc vibration) frequency arising from a control signal drive frequency $f_d = 6.8\text{kHz}$ and control signal pulse width $t_p \ll 1/f_N$, showing that the output audio signal shows a dominant peak at 6.8kHz, which is approximately 5dB larger than the output generated at the natural frequency of the disc (3kHz), and also of note is that the output at 3kHz is now significantly less than that in Fig. 4, a decrease of approximately 30dB,

Fig. 6 is a further plot of output audio signal decibel level vs. output sound frequency resulting from a binary-FSK control signal in which data was transmitted by alternately driving at frequencies of 5.5kHz and 6.8kHz, representing binary 1's and 0's respectively,

Fig. 7 is a plot of background noise decibel level plotted against frequency of such noise, demonstrating the tendency for acoustic background noise to decrease at higher frequencies, and,

Figs. 8 and 9 are plots showing audio output decibel peaks which arise at sound frequencies which are multiples of the control signal drive frequency, allowing decoding at higher frequency bands where background noise is less.

[0007] Referring to Fig. 1(a) an acoustic interface 1 suitable for an alarm device or any other device for which acoustic encoded information is required to be outputted is shown in block diagram form in Fig. 1(a) and in Fig. 1(b) with a plan view of a piezoelectric disc sounder 2. The acoustic signals are generated by a vibratory element, in this case a piezoelectric disc 2 having a main element 3 and a feedback element 4. The feedback element 4 is linked to the transistor 5, which drives an oscillator circuit 6 according to a control signal 7 from an encoding processor 8. The encoding processor 8 is in one example that of a smoke alarm device, and it is programmed to drive the interface 1 to provide data concerning the alarm device.

[0008] The feedback component 4 provides a signal which is used as a simple means of maintaining the drive frequency at a desired level.

[0009] The microcontroller (MCU) 8 is in this example an 8-bit processor capable of generating minimum timing

pulses in the range of $4\mu\text{s}$ to $25\mu\text{s}$ and it provides control signals to the high voltage oscillator circuit 6 having either an inductor-capacitor type oscillator or a dedicated IC for generating high voltage pulses from a lower voltage input, necessary to drive the sounder at high audio output.

[0010] As shown in Fig. 1(b) the feedback component 4 is linked to a transistor switch 5, which is activated/deactivated via the control signal 7 from the MCU 8, and when the transistor 5 is active it allows the higher voltage from the oscillator to drive the main element 3 of the piezo disc 2. This in turn generates a small feedback signal which is used to control the voltage (or current) to the oscillator 6. In this way, the feedback helps maintain the oscillator frequency so that the disc 2 is driven at its designed frequency (natural frequency) for optimum output. This fixed feedback circuit is very advantageous for alarm devices, which must maintain high sound output even under changing ambient conditions which could potentially alter the piezo resonance frequency. The feedback ensures that it is always driven at its optimum for the given conditions.

[0011] The microcontroller MCU 8 is programmed to provide a higher data rate and a lower audio level than is known.

[0012] The acoustic interface 1 is part of a smoke alarm device in this example, the microcontroller being part of the alarm device, and is preferably the main controller. However, the interface may be part of a different device such as a domestic appliance.

[0013] As is described in more detail below the piezo disc vibratory element 3 has a natural frequency and the control signals provided by the microcontroller MCU 8 are pulses with pulse widths which are significantly smaller than the period corresponding to the piezoelectric disc's natural frequency. In this case the natural frequency is 3kHz, and in general it is preferred that the piezo disc has a natural frequency in the range of 2 kHz to 4 kHz.

[0014] The microcontroller 8 is programmed to generate a test output record including various items of data such as the device's serial number, the battery level, a contamination level if it is an optical alarm, an event log, and an installation date. This information is encoded by control of the high voltage oscillator linked to the piezoelectric disc horn, which is an item required by the alarm device anyway for generating an audible alarm output.

[0015] The data is decoded by any electronic device having a microphone and a processing capability, such as a PDA, a laptop computer, or a smartphone. If the device has a camera, then it could both capture the acoustic signal and take an image of the alarm device to provide a more comprehensive record. In one example, a mobile phone downloads over a mobile network an application to do this processing.

[0016] In one example of use, in order to do an audit, it is only necessary for the technician to press a test button (not shown) upon which the microprocessor 8 generates a control signal encoding the audit data. The resulting sound generated by the horn is captured by the user de-

vice. It may be decoded locally by the device, and the decoded data may be uploaded to a remote host. Alternatively, a representation of the acoustic signal may be uploaded to a central host for decoding and further processing and storage. Whenever the test button is pressed the horn will send out a coded signal with test response information. This could be done immediately, or 5 seconds after the horn has reached full volume. The data which is conveyed may include any one or more of: preamble bits, a device identification number, a device status flag, battery status, contamination status, alarm events, faulty smoke sensor, installation date, location, whether the device is in standby, hush, or alarm modes.

[0017] The testing device has an acoustic pick-up and a decoding processor which provides an output for display of the received data on a display and/or transmission it to a remote host server. It may provide an instruction for an action such as battery replacement, device replacement, or device, cleaning.

[0018] Having a unique serial number greatly helps with the tracking of smoke alarm devices - the devices can be sent back to the manufacturer for analysis and the subsequent report will clearly identify the unit and allow the maintenance company to relate it to the apartment from which it was removed. For example, if the unit was heavily contaminated or damaged, and it was clear that this was caused by a tenant, then the tenant (or landlord) could be billed for the replacement costs of fitting a new unit.

[0019] As noted above, on the three-wire piezo disc 2, two of the wires are for power while the third is for the feedback. When the main element of the piezo disc is energized with an electrical oscillation, it causes the disc to deform and mechanically oscillate. This mechanical oscillation of the disc 2 generates an electrical signal from the piezo material. A portion of this signal is generated from the feedback element of the disc and is used as part of the feedback circuit which amplifies this signal and uses it to drive the main element of the disc. The microcontroller 8 ensures that the disc 2 is always driven at its optimum frequency for optimum sound and data output.

[0020] A digital control signal is fed to the base of the transistor to turn the oscillation ON/OFF. A sufficiently long ON duration will cause the disc to oscillate at full power at its natural frequency, usually around 3kHz. The microcontroller 8 is configured to drive the disc to avoid the prior art problem of the oscillation taking a significant time to build up to maximum resonance and subsequently, a significant ring-down time. In particular, it modulates the control signal with pulses significantly shorter in time than the disc's natural period ($1/\text{natural frequency}$), and hence the circuit-disc resonance behavior can be interrupted, and this reduces the audio output at the fundamental.

[0021] By controlling the pulse width and frequency of the control signal, additional frequencies can be generated with a sufficient relative intensity to the fundamental that they become useful for data transmission and allow

a more efficient encoding scheme such as Frequency Shift Keying (FSK). This control scheme provides that data is transmitted at lower audio output level because the disc never fully achieves resonance. Also, it generates and controls additional frequencies allowing the use of more efficient encoding schemes, such as Binary-FSK. Driving the disc off-resonance decreases the ring-down time and consequently increases the maximum data rate. The invention has the benefit of not requiring change to the physical hardware, so the same circuit used for high sound output during alarming can also be used for data transmission that is both faster and quieter than previous methods. We have found that the data rate is about 5-10 times faster than prior approaches.

[0022] Frequency Shift-Keying ("FSK") encodes data in the frequency of the control signal. A minimum of two controllable frequencies is required. One frequency is used to represent the binary '0's, while the other is used for '1's. This is more efficient than single frequency encoding, which relies on time delays or transitions to determine whether the bit is a '1' or '0'. Manchester encoding for example is only 50% efficient because its data rate is only half the clock rate since it must generate transitions from low-to-high or high-to-low, in order to be decoded successfully. FSK does not have this issue and can be much faster. Many modern wireless systems, such as Wi-Fi™, use some version of FSK.

[0023] As shown in Fig. 2 the control pulses are significantly shorter than the period of the disc's natural frequency, in order to prevent (or reduce) resonance at the fundamental. The processor 8 is programmed to provide the control signals 7 so that the control signal frequency f_d does not approach f_N , or so that the control signal pulse width t_p does not approach $1/f_N$. Hence, the fundamental frequency will not dominate the response and other useful frequencies are produced. In general, it is preferred that f_d is greater than f_N by a value in the range of 40% to 250%. Also, it is preferred that the control signal pulse width t_p is much less than the disc's natural frequency period $1/f_N$, and in general it is preferred that it is less than 8% of $1/f_N$.

[0024] In one example the control signals used for generating binary '0's are at 6.8kHz and binary '1's are at 5.5kHz, from the 3kHz natural frequency piezo disc 2, as shown in Fig. 3. In the first example, for a binary "1", the pulse width is 16μs and the gap is 165μs giving a repetition rate of 181μs. The pulse width of 16μs is much less than the $1/f_N$ duration of 333μs. In another example, for binary "0", the repetition rate is 147μs and the pulse width is the same (16 μs).

[0025] The frequency difference between a 0 and a 1 is in this example 1.3kHz. It is preferred that the difference be at least 1kHz.

[0026] The processor 8 control signal 7 drive scheme avoids a situation such as shown in Fig. 4 in which a high dB level is reached at the disc's fundamental. Referring to Fig. 4, when the control signal pulse widths are greater than $1/f_N$ the output audio signal is dominated by a high

amplitude 3kHz signal, and its 3rd harmonic.

[0027] On the other hand, referring to Fig. 5, with $f_d = 6.8\text{kHz}$ and the pulse width of the control signal $t_p \ll 1/f_N$ the output audio signal shows a dominant peak at a disc vibration (sound) frequency of 6.8kHz, which is approximately 5dB larger than the disc's natural vibration frequency of 3kHz. Compared to the output shown in Fig. 4, the fundamental intensity has decreased by over 30dB, and is thus significantly quieter while also generating a more controllable frequency.

[0028] Fig. 6 demonstrates the audio output for a binary-FSK signal generated by the above procedure. In this example, data was transmitted by alternately driving at frequencies of 5.5kHz and 6.8kHz, representing binary 1s and 0s respectively. The decoder listens for audio signals at 5.5kHz and 6.8kHz to recognize 1s and 0s.

[0029] For improved decoding, the difference between a binary 1 or 0 must be as clear as possible. In the above scheme, since only one drive frequency can be used at a time, it is important that the chosen FSK output frequencies can be produced independently with little cross-talk. For example, when a 6.8kHz output is generated, the output at 5.5kHz should be as low as possible. Therefore, an important parameter for decoding performance is the relative ON-OFF amplitude difference between the chosen FSK frequencies.

[0030] In reference to Fig.5, where only 6.8kHz is active (a binary 0 is being sent), it can be seen that the amplitude at 6.8kHz is significantly larger than that at 5.5kHz - a relative difference of 29dB. This is sufficiently high that the decoder should not mistake a 1 for a 0 or vice versa, even in the presence of background noise. This demonstrates that the control scheme above allows frequencies to be driven independently with a large signal-to-noise ratio, making FSK data-encoding practical, even though the disc and feedback circuit are primarily designed for 3kHz output.

[0031] In general, it is preferred that:

The control signal frequency difference between encoding 0 and 1 is at least 1kHz.

The pulse width t_p is less than 8% of the disc natural frequency period.

The drive frequency is greater than the disc's natural vibration frequency by at least 40%.

[0032] In summary, the acoustic interface uses Binary FSK modulation, one frequency for binary 1, and another frequency for the 0. Turning it on and off rapidly at frequencies greater than the disc's natural frequency by at least 40% has the effect of dampening the feedback of the primary resonance (in one example, 3kHz), preventing the disc from resonating at the natural frequency. It is repeatedly interrupted and is used to generate other frequencies of sufficient amplitude that they become useful. Because it is not driven at resonance, disc vibration dampens down a lot faster, so higher data rate is possible. The microcontroller can generate and control multi-

ple control signal frequencies. When it generates say 6.8kHz for binary 0, that 6.8kHz is not unintentionally generated for a binary 1 at 5.5kHz. While there are unwanted frequencies, that is not a problem because the difference between a 1 and a 0 is sufficient to make them easily distinguishable. We have found that the acoustic interface is at least 5 times faster and significantly quieter than if the drive signals have a frequency close to the disc's natural frequency. The control is via the duty cycle and frequency of the pulses used to turn on/off the piezo.

[0033] In various examples the drive processor providing the control signals is a dedicated IC of the host device, while in other examples it is an LC oscillator circuit. In general, it is preferred that there be a 3-wire arrangement with feedback from the vibrating element such as a piezo.

[0034] In one example the frequencies are 5.5kHz for binary 1, and 9kHz for binary 0. In another example it is 5.5kHz and 6.8kHz respectively. In the 9kHz signal example, this may for example be generated by driving at 4.5kHz and taking advantage of the second harmonic output produced at 9kHz, and the listening device decoding processor may listen out for 9kHz or 4.5kHz.

[0035] Other higher frequency harmonics can also be used, such as 11kHz from a 5.5kHz drive signal, or 13.5kHz from the 3rd harmonic caused by a drive signal at 4.5kHz. In general, it is preferred to drive the piezo with a control signal in the range of 4kHz to 7kHz.

[0036] If the drive signals are at say 4.5kHz, this produces disc vibration harmonics at 9kHz and 13.5kHz, both of which can be used to decode the signals. There are particularly good results from decoding at 9kHz because the signal is larger, however the listening device can successfully decode at 13.5kHz also.

[0037] As shown in Fig. 7, audio frequency noise dB level usually decreases as frequency increases. In this example the noise is as high as -60dB for frequencies in the region of 10Hz to low hundreds Hz. In the context of data transmission, common sources of audio frequency noise, such as speech, music and road traffic usually have higher amplitudes at the lower end of the audible range (<5kHz). Beyond this, the amplitude of ambient noise tends to decrease towards zero. Therefore, to maximise signal-to-noise ratio (SNR), a higher audio frequency carrier wave should ideally be used.

[0038] Also, since the data transmissions are advantageously decoded by a smartphone, the characteristics of the smartphone microphone system are important to the overall operation of the data transfer. Most modern phones have active noise-cancellation algorithms and use multiple microphones to reduce noise. In some cases, the data transmission can be regarded as noise by the phone, and it therefore actively attempts to eliminate this perceived "noise" signal. This can severely interfere with decoding the data and leads to errors. An additional problem is that different makes and models of phones behave differently in terms of noise cancelling and therefore there is no single range of preferred frequencies that will work for audio data transmission on all phones. Hav-

ing the ability to decode with different frequencies when required is an advantage.

[0039] As set out above it is advantageous if resonance is avoided. For successful transmission, another important factor is the amplitude of the output. A higher duty cycle gives more power to the transmission but requires a higher pulse width during the ON phase, which can lead to the resonance condition we try to avoid. There is therefore a balance between audio output level and maximum frequency before resonance occurs in the 3-wire piezo circuit.

[0040] We find that the useful limit for upper drive frequency is about 7kHz for a 3kHz disc. Beyond this, the timing constraints becomes more difficult, and the output amplitude drops to unacceptable levels.

[0041] To achieve output frequencies beyond 7kHz and take advantage of the lower background noise at higher frequencies, in some examples the processor is configured to utilise the harmonics which are naturally produced by the disc when driven. For example, as shown in Fig. 8, when driven at 5.5kHz, a harmonic at 11kHz is created.

[0042] Fig. 9 shows the sound output when driven at 4.5kHz, with disc vibration (sound) intensity peaks at 5.5kHz and 9kHz. It also shows a relatively strong 3rd harmonic at 13.5kHz. As can be seen, the 9kHz output signal is actually larger than the signal at the driven frequency of 4.5kHz. This is because 9kHz is a multiple of the disc's natural frequency. The disc will therefore be relatively efficient at oscillating at 9kHz even though it is electronically driven at 4.5kHz.

[0043] The data transmitted is thus present in the 4.5kHz signal and the 9kHz signal and the 13.5 kHz signal. This provides three sources from which decoding can take place to recover the data. This is very beneficial in the context of noise-cancelling smart-phone systems, where one range of frequencies may be more prone to cancellation on a particular phone. Successful decoding of the transmitted data is more likely when decoding on more than a single frequency. For example, if a particular phone has a weak response at 4.5kHz, the decoded signal may have errors, but decoding at 9kHz or 13.5kHz can resolve the errors.

[0044] Components of embodiments can be employed in other embodiments in a manner as would be understood by a person of ordinary skill in the art. The invention is not limited to the embodiments described but may be varied in construction and detail within the scope of the claims. While the acoustic interface has been described as being for a smoke alarm device, it may be for any other appliance for which status information is to be communicated acoustically to be picked up and decoded by a processor such as a smartphone.

[0045] We find that the useful limit for upper drive frequency is about 7kHz for a 3kHz disc. Beyond this, the timing constraints becomes more difficult, and the output amplitude drops to unacceptable levels.

[0046] To achieve output frequencies beyond 7kHz

and take advantage of the lower background noise at higher frequencies, in some examples the processor is configured to utilise the harmonics which are naturally produced by the disc when driven. For example, as shown in Fig. 8, when driven at 5.5kHz, a harmonic at 11kHz is created.

[0047] Fig. 9 shows the sound output when driven at 4.5kHz, with disc vibration (sound) intensity peaks at 5.5kHz and 9kHz. It also shows a relatively strong 3rd harmonic at 13.5kHz. As can be seen, the 9kHz output signal is actually larger than the signal at the driven frequency of 4.5kHz. This is because 9kHz is a multiple of the disc's natural frequency. The disc will therefore be relatively efficient at oscillating at 9kHz even though it is electronically driven at 4.5kHz.

[0048] The data transmitted is thus present in the 4.5kHz signal and the 9kHz signal and the 13.5 kHz signal. This provides three sources from which decoding can take place to recover the data. This is very beneficial in the context of noise-cancelling smart-phone systems, where one range of frequencies may be more prone to cancellation on a particular phone. Successful decoding of the transmitted data is more likely when decoding on more than a single frequency. For example, if a particular phone has a weak response at 4.5kHz, the decoded signal may have errors, but decoding at 9kHz or 13.5kHz can resolve the errors.

[0049] Components of embodiments can be employed in other embodiments in a manner as would be understood by a person of ordinary skill in the art. The invention is not limited to the embodiments described but may be varied in construction and detail. While the acoustic interface has been described as being for a smoke alarm device, it may be for any other appliance for which status information is to be communicated acoustically to be picked up and decoded by a processor such as a smart-phone.

Claims

1. An acoustic interface (1) for a device such as an alarm device, the acoustic interface comprising a vibratory element (2), and a drive circuit (8, 5) with a processor (8) for delivering drive electrical control signals (7) to the element to cause it to vibrate and generate a sound signal with encoded binary data, wherein the vibrating element (2) has a natural frequency,
characterized in that,
the control signals are frequency encoded with pulses having pulse widths (t_p) which are shorter than the vibrating element natural frequency period ($1/f_N$) and a frequency which is greater than said natural frequency.
2. An acoustic interface as claimed in claim 1, wherein the processor (8) is configured to provide the control signals via a feedback transistor (5) and a voltage oscillator (6).
3. An acoustic interface as claimed in claim 2, wherein the vibratory element (2) comprises at least three electrical contacts of which two are for power and a third is for feedback to the feedback transistor (5), in which mechanical oscillation of the vibratory element generates an electrical feedback signal used to amplify this control signal (7).
4. An acoustic interface as claimed in any preceding claim, wherein the processor (8) is configured to generate the control signals according to a Frequency Shift Keying scheme.
5. An acoustic interface as claimed in claim 4, wherein the processor is configured to generate the control signals according to a Binary Frequency Shift Keying scheme, in which one frequency is used to represent a binary '0' and a different frequency is used to represent a '1'.
6. An acoustic interface as claimed in claim 5, wherein the processor is configured to generate the control signals with a frequency difference between binary 0 and 1 representations of at least 1kHz.
7. An acoustic interface as claimed in any preceding claim, wherein the processor is configured to generate the control signals having a pulse width t_p less than 8% of said natural frequency period.
8. An acoustic interface as claimed in any preceding claim, wherein the processor is configured to generate the control signals having a frequency which is greater than said natural frequency by at least 40%.
9. An acoustic interface as claimed in any preceding claim, wherein the processor is configured to generate the control signals having a frequency which causes at least one additional harmonic of the vibratory element, where the additional harmonic is double or treble the drive control signal frequency and is used for encoding a binary value at said at least one additional harmonic.
10. An alarm device comprising a condition sensor, a controller, an alarm sound emitter with a vibrating element, and an acoustic interface of any preceding claim, in which the controller is configured to encode alarm status data in the acoustic output of the interface.
11. An alarm device as claimed in claim 10, wherein the acoustic interface vibrating element is also the alarm sound emitter.

12. An alarm device as claimed in either of claims 10 or 11, wherein the alarm device is a fire alarm device, and the condition sensor is a heat or smoke detector.
13. A system comprising an acoustic interface of any of claims 1 to 9 or an alarm device of any of claims 10 to 12, and a decoding device having an acoustic pick-up and a decoding processor configured to decode acoustic signals and provide a user data output.
14. A system as claimed in claim 13, wherein the processor (8) for delivering drive electrical control signals (7) is configured to provide the control signals to generate a second harmonic, and the decoding processor is configured to decode at double or treble the drive control frequency.
15. A system as claimed in claim 14, wherein said decoding of the decoding processor is used for only one of a binary 0 or 1 decoding.

Patentansprüche

1. Akustische Schnittstelle (1) für ein Gerät, wie z.B. ein Alarmgerät, wobei die akustische Schnittstelle ein Vibrationselement (2) und eine Ansteuerungsschaltung (8, 5) mit einem Prozessor (8) zum Liefern von elektrischen Ansteuerungssignalen (7) an das Element umfasst, um es in Vibration zu versetzen und ein Tonsignal mit codierten binären Daten zu erzeugen, wobei das Vibrationselement (2) eine Eigenfrequenz hat,
dadurch gekennzeichnet, dass
die Steuersignale mit Impulsen mit Impulsbreiten (t_p) frequenzcodiert sind, die kürzer sind als die Eigenfrequenzperiode ($1/f_N$) des Vibrationselements, und eine Frequenz haben, die größer ist als die genannte Eigenfrequenz.
2. Akustische Schnittstelle nach Anspruch 1, wobei der Prozessor (8) zum Bereitstellen der Steuersignale über einen Feedback-Transistor (5) und einen Spannungssoszillator (6) konfiguriert ist.
3. Akustische Schnittstelle nach Anspruch 2, wobei das Vibrationselement (2) mindestens drei elektrische Kontakte umfasst, von denen zwei für Strom und ein dritter für Feedback zum Feedback-Transistor (5) vorgesehen sind, wobei die mechanische Oszillation des Vibrationselements ein elektrisches Feedback-Signal erzeugt, das zum Verstärken dieses Steuersignals (7) benutzt wird.
4. Akustische Schnittstelle nach einem vorherigen Anspruch, wobei der Prozessor (8) zum Erzeugen der Steuersignale nach einem Frequenzumtastungsschema konfiguriert ist.
5. Akustische Schnittstelle nach Anspruch 4, wobei der Prozessor zum Erzeugen der Steuersignale nach einem binären Frequenzumtastungsschema konfiguriert ist, bei dem eine Frequenz zum Darstellen einer binären "0" und eine andere Frequenz zum Darstellen einer "1" verwendet wird.
6. Akustische Schnittstelle nach Anspruch 5, wobei der Prozessor zum Erzeugen der Steuersignale mit einer Frequenzdifferenz zwischen binären 0- und 1-Darstellungen von mindestens 1 kHz konfiguriert ist.
7. Akustische Schnittstelle nach einem vorherigen Anspruch, wobei der Prozessor zum Erzeugen der Steuersignale mit einer Impulsbreite t_p von weniger als 8% der genannten Eigenfrequenzperiode konfiguriert ist.
8. Akustische Schnittstelle nach einem vorherigen Anspruch, wobei der Prozessor zum Erzeugen der Steuersignale mit einer Frequenz konfiguriert ist, die um mindestens 40 % höher ist als die genannte Eigenfrequenz.
9. Akustische Schnittstelle nach einem vorherigen Anspruch, wobei der Prozessor zum Erzeugen der Steuersignale mit einer Frequenz konfiguriert ist, die mindestens eine zusätzliche Harmonische des Vibrationselements verursacht, wobei die zusätzliche Harmonische zwei- oder dreimal so hoch ist wie die Frequenz des Ansteuerungssignals und zum Codieren eines binären Werts bei der genannten mindestens einen zusätzlichen Harmonischen benutzt wird.
10. Alarmgerät, das einen Zustandssensor, eine Steuerung, einen Alarmtonggeber mit einem Vibrationselement und eine akustische Schnittstelle nach einem vorherigen Anspruch umfasst, wobei die Steuerung zum Codieren von Alarmstatusdaten in der akustischen Ausgabe der Schnittstelle konfiguriert ist.
11. Alarmgerät nach Anspruch 10, wobei das Vibrationselement der akustischen Schnittstelle auch der Alarmtonggeber ist.
12. Alarmgerät nach Anspruch 10 oder 11, wobei das Alarmgerät ein Feuermeldegerät ist und der Zustandssensor ein Wärme- oder Rauchmelder ist.
13. System mit einer akustischen Schnittstelle nach einem der Ansprüche 1 bis 9 oder Alarmgerät nach einem der Ansprüche 10 bis 12 und Decodiergerät mit einem akustischen Aufnehmer und einem Decodierprozessor, der zum Decodieren von akustischen Signalen und zum Bereitstellen einer Benutzerdatenausgabe konfiguriert ist.
14. System nach Anspruch 13, wobei der Prozessor (8)

zum Liefern von elektrischen Ansteuerungssignalen (7) zum Bereitstellen der Steuersignale zum Erzeugen einer zweiten Harmonischen konfiguriert ist und der Decodierprozessor zum Decodieren mit der zwei- oder dreifachen Ansteuerungsfrequenz konfiguriert ist.

15. System nach Anspruch 14, wobei das genannte Decodieren des Decodierprozessors nur für eine binäre 0- oder 1-Decodierung benutzt wird.

Revendications

1. Interface acoustique (1) pour un dispositif tel qu'un dispositif d'alarme, l'interface acoustique comprenant un élément vibratoire (2) et un circuit d'excitation (8, 5) avec un processeur (8) pour délivrer des signaux de commande électriques d'excitation (7) à l'élément pour le faire vibrer et générer un signal sonore avec des données binaires codées, l'élément vibrant (2) ayant une fréquence propre, l'interface acoustique étant **caractérisée en ce que** :
les signaux de commande sont codés en fréquence avec des impulsions dont les largeurs d'impulsion (t_p) sont inférieures à la période de fréquence propre ($1/f_N$) de l'élément vibrant et dont la fréquence est supérieure à ladite fréquence propre.
2. Interface acoustique selon la revendication 1, dans laquelle le processeur (8) est configuré pour fournir les signaux de commande par l'intermédiaire d'un transistor de réaction (5) et d'un oscillateur à tension (6).
3. Interface acoustique selon la revendication 2, dans laquelle l'élément vibratoire (2) comprend au moins trois contacts électriques dont deux pour l'alimentation et un troisième pour la réaction vers le transistor de réaction (5), l'oscillation mécanique de l'élément vibratoire générant un signal électrique de réaction utilisé pour amplifier ce signal de commande (7).
4. Interface acoustique selon l'une quelconque des revendications précédentes, dans laquelle le processeur (8) est configuré pour générer les signaux de commande selon un schéma de modulation par déplacement de fréquence.
5. Interface acoustique selon la revendication 4, dans laquelle le processeur est configuré pour générer les signaux de commande selon un schéma de modulation par déplacement de fréquence binaire, où une fréquence est utilisée pour représenter un « 0 » binaire et une fréquence différente est utilisée pour représenter un « 1 ».

6. Interface acoustique selon la revendication 5, dans laquelle le processeur est configuré pour générer les signaux de commande avec une différence de fréquence entre les représentations binaires 0 et 1 d'au moins 1 kHz.
7. Interface acoustique selon l'une quelconque des revendications précédentes, dans laquelle le processeur est configuré pour générer les signaux de commande avec une largeur d'impulsion t_p inférieure à 8 % de ladite période de fréquence propre.
8. Interface acoustique selon l'une quelconque des revendications précédentes, dans laquelle le processeur est configuré pour générer les signaux de commande avec une fréquence supérieure d'au moins 40 % à ladite fréquence propre.
9. Interface acoustique selon l'une quelconque des revendications précédentes, dans laquelle le processeur est configuré pour générer les signaux de commande avec une fréquence qui provoque au moins un harmonique supplémentaire de l'élément vibratoire, l'harmonique supplémentaire étant le double ou le triple de la fréquence du signal de commande d'excitation et étant utilisé pour coder une valeur binaire audit au moins un harmonique supplémentaire.
10. Dispositif d'alarme comprenant un capteur d'état, un contrôleur, un émetteur sonore d'alarme avec un élément vibrant et une interface acoustique selon l'une quelconque des revendications précédentes, le contrôleur étant configuré pour coder des données de statut d'alarme dans la sortie acoustique de l'interface.
11. Dispositif d'alarme selon la revendication 10, dans lequel l'élément vibrant de l'interface acoustique est également l'émetteur sonore d'alarme.
12. Dispositif d'alarme selon l'une des revendications 10 ou 11, le dispositif d'alarme étant un dispositif d'alarme incendie et le capteur d'état étant un détecteur de chaleur ou de fumée.
13. Système comprenant une interface acoustique selon l'une quelconque des revendications 1 à 9 ou un dispositif d'alarme selon l'une quelconque des revendications 10 à 12, ainsi qu'un dispositif de décodage comportant un capteur acoustique et un processeur de décodage configuré pour décoder des signaux acoustiques et fournir une sortie de données d'utilisateur.
14. Système selon la revendication 13, dans lequel le processeur (8) pour la délivrance de signaux de commande électriques d'excitation (7) est configuré pour fournir les signaux de commande afin de générer un

deuxième harmonique, et le processeur de décodage est configuré pour décoder à une fréquence double ou triple de la fréquence de commande d'excitation.

5

- 15.** Système selon la revendication 14, dans lequel ledit décodage par le processeur de décodage est utilisé pour le décodage d'un 0 binaire seulement ou d'un 1 binaire seulement.

10

15

20

25

30

35

40

45

50

55

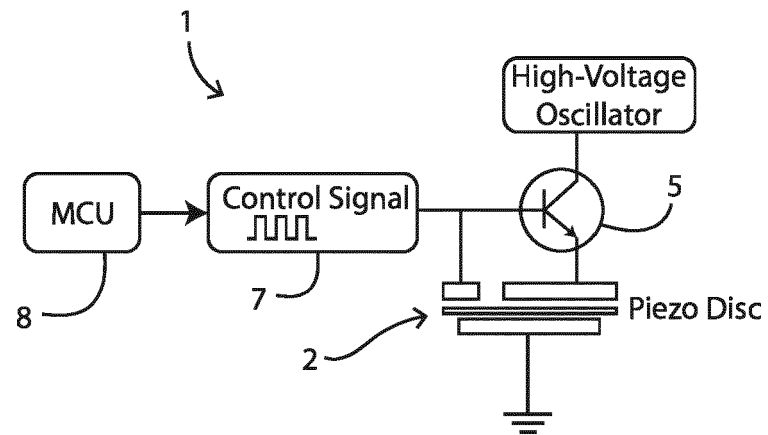


Fig.1(a)

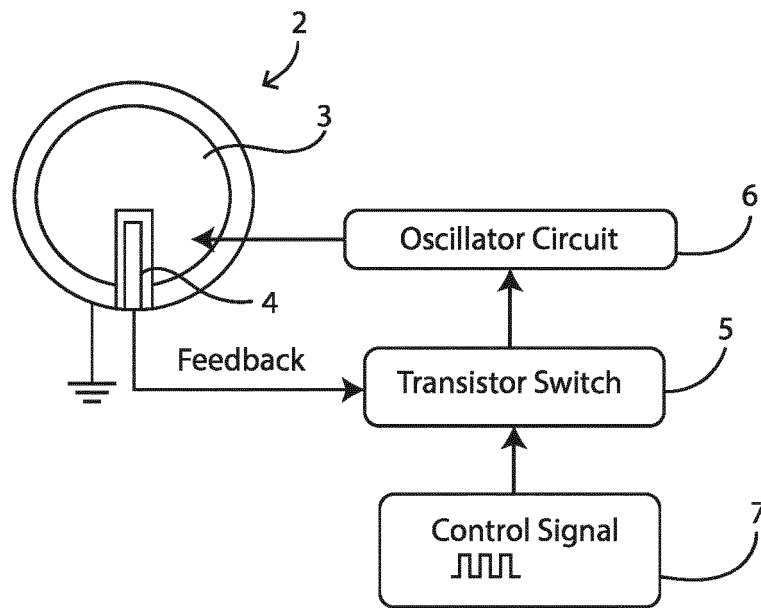


Fig.1(b)


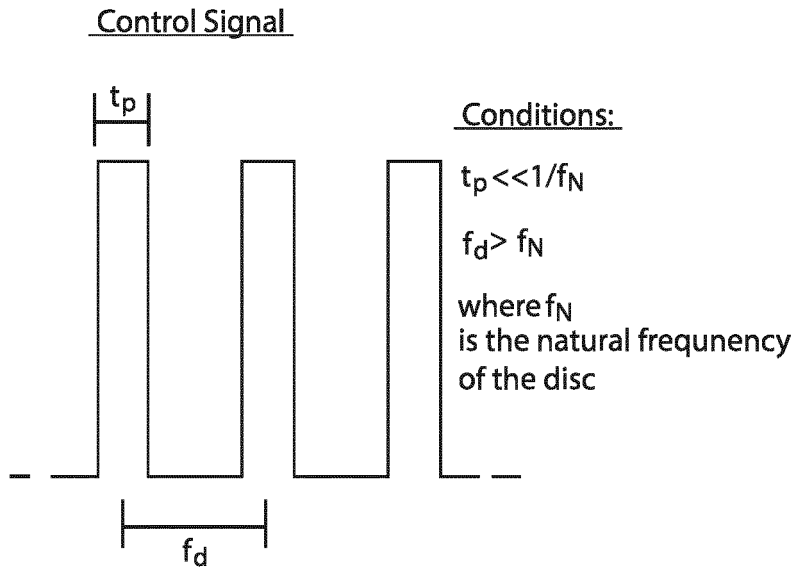


Fig.2

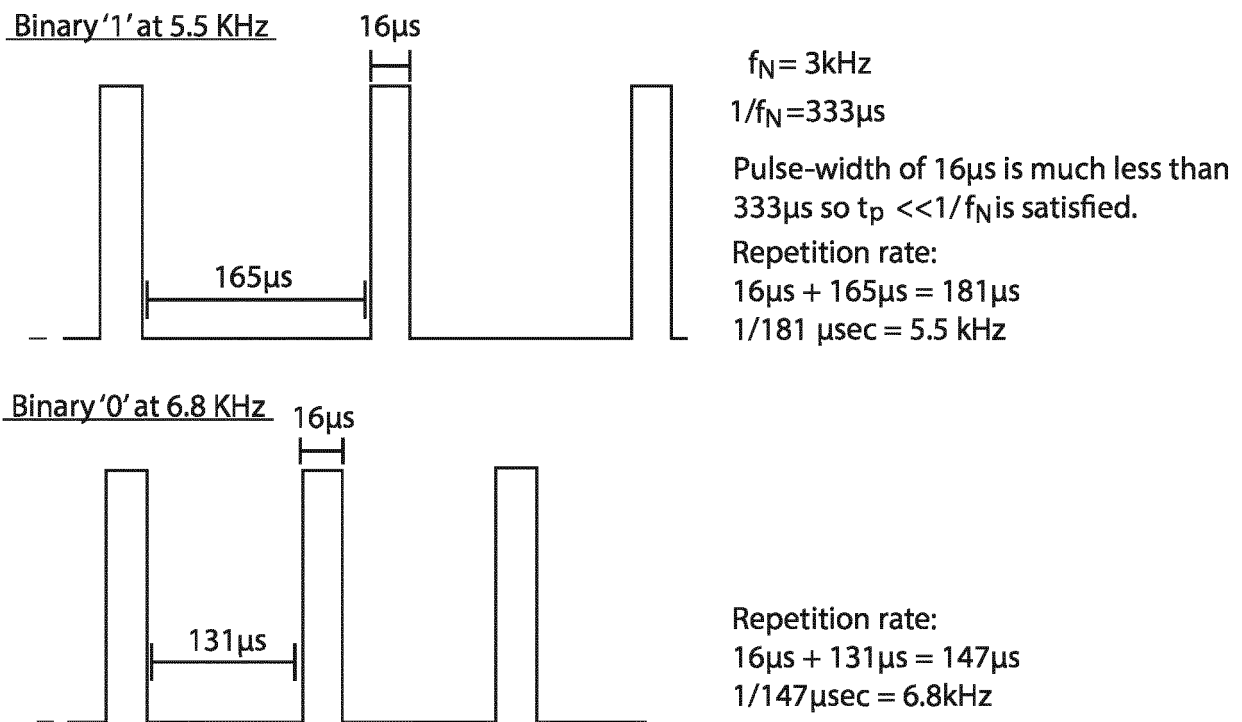

Example of control signals used for generating binary '0's at 6.8kHz and binary '1's at 5.5kHz, from a 3kHz piezo disc.

Fig.3

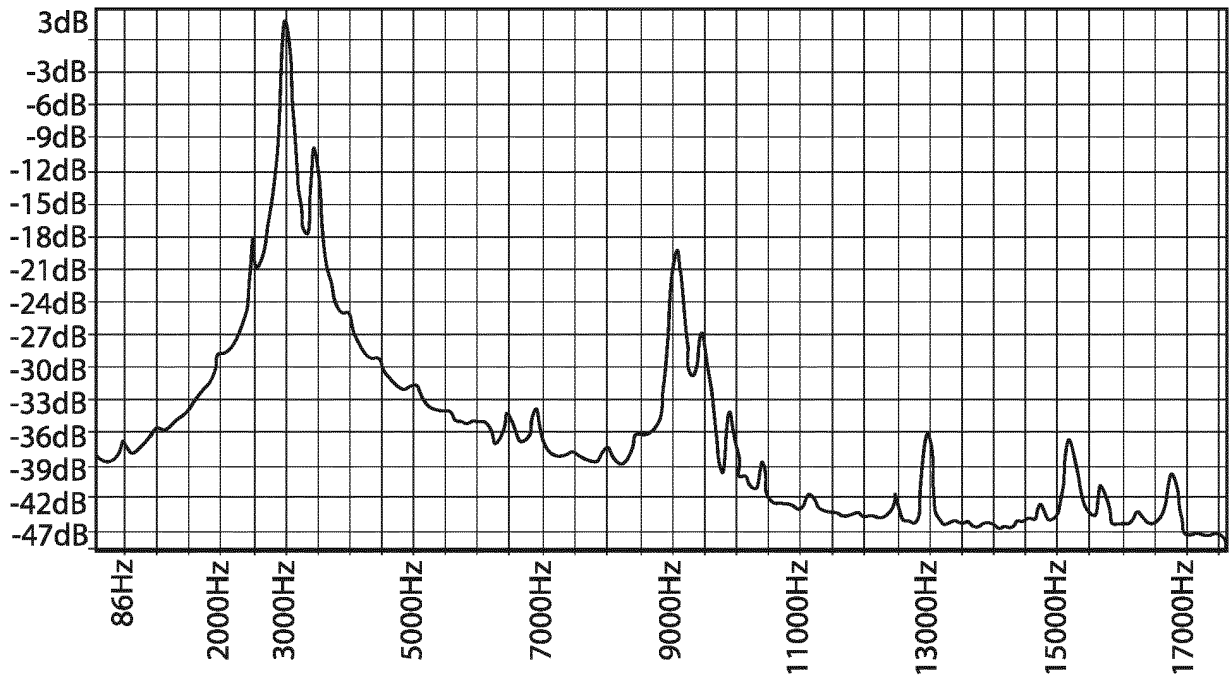


Fig.4

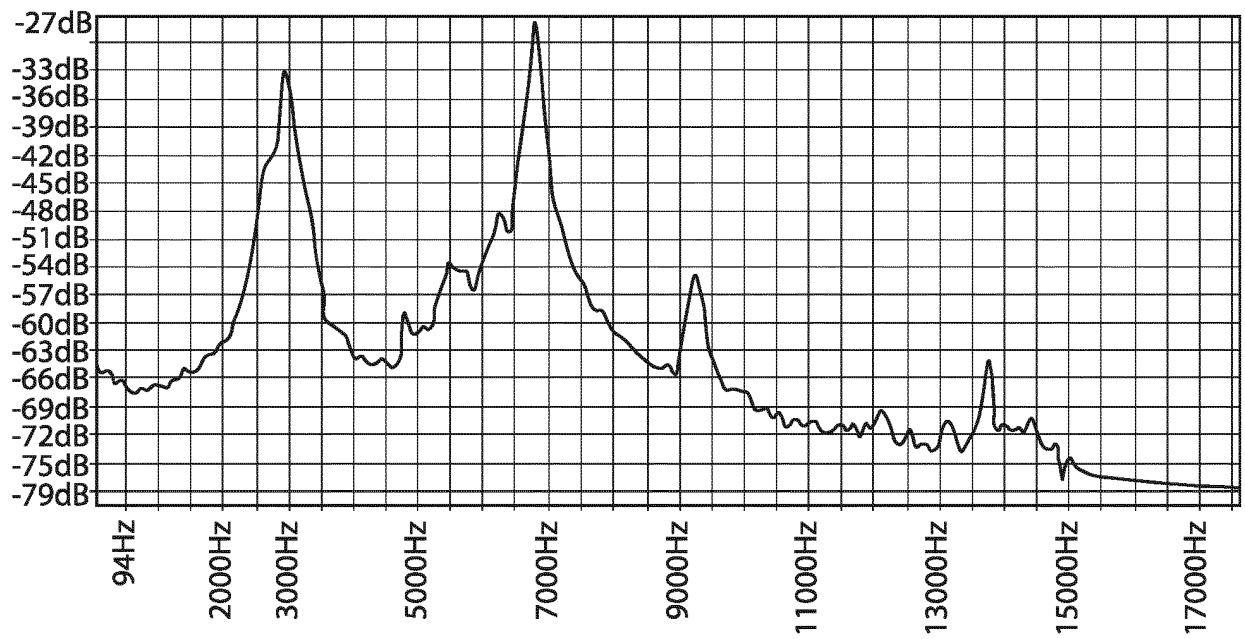


Fig.5

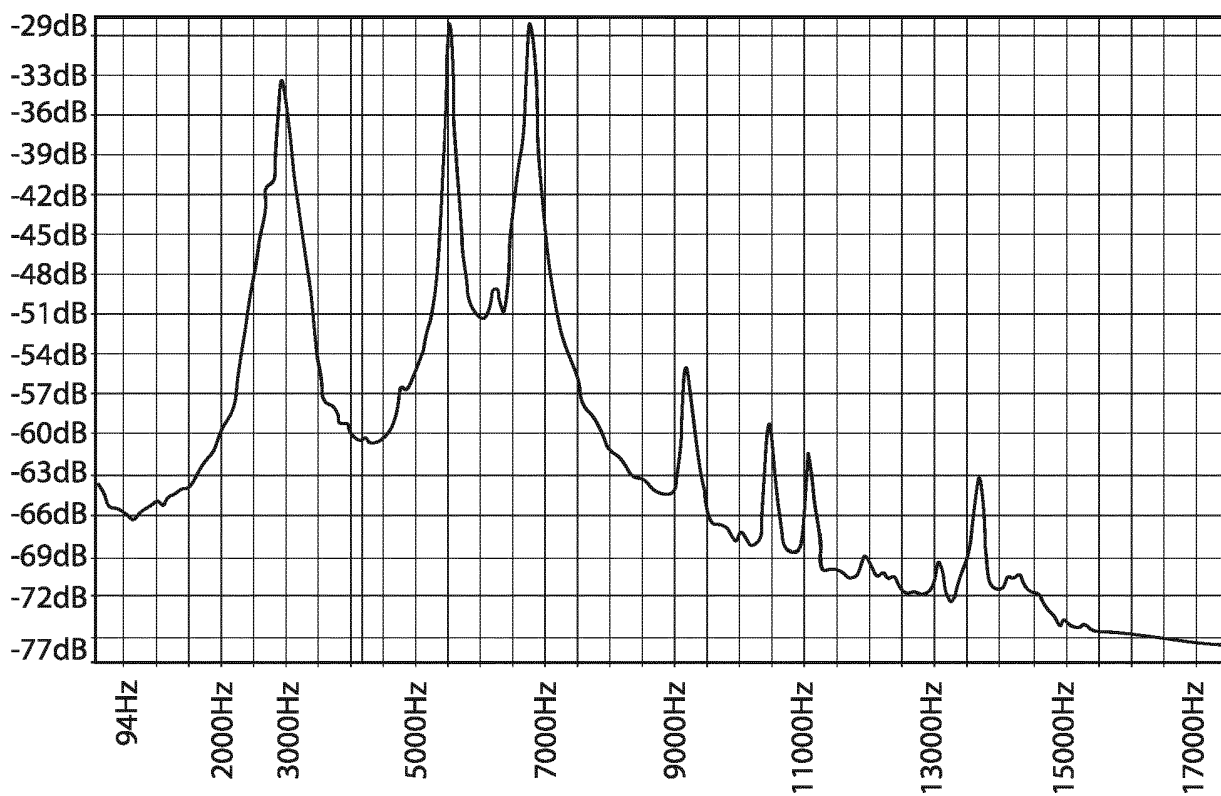


Fig.6

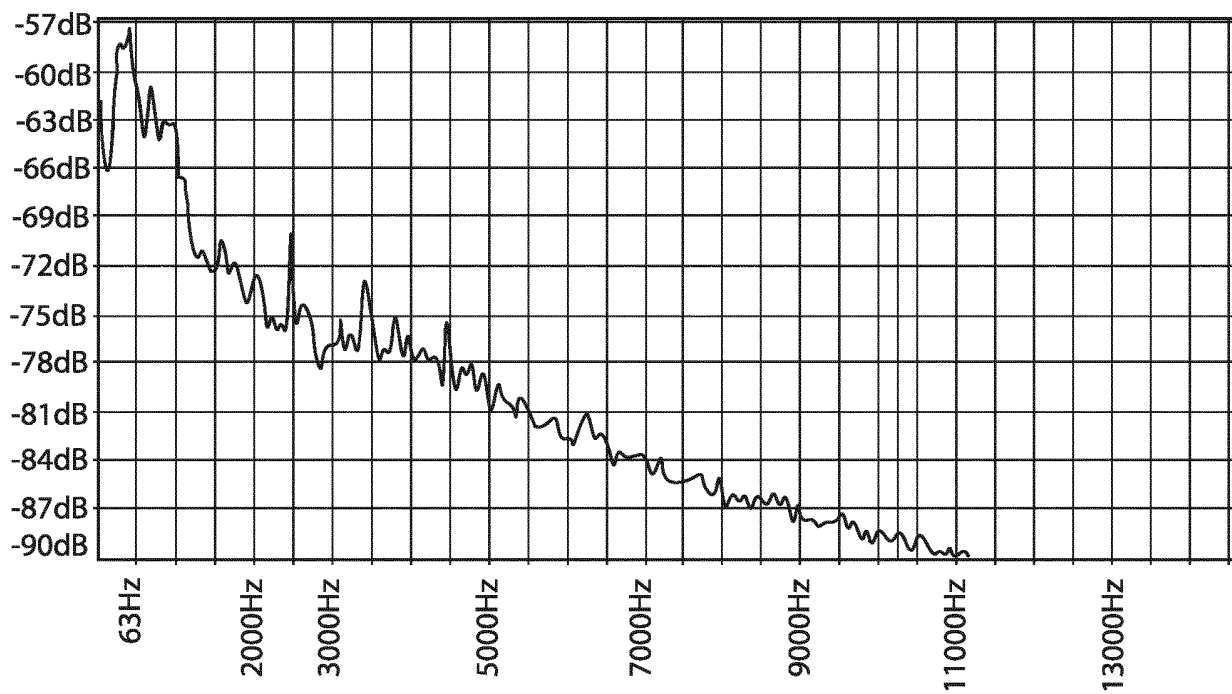


Fig.7

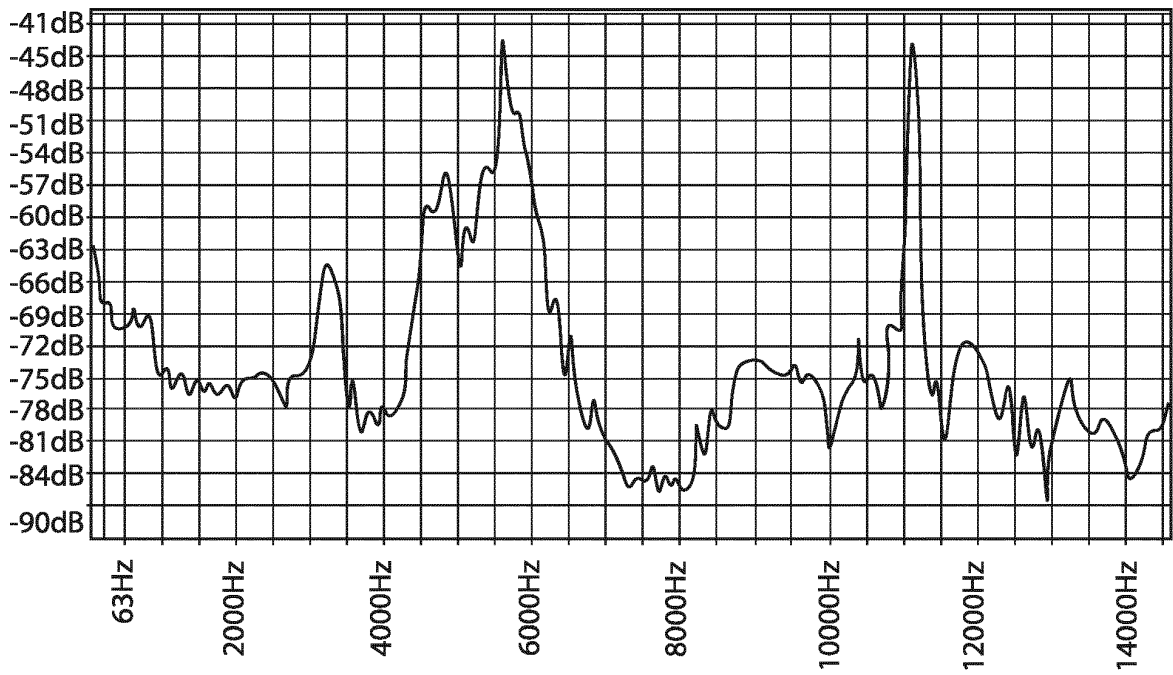


Fig.8

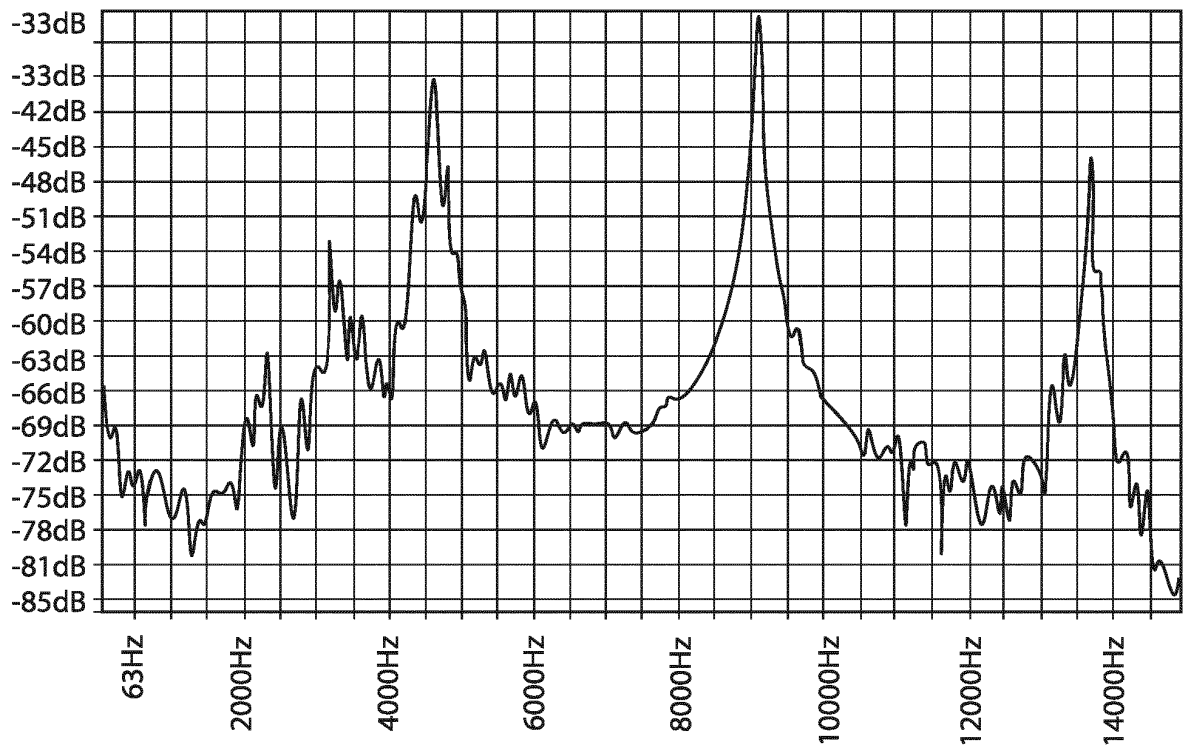


Fig.9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2461299 A [0002]
- US 20130197320 A [0002]