



Europäisches Patentamt
European Patent Office
Office européen des brevets

Publication number:

**0 143 668
B1**

12

EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification: 25.04.90

51 Int. Cl.⁵: **G 01 G 19/413**

21 Application number: **84308309.8**

22 Date of filing: **29.11.84**

54 Electronic scale.

30 Priority: **29.11.83 JP 225174/83**

43 Date of publication of application:
05.06.85 Bulletin 85/23

45 Publication of the grant of the patent:
25.04.90 Bulletin 90/17

84 Designated Contracting States:
BE CH DE GB LI NL SE

56 References cited:
**EP-A-0 020 920
EP-A-0 064 341
EP-A-0 081 815
EP-A-0 087 310
EP-A-0 139 420**

**PATENTS ABSTRACTS OF JAPAN, vol. 6, no.
221 (P-153) 1099r, 5th November 1982; & JP - A -
57 124 219 (TERAOKA SEIKOSHO K.K.) 03-08-
1982**

73 Proprietor: **KABUSHIKI KAISHA ISHIDA KOKI
SEISAKUSHO
44, Shogoin Sannou-cho Sakyo-ku
Kyoto-shi Kyoto 606 (JP)**

72 Inventor: **Hikita, Michiyasu
18-17, 2-chome, Higashiyagura
Kusatsu-shi, Shiga (JP)**

74 Representative: **Fane, Christopher Robin King
et al
HASLTINE LAKE & CO. Hazlitt House 28
Southampton Buildings Chancery Lane
London, WC2A 1AT (GB)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 143 668 B1

Description

The present invention relates to an electronic scale, of the kind which stores commodity data, such as article names, unit prices, tares, etc., recalls stored commodity data in response to selective depression of keys, and displays and prints such recalled commodity data (hereinafter referred to also as article data).

An electronic scale is generally operated by entering article data such as unit prices and tares into a control unit, and storing them in response to actuation of a key-operated input unit such as a ten key pad, and recalling article data by entering a call number. The scale displays the weight of the article or commodity quantity concerned and the unit price and total price thereof. Such an electronic scale, for example as disclosed in EP—A—0 020 920, may have a printer for printing data such as an article name and date, in addition to the foregoing article data, on a label and issuing such a printed label.

Fig. 1 of the accompanying drawings illustrates in perspective an electronic scale of the type described above. When an article for sale is placed on a weighing pan or tray 1, a control unit contained in the scale effects a required arithmetic operation based on a unit price and other data which have already been fetched by a call number entered by ten-keys 3, for displaying a total price, the unit price, the weight and other data on a display unit 2. The illustrated electronic scale has a printer 4 which prints the article name, date, unit price, total price, and other data as shown in Fig. 3(b) on an unprinted label as shown in Fig. 3(a).

Fig. 2 is a block diagram of the electronic scale, explanatory of the functions thereof. The electronic scale includes a weighing unit 8, an A/D converter 9, an arithmetic control unit 10, a storage unit 11, a key-operated input unit 7, a display unit 2, and a printer 4. Article codes, article names, unit prices, and other necessary data are entered in advance through ten-keys and function keys in the key input unit 7, and are stored in a registration memory in the storage unit 11 under the control of the arithmetic control unit 10. The storage unit 10 is composed of a RAM and a ROM as shown in Figs. 15 and 21. Then, an article is placed on the weighing pan 1 shown in Fig. 1, and the weight of the article is measured by the weighing unit 8. The measured weight (in analog representation) is converted by the A/D converter 9 into a digital signal, which is applied as weight data to the arithmetic control unit 10.

The arithmetic control unit 10 obtains necessary data on the article from the registration memory, effects an arithmetic operation on the fetched data and the weight data, and then displays data on the display unit 2 and controls the printer 4 to print the data on a label.

The data for each article is stored into the registration memory by operating the ten-keys to enter numbers. According to the conventional

practice, entering the data through depression of keys was very time-consuming, since article names were expressed by character codes each composed of 4 numerals, as shown by stored examples in Fig. 4.

It is desirable to provide an electronic scale which can register and fetch article data through simple key operation effected in a shortened period of time.

According to the present invention there is provided an electronic scale comprising:

a weighing unit for weighing a quantity of a commodity to be purchased;

a storage unit for storing respective sets of commodity data relating to different commodities;

an arithmetic control unit operable to compute a purchase price based on weight data received from the said weighing unit and on commodity data recalled from the said storage unit;

a key input unit having keys operable selectively to cause the commodity data relating to any selected one of the said different commodities to be recalled from the said storage unit for use by the said arithmetic control unit;

a display unit connected with the arithmetic control unit for displaying the weight of the said quantity and the computed purchase price;

and a printer connected with the arithmetic control unit for printing on a label or receipt the weight of the said quantity and the computed purchase price and the name of the commodity identified with the said data recalled from the said storage unit;

characterized in that the said keys of the said input unit are operable to register individual character codes, denoting respective different commodities, in association with respective keys of the said input unit so that those keys are identified individually with the said different commodities on a one-to-one basis, and in that the said key input unit includes a key operable selectively to bring about a change in the size of a character to be printed on the said label or receipt.

A preferred embodiment of the present invention has means whereby any one of three different character sizes can be selected, by actuation of a single key, for printing registered data.

Another embodiment of the present invention can provide an electronic scale capable of printing registered data in the order of call numbers.

A further embodiment of the present invention can provide an electronic scale capable of counting and displaying the number of characters entered by keys as representing an article name.

Reference will now be made, by way of example to the accompanying drawings, in which:

Fig. 1 is a perspective view of an electronic scale embodying the present invention;

Fig. 2 is a block diagram of the electronic scale of Fig. 1;

Figs. 3(a) and 3(b) are views showing labels before and after being printed, respectively;

Fig. 4 is a view showing examples of article data stored in a registration memory in the electronic scale;

Figs. 5 through to 10 show examples of sheets to be fitted over preset keys of the scale of Fig. 1;

Fig. 11 is a view of a sheet to be fitted when the preset keys are to be used as registration keys;

Fig. 12 is a view showing a displayed example on a display unit;

Fig. 13 is a view illustrative of an example of registered data printed as an item list;

Fig. 14 is a view of a sheet to be fitted when the preset keys are to be used as keys for calling registered data;

Fig. 15 is a view illustrating the construction of a ROM in a storage unit;

Fig. 16 is a diagram showing the sequence or direction in which data registered in the registration memory are printed;

Figs. 17 through 18 are flowcharts showing steps of operation of the electronic scale of Fig. 1;

Figs. 19 and 20 are flowcharts showing steps of operation of an electronic scale according to another embodiment of the present invention; and

Fig. 21 is a view illustrative of a RAM in the storage unit.

The electronic scale of Fig. 1 has a set of preset keys 6, the preset keys 6 and the ten-keys and function keys which have been conventionally available jointly constituting a key input unit 7 (Fig. 2). The preset keys 6 are operated upon to register and call required data while a sheet 5 is fitted thereover which bears article means and Kanji characters (Chinese characters) at respective keys. Figs. 5 through 10 are illustrative of examples of such sheets. For the sake of illustration, the illustrated sheets also bear key numbers which are not present on actual sheets.

Fig. 5 shows a sheet for registering article names either by means of Kanji characters or by means of Katakana characters (Japanese characters). For example, a key K33 is depressed to select a Kanji character mode, and then a key K36 is depressed to register a Kanji character meaning "pork". When a Katakana selection key K34 is depressed and then the key K36 is selected, a Katakana character for "a" is registered. Fig. 6 is a sheet for calling registered data, the sheet bearing character names which are frequently used, such as "beef roast", "beef sukiyaki" and others, associated with the respective keys. Figs. 7 through 10 are illustrative of registration sheets for using Kanji characters, Katakana characters, upper-case alphabetical letters, and lowercase alphabetical letters. When a key K33 for "sheet 1" is depressed and a key K38 is depressed, for example, a character meaning "pork" is registered. When the sheet of Fig. 8 is used and a key K34 for "sheet 2" is depressed following by depression of the key K38, then a character meaning "i" is registered. When the sheet of Fig. 9 is used and a key K35 for "sheet 3" is depressed and the key K38 is depressed, an upper-case alphabetical letter "B" is registered. When the sheet of Fig. 10 is

employed, a key K36 for "sheet 4" is depressed, and if the key K38 is then depressed, a lower-case alphabetical letter "b" is registered.

With the electronic scale of Fig. 1, characters for article names can be registered by combining numerals through ten-keys, and by the preset keys in association with the sheets shown in Figs. 5 and 7 through 10. Furthermore, article data can be recalled by entering call numbers of Fig. 4 through the ten-keys, and can also be fetched by entering article names using the called sheet of Fig. 6. Where the letter call sheet is employed, the operator fits the call sheet over the preset keys, and puts the arithmetic control unit comprising a microcomputer or the like in a call mode. Then, the key K33 is depressed to select "beef roast", whereupon the arithmetic control unit reads data relating to beef roast such as the article code, the character code, and the unit price from the registration memory, and automatically sets such data. The call numbers and the preset key numbers are placed in a 1-to-1 correspondance such that the call number 001 corresponds to the preset key K33, the call number 002 to the preset key K34, and so on. Normally, there are 750 call numbers from 001 through 750 available through the ten-keys. However, the preset keys are limited in number, there being only 54 preset keys from K33 through K87. Therefore, the preset keys are made to correspond to frequently used call numbers as desired. For example, the call number 001 may correspond to the preset key K50.

Fig. 11 shows a sheet to be fitted over the preset keys for using them as keys for registering data such as call numbers, article codes, and article names. In the illustrated embodiment, there are 48 preset keys from K33 to K80 including 31 character keys for A, B, C, ..., A, &, %, -, (, and), 11 preset ten-keys for 0, 1, 2, ..., 9, and BACK SPACE, and 6 special keys for [,], SP, NEW LINE, SHIFT, and SET.

When entering call numbers, article codes, unit prices, and using the [,] keys, the 0, 1, ..., 9 keys are used as numeral keys for 0, 1, ..., 9, and the BACK SPACE key is used as a clear key. When entering article name characters (except when using the [,] keys), the 0, 1, ..., 9 keys are used as character keys 0, 1, ..., 9, and the BACK SPACE key is used as a back space key. That is, the 0 through 9 keys or the preset ten-keys are automatically switched to numerical/character keys when entering article names, and to numeral keys when entering numerical data. By using the sheet of Fig. 11, therefore, all data to be registered can be entered only with the preset keys having the key numbers K33 through K80.

The sheet will be used as follows:

(1) Where the order or sequence in which data to be registered on one article is fixed, the first data item having the call number, the second the article code, the third the article name, the fourth the unit price, for example, the operator depresses keys to enter the data in that sequence.

(2) When the preset keys 0 through 9 are turned on at the time of entering the first, second, and

fourth data, the key number is converted into the numeral corresponding thereto and the numeral is stored. For example, when the key K74 for "3" is depressed, the key number 74 is converted into the numeral 3 which is stored.

(3) When the preset keys 0 through 9 are turned on at the time of entering the third article data, the key number is converted into the corresponding character code which is then stored. For example, when the key 74 for "3" is depressed as part of an article name, the key number 74 is converted into the character code for 3 which is stored.

By thus using the sheet of Fig. 11, numerical values can be entered without using the ten-keys K1 through K32 as shown in Fig. 2.

By means of the shift key K78 any one of three character sizes can be selected, the number of depressions of the shift key being displayed on a weight display in Fig. 12.

(1) Before the shift key is turned on, "0" is displayed on the weight display to specify large-size characters. For example, when turning on the "A" key, it is converted into a large-size character code for "A".

(2) When the shift key is turned on once, "1" is displayed on the weight display to specify medium-size characters. When the "A" key is depressed, for example, it is converted into a medium-size character code for "A".

(3) When the shift key is depressed twice, "2" is displayed on the weight display to specify small-size characters. When the "A" key is depressed, for example, it is converted into a small-size character code for "A".

Fig. 13 shows registered data printed in the three character sizes thus specified.

Fig. 14 is illustrative of a sheet to be fitted over the preset keys when they are to be used as keys for calling registered data. For example, when the key K33 is turned on and small-size characters are specified, then "STEAK BONELESS" is printed in a small size as shown in Fig. 13.

Means are provided to count and display the number of entered characters while an article name (characters) is being entered through the preset keys. In performing this function, the count is incremented by +1 each time one of the 31 character keys A, B,...Z,...) and 10 keys 0, 1,...9 is depressed, and the incremented count is displayed on the weight display. When the BACK SPACE key is turned on, the count is decremented by -1. In this manner, the operator can confirm how many characters have been entered as an article name by looking at the displayed count.

Registration of words and phases through the special keys for "[", "]" will be described. Characters, words, phrases, and sentences which are not found on the preset keys are stored in a ROM in the storage unit in association with fixed data numbers (for example, 300s). Fig. 15 shows an example in which "ARM" is stored at a fixed data number 300, and a "ROUND" is stored at a fixed data number 301. When "ROUND" is

desired to be used as part of an article name, the keys for "[", "3", "0", "1" are depressed to register "ROUND" in the registration memory in the RAM.

Fig. 16 illustrates an example of a list prepared by printing registered data in the order of call numbers. The registration memory stores registered data on articles in the order of call numbers (from smaller to larger), the data including the call number, the article code, the article name, the unit price, the tare, the effective term, the fixed value, the number of figure positions for printing bar codes, and others), and the registered data are printed on a continuous sheet in the order of call numbers (from larger to smaller).

(1) Where the electronic scale has a receipt printer, registered data are successively printed on a receipt sheet.

(2) Where the electronic scale has a label printer, a continuous sheet is inserted in place of a label for printing data thereon.

Figs. 17 and 18 are flowcharts of processing procedures according to a first embodiment of the present invention. The flowchart of Fig. 17 is illustrative of the processing procedures in which the sheet of Fig. 5 is fitted over the preset keys 6 and article names are registered through the ten-keys or preset keys. The procedure will hereinafter be described.

(1) The arithmetic control unit 10 is entered into a registration mode, and a call number is entered through the ten-keys so as to be stored and set in the buffer memory in the storage unit 11. Where an article name is to be registered, the arithmetic control unit 10 is entered into an article name registration mode (steps P1 through P4).

(2) When one of ten-keys, the function keys, or the preset keys is turned on, it is converted into a corresponding key number by an encoder circuit in the key input unit 7. The arithmetic control unit 10 checks this key number to determine whether the ten-keys (key numbers K1 through K10) are turned on (steps P5 through P7). If the ten-keys are turned on, the arithmetic control unit 10 stores the number entered by the ten-keys, that is, the article name character code, into a number memory in the storage unit 11 (step P8).

(3) If no ten-keys are turned on in the step P7, the arithmetic control unit 10 then determines whether the call key among the function keys is turned on or not (step P9). If the call key is turned on, then the arithmetic control unit 10 stores the content of the number memory into the buffer memory in the storage unit 11, and clears the number memory to zero (steps P10, P11).

(4) If no call key is turned on in the step P9, the program goes to a step P12 in which the arithmetic control unit 10 determines whether the preset keys are turned on or not. Then, the arithmetic control unit 10 determines whether the Kanji Key K33 is depressed or not. If the Kanji key is turned on, then the arithmetic control unit 10 sets a Kanji flag to "H" (steps P13, P14). If the

Kanji key is not turned on, the arithmetic control unit 10 determines whether the Katakana key K34 is turned on or not. If the Katakana key is turned on, then the arithmetic control unit 10 sets the Kanji key to "L" (steps P15, P16). If the Katakana key is not turned on, then the arithmetic control unit 10 stores the key numbers converted in the step P6, that is, the key number of any one of the keys K35 through K87, into a key number memory in a step P17. Thereafter, the arithmetic control unit 10 checks whether the Kanji flag is "H"; or "L" in a step P18. If the Kanji flag is "H", then the arithmetic control unit 10 converts the key number into a Kanji character code which is stored in the buffer memory (step P19). If the Kanji flag is "L", then the arithmetic control unit 10 converts the key number into a Katakana character code which is stored in the buffer memory (step P20).

(5) If the preset keys are not turned on in the step P12, then the arithmetic control unit 10 checks whether an end key among the function keys is turned on or not in a step P21. If the end key is not turned on, then an alarm buzzer is energized (step P22). If the end key is turned on, then the arithmetic control unit 10 stores the call number and the article name character code stored in the buffer memory into the registration memory.

Fig. 18 is illustrative of a processing flow at the time the sheets of Figs. 7 through 10 are used, the flow corresponding to the steps P13 through P20 in the flowchart of Fig. 17.

(1) If the preset keys 6 are turned on in the step P12, the arithmetic control unit 10 checks in a step S1 whether the key K33 for the sheet 1 of Fig. 7 is turned on or not. If the sheet-1 key is turned on, then the arithmetic control unit sets a flag 1 to "H" in a step S2 and sets other flags to "L". Likewise, the arithmetic control unit 10 checks whether the keys K34, K35, K36 for the sheets 2, 3, 4, respectively, are turned on or not in steps S3, S5, S7, and sets flags 2, 3, 4 to "H" and other flags to "L" dependent on the sheets (steps S4, S6, S8).

(2) In a step S9, the arithmetic control unit 10 stores key numbers K37 through K87 other than the key numbers K33 through K36 corresponding to the sheets 1 through 4 into the key number memory.

(3) Then, the arithmetic control unit 10 checks whether the flag 1 is "H" or not in a step S10. If the flag 1 is "H", then the arithmetic control unit 10 converts the stored key number into a Kanji character code which is stored in the buffer memory (step S11). If the flag 2 is "H", then the arithmetic control unit 10 converts the stored key number into a Katakana character code which is stored in the buffer memory (steps S12, S13). Likewise, if the flag 3 is "H", then the arithmetic control unit converts the stored key number into an upper-case alphabetical letter code which is stored in the buffer memory (steps S14, S15). If the flag 4 is "H", then the arithmetic control unit converts the stored key number into a lower-case alphabetical letter code which is stored in the buffer memory (steps S16, S17). The preset keys

can register a message such as a special bargain day in addition to the article name character.

Figs. 19 and 20 are flowcharts showing steps of operation according to another embodiment of the present invention. The flowchart of Fig. 20 is followed when registering data using the preset keys. For this operation, the following items are stored in memories in the RAM of Fig. 21.

- 5 (1) Registration memory *a*:
Article codes and article name character codes are stored for respective call numbers
- 10 (2) Type count memory *b*:
[1] Call number
[2] Article code
[3] Article name
[4] Unit price
[5] Tare, effective term, fixed value, figure number for printing bar codes, as desired.
- 15 (3) Shift count memory *c*:
[1] "0", Large-size character
[2] "1", Medium-size character
[3] "2", small-size character
- 20 (4) Character count memory *d*:
Count indicating the number of characters
- 25 (5) Call number count memory *e*:
Call numbers from 1 through 9998
- 30 (6) Article name buffer memory *f*:
Character code
- 35 (7) Registration buffer memory *g*:
Temporary storage of the items [1] through [5] stored in the type count memory
- 40 (8) Number memory:
0 through 9 stored
- 45 (9) Key number memory:
Character key numbers

The flowchart will now be described.

(1) A registration mode is entered, and "P" is displayed on a sum display as shown in Fig. 12 (step S00). Then, an item registration mode is entered to display "P1" on the sum display (step S20). "1" is stored in a type count memory and displayed on the sum display, and "0" is stored in a shift count memory and a character count memory (step S30).

(2) Depression of the preset keys is confirmed. Where the stored value in the type count memory is other than 3, that is, for the call number, the article code, and the unit price, and when the turned-on key is other than the BACK SPACE key among the preset ten-keys, then a numeral ranging from 0 to 9 and corresponding to the turned-on key is stored in the number memory, and the stored value is displayed on the unit price display (steps S50, S60, S80 through S83). If the BACK SPACE key is turned on, the number memory is

cleared to zero, and "0" is displayed on the unit price display (step S84).

(3) If the turned-on key is a SET key, (step S60), then the following processing is followed:

[1] If the stored value in the type count memory is 1, that is, for the cell number (step S61), and when the stored value in the number memory is 9999 (step S62), then the number memory is cleared to zero, and "0" is displayed on the unit price display (step S66), and the item registration mode is released (step S67).

[2] If the stored value in the type count memory is 1 and when the stored value in the number memory is not 9999, then the stored value in the number memory is registered as a call number and stored in the buffer memory (step S71). Then, the number memory is cleared to zero and "0" is displayed on the unit price display (step S64). The stored value in the type count memory is incremented by +1, and the incremented value is displayed on the sum memory (step S65).

[3] If the stored value in the type count memory is 2 when the stored value in the type count memory is not 1 (step S70), then the stored value in the number memory is registered as an article code and stored in the registration buffer memory (step S71). If the stored value in the type count memory is 3 (step S72), then the stored value in the article name buffer memory is registered as a character code and stored in the registration buffer memory (step S73).

[4] When the stored value in the type count memory is not 1 through 3, then the stored value in the number memory is stored as a unit price in the registration buffer memory (step S74), and the number memory is cleared to zero, with "0" displayed on the unit price display (step S75). Then, the call numbers stored in the registration memory are searched, and all registered data having call numbers larger than the call number stored in the registration buffer memory are shifted, during which time the content stored in the registration buffer memory is stored. Therefore, the registration memory always stores registered data in the order of call numbers (from smaller to larger) (step S76) as indicated in the example of Fig. 16. (4) When the stored value in the type count memory is 3, that is, for registering an article name, then the following process is effected:

[1] If the turned-on key is the SHIFT key (step S90), the shift count memory is incremented by +1 (step S91), and after the stored value in the shift count memory has been confirmed as being 3, the shift count memory is cleared to zero (step S93). If the stored value in the shift count memory is not 3, the stored value in the shift count memory is displayed on the weight display (step S94).

[2] If the turned-on key is the BACK SPACE key when the turned-on key is not the SHIFT key (step S100), then the final data among those stored in the article name buffer memory is cleared, and a space code is stored (step S101). Then, the stored value in the character count memory is

decremented by -1, and the decremented value is displayed on the weight display (step S102).

If the turned-on key is an SP key (step S110), then the space code is stored in the article name buffer memory (step S111), and the character count memory is incremented by +1, with the incremented value displayed on the weight display (step S112).

[3] If the turned-on key is a "[" key (step S120), then the following process is carried out:

(a) If the next turned-on key is a preset ten-key which is not the BACK SPACE key, then a numeral (ranging from 0 to 9) corresponding to the turned-on key is stored in the number memory and displayed on the unit price display (steps S121 through S124). If the BACK SPACE key is turned on at this time, then the number memory is cleared to zero, and "0" is displayed on the unit price display (step S125).

(b) If the turned-on key is neither a preset ten-key (step S122) nor a "]" key (step S130), then the alarm buzzer is actuated (step S134), and the program returns to the step S121.

If the turned-on key is the "]" key, then the stored value in the number memory is stored as a fixed data number in the article name buffer memory (step S131).

The fixed data number is employed for storing a character, a word, a phrase, or a sentence which is not present on the preset keys. By registering the data with the fixed data number, the word or the like can automatically be fetched and printed when the fixed data number is called.

Then, the number memory is cleared to zero, "0" is displayed on the unit price display (step S1320), the character count memory is incremented by +1, and the incremented value is displayed on the weight display (step S133).

(c) If the turned-on key is the "]" key (step S140), then the alarm buzzer is energized (step S141).

(d) If the turned-on key is the NEW LINE key (step S150), then a line-feed code is stored in the article name buffer memory (step S151).

(e) If the turned-on key is one of the A, B, ..., Z, 0, 1, ..., 9, &, %, -, (, and 0 keys, that is, is not the SHIFT key (step S90), the BACK SPACE key (step S100), the SP key (step S110), the "[" key (step S120), the "]" key (step S140), or the NEW LINE key (step S150), then the key number of the turned-on key is stored in the key number memory (step S160), whether the stored value in the shift count memory is 0 or not. If the stored value in the shift count memory is 0 (step S161), then the stored value in the key number memory is converted into a large-size character code which is stored in the article name buffer memory (step S162). If the turned-on key is the key K33 for "A", for example, then 33 is converted into a large-size character code for "A".

If the stored value in the shift count memory is 1 (step S164), then the stored value in the key number memory is converted into a medium-size character code which is stored in the article name buffer memory (step S165).

If the stored value in the shift count memory is neither 0 nor 1, then the stored value in the shift count memory is 2. Therefore, the stored value in the key number memory is converted into a small-size character code which is stored in the article name buffer memory (step S166). The character count memory is incremented by +1, and the incremented value is displayed on the weight display (step S163).

The flowchart of Fig. 20 is illustrative of steps of operation for successively printing registered data. Now, the flowchart of Fig. 20 will be described with reference to an example in which 63 articles are registered at call numbers 10 through 135 as shown in Fig. 16.

(1) The registration mode is entered, and "P" is displayed on the sum display (step S100). Then, an item list printing mode is entered, and "P9" is displayed on the sum display (step S200). The call number count memory is cleared to zero (step S210), and the call number stored at a head address in the registration memory is read (step S220).

(2) The number of articles that can be printed on a A4-size sheet, for example, is set to α . In the example of Fig. 16, $\alpha=15$, and remainders after 15 has been multiplied by an integer, that is, three articles having call numbers 130, 131, 135 are printed at first. This process is effected as follows:

(3) With the call numbers confirmed as being stored (step S230), the call number count memory is incremented by +1 (step S231), and whether the stored value in the call number count memory is α or not is checked (step S232). If the above condition is met, then the call number count memory is cleared to zero (step S234). If the above condition is not met, then a call number stored next is read out (step S233). Thus, the remainders after α has been multiplied by an integer are counted in the steps S230 through S233.

(4) There is no call number stored upon completion of counting. The following process is carried out in order to print articles equal to the stored value in the call number count memory in the order to the call numbers (from larger call numbers). In the example of Fig. 16, the registered data of the call numbers 135, 131, 130 are printed.

If the stored value in the call number count memory is not 0, then an index i is set to 1, and registered data for one article are read out and printed in the order of call numbers (from larger call number) stored in the registration memory (step S242). Then, if the value of i is not equal to the stored value in the call number count memory (step S243), then 1 is added to i , and the process of the step S242 is repeated (step S244). If i is equalized to the stored value in the call number count memory, the program leaves this processing loop and proceeds to a next process in which the sheet is fed for a fixed number of lines to provide a cutting margin for cutting off the printed-out sheet to an A4-size sheet (step S245).

(5) Then, the preset α articles are printed and a cutting margin is provided by the following process:

It is confirmed that reading and printing up to the registered data stored at the head address is not yet completed (step S250). The index i is set to 1 (step S251), and registered data for one article are read out and printed in the order of call numbers (from larger call number) stored in the registration memory (step S252). 1 is added to i until $i=\alpha$, and the process in the step S252 is repeated (steps S253, S254). When $i=\alpha$, then the sheet is fed for a fixed number of lines (step S255). In the example of Fig. 16, the process is repeated four times ($\alpha=15$, $15 \times 4=60$), so that 60 articles are printed.

Fig. 13 shows an example of the sheet printed in the above manner.

Fig. 12 illustrates a displayed example on the display unit, which will be described below.

(1) The item registration mode is entered, and "P-1" is displayed in a mode column on the sum display. To register a call number, 1 is selected as the stored value in the type count memory, and displayed on the sum display.

(2) 12 is entered as a call number, and this stored value in the number memory is displayed on the unit price display.

(3) A character "B" is entered first in order to enter BEEF ROUND as an article name. At this time, the displayed value on the weight display for the stored value in the character count memory becomes 1, and the displayed value on the sum display for the stored value in the type count memory becomes 3 for registering the article name. The number memory is cleared to zero (see the steps S72, S73, S64).

(4) Then, the "E", "E", "F" keys and the SP key are depressed to cause the stored value in the character count memory to become 5. To store a fixed data number 301 corresponding to ROUND in the article name buffer memory, "[", "3", "0", "1" are entered to thereby display "301" on the unit price display.

(5) The "]" key is depressed to increase the stored value in the character count memory up to 6, and a line feed is effected. In order to print TIP ROAST in a small size, the NEW LINE, SHIFT, SHIFT keys are depressed. At this time, the stored value in the shift count memory is displayed as 2 on the weight display, and the number memory is cleared to zero (see the steps S130, S132).

(6) For conversion into a small-size character code, the character key T is turned on to equalize the stored value in the character count memory to 7.

(7) 9999 is entered as a call number, and the SET key is depressed. The item registration mode is now released, and "P" is displayed on the sum display (see the steps S60, S62, S67).

Although certain preferred embodiments have been shown and described, it should be understood that many changes and modifications may be made therein without departing from the scope of the appended claims.

Claims

1. An electronic scale comprising:

a weighing unit (8) for weighing a quantity of a commodity to be purchased;

a storage unit (11) for storing respective sets of commodity data relating to different commodities;

an arithmetic control unit (10) operable to compute a purchase price based on weight data received from the said weighing unit and on commodity data recalled from the said storage unit;

a key input unit (7) having keys operable selectively to cause the commodity data relating to any selected one of the said different commodities to be recalled from the said storage unit for use by the said arithmetic control unit;

a display unit (2) connected with the arithmetic control unit for displaying the weight of the said quantity and the computed purchase price;

and a printer (4) connected with the arithmetic control unit for printing on a label or receipt the weight of the said quantity and the computed purchase price and the name of the commodity identified with the said data recalled from the said storage unit;

characterized in that the said keys of the said input unit are operable to register individual character codes, denoting respective different commodities, in association with respective keys of the said input unit so that those keys are identified individually with the said different commodities on a one-to-one basis, and in that the said key input unit includes a key operable selectively to bring about a change in the size of a character to be printed on the said label or receipt.

2. An electronic scale as claimed in claim 1, wherein the said key input unit has a removable sheet (5) fitted over the said keys and indicating respectively, at the positions of those keys, the different commodities with which the keys are individually identified, which sheet is replaceable by a different such sheet when the scale is to be used to weigh an alternative selection of commodities.

3. An electronic scale as claimed in claims 1 to 2, wherein said key input unit includes means for automatically switching between numeral keys and numerical/character keys in response to actuation of a key.

4. An electronic scale as claimed in claims 1, 2 or 3, wherein the said key input unit can be switched, by actuation of a predetermined key, into a condition in which it can be used to register, in the said storage unit, commodity data including words.

5. An electronic scale as claimed in claim 4, wherein the said display unit is operable to display a count of the number of entered characters of an article name being registered by means of the said key input unit when in the said condition.

6. An electronic scale as claimed in any preceding claim, wherein the commodity data for each individual commodity includes an individual call number, and the said printer is operable to print out automatically, in the order of the respective

call numbers, commodity data stored in the said storage unit.

Patentansprüche

1. Elektronische Waage mit einer Wägeeinheit (8) zum Wägen einer Menge zu kaufender Waren;

einer Speichereinheit (11) zum Speichern jeweiliger Gruppen von Warendaten, die verschiedene Waren betreffen;

einer arithmetischen Steuereinheit (10), die zur Berechnung eines Kaufpreises betreibbar ist, der auf von der Wägeeinheit empfangenen Gewichtsdaten und auf aus der Speichereinheit abgerufenen Warendaten basiert;

einer Tasten-Eingabeeinheit (7) mit Tasten, die wahlweise betätigbar sind, um die Warendaten, welche eine beliebige gewählte der verschiedenen Waren betreffen, zur Verwendung durch die arithmetische Steuereinheit aus der Speichereinheit abzurufen;

einer mit der arithmetischen Steuereinheit verbundenen Anzeigeeinheit (2) zum Anzeigen des Gewichts der Menge und des berechneten Kaufpreises;

und einem mit der arithmetischen Steuereinheit verbundenen Drucker (4) zum Drucken des Gewichtes der Menge und des berechneten Kaufpreises und des Namens der durch die aus der Speichereinheit abgerufenen Daten identifizierten Waren auf ein Etikett oder eine Quittung; dadurch gekennzeichnet, daß

die Tasten der Eingabeeinheit derart betätigbar sind, daß einzelne Zeichencodes, die jeweils verschiedene Waren bezeichnen, in Zuordnung zu jeweiligen Tasten der Eingabeeinheit gespeichert werden, so daß diese Tasten einzeln auf einer eine-zu-eins Basis mit den verschiedenen Waren identifiziert werden, und daß die Tasten-Eingabeeinheit eine Taste aufweist, die wahlweise zum Bewirken einer Veränderung der Größe eines auf das Etikett oder die Quittung zu druckenden Zeichens betätigbar ist.

2. Elektronische Waage nach Anspruch 1, bei der die Tasten-Eingabeeinheit ein abnehmbares Blatt (5) aufweist, das über den Tasten angebracht ist und an den Positionen der Tasten jeweils die verschiedenen Waren angibt mit denen die einzelnen Tasten identifiziert sind, wobei das Blatt durch ein anderes Blatt ersetzbar ist, wenn die Waage zum Wägen einer anderen Auswahl von Waren verwendet werden soll.

3. Elektronische Waage nach Anspruch 1 oder 2, bei der die Tasten-Eingabeeinheit Mittel zum automatischen Umschalten zwischen numerischen Tasten und alpha-numerischen Tasten in Antwort auf die Betätigung einer Taste aufweist.

4. Elektronische Waage nach den Ansprüchen 1, 2 oder 3, bei der die Tasten-Eingabeeinheit durch Betätigen einer vorbestimmten Taste in einen Zustand geschaltet werden kann, in der sie zum Speichern von Warendaten, einschließlich Worten, in die Speichereinheit verwendet werden kann.

5. Elektronische Waage nach Anspruch 4, bei der die Anzeigeeinheit derart betreibbar ist, daß sie eine Zählung der Anzahl der mittels der Tasten-Eingabeeinheit in dem genannten Zustand gespeicherten Zeichen eines Artikelnamens anzeigt.

6. Elektronische Waage nach einem der vorhergehenden Ansprüche, bei der die Warendaten für jede einzelne Ware eine individuelle Aufrufnummer enthalten, und der Drucker derart betreibbar ist, daß er die in der Speichereinheit gespeicherten Warendaten in der Reihenfolge der jeweiligen Aufrufnummern automatisch ausdruckt.

Revendications

1. Balance électronique comprenant:
 une unité de pesage (8) pour peser une quantité d'un article à acheter;
 une unité mémoire (11) pour emmagasiner des ensembles respectifs de données d'articles relatives à différents articles;
 une unité de contrôle arithmétique (10) organisée pour calculer un prix d'achat basée sur des données de pesée reçues de l'unité de pesage précitée et sur des données d'article extraites de l'unité mémoire précitée;
 une unité d'entrée à touches (7) ayant des touches pouvant être actionnées sélectivement afin d'appeler de ladite unité mémoire, des données d'article relatives à un article sélectionné parmi les différents articles précités, lesquelles données sont destinées à être utilisées par l'unité de contrôle arithmétique précitée;
 une unité d'affichage (2) connectée à l'unité de contrôle arithmétique pour afficher le poids de ladite quantité et le prix d'achat calculé;
 et une imprimante (4) connectée à l'unité de contrôle arithmétique pour imprimer sur une étiquette ou un reçu le poids de ladite quantité et le prix d'achat calculé et la dénomination de l'article identifié avec les données extraites de l'unité mémoire précitée;
 caractérisée en ce que lesdites touches de l'unité d'entrée précitée peuvent être actionnées pour enregistrer des codes de caractères individuels, désigner des articles différents respectifs en association avec les touches respectives de

l'unité d'entrée précitée de manière que ces touches soient identifiées individuellement avec lesdits articles différents sur la base d'une correspondance bi-univoque, et en ce que l'unité d'entrée à touches précitée comprend une touche pouvant être actionnée sélectivement afin d'occasionner une modification de la grandeur d'un caractère à imprimer sur ladite étiquette ou ledit reçu.

2. Balance électronique selon la revendication 1, dans laquelle l'unité d'entrée à touches précitée à une feuille amovible (5) adaptée au-dessus desdites touches et indiquant respectivement, aux emplacements de ces touches, les différents articles avec lesquels les touches sont identifiées individuellement, laquelle feuille est remplaçable par une feuille différente lorsque la balance doit être utilisée pour la pesée d'une autre sélection d'articles.

3. Balance électronique selon la revendication 1 ou 2, dans laquelle l'unité d'entrée à touches précitée comprend des moyens pour effectuer automatiquement une commutation entre des touches numériques et des touches numériques/caractères en réponse à l'action d'une touche.

4. Balance électronique selon la revendication 1, 2 ou 3, dans laquelle l'unité d'entrée à touches précitée peut être commutée par l'action d'une touche prédéterminée, dans un état dans lequel elle peut être utilisée pour enregistrer, dans l'unité mémoire précitée, des mots comprenant des données d'articles.

5. Balance électronique selon la revendication 4, dans laquelle l'unité d'affichage précitée est organisée pour afficher un comptage du nombre de caractères introduits correspondant à une dénomination d'article enregistré au moyen de l'unité d'entrée à touches précitée lorsque celle-ci se trouve dans ledit état.

6. Balance électronique selon l'une quelconque des revendications précédentes, dans laquelle les données d'article pour chaque article individuel comprennent un numéro d'appel individuel, et dans laquelle l'imprimante précitée est agencée pour imprimer automatiquement, dans l'ordre des numéros d'appel respectifs, les données d'articles emmagasinées dans l'unité mémoire précitée.

50

55

60

65

9

Fig. 1

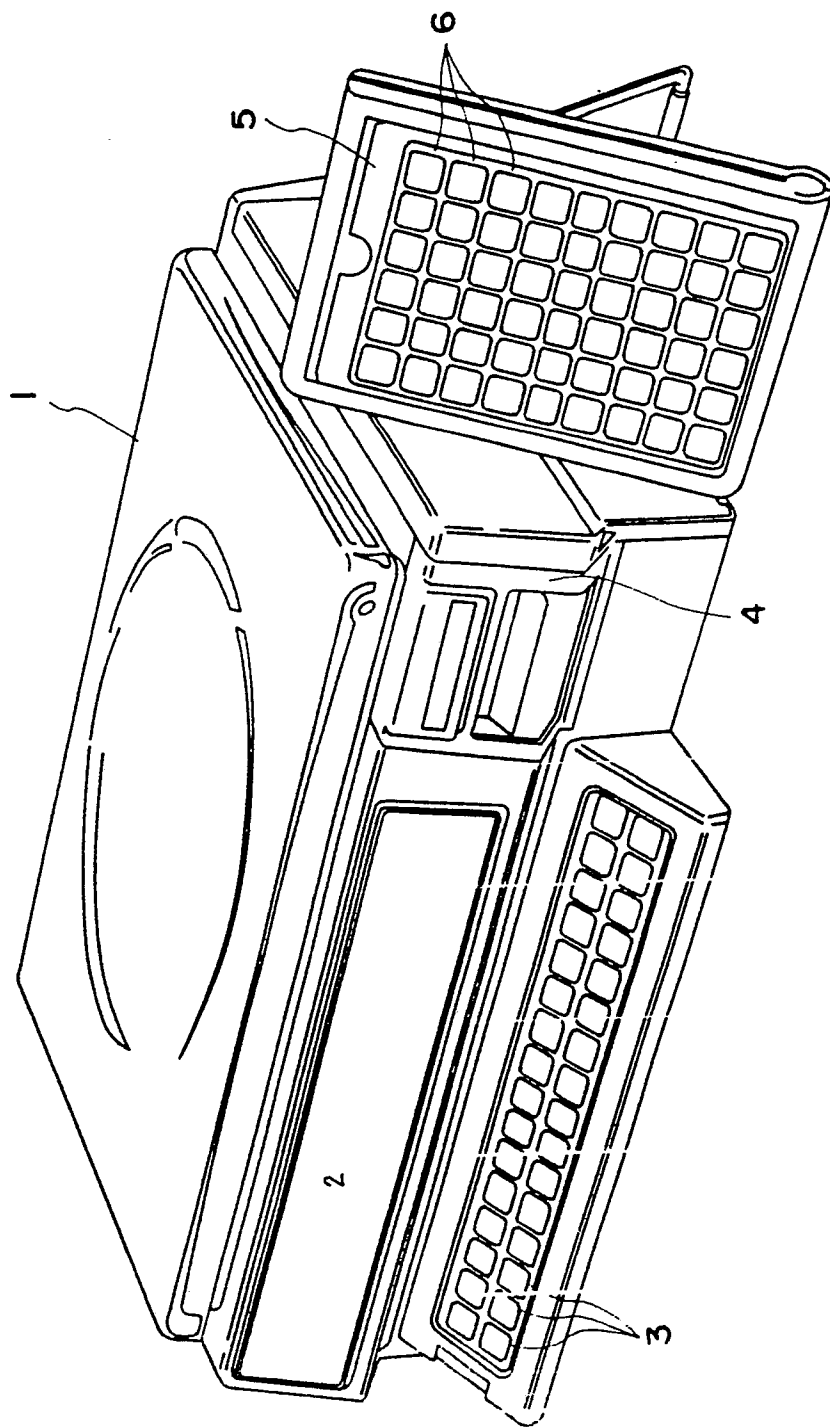


Fig. 2

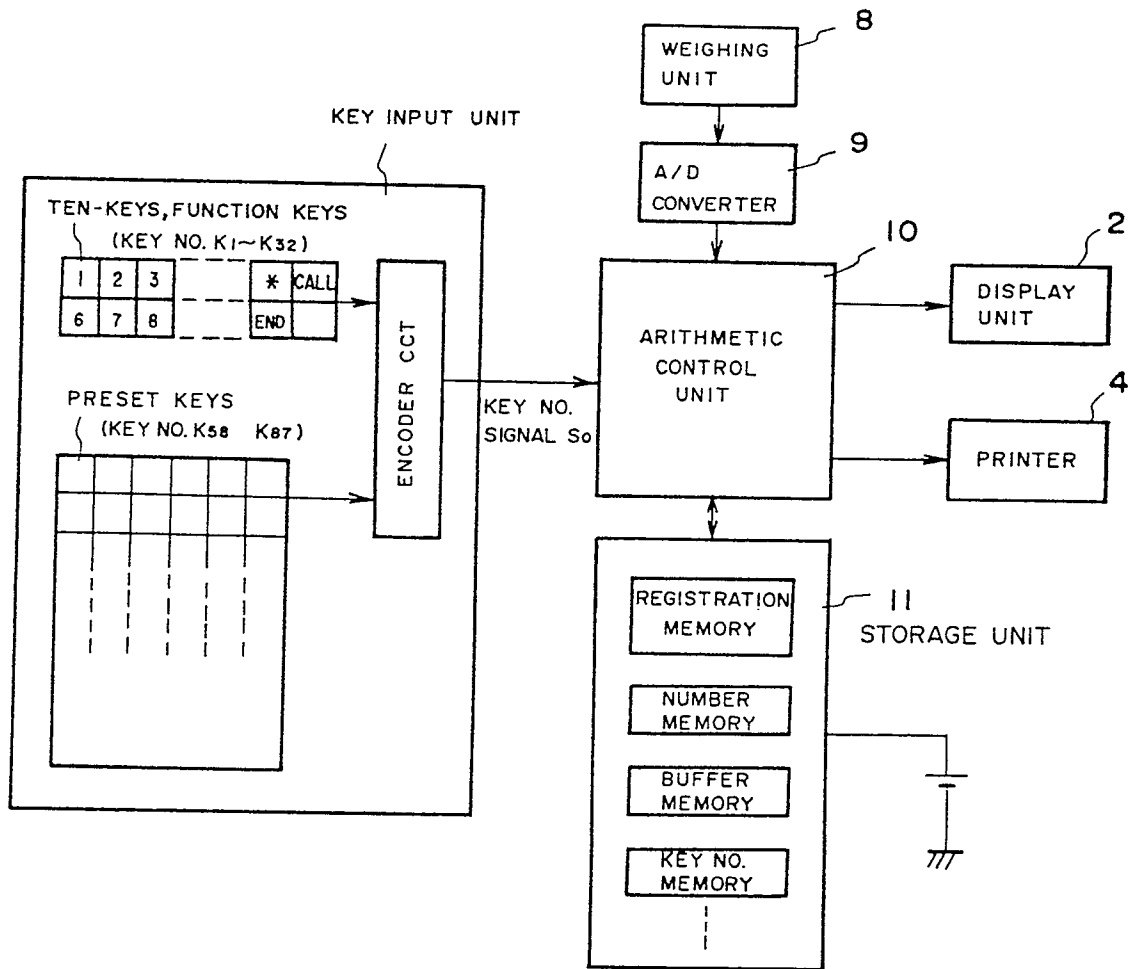


Fig. 3

(a)

(b)

EXAMPLE OF UNPRINTED LABEL

PROCESSED DATE	PRICE (YEN) PER 100g	NET WEIGHT	PRICE (YEN)	CODE
EFFECTIVE UNTIL	ARTICLE NO.		KEEP REFRIGERATED AT 10°C OR BELOW	
THANK YOU VERY MUCH		○ ○	DEPARTMENT STORE	

EXAMPLE OF PRINTED LABEL

PORK ROAST				
PROCESSED DATE	PRICE (YEN) PER 100g	NET WEIGHT	PRICE (YEN)	CODE
58. 6. 15.	123	175	215	6
EFFECTIVE UNTIL	ARTICLE NO.		KEEP REFRIGERATED AT 10°C OR BELOW	
THANK YOU VERY MUCH		○ ○	DEPARTMENT STORE	

Fig. 4

CALL NO.	ARTICLE CODE	CHARACTER CODE FOR ARTICLE				UNIT PRICE
0 0 1	1 2 0 0 1 1	1 2 4 8	1 2 7 7	1 2 9 1	--- 4 5 6 7	4 8 9
0 0 2	1 2 0 0 2 3	1 2 1 1	1 4 5 6	1 8 9 2	--- 6 8 9 8	7 2 5
0 0 3	1 2 0 0 4 5	1 2 1 3	1 5 7 8	9 9 7 7	--- 1 1 2 3	6 8

Fig. 5

KANJI LETTER	KATAKANA LETTER	KANJI FOR "BEEF" / BLANK	KANJI FOR "PORK" / KATAKANA FOR "A"	KANJI FOR "CHICKEN" / KATAKANA FOR "I"	KANJI FOR "NET" / KATAKANA FOR "U"
K33	K34	K35	K36	K37	K38
KANJI FOR "MEAT" / KATAKANA FOR "E"	KANJI FOR "ROAST" / KATAKANA FOR "O"	KANJI FOR "FOR" / KATAKANA FOR "KA"	KANJI FOR "BEST" / KATAKANA FOR "KI"	KANJI FOR "MEDIUM" / KATAKANA FOR "KU"	KANJI FOR "AVERAGE" / KATAKANA FOR "KE"
K39	K40	K41	K42	K43	K44

K45
5
K47

Fig. 6

LETTERS FOR "BEEF ROAST"	LETTERS FOR "BEEF SUK'YAKI"	LETTERS FOR "BEEF MINCE"	---	---	---
K 33	K 34	K 35	K 36	K 37	K 38
K 19 S K 44					
K 45 S K 87					

Fig. 7

SHEET 1	—	—	—	KANJI FOR "BEEF"	KANJI FOR "PORK"
K 33	K 34	K 35	K 36	K 37	K 38
KANJI FOR "CHICKEN"	KANJI FOR "NET"	KANJI FOR "MEAT"	KANJI FOR "ROAST"	KANJI FOR "FOR"	KANJI FOR "BEST"
K 39	K 40	K 41	K 42	K 43	K 44
K 45 K 87					

Fig. 8

—	SHEET 2	—	—	KATAKANA FOR "A"	KATAKANA FOR "I"
K 33	K 34	K 35	K 36	K 37	K 38
KATAKANA FOR "U"	KATAKANA FOR "E"	KATAKANA FOR "O"	KATAKANA FOR "KA"	KATAKANA FOR "KI"	KATAKANA FOR "KU"
K 39	K 40	K 41	K 42	K 43	K 44
K 45 K 87					

Fig. 9

—	—	SHEET 3	—	A	B
K33	K34	K35	K36	K37	K38
C	D	E	F	G	H
K39	K40	K41	K42	K43	K44

K45
} K87

Fig. 10

—	—	—	SHEET 4	a	b
K33	K34	K35	K36	K37	K38
c	d	e	f	g	h
K39	K40	K41	K42	K43	K44

K45
} K87

Fig. 11

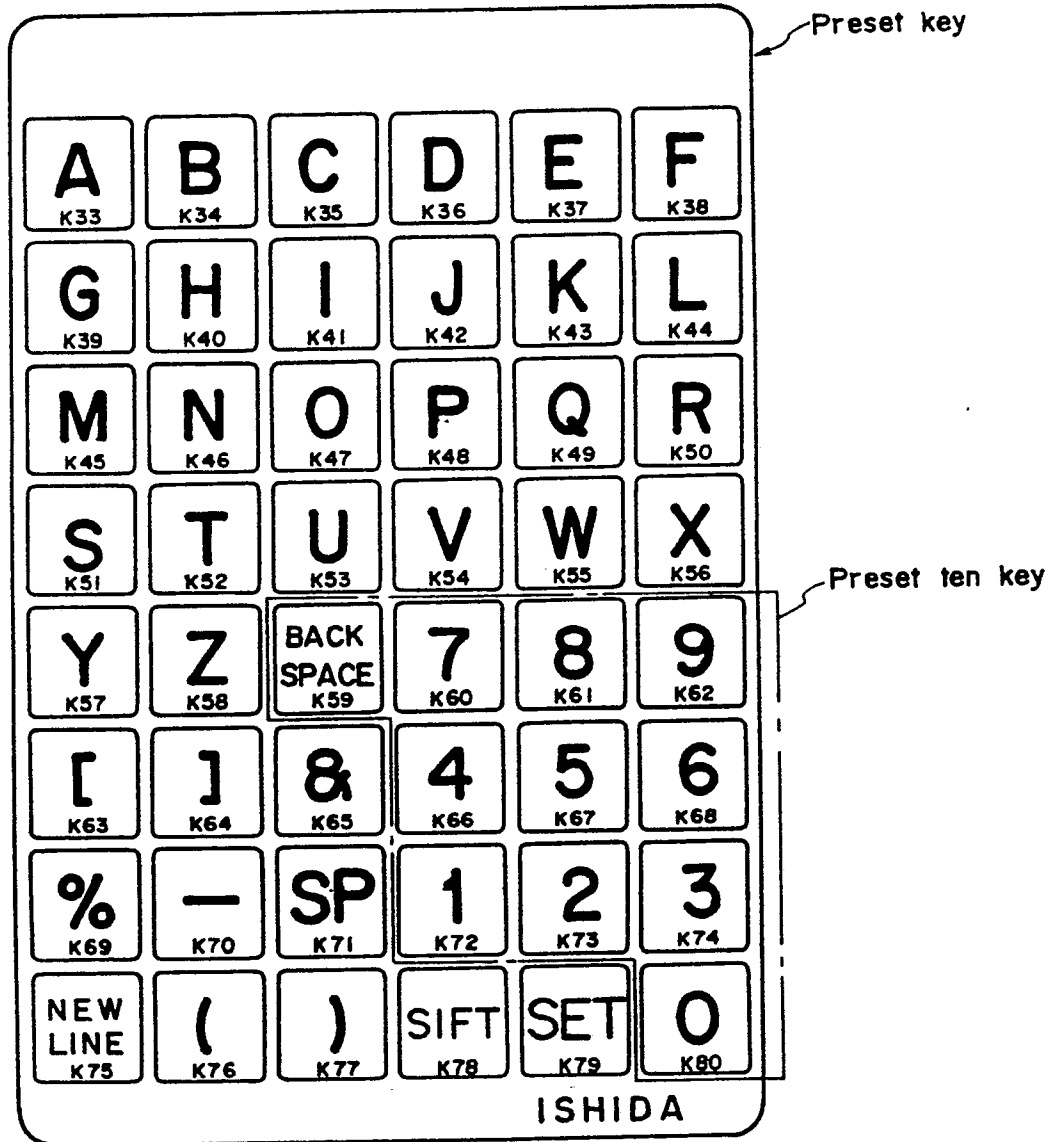


Fig. 12

DISPLAY EXAMPLES ON DISPLAY UNIT						
(1) WHEN ITEM REGISTRATION MODE IS SELECTED	WEIGHT DISPLAY		UNIT PRICE DISPLAY		SUM MEMORY	
	CHARACTER COUNT MEMORY VALUE	SHIFT COUNT MEMORY VALUE	NUMBER MEMORY VALUE	MODE	TYPE COUNT MEMORY VALUE	
(2) WHEN "J2" IS ENTERED AS CALL NO.			12	P - 1 1	1	
(3) WHEN "R" IS ENTERED	1 - 0		0	P - 1 3		
(4) WHEN "EEF, SP, C, 3, 0, 1" IS ENTERED	5 - 0		3 0 1	P - 1 3		
(5) WHEN "J NEW LINE, SHIFT, SHIFT" IS ENTERED	6 - 2		0	P - 1 3		
(6) WHEN "T" IS ENTERED	7 - 2		0	P - 1 3		
(7) WHEN "9999" IS ENTERED AS CALL NO. AND "SET" IS ENTERED			0			0

Fig. 13

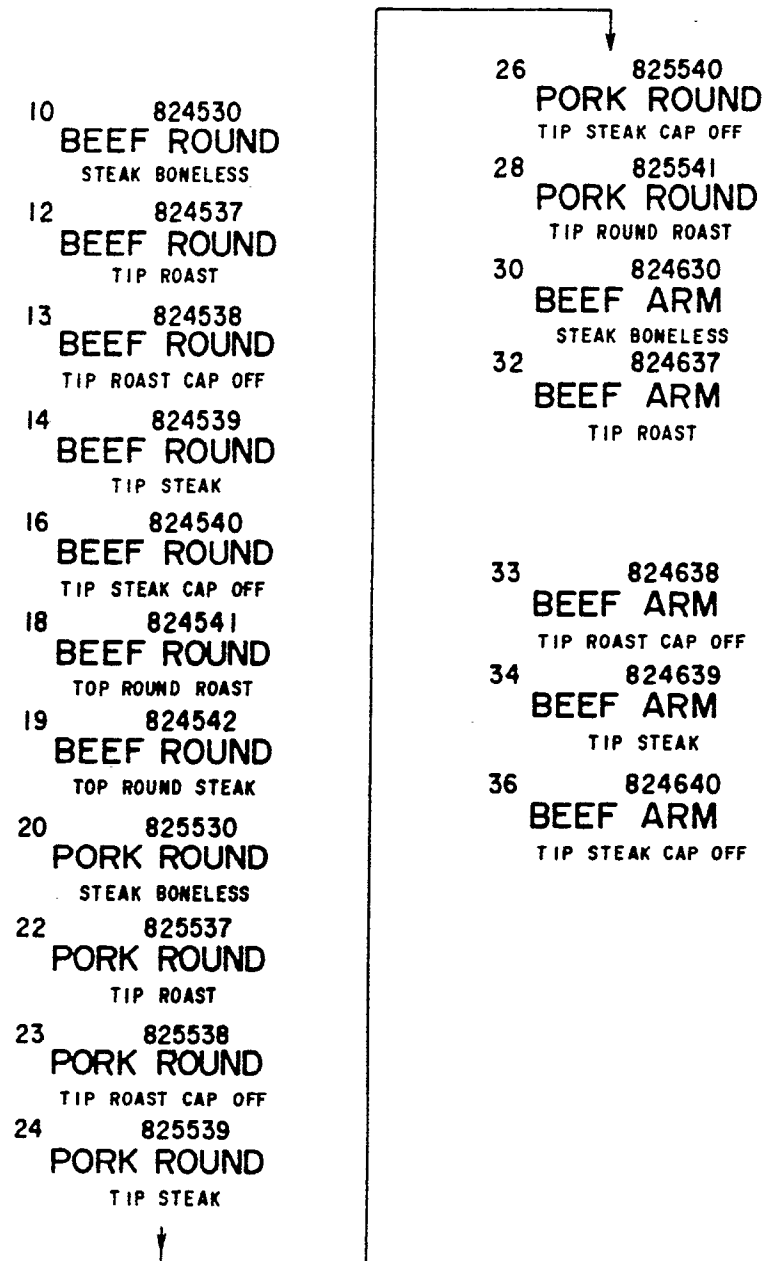


Fig. 14

Let's work vigorously today !					
BEEF STEAK BONELESS	BEEF TIP ROAST	BEEF TIP ROAST CAP OFF	BEEF TIP STEAK	BEEF TIP STEAK CAP OFF	BEEF TOP ROUND ROAST
K33	K34	K35	K36	K37	K38

ISHIDA

Fig. 15

EXAMPLE OF ROM

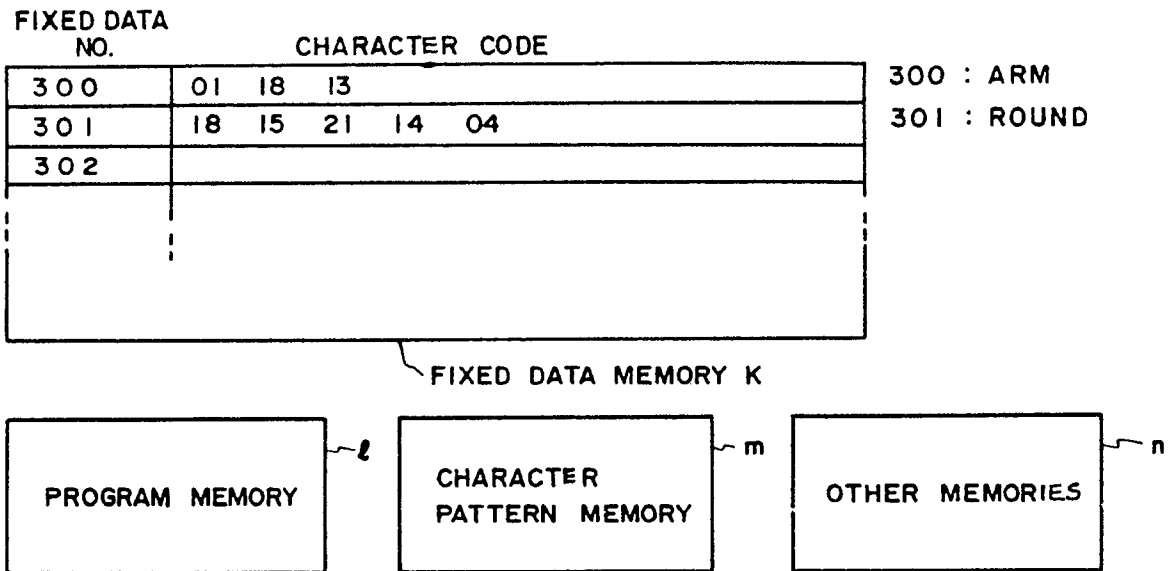


Fig. 16

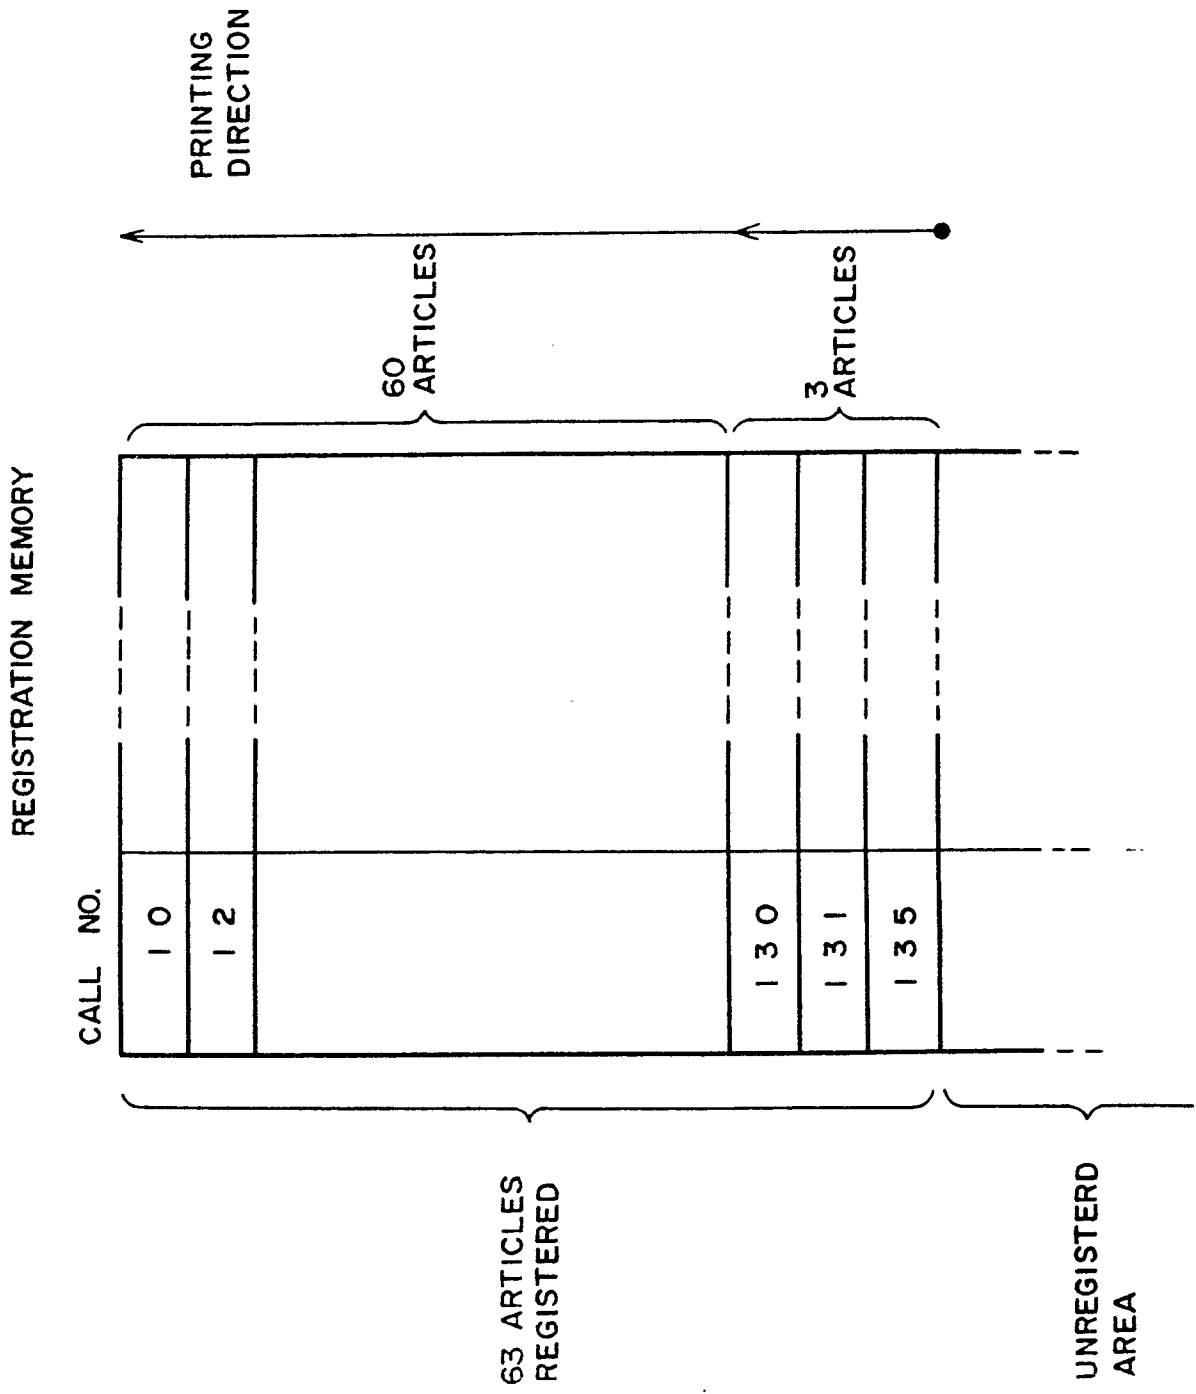


Fig.17

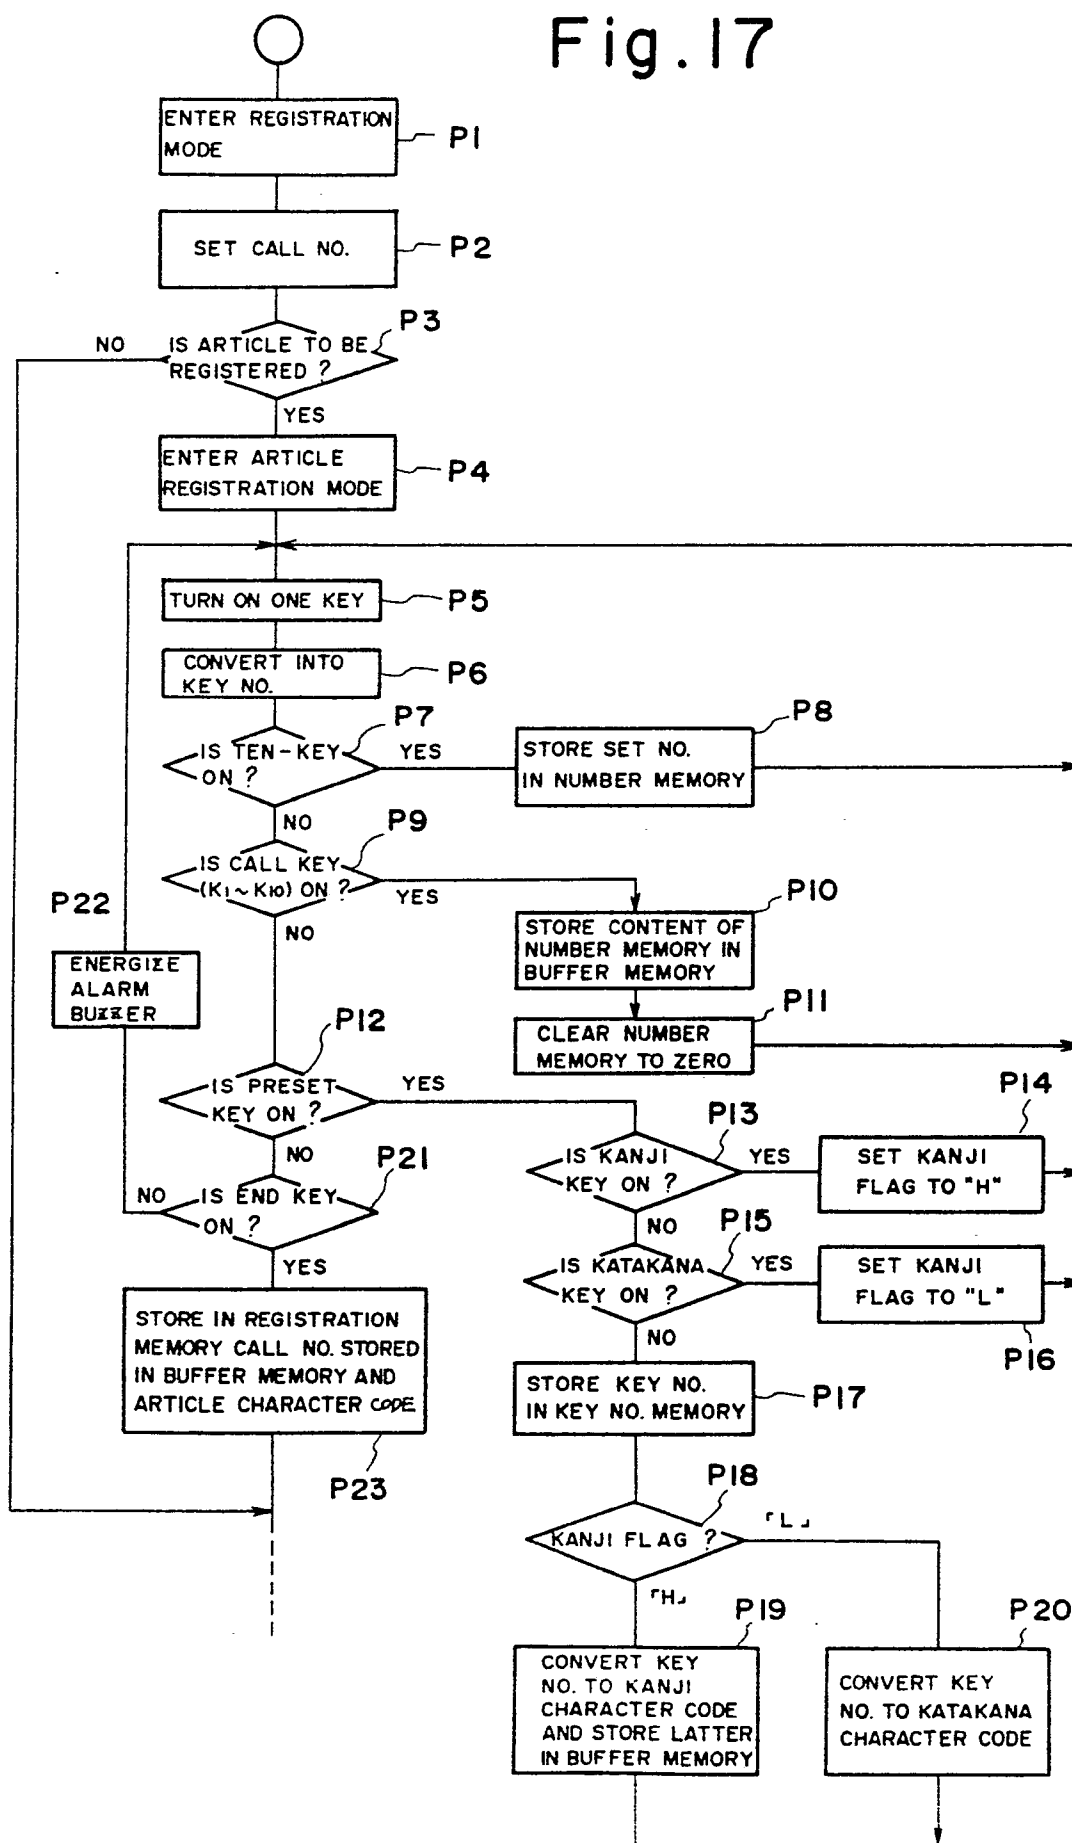


Fig. 18

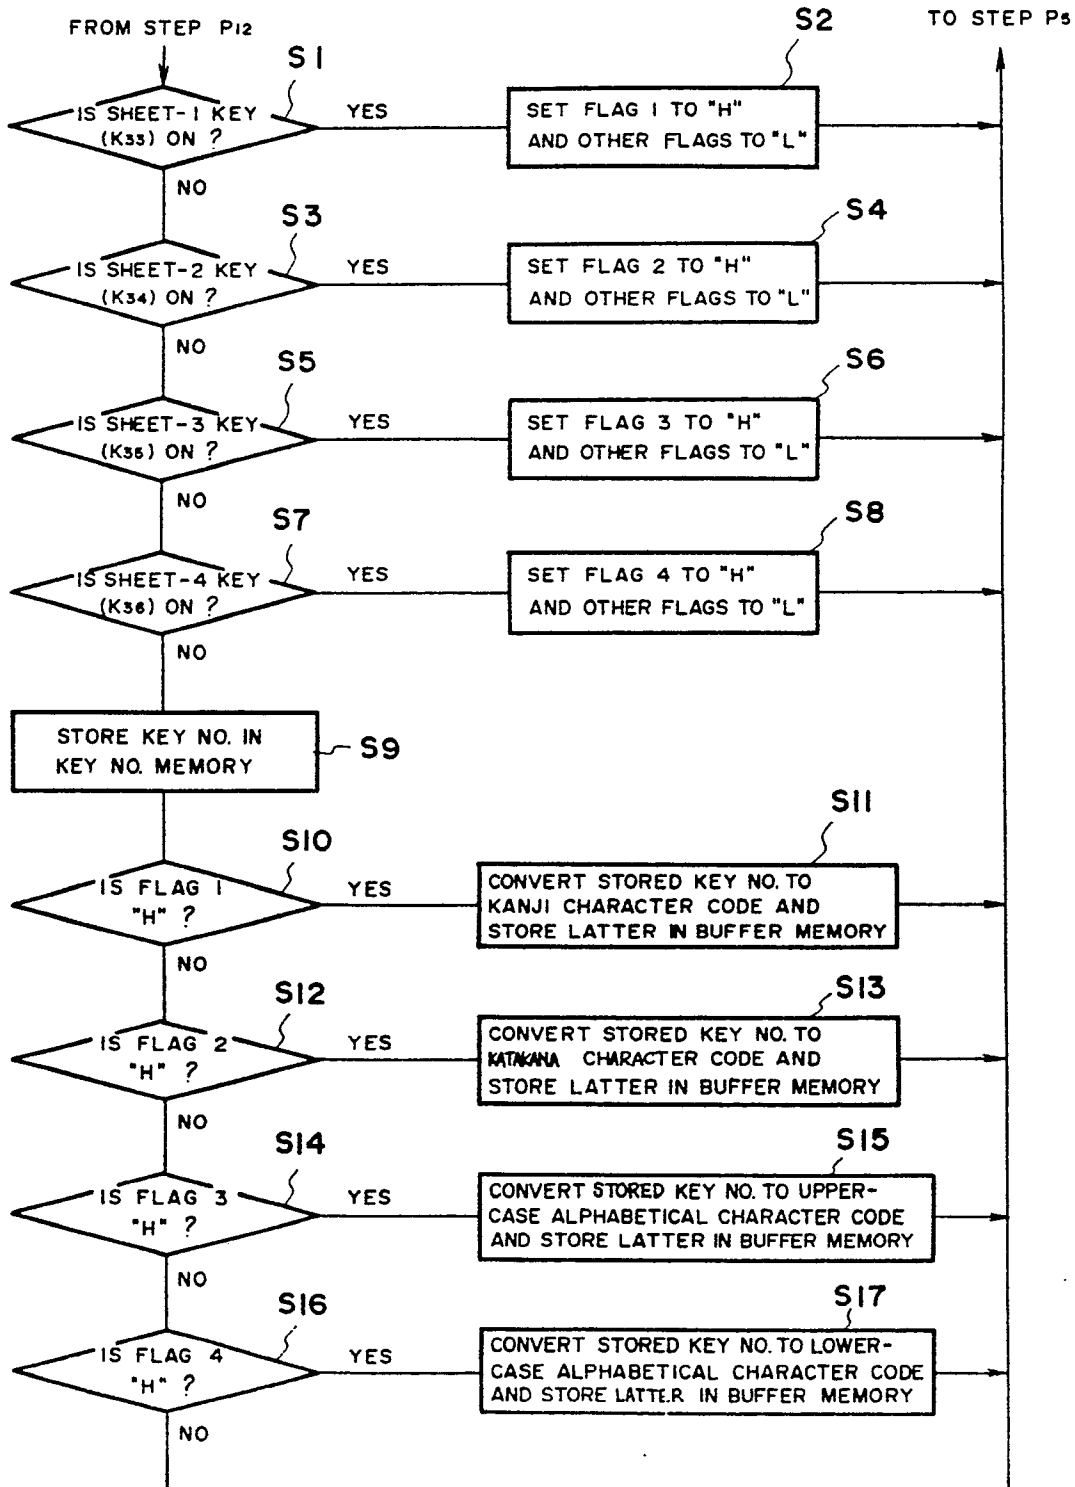


Fig.19 ($\frac{1}{4}$)

(A)

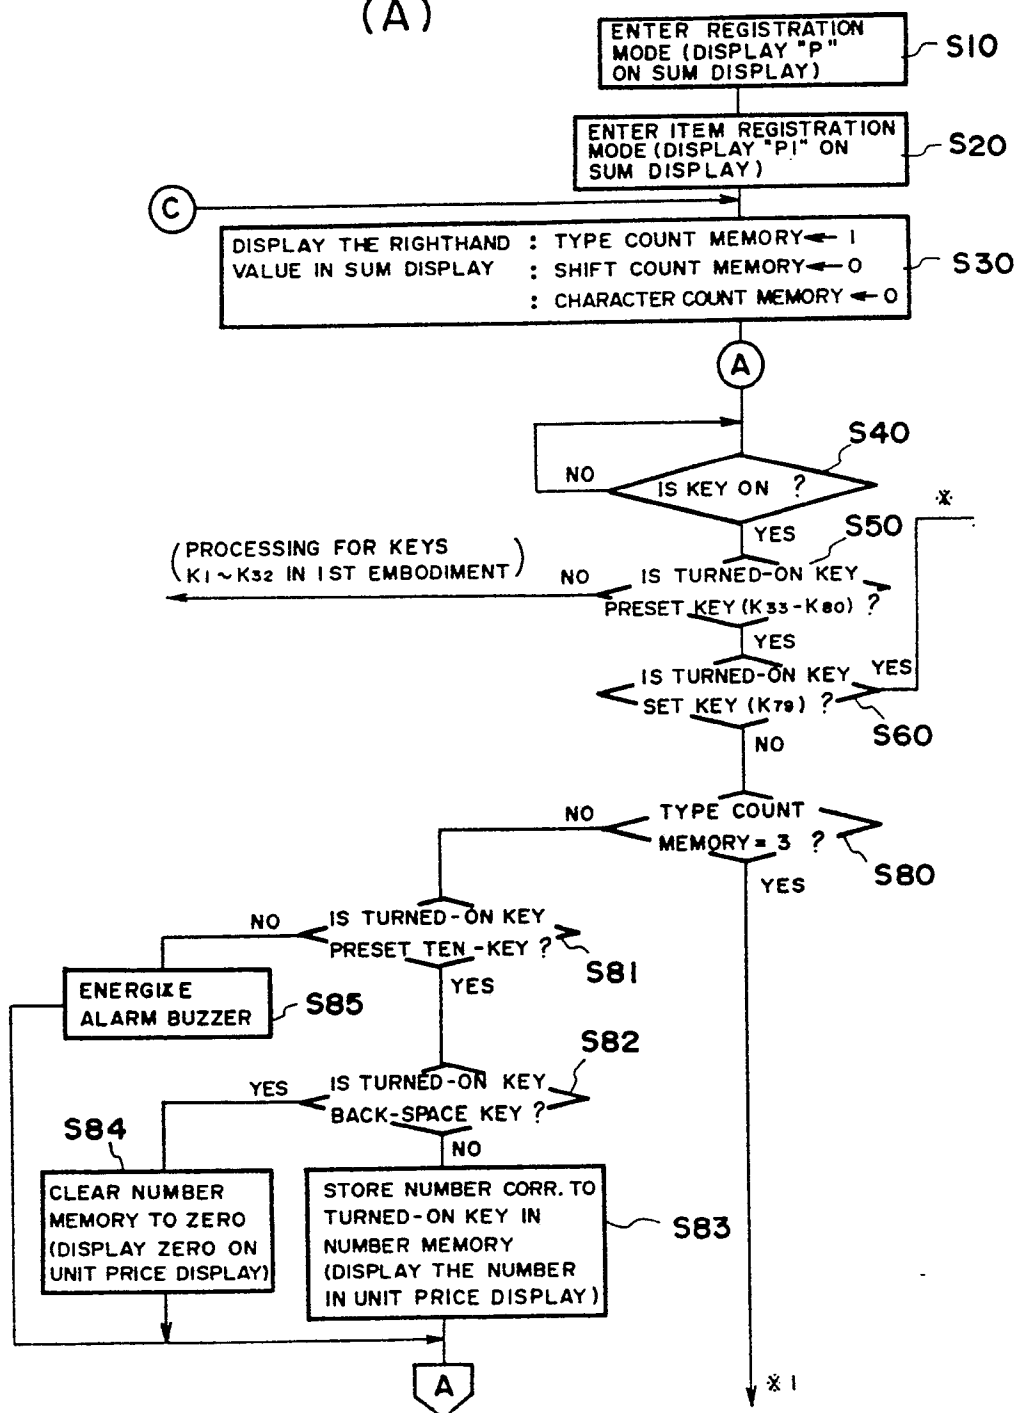


Fig. 19 (1/4)

(B)

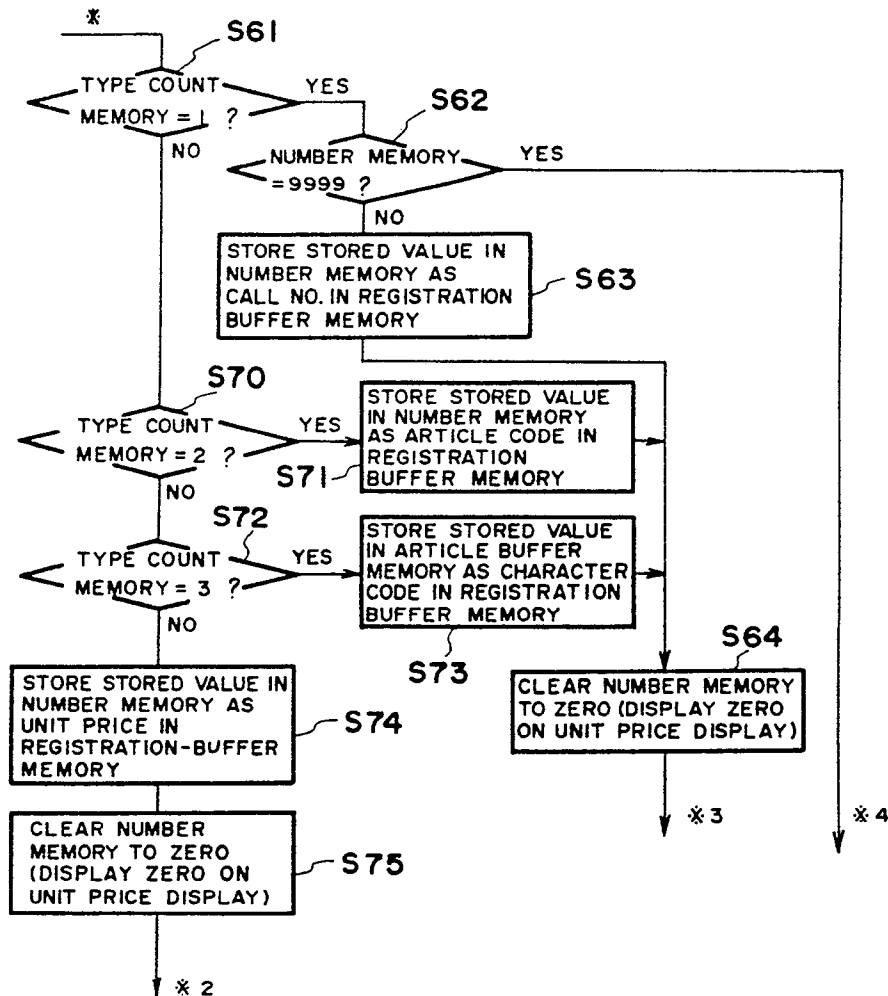


Fig. 19 (2/4)

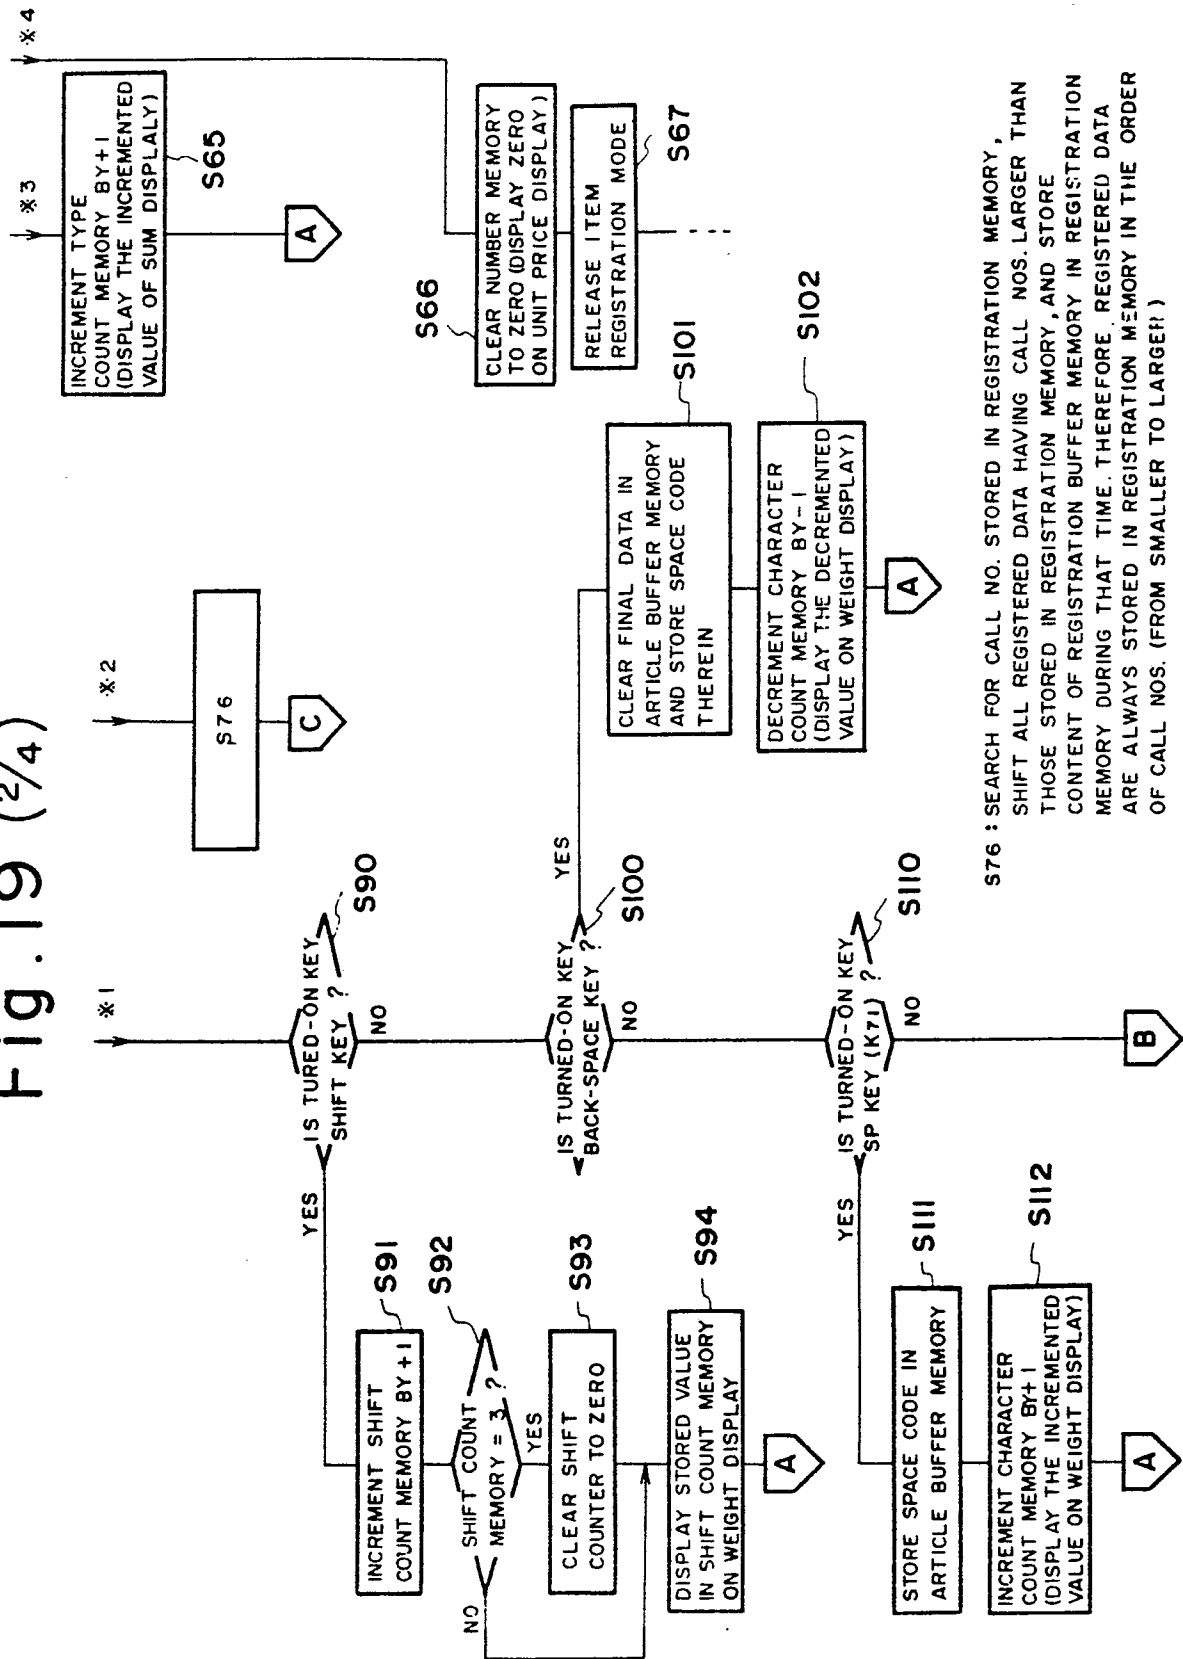


Fig. 19 (3/4)

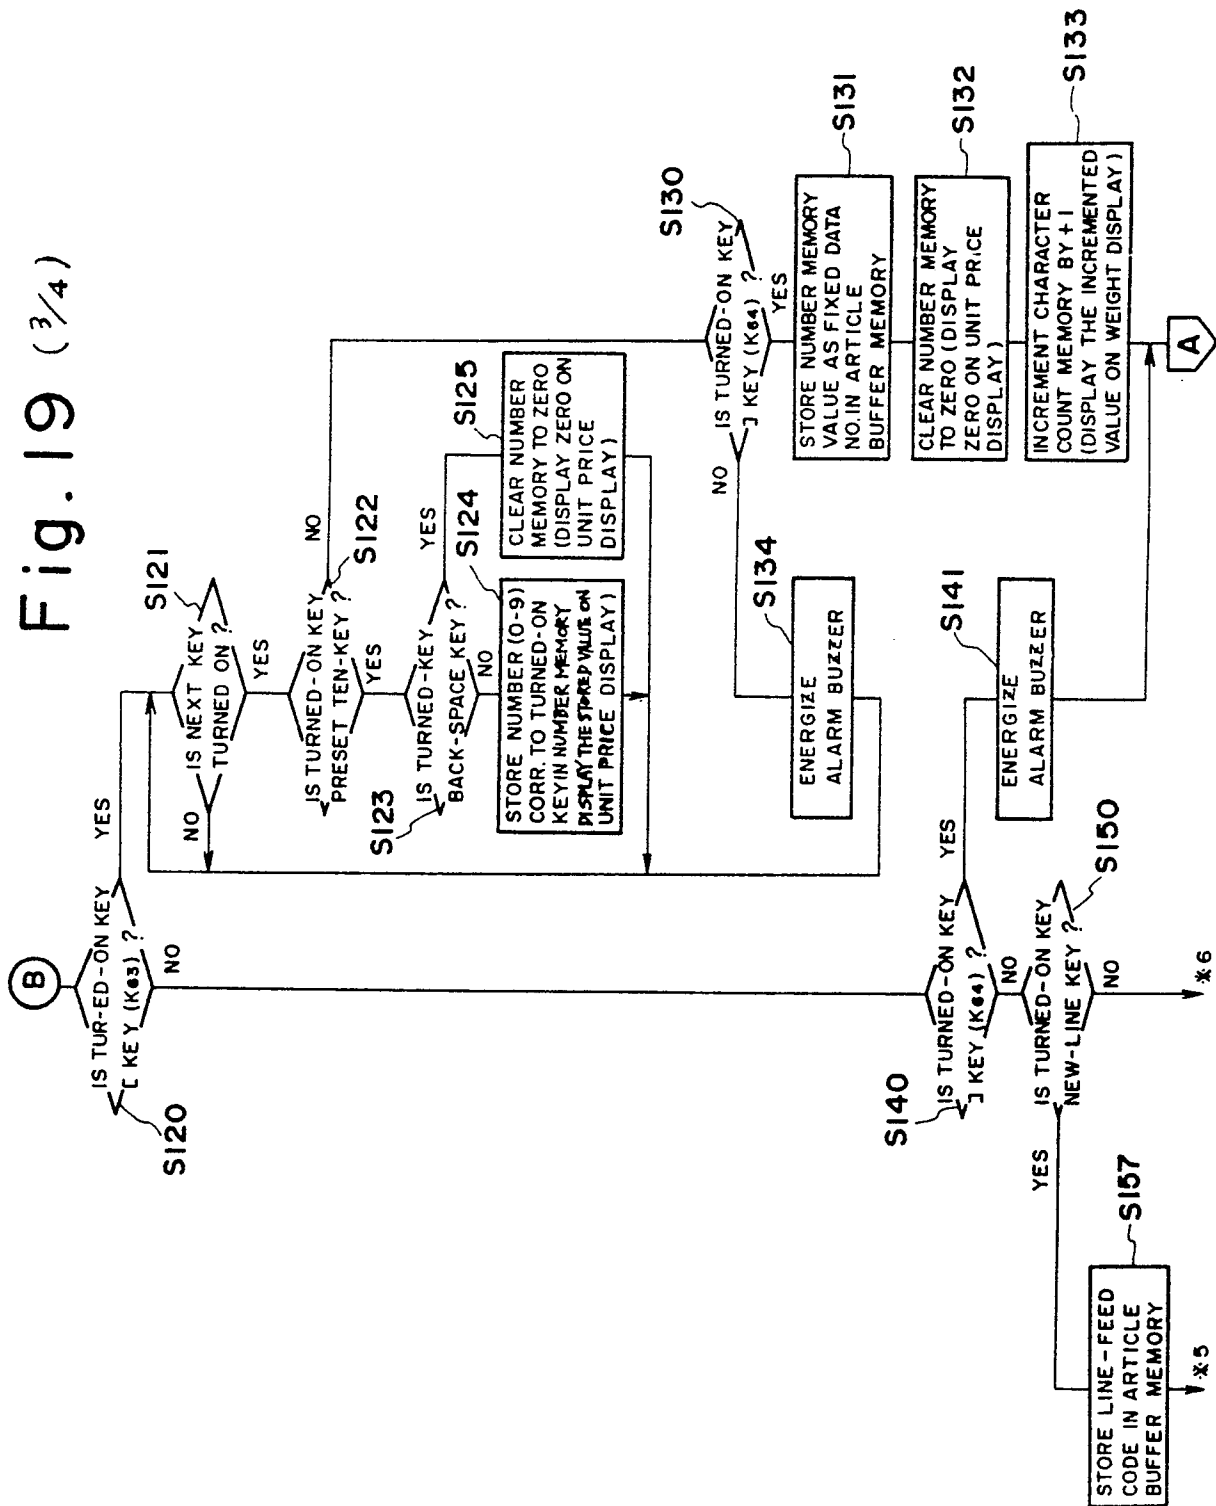


Fig. 19 (4/4)

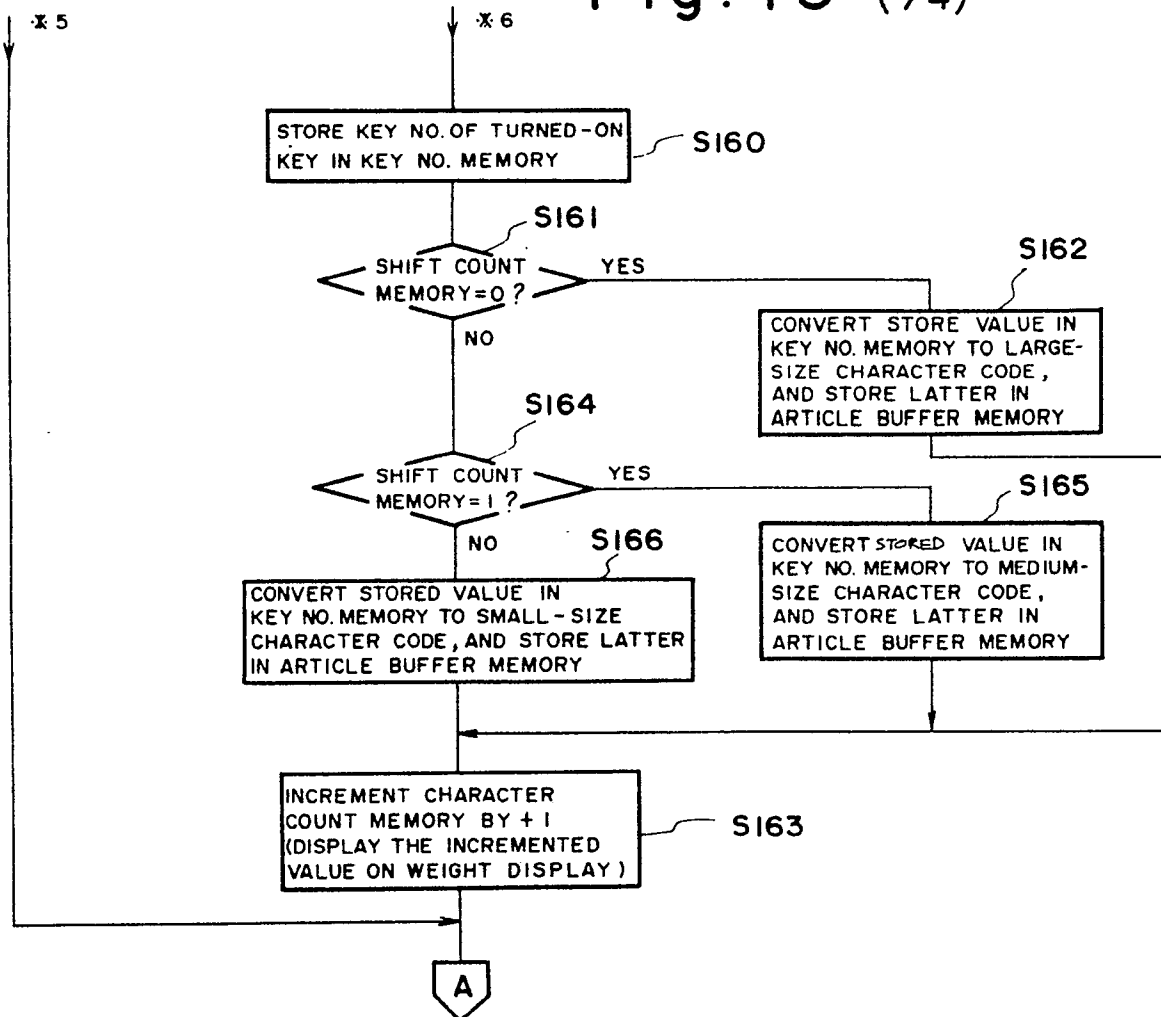


Fig. 20 (1/2)


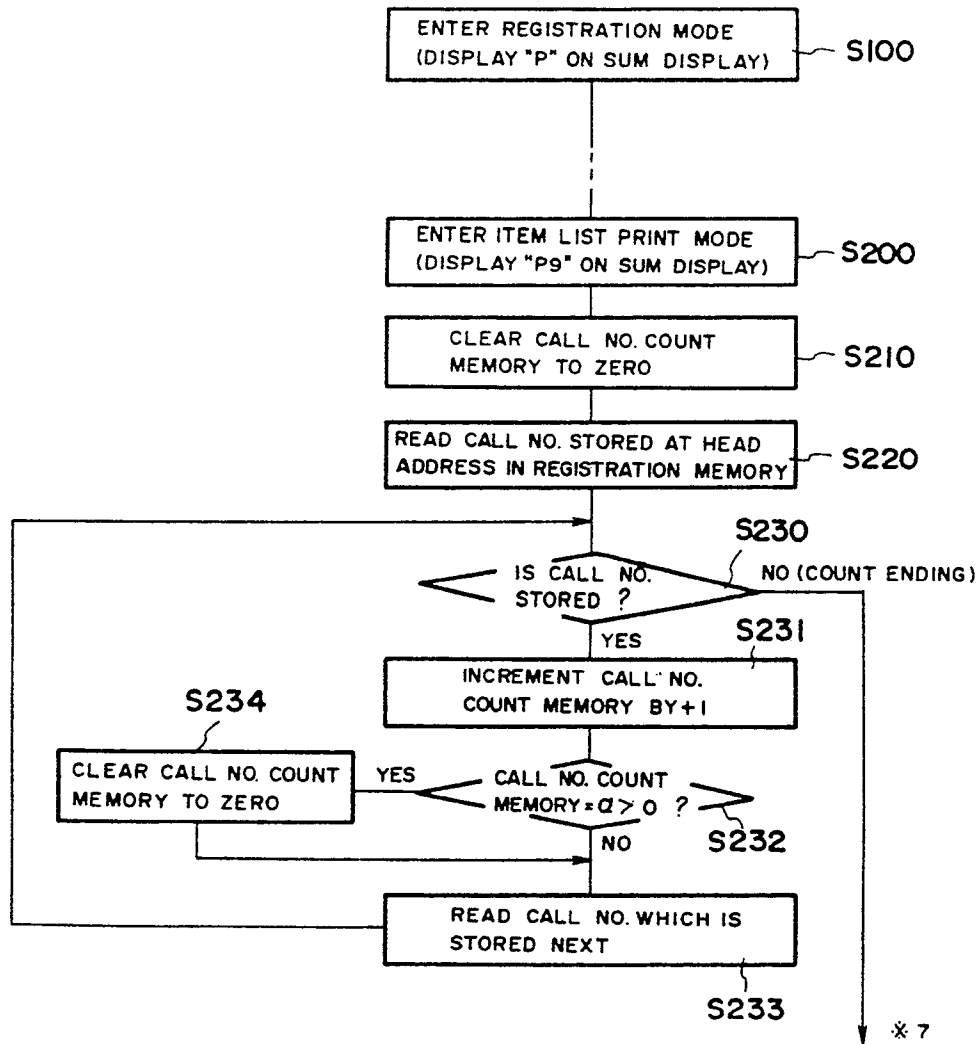


Fig. 20 (2/2)

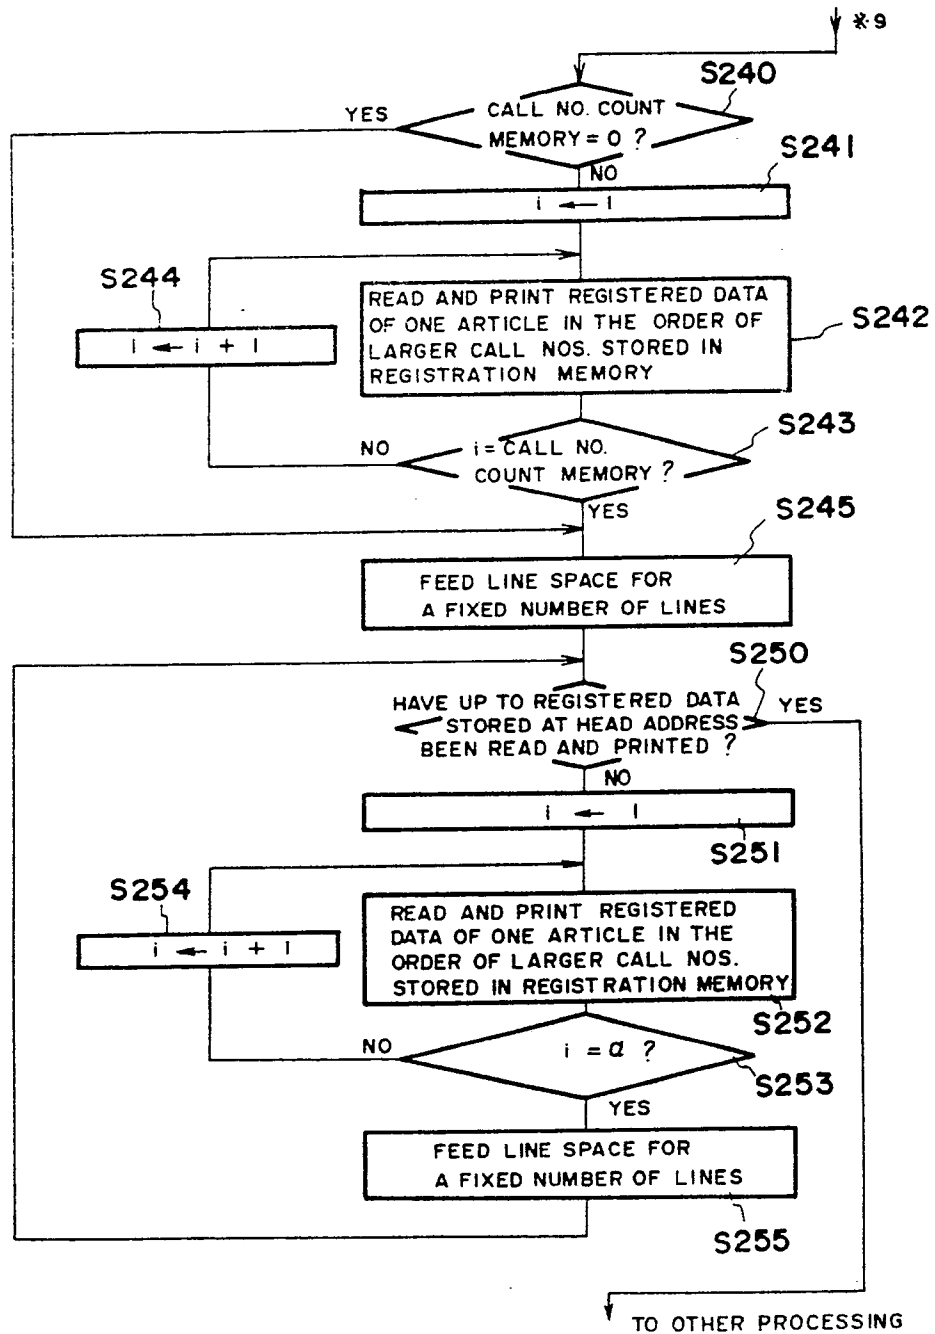

EXAMPLE OF RAM

CALL NO.	ARTICLE CODE	ARTICLE CHARACTER CODE						
10	824530	02	05	05	06	32	301	-----
12	824537	02	05	05	06	32	301	-----
13	824538							

REGISTRATION MEMORY &

REGISTRATION MEMORY a

TYPE COUNT MEMORY b

SHIFT COUNT	MEMORY	c
-------------	--------	---

CHARACTER COUNT
MEMORY

CALL NO. COUNT
MEMORY

ARTICLE BUFFER
MEMORY

REGISTRATION
BUFFER MEMORY

NUMBER MEMORY

KEY NO. MEMORY

OTHER MEMORIES