

19



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



11 Publication number:

**0 341 251 B1**

12

## EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification: **17.03.93** 51 Int. Cl.<sup>5</sup>: **H01R 9/00**

21 Application number: **88900746.4**

22 Date of filing: **18.12.87**

86 International application number:  
**PCT/US87/03389**

87 International publication number:  
**WO 88/05610 (28.07.88 88/17)**

54 **ELECTRICAL TAP CONNECTOR ASSEMBLY.**

30 Priority: **20.01.87 US 4512**  
**12.02.87 US 13748**

43 Date of publication of application:  
**15.11.89 Bulletin 89/46**

45 Publication of the grant of the patent:  
**17.03.93 Bulletin 93/11**

84 Designated Contracting States:  
**DE FR GB IT NL**

56 References cited:  
**EP-A- 20 188**  
**US-A- 3 627 929**

73 Proprietor: **THE WHITAKER CORPORATION**  
**Suite 450, 4550 New Linden Hill Road**  
**Wilmington, Delaware 19808(US)**

72 Inventor: **PAUZA, William, Vito**  
**R.D. 2, Box 82**  
**Palmyra, PA 17078(US)**

74 Representative: **Warren, Keith Stanley et al**  
**BARON & WARREN 18 South End Kensington**  
**London W8 5BU (GB)**

**EP 0 341 251 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

The present invention relates to the field of electrical tap connectors and, more particularly, to a tap connector assembly for coaxial cable networks.

One expanding use for electrical tap connectors is in the field of premises wiring. Premises wiring typically carries voice, electronic data, and/or electrical power over one or more electrical conductors in a communications cable network. Workstations situated at various locations are linked to the cable network by tap connectors.

The communications cable may take various forms. For example, the cable may comprise a twisted pair cable containing insulated wires that are spirally twisted together in pairs. Alternatively, the cable may comprise a coaxial cable containing one or more insulated conductors surrounded by a cylindrical, conductive sheath.

Tap connectors for coaxial cable networks were frequently relatively difficult to install and required special tools and skills for proper installation. In addition, many coaxial tap connectors were not effective in maintaining the integrity of the overall network when the connectors were not in use or when external apparatus was being plugged into or disconnected from the network.

The present invention relates to a tap connector assembly comprising, a connector housing, first and second signal carrying contacts carried by the housing and adapted to be electrically connected to signal carrying conductors of the first and second cables, respectively, a third grounding contact carried by the housing and adapted to be connected to conductive sheaths of the first and second cables, and the housing having a construction for receiving a mating connector, whereby the first, second, and third contacts are engaged by the mating connector when the mating connector is received to provide electrical connection of the first and second signal carrying contacts and the third grounding contact with the mating connector. The present invention consists in a tap connection assembly as defined in claim 1.

An embodiment of the present invention will now be described by way of example with reference to the accompanying drawings in which:

Fig. 1 is an enlarged perspective view of a tap connector assembly;

Fig. 2 is a partially exploded, perspective view of the tap connector assembly of Fig. 1;

Fig. 3 is a partially exploded, cross sectional view of the receptacle tap connector of Figs. 1 and 2;

Figs. 4 and 5 are cross sectional views of the tap connector assembly of Figs. 1-3 in unmated and mated condition, respectively;

Figs. 6 and 7 are cross sectional views of the unmated and mated connector assemblies of Figs. 4 and 5 looking in the direction of arrows 6-6 and 7-7 in Figs. 4 and 5, respectively;

Figs. 8 and 9 are cross sectional views of the unmated and mated connector assemblies of Figs. 4 and 5 looking in the direction of arrows 8-8 and 9-9 in Figs. 4 and 5, respectively; and

Fig. 10 is a rear perspective view of the plug connector of Figs. 1 and 2.

Figs. 1, 2, 4, and 5 illustrate an electrical tap connector assembly. The connector assembly is generally designated by reference numeral 10 and includes a receptacle tap connector 6 adapted to be incorporated into an electrical cable network, and a plug connector 8 mateable therewith to connect external apparatus into the cable network. The connector assembly is particularly designed to provide access to a premises wiring system although it should be understood that it is not intended to restrict the invention to any particular application.

Receptacle tap connector 6 is adapted to connect two cables 12a and 12b in the cable network. As shown in Figs. 2 and 3, cables 12a and 12b include an outer jacket 21 of polymeric, insulative material coaxially and concentrically surrounding an electrically conductive grounding sheath 22. Electrically conductive sheath 22, in turn, surrounds an insulative sheath 23 which contains the one or more transmission lines of the cables. The transmission lines can include one or more electrical conductors and/or one or more optical fiber conductors. In the embodiment described herein, the cables comprise coaxial cables carrying a single, signal carrying electrical center conductor 24 axially within the conductive outer sheath 22.

Receptacle tap connector 6 is illustrated in detail in Figs. 2-5 and is designed to be easily assembled and installed into a cable network without specialized tools or skills. Generally, receptacle tap connector 6 includes housing assembly 14, a pair of fitting assemblies 16 and 17, and a signal carrying contact assembly 18. Housing assembly 14 will be described in greater detail hereinafter, but generally comprises an elongated, molded plastic housing 30 having a central cavity portion 31 for receiving and supporting signal carrying contact assembly 18 and a grounding contact 19, and a pair of end portions 32 and 33 for receiving and supporting fitting assemblies 16 and 17, respectively, when the connector is assembled.

Fitting assemblies 16 and 17 are identical, and the same reference numerals are used herein to describe their construction. Each fitting assembly comprises a molded plastic, bolt shaped fitting 41 having an electrically conductive member 42 attached thereto. Fitting 41 has a central passageway 43 extending axially therethrough, and an internal

shoulder 44 of the passageway divides the passageway into first passageway portion 43a and second, reduced diameter, passageway portion 43b. Conductive member 42 comprises a relatively thin, metal member shaped to define a sleeve portion 46 and a flange portion 47. The sleeve and flange portions have a central opening 49 passing therethrough which is adapted to be aligned with passageway 43 in fitting 41 when the two components are assembled. More particularly, and as best shown in Figs. 3-5, conductive member 42 is mounted to fitting 41 by extending sleeve portion 46 into passageway 43 until flange portion 47 contacts end face 51 of fitting 41. Following insertion, the end of sleeve portion 46 extending into passageway portion 43a is flared outwardly, as indicated at 46a in Figs. 3-5, by a suitable tool to secure conductive member 42 to the fitting while allowing the conductive member to freely rotate relative to the fitting.

Fitting assemblies 16 and 17 so constructed comprise clamping members and are adapted to receive the ends of cables 12a and 12b, respectively. Prior to insertion of the cables into the fittings, the cables are prepared by cutting and stripping off a length of their outer dielectric jacket 21 to expose a portion of braided, conductive sheath 22 therein. A lesser portion of the conductive sheath is also removed to expose inner dielectric sheath 23. The cables so prepared are then inserted into and through passageways 43 of fittings 41 from ends 52 thereof and through openings 49 in conductive members 42. Insertion of the cables is limited by impingement of their outer jackets 21 against flared portions 46a of sleeve 46; however, conductive sheaths 22, dielectric sheath 23, and center conductors 24 pass fully through openings 49. Exposed conductive outer sheaths 22, after being passed through the fitting assemblies, are then fanned out, as shown at 22a, over outer surfaces 53 of radially extending flange portions 47 of conductive members 42 to complete assembly of the cables to the fitting assemblies. As will be explained hereinafter, surfaces 53 function as first sheath engaging surfaces or clamping surfaces for clamping the conductive sheaths to receptacle connector 6.

Each of the fittings 41 includes an outer, threaded surface portion 56 for engagement with housing assembly 14 and a fluted portion 57 to provide an enhanced gripping surface for the worker to assist in insertion of the fitting assemblies into the housing assembly.

Fitting assemblies 16 and 17 are adapted to be inserted into and secured to end portions 32 and 33, respectively, of housing 30. End portions 32 and 33 define recesses 71 and 72, respectively, which are internally threaded for attachment to

threaded portions 56 of fitting assemblies 16 and 17, respectively. Recesses 71 and 72 have back walls 74 and 75, respectively, having small central apertures 76 and 77, respectively (Fig. 3), therein for receiving center conductors 24 of the cables and their insulative coating 23, as shown in Figs. 4 and 5. The housing is molded from an insulative plastic to define narrow slots 81 and 82 extending into cavities 71 and 72, respectively, adjacent back walls 74 and 75 thereof. These slots are adapted to receive disk like portions 91 and 92 of grounding contact 19. Outer surfaces 93 and 94 of disk like portions 91 and 92, respectively, define second sheath engaging surfaces or clamping surfaces to be clamped against first sheath engaging surfaces 53 on flange portions 47 of conductive members 42 to clamp fanned out portions 22a of outer conductive sheaths 22 therebetween when fitting assemblies 16 and 17 are mounted to housing assembly 14. Disk like portions 91 and 92 include central apertures 90 and 95 for receipt of center conductors 24 and their insulative sheaths 23 when the cables are extended into housing assembly 14.

As best shown in Fig. 3, disk like portions 91 and 92 of grounding contact 19 are of domed resilient spring configuration to provide stored spring energy to compensate for any creep characteristics of the plastic components when fitting assemblies 16 and 17 are screwed into ends 32 and 33 of housing 30. The grounding contact also includes a central strip 98 connecting the disk like ends 91 and 92 and a center ground bar 99 positioned at right angles along one side of the strip. The grounding contact is secured to the housing by four bosses 96 on the central strip (Fig. 2) which are pressed into the inner surfaces of the sides of molded housing 30. Spring fingers 97 may also be provided on center ground bar 99 to engage a surface on housing 30 to further lock the grounding contact to the housing after the grounding contact is inserted into the housing.

When grounding contact 19 is inserted into housing 30, domed, disk like portions 91 and 92 extend into slots 81 and 82, respectively, such that disk like portions 91 and 92 are positioned within cavities 71 and 72 adjacent back walls 74 and 75 thereof. Center ground bar 99 extends through a slot 100 formed in the side of housing 30.

To assemble receptacle connector 6, grounding contact 19 is first inserted into housing 30. Fitting assemblies 16 and 17, having the ends of cables 12a and 12b, respectively, attached thereto, are then threaded into ends 32 and 33 of housing 30. Fanned out braided portions 22a of outer sheaths 22 are sandwiched between sheath engaging surfaces 53 on contact members 47 and sheath engaging surfaces 93 and 94 on disk like portions 91 and 92. As the fitting assemblies are screwed

onto the housing, domed disk like portions 91 and 92 collapse in a fashion similar to a bellville washer and are capable of recovering through spring action to an extent necessary to compensate for movement due to plastic creep of the threaded plastic elements. The conductive sheaths of the cables are thus firmly clamped to the connector and electrically connected to grounding contact 19 therein.

Second clamping surfaces 93 and 94 on disk like portions 91 and 92 are preferably roughened to more firmly clamp fanned out conductive sheaths 22a thereagainst. Such roughened surfaces can comprise, for example, a plurality of raised ridges or depressions on the surfaces. For illustrative purposes, Fig. 3 shows (in cross section) a plurality of circular ridges 151 on clamping surface 93, and a plurality of radial ridges 152 on clamping surface 94.

During threading of fitting assemblies 16 and 17 into housing 30, dielectric covered, but unshielded, signal carrying, center conductors 24 of cables 12a and 12b pass through holes 90 and 95 in disk like portions 91 and 92 of the grounding contact and into central cavity portion 31 of housing 30. The cables thus also function to retain grounding contact 19 within housing 30 when the receptacle connector is fully assembled. The covered center conductors pass over U shaped rib structures 101 and 102 formed in central portion 31 which support the covered center conductors and function as anvils for connection of the center conductors to signal carrying contact members as will be explained below. A centrally located wall 106 extends across central cavity portion 31 and serves as a stop and a dielectric barrier to ensure that the center conductors entering the central portion of the housing from the opposite ends do not inadvertently contact one another. Housing assembly 14 is now ready to receive signal carrying contact assembly 18.

Signal carrying contact assembly 18 comprises a contact housing 121 of molded plastic and a pair of signal carrying contacts 122 and 123 supported within the housing.

Signal carrying contacts 122 and 123 each include depending U shaped portions which define slot means 131 composed of first and second slots 131a and 131b formed in the two sides of the U shaped portions to receive exposed insulating layers 23 of cables 12a and 12b. Tapered areas 133 on the bottom of each slot guide insulating layers 23 into the slots, and edges 132 thereof comprise cutting edges for cutting through insulation layers 23 when contact assembly 18 is inserted into housing 30 to provide direct electrical contact between center conductors 24 of cables 12a and 12b and contacts 122 and 123, respectively. When contact

assembly 18 is fully inserted into housing 30, center conductors 24 extend through narrow slot portions 134a and 134b of slots 131a and 131b to firmly clamp conductors 24 and reliably establish electrical contact between the contacts and the center conductors (see Figs. 8 and 9). Insulation displacement contacts of the type utilized herein are known in the art and are disclosed, for example in U.S. Patent No. 3,617,983.

On the upper ends of signal carrying contacts 122 and 123 opposite slot means 131 and extending at right angles along one side of the contacts, are normally closed switch means 140 defined by switch arms 141 and 142. Switch arm 141 is fixed to contact 122 while longer switch arm 142 is movable with respect to contact 123. Switch means 140 is designed to provide a first signal path between signal carrying contacts 122 and 123 and, hence, between signal carrying conductors 24 of cables 12a and 12b.

Switch arms 141 and 142 include elongated embossment features 161 and 162 near their outer tips. Embossment features 161 and 162 are oriented to be at right angles to one another to describe a cross contact configuration when the switch arms are in contact with one another. Movable switch arm 142 is preferably formed in a preloaded condition such that when it is installed into the contact housing, movable arm 142 is in a somewhat flexed condition to ensure firm, reliable, electrical connection of the switch arms.

Signal carrying contacts 122 and 123 also include flat portions 163 and 164 formed as continuations of the U shaped portions. Flat portions 163 and 164 define connection areas for contact terminals contained in mating plug connector 8 as will be explained below. As best shown in Figs. 4 and 5, molded features 171 and 172 on contact housing 121 provide support for the signal carrying contacts; and curved contact portions 173 and 174 between the flat and U shaped portions of the contacts bear against the molded contact housing features to provide support during insulation displacement connection with the cables.

Insulation displacement connection occurs when signal carrying contact housing assembly 18 is inserted into the central cavity of connector housing 30. During insertion of contact assembly 18, the center conductors of the cables are received within tapered areas 133 of slot means 131 of the contacts. During continued insertion, cutting edges 132 cut through protective sheaths 23 of the cables and allow the thus exposed center conductors of the cables to pass into narrow portions 134a and 134b of the slots to electrically connect the center conductors to the contacts. Anvils 101 and 102 in connector housing 30 and molded portions 171 and 172 in signal carrying contact housing 121

provide backup support during cutting of the insulative layer of the cable. The size of narrow slot portions 134a and 134b is such as to firmly and reliably retain center conductor wires 24 therein; and by providing slots in the two sides of each U shaped contact, even greater reliability is achieved. When the signal carrying contact housing is inserted into the connector housing, center ground bar 99 of grounding contact 19 is received within a tapered slot 105 in the signal carrying contact housing as best illustrated in Figs. 6 and 7.

Signal carrying contact housing 121 includes passive latching features 126 on its lowermost four corners which are positioned to engage projections 125 on connector housing 30, and active latching features 127 on each side to cooperate with latching features 128 on housing 30 to secure contact assembly 18 within connector housing 30.

When signal carrying contact assembly 18 is inserted into housing assembly 14, assembly of receptacle tap connector 6 and its connection to cables 12a and 12b is completed. When the receptacle tap connector is not being used to tap into the cable network, switch arms 141 and 142 are in contact; and switch means 140 is closed as shown in Fig. 8 to provide a first signal path within the receptacle tap connector housing between signal carrying contacts 122 and 123 and, hence, between center conductors 24 of cables 12a and 12b. Similarly, the outer conductive sheaths of cables 12a and 12b are connected to grounding contact 19.

To tap into the cable network, plug connector 8 is inserted into recess or cavity 175 within signal receiving contact housing 121 of receptacle tap connector 6. Plug connector 8 is connected to an electrical cable 176 having a conductive sheath 177, a pair of signal carrying, insulation covered conductors 183 and 184, and an insulation covered, third conductor 182. The conductors 182, 183, 184 include corresponding conductive portions 182', 183', 184' connected to corresponding conductive terminals 186, 187, 188, each of the terminals having a blade configuration that is of the type disclosed in U.S. Patent No. 2,791,755. The terminals 186, 187, 188 are mounted on an external surface of an insulative housing 181 of plug 8 and are oriented on housing 181 to face, respectively, signal carrying contacts 122, 123 and ground bar 99 of grounding contact 19. At least a portion of plug 8 and terminals 186, 187, 188 are constructed for removable insertion into a plug receiving opening or recess 175 of contact housing 121. Upon said insertion, housing 181 of plug 8 urges terminal 186 to engage compressibly and slidably impinge ground bar 99 to establish an electrical connection of conductive sheath 177 of plug 8 to conductive sheaths 22 of cables 12a and 12b (see Figs. 6 and

7. Also upon said insertion, housing 181 of plug 8 urges terminals 187 and 188 to engage compressibly and slidably impinge, respectively, flat surfaces 163 and 164 of signal carrying contacts 122 and 123 to establish a second signal path between the first and second signal carrying contacts through plug 8 (see Figs. 4 and 5). Cables 182, 183, and 184 are retained within plug connector housing 181 by known stuffer boxes 191, 192, and 193.

Plug connector 8 includes a latching member 201 having a portion 207 adapted to engage a latching surface 202 in contact housing 18 when the plug connector is inserted into the receptacle connector to retain the connectors in mated condition (see Figs. 6, 7, and 10). Latch 201 includes an extended finger portion 203 to readily permit the plug connector to be disconnected from the receptacle connector when desired. Extended ribs 211 and 212 formed in contact housing 121 help guide the plug connector into plug receiving cavity 175 of the contact housing during mating.

Plug connector housing 181 is configured to define a cam surface 205 (see Figs. 9 and 10) on the lower outside corner thereof. Cam surface 205 is positioned to engage movable switch arm 142 during mating of the connectors and to disengage it from switch arm 141 to interrupt the first signal path between signal carrying contacts 122 and 123. More particularly, during mating of the connectors, ground connection is first made between grounding contact center bar 99 and grounding contact terminal 186 on the plug connector to connect the conductive sheaths in cables 12a and 12b to grounding cable 182. Further insertion of the plug connector into cavity 175 causes signal carrying contacts 187 and 188 on the plug connector to engage flat portions 163 and 164 on contacts 122 and 123, momentarily creating a dual signal path through both the normally closed switch means 140 and the the plug connector. Further insertion and bottoming of the plug connector, however, cause cam surface 205 to move movable switch arm 142 away from switch arm 141, thereby opening switch means 140 and leaving only a series connection from the cables 12a and 12b through the plug connector into workstation apparatus (not shown) connected to the plug connector. Of course, if and when the plug connector is disconnected from the receptacle connector, movable switch arm 142 is released by cam 205 and automatically returns back into contact with switch arm 141 to close switch means 140 and reestablish the first signal path between signal carrying contacts 122 and 123.

With the present invention, accordingly, a tap connector assembly is provided which maintains network integrity at all times. The assembly in-

cludes a receptacle tap connector mountable to a coaxial cable network and which provides a first electrical signal path between two cables when the tap is not in use. The assembly also includes a plug connector mateable with the receptacle tap connector, which, when mated interrupts the first signal path after establishing a second signal path between the two cables through the plug connector and external apparatus connected thereby to establish a series connection of the external apparatus into the network.

The connector assembly is manufactured primarily from stamped and formed metal strip and molded plastic rather than machined, precision made parts resulting in a connector that is of lower cost and capable of high volume production.

It should be understood that the invention can take numerous other forms. Accordingly, it should be understood that the invention should be limited only insofar as is required by the scope of the following claims.

#### Claims

1. A tap connector assembly (10) comprises, a housing (14), a conductive grounding contact (19) carried by the housing (14) for connection to corresponding conductive sheaths (22,23) of first and second electrical cables (12a,12b), and conductive first and second signal carrying contacts (122,123) carried by the housing (14) for connection to corresponding signal carrying conductors (24,24) of the first and second electrical cables (12a,12b), portions (141,142) of the first and second signal carrying contacts (122,123) are electrically connected together, a plug (8) connected to a third electrical cable (176), the plug having corresponding conductive electrical terminals (186,187,188) for connection to respective conductors (182,183,184) of the third electrical cable (176), and the housing (14) has a cavity (175) to receive the plug (8); characterized in that;
  - the portions (141,142) of the first and second signal carrying contacts (122,123) comprise a normally closed switch (140), the electrical terminals (186,187,188) of the plug (8) include two signal carrying terminals (187,188) connected to two signal carrying conductors (183,184) of the third electrical cable (176), and the plug (8) is constructed for receipt in the cavity (175) to connect a grounding terminal (186) of the plug (8) to the grounding contact (19) carried by the housing (14), and to connect each of the signal carrying terminals (187,188) of the plug (8) to a corresponding one of the signal carrying contacts (122,123) carried by the housing (14), and to engage the plug (8) against the switch (140) and separate the portions (141,142) of the signal carrying contacts (122,123) that comprise the switch (140).
2. The tap connector assembly (10) of claim 1 further characterized in that; first and second clamping members (16,17) are assembled on the housing (14) for clamping the conductive sheaths (22,22) of said first and second cables (12a,12b), respectively, to said grounding contact (19).
3. The tap connector assembly (10) of claim 2 further characterized in that; said first and second clamping members (16,17) include first and second conductive members (42,42), sheath engaging surfaces (53,53), said grounding contact (19) includes a pair of sheath engaging surfaces (93,94).
4. The tap connector assembly (10) of claim 3, further characterized in that; said first and second clamping members (16,17) comprise first and second fittings (41,41) having axial passageways (43,43) for receiving said first and second cables (12a,12b), respectively, and wherein said housing (14) includes apertures (76,77) aligned with the passageways (43,43) in said first and second fittings (41,41) when said first and second fittings (41,41) are attached to said housing (14).
5. The tap connector assembly (10) of claim 4, further characterized in that; said sheath engaging surfaces (53,53,93,94) of said fittings (41,41) and said grounding contact (19) comprise substantially disk shaped surfaces.
6. The tap connector assembly (10) of claim 4, further characterized in that; said fittings (41,41) are threadably attached to said housing (14).
7. The tap connector assembly (10) of claim 1, further characterized in that; said first and second signal carrying contacts (122,123) comprises insulation displacement contacts.
8. The tap connector assembly (10) of claim 1, further characterized in that; a movable switch arm (142) is a part of one of said signal carrying contacts and is displaced by said plug (8) to open said normally closed switch (140).

## Patentansprüche

1. Abzweigverbinderanordnung (10) mit einem Gehäuse (14), mit einem leitfähigen Erdungskontakt (19), der zur Verbindung mit entsprechenden leitfähigen Umhüllungen (22, 23) eines ersten und eines zweiten elektrischen Kabels (12a, 12b) von dem Gehäuse (14) getragen ist, mit einem ersten und einem zweiten von dem Gehäuse (14) getragenen Signalübertragungskontakt (122, 123) zur Verbindung mit entsprechenden signalführenden Leitern (24, 24) des ersten und des zweiten elektrischen Kabels (12a, 12b), wobei Bereiche (141, 142) des ersten und des zweiten Signalübertragungskontakts (122, 123) elektrisch miteinander verbunden sind, und mit einem Stecker (8), der mit einem dritten elektrischen Kabel (176) verbunden ist, wobei der Stecker entsprechende leitfähige elektrische Anschlüsse (186, 187, 188) zur Verbindung mit den jeweiligen Leitern (182, 183, 184) des dritten elektrischen Kabels (176) aufweist und wobei das Gehäuse (14) einen Hohlraum (175) zur Aufnahme des Steckers (8) besitzt, dadurch gekennzeichnet, daß die Bereiche (141, 142) des ersten und des zweiten Signalübertragungskontakts (122, 123) einen normalerweise geschlossenen Schalter (140) bilden, daß die elektrischen Anschlüsse (186, 187, 188) des Steckers (8) zwei Signalübertragungsanschlüsse (187, 188) beinhalten, die mit zwei signalführenden Leitern (183, 184) des dritten elektrischen Kabels (176) verbunden sind, und daß der Stecker (8) zur Aufnahme in dem Hohlraum (175) ausgebildet ist, um einen Erdungsanschluß (186) des Steckers (8) mit dem von dem Gehäuse (14) getragenen Erdungskontakt (19) zu verbinden und jeden der Signalübertragungsanschlüsse (187, 188) des Steckers (8) mit einem entsprechenden Signalübertragungskontakt der von dem Gehäuse (14) getragenen Signalübertragungskontakte (122, 123) zu verbinden sowie den Stecker (8) mit dem Schalter (140) in Eingriff zu bringen und die Bereiche (141, 142) der den Schalter (140) bildenden Signalübertragungskontakte (122, 123) voneinander zu trennen.
2. Abgreifverbinderanordnung (10) nach Anspruch 1, dadurch gekennzeichnet, daß ein erstes und ein zweites Klemmelement (16, 17) an dem Gehäuse (14) angebracht sind zum Klemmen der leitfähigen Umhüllungen (22, 22) des ersten bzw. des zweiten Kabels (12a, 12b) gegen den Erdungskontakt (19).
3. Abgreifverbinderanordnung (10) nach Anspruch 2, dadurch gekennzeichnet, daß das erste und das zweite Klemmelement (16, 17) ein erstes und ein zweites leitfähiges Element (42, 42) und Umhüllungsangreifflächen (53, 53) beinhalten und der Erdungskontakt (19) ein Paar Umhüllungsangreifflächen (93, 94) beinhaltet.
4. Abzweigverbinderanordnung (10) nach Anspruch 3, dadurch gekennzeichnet, daß das erste und das zweite Klemmelement (16, 17) ein erstes und ein zweites Anschlußstück (41, 41) mit einer axialen Passage (43, 43) zur Aufnahme des ersten bzw. des zweiten Kabels (12a, 12b) aufweisen, und daß das Gehäuse (14) Öffnungen (76, 77) aufweist, die bei an dem Gehäuse (14) angebrachtem ersten und zweiten Anschlußstück (41, 41) mit den Passagen (43, 43) in dem ersten und dem zweiten Anschlußstück (41, 41) ausgerichtet sind.
5. Abzweigverbinderanordnung (10) nach Anspruch 4, dadurch gekennzeichnet, daß es sich bei den Umhüllungsangreifflächen (53, 53, 93, 94) der Anschlußstücke (41, 41) und des Erdungskontakts (19) um im wesentlichen plattenförmige Flächen handelt.
6. Abgreifverbinderanordnung (10) nach Anspruch 4, dadurch gekennzeichnet, daß die Anschlußstücke (41, 41) an dem Gehäuse (14) durch gewindemäßigen Eingriff angebracht sind.
7. Abzweigverbinderanordnung (10) nach Anspruch 1, dadurch gekennzeichnet, daß es sich bei dem ersten und dem zweiten Signalübertragungskontakt (122, 123) um die Isolierung verdrängende Kontakte handelt.
8. Abgreifverbinderanordnung (10) nach Anspruch 1, dadurch gekennzeichnet, daß ein beweglicher Schalterarm (142) Bestandteil von einem der Signalübertragungskontakte ist und durch den Stecker (8) zum Öffnen des normalerweise geschlossenen Schalters (140) verdrängt wird.

## Revendications

1. Ensemble (10) à connecteurs de dérivation comportant un boîtier (14), un contact conducteur (19) de mise à la masse porté par le boîtier (14) pour une connexion à des gaines conductrices correspondantes (22, 23) de premier et second câbles électriques (12a, 12b), et des premier et second contacts conducteurs (122, 123) pour signaux portés par le boîtier (14) pour une connexion sur des conducteurs correspondants (24, 24) pour signaux des pre-

mier et second câbles électriques (12a, 12b), des parties (141, 142) des premier et second contacts (122, 123) pour signaux étant connectées électriquement entre elles, une fiche (8) étant connectée à un troisième câble électrique (176), la fiche ayant des bornes électriques conductrices correspondantes (186, 187, 188) pour une connexion sur des conducteurs respectifs (182, 183, 184) du troisième câble électrique (176), et le boîtier (14) ayant une cavité (175) destinée à recevoir la fiche (8) ; caractérisé en ce que :

les parties (141, 142) des premier et second contacts (123, 124) pour signaux comprennent un interrupteur (140) normalement fermé, les bornes électriques (186, 187, 188) de la fiche (8) comprennent deux bornes (187, 188) pour signaux connectées aux deux conducteurs (183, 184) pour signaux du troisième câble électrique (176), et la fiche (8) est réalisée de façon à être reçue dans la cavité (175) pour connecter une borne (186) de mise à la masse de la fiche (8) à la borne (19) de mise à la masse portée par le boîtier (14), et pour connecter chacune des bornes (187, 188) pour signaux de la fiche (8) à l'un, correspondant, des contacts (122, 123) pour signaux portés par le boîtier (14), et pour engager la fiche (8) contre l'interrupteur (140) et séparer les parties (141, 142) des contacts (122, 123) pour signaux qui constituent l'interrupteur (140).

2. Ensemble à connecteurs de dérivation (10) selon la revendication 1, caractérisé en outre en ce que des premier et second éléments de bridage (16, 17) sont assemblés sur le boîtier (14) pour brider les gaines conductrices (22, 22) desdits premier et second câbles (12a, 12b), respectivement, sur ledit contact (19) de mise à la masse. 35 40
3. Ensemble à connecteurs de dérivation (10) selon la revendication 2, caractérisé en outre en ce que lesdits premier et second éléments de bridage (16, 17) comprennent des premier et second éléments conducteurs (42, 42), des surfaces (53, 53) d'engagement de gaine, ledit contact (19) de mise à la masse comprenant deux surfaces (93, 94) d'engagement de gaine. 45 50
4. Ensemble à connecteurs de dérivation (10) selon la revendication 3, caractérisé en outre en ce que lesdits premier et second éléments de bridage (16, 17) comprennent des premier et second raccords (41, 41) ayant des passages axiaux (43, 43) pour recevoir lesdits premier et second câbles (12a, 12b), respective-

ment, et dans lequel ledit boîtier (14) présente des ouvertures (76, 77) alignées avec les passages (43, 43) dans lesdits premier et second raccords (41, 41) lorsque lesdits premier et second raccords (41, 41) sont reliés audit boîtier (14).

5. Ensemble à connecteurs de dérivation (10) selon la revendication 4, caractérisé en outre en ce que lesdites surfaces (53, 53, 93, 94) d'engagement de gaine desdits raccords (41, 41) et dudit contact (19) de mise à la masse comprennent des surfaces sensiblement en forme de disque. 10 15
6. Ensemble à connecteurs de dérivation (10) selon la revendication 4, caractérisé en outre en ce que lesdits raccords (41, 41) sont reliés par vissage audit boîtier (14). 20
7. Ensemble à connecteurs de dérivation (10) selon la revendication 1, caractérisé en outre en ce que lesdits premier et second contacts (122, 123) pour signaux comprennent des contacts à déplacement d'isolant. 25
8. Ensemble à connecteurs de dérivation (10) selon la revendication 1, caractérisé en outre en ce qu'une lame mobile (142) d'interrupteur constitue une partie de l'un desdits contacts pour signaux et est déplacée par ladite fiche (8) pour ouvrir ledit interrupteur (140) normalement fermé. 30

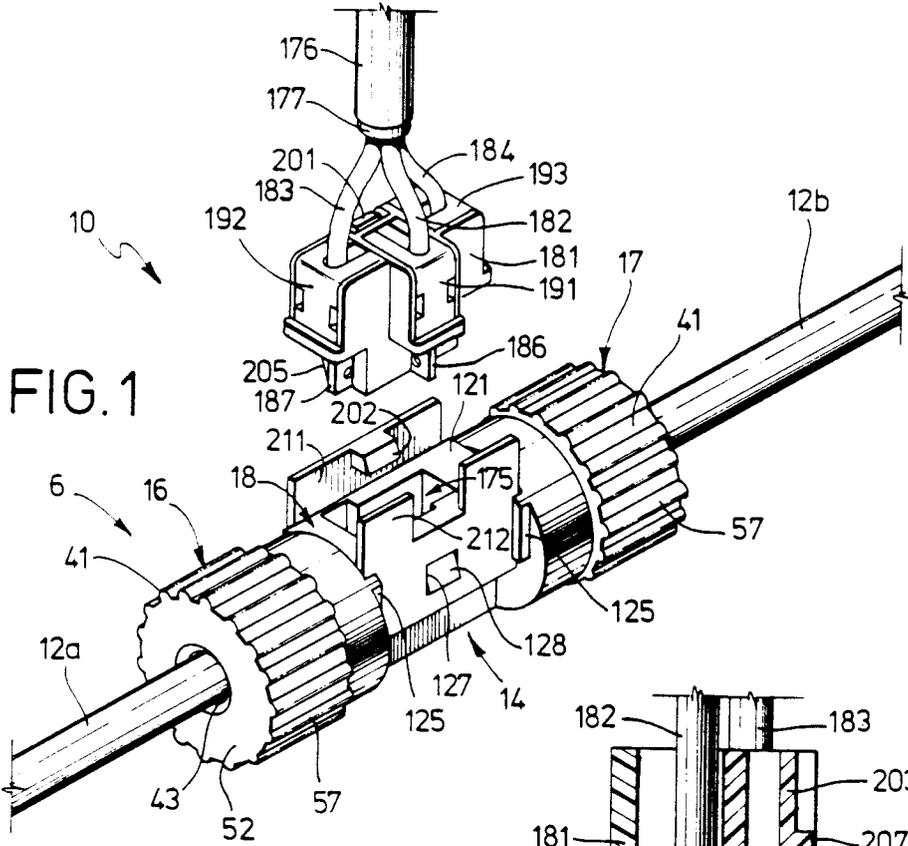


FIG. 1

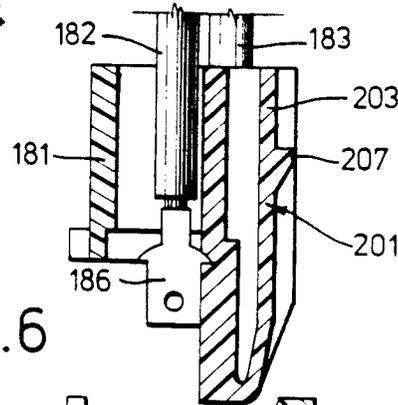


FIG. 6

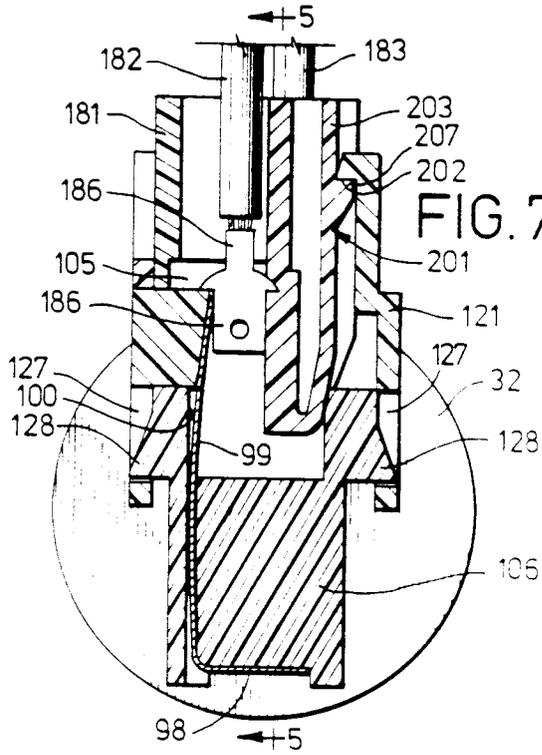
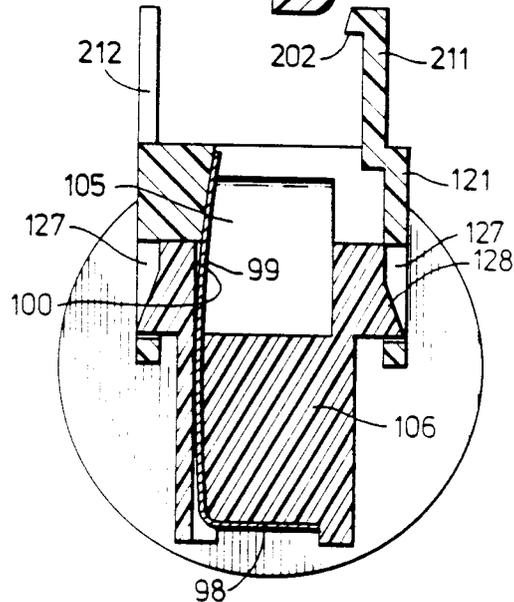


FIG. 7





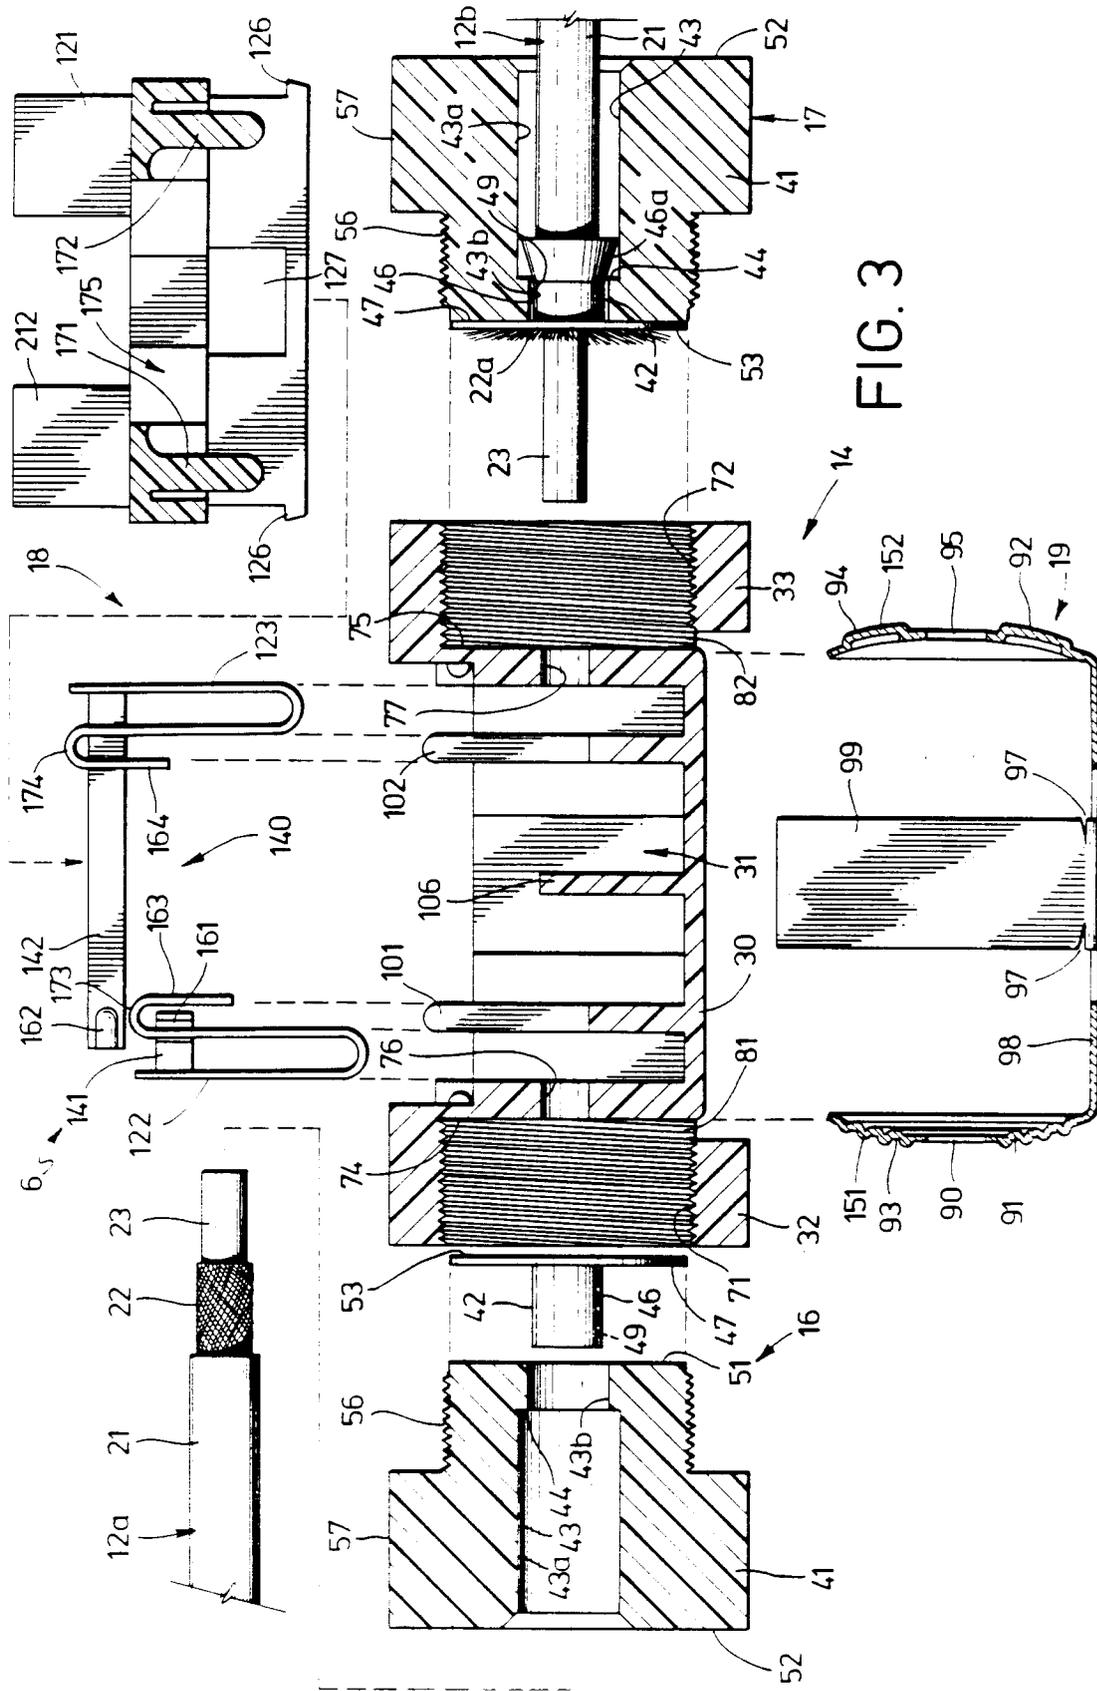


FIG. 3

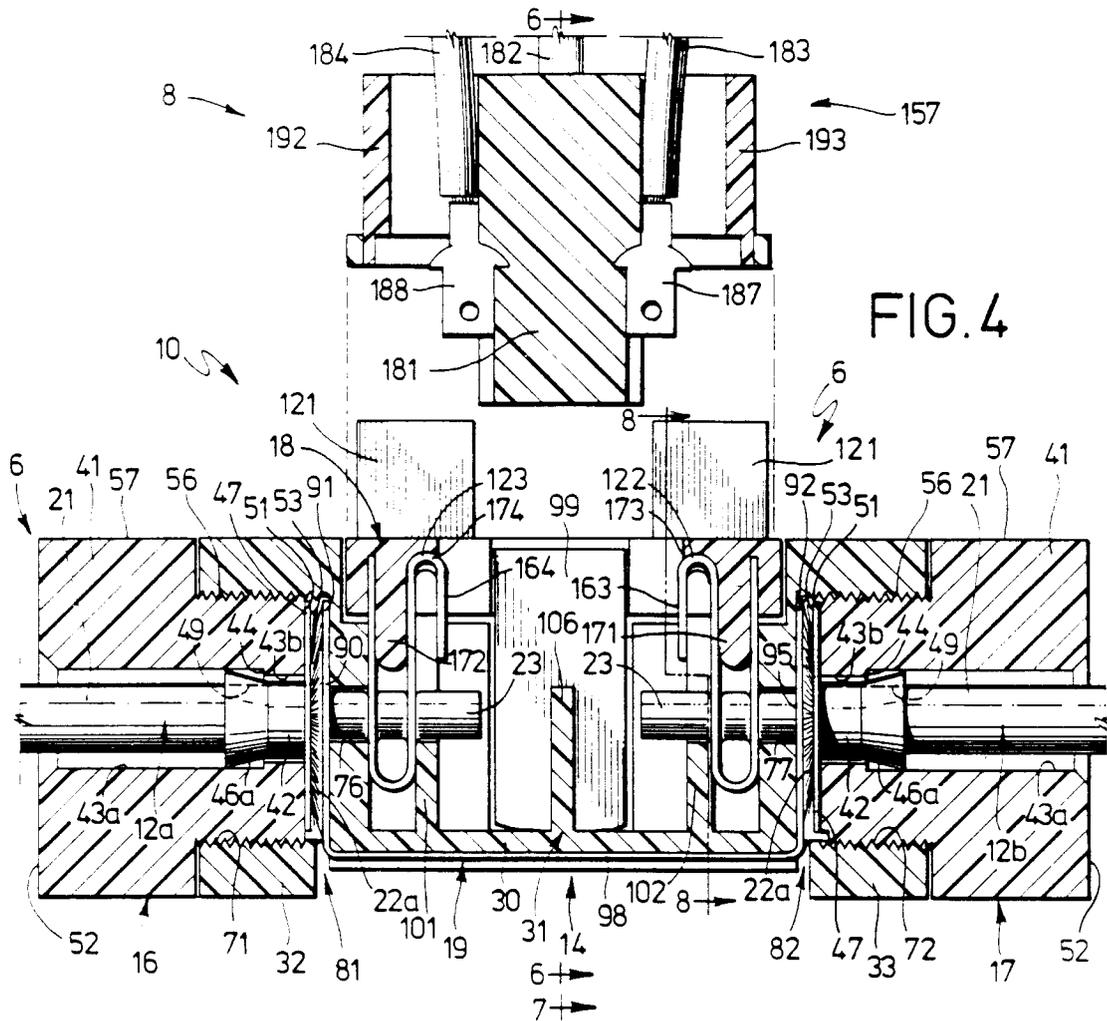


FIG. 4

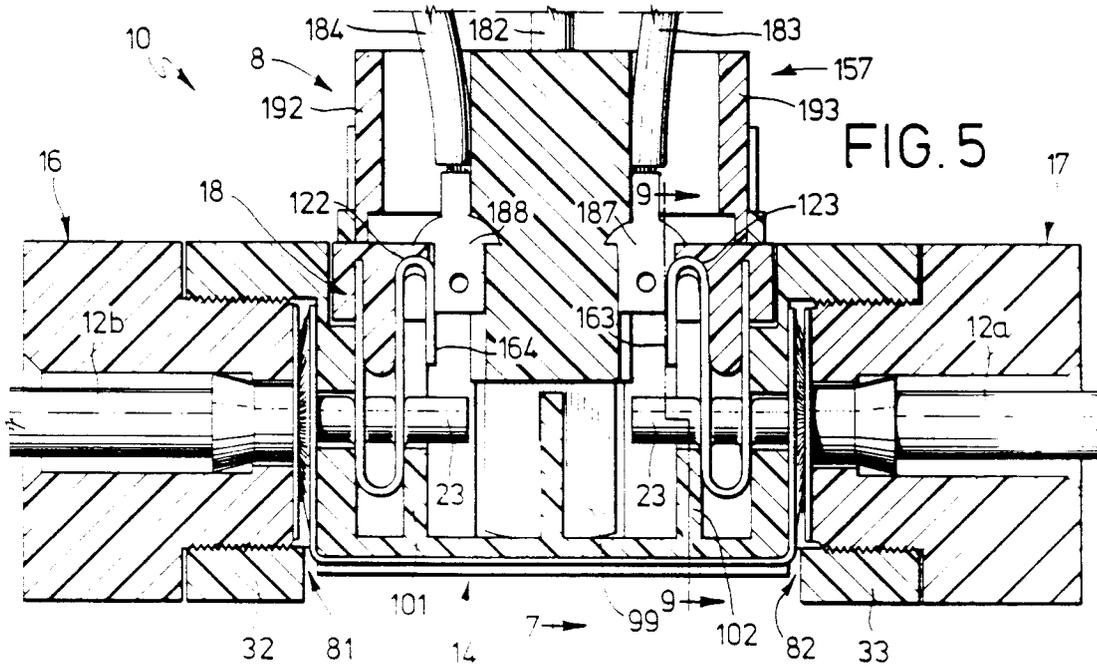


FIG. 5

