

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 924 958 A1**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

**23.06.1999 Bulletin 1999/25**

(51) Int Cl.<sup>6</sup>: **H04R 3/00, H04R 25/00**

(21) Application number: **98204331.7**

(22) Date of filing: **18.12.1998**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**

Designated Extension States:

**AL LT LV MK RO SI**

(30) Priority: **19.12.1997 NL 1007858**

(71) Applicant: **Microtronic Nederland B.V.  
1014 BM Amsterdam (NL)**

(72) Inventors:

- **Boone, Marinus Marias  
2715 NG Zoetermeer (NL)**
- **Merks, Ivo Leon Diane Marie  
2622 CR Delft (NL)**
- **Van Halteren, Aart Zeger  
1447 EG Hobrede (NL)**

(74) Representative: **Ottevangers, Sietse Ulbe et al  
Vereenigde Octrooibureaux  
Nieuwe Parklaan 97  
2587 BN 's-Gravenhage (NL)**

(54) **Directional hearing device**

(57) A hearing device comprising at least two microphones, a processor and an output for further processing in a reproducer, the microphones being electrically coupled to the processor, and the output for further processing in a reproducer being connected to the processor.

The processor comprises: a summer providing a sum signal of the microphone signals, and to which sum-

mer a proportional amplifier is connected, and a summer for providing a difference signal of the microphone signals, to which summer an integrator is connected, and that the proportional amplifier and the integrator are coupled on the output side to a third summer providing a sum signal of the proportional amplifier and the integrator, and that the third summer forms the output for further processing in a reproducer.

**EP 0 924 958 A1**

## Description

**[0001]** The invention relates to a hearing device comprising at least two microphones, a processor and an output for further processing in a reproducer, the microphones being electrically coupled to the processor which comprises a first summer for providing a difference signal of the microphone signals, to which first summer an integrator is connected, and the output for further processing in a reproducer being connected to the processor.

**[0002]** Such a hearing apparatus is known from the international patent application WO 95/12961. This application relates to a directional microphone system in which three microphones are used. Of two microphones, the output signals are amplified both proportionally and integrally and supplied to a summer.

**[0003]** In hearing apparatus, the directivity is very important to achieve a high audibility of speech. The acoustic signals should be selectively amplified: only the speech signals or other important audio information should be amplified, not the inevitable undesired noise.

**[0004]** There is therefore a need for highly directional hearing apparatus in which the directional characteristic of the hearing apparatus gives a good response to the difference in sound pressure between two discrete microphones.

**[0005]** The invention provides such a hearing apparatus, which is characterized in that the processor comprises a second summer providing a sum signal of the microphone signals, and to which second summer a proportional amplifier is connected, and that the proportional amplifier and the integrator are coupled on the output side to a third summer providing a sum signal of the proportional amplifier and the integrator, and that the third summer forms the output for further processing in a reproducer.

**[0006]** Thus, a flat frequency response and a nearly constant directional index can be achieved.

**[0007]** The invention can advantageously be used such that the hearing device comprises three microphones and two processors, of which microphones in each case two are connected pairwise to a processor, that a first processor is connected to a low-pass filter, that a second processor is connected to a high-pass filter, that the low-pass filter and the high-pass filter are connected to a fourth summer for providing a sum signal of the low-pass filter and the high-pass filter, and that the fourth summer forms the output for further processing in a reproducer.

**[0008]** The invention will now be explained below in more detail, with reference to the accompanying drawings and the description, by way of example, in which drawings:

Fig. 1 schematically shows the diagram of the invention;

Fig. 2 schematically shows the diagram of an ad-

vantageous embodiment of the invention; and Figs. 3a and 3b show graphs of the frequency response vs. frequency and directional index vs. frequency, plotting results of a hearing device according to the invention.

**[0009]** Referring to Fig. 1 two microphones  $m_1$  and  $m_2$  are schematically shown, which form part of a hearing device according to the invention. The microphones  $m_1$  and  $m_2$  are, for instance, omnidirectional microphones spaced apart a given distance. The processor is schematically indicated by dash lines.

**[0010]** The microphones  $m_1$  and  $m_2$  are electrically coupled in any suitable manner to a first summer S1 for providing a difference signal of these microphone signals. Furthermore, an integrator I is connected to this first summer S1. As is known to those skilled in the art, an integrator can be composed using analog electronics. The microphones  $m_1$  and  $m_2$  are also electrically coupled in any suitable manner to a second summer S2 for providing a sum signal of these microphone signals. A proportional amplifier P is connected to this second summer.

**[0011]** Both the integrator I and the proportional amplifier P have their outputs coupled to a third summer S3 which provides a sum signal of the signal from the proportional amplifier P and the signal from the integrator I. The sum signal from the third summer S3 forms the output U for further processing in a reproducer (not shown).

**[0012]** The output signal is the input signal for the reproducer.

**[0013]** The operation of such a hearing device is based on the principle of the first order gradient receiver. This principle is known per se to those skilled in the art and will therefore not be described in detail.

**[0014]** Suffice it to observe that the gradient is obtained by processing the signals from the separate omnidirectional microphones.

**[0015]** In practice, the hearing device shown in Fig. 1 is adapted for a specific frequency range.

**[0016]** Fig. 2 shows three omnidirectional microphones  $m_1$ ,  $m_2$  and  $m_3$  for a hearing device and two processors GP1 and GP2 with output signals  $U_1$  and  $U_2$ , respectively. The distance between  $m_1$  and  $m_3$  is different from the distance between  $m_1$  and  $m_2$ . Of these microphones, in each case two are connected pairwise to a first and a second processor, GP1 indicating a low-frequency gradient processor and GP2 a high-frequency gradient processor, respectively.

**[0017]** Each of these processors is designed in the same manner as the processor shown in Fig. 1.

**[0018]** A low-pass filter LF is connected to the processor GP1, while a high-pass filter HF is connected to the processor GP2.

**[0019]** Furthermore, the low-pass filter LF and the high-pass filter HF are connected to a fourth summer S4 which can provide a sum signal of LF and HF. The

output of the summer S4 feeds the reproducer (not shown).

**[0020]** The cross-over frequency of the high-pass filter and the low-pass filter can be optimized such that the output has a flat frequency response.

**[0021]** Figs. 3a and 3b show graphs of results of an advantageous embodiment according to the invention. The microphone distances were 0.1 m for the low-frequency microphone pair and 0.016 m for the high-frequency microphone pair. The graduations are logarithmic.

**[0022]** In Fig. 3a the horizontal axis indicates the frequency in Hz, while the vertical axis shows the frequency response in dB.

**[0023]** In Fig. 3b the horizontal axis indicates the frequency in Hz, while the vertical axis shows the directivity index in dB.

**[0024]** The directivity index is a measure, generally accepted by skilled persons, of the directional behavior of a microphone or microphone arrangement.

**[0025]** The graphs show that between 100 Hz and 5000 Hz the frequency response is flat and the directivity index is nearly constant.

**[0026]** It is observed that a flat frequency response can be undesirable in some applications of hearing devices, because, e.g., amplification is only necessary at higher frequencies. In that case high-pass filters can be used immediately after the microphones or at the output of the circuit.

**[0027]** The hearing device according to the invention may advantageously be accommodated in or on a side piece of eyeglasses. The electric power may then be supplied by, e.g., a battery or solar cell. The electrical output signal may be fed to the reproducer via a plug contact or a coil generating an electromagnetic field which can be received by a listening coil in the hearing apparatus.

the output for further processing in a reproducer.

2. A hearing device according to claim 1, characterized in that it comprises three microphones and two processors, of which microphones in each case two are connected pairwise to a processor,

that a first processor is connected to a low-pass filter,  
that a second processor is connected to a high-pass filter,  
that the low-pass filter and the high-pass filter are connected to a fourth summer for providing a sum signal of the low-pass filter and the high-pass filter, and  
that the fourth summer forms the output for further processing in a reproducer.

3. A hearing device according to claim 1 or 2, characterized in that it is accommodated in or on a side piece of eyeglasses.

4. A hearing device according to any one of claims 1-3, characterized in that the electrical output signal is fed to the reproducer via a plug contact or a coil.

## Claims

1. A hearing device comprising at least two microphones, a processor and an output for further processing in a reproducer, the microphones being electrically coupled to the processor which comprises a first summer for providing a difference signal of the microphone signals, to which first summer an integrator is connected, and the output for further processing in a reproducer being connected to the processor,

characterized in that the processor comprises a second summer providing a sum signal of the microphone signals, and to which second summer a proportional amplifier is connected, and

that the proportional amplifier and the integrator are coupled on the output side to a third summer providing a sum signal of the proportional amplifier and the integrator, and that the third summer forms

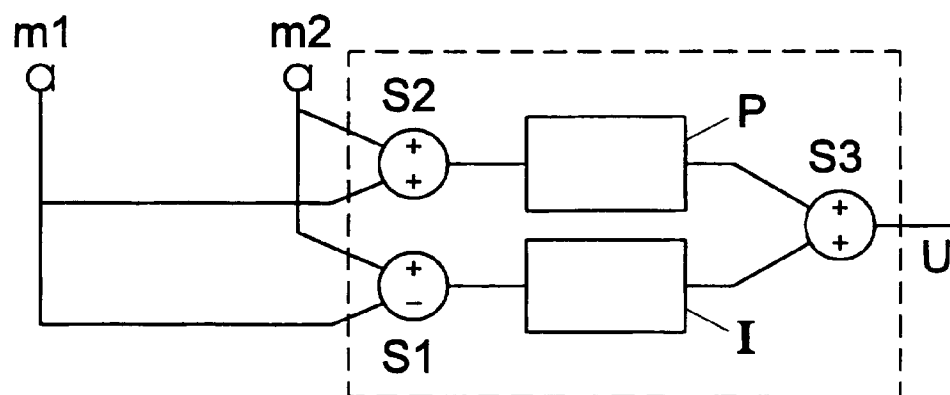


Fig. 1

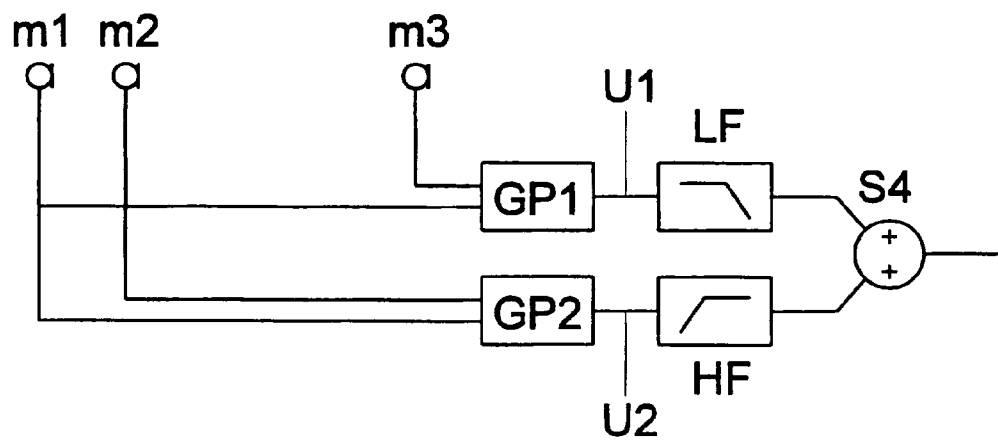


Fig. 2

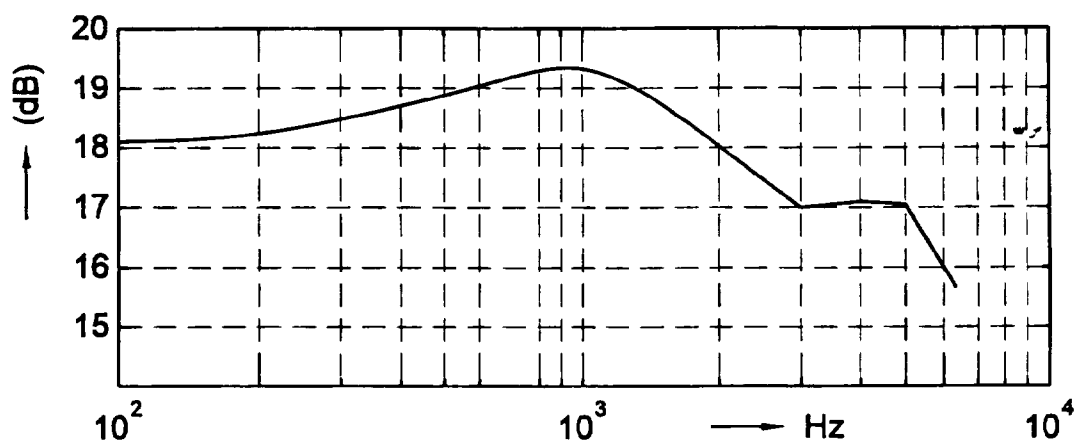


Fig. 3A

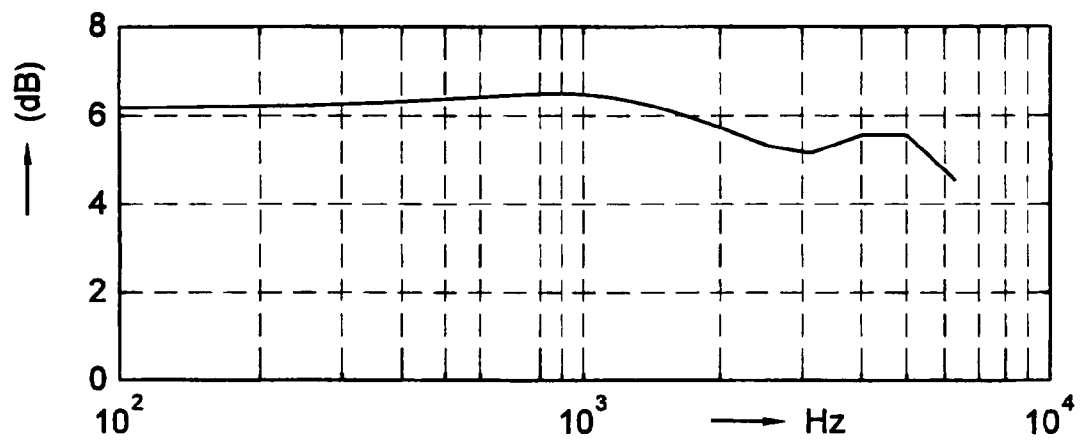


Fig. 3B



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 98 20 4331

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl. 6)
Y,D	WO 95 12961 A (MOTOROLA INC) 11 May 1995 * page 7, line 16 - page 9, line 28; figures 2,3 *	1	H04R3/00 H04R25/00
Y	US 4 334 740 A (WRAY WILLIAM R) 15 June 1982 * column 7, line 43 - column 8, line 2; figure 4 *	1	
A	DE 44 36 272 A (SCHALLTECHNIK DR ING SCHOEPS G) 18 April 1996 * column 3, line 50 - column 4, line 32; figures *	1,2	
A	US 4 773 095 A (ZWICKER EBERHARD ET AL) 20 September 1988 * column 1, line 50 - column 2, line 27; figures *	3,4	
A	EP 0 430 513 A (MATSUSHITA ELECTRIC IND CO LTD) 5 June 1991 * column 3, line 7 - column 4, line 49; figures *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04R
A	EP 0 652 686 A (AT & T CORP) 10 May 1995 * page 2, line 26 - line 47 * * page 8, line 34 - line 49; figure 11 *	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 26 March 1999	Examiner Gastaldi, G
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/92 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 20 4331

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-03-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9512961 A	11-05-1995	US 5463694 A	31-10-1995
		AU 7959794 A	23-05-1995
		BR 9405742 A	05-12-1995
		CA 2150819 A,C	11-05-1995
		CN 1116036 A	31-01-1996
		DE 4498516 C	23-04-1998
		DE 4498516 T	31-07-1997
		FR 2712132 A	12-05-1995
		GB 2289597 A,B	22-11-1995
		IT RM940678 A,B	02-05-1995
		JP 8505514 T	11-06-1996
US 4334740 A	15-06-1982	AT 600779 A	15-08-1984
		AU 532406 B	29-09-1983
		AU 5071979 A	20-03-1980
		CA 1158173 A	06-12-1983
		CH 651165 A	30-08-1985
		DE 2936082 A	20-03-1980
		FR 2436416 A	11-04-1980
		GB 2031690 A,B	23-04-1980
		GB 2104344 A,B	02-03-1983
		JP 55091292 A	10-07-1980
		JP 63004398 B	28-01-1988
DE 4436272 A	18-04-1996	NONE	
US 4773095 A	20-09-1988	AT 53736 T	15-06-1990
		DE 8529458 U	07-05-1987
		DK 492086 A	17-04-1987
		EP 0219026 A	22-04-1987
		JP 62095098 A	01-05-1987
EP 0430513 A	05-06-1991	DE 69022688 D	02-11-1995
		DE 69022688 T	09-05-1996
		JP 3219798 A	27-09-1991
		KR 9406042 Y	01-09-1994
		US 5193117 A	09-03-1993
EP 0652686 A	10-05-1995	US 5473701 A	05-12-1995
		CA 2117931 A,C	06-05-1995

EPO FORM P0439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82