



(11)

EP 2 178 169 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
04.06.2014 Bulletin 2014/23

(51) Int Cl.:
H01Q 13/18 ^(2006.01) **H01Q 9/30** ^(2006.01)
H01Q 9/04 ^(2006.01)

(21) Application number: **08166982.2**

(22) Date of filing: **17.10.2008**

(54) **Three-fold polarization diversity antenna**

Dreifache Polarisationsantennendiversität

Antenne de diversité de polarisation triple

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**
Designated Extension States:
AL BA MK RS

(43) Date of publication of application:
21.04.2010 Bulletin 2010/16

(73) Proprietor: **BlackBerry Limited**
Waterloo, ON N2K 0A7 (CA)

(72) Inventors:
• **Rao, Qinjiang**
Waterloo, Ontario N2K 3S8 (CA)

- **Wen, Geyi**
Waterloo Ontario N2T 2V1 (CA)
- **Wang, Dong**
Waterloo Ontario N2T 2T2 (CA)

(74) Representative: **Patel, Binesh**
Barker Brettell LLP
100 Hagley Road
Edgbaston
Birmingham
B16 8QQ (GB)

(56) References cited:
US-A- 4 242 685 US-A- 4 443 802
US-A- 4 684 953

EP 2 178 169 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This patent application relates to an antenna apparatus. In particular, this patent application relates to an antenna having polarization diversity.

[0002] The electric field of a propagating electromagnetic wave has two linear components that are orthogonal to one another. Typically, these components trace out an ellipse as a function of time. However, the electromagnetic wave might have only a single electric field component, in which case the electromagnetic wave is said to be linearly polarized.

[0003] If an electromagnetic wave is linearly polarized, signal quality may be adversely affected by multipath signals, since many linearly polarized signals with different polarization might exist at the receiving antenna. A polarization diverse antenna can be used to improve signal transmission/reception quality in multipath environments since the signal strength received by such antennas can be greater than with a single linearly polarized antenna. A polarization diverse antenna can also be used to increase network capacity since multiple signals of the same frequency, but different polarizations, can be transmitted from and/or received at a single antenna.

[0004] Conventional linear polarization diversity antennas may have two feed/receive lines that transmit/receive two respective orthogonal components of the electromagnetic wave. For example, Zhang (US 6,593,891) describes a polarization diverse antenna that comprises a dielectric substrate having an upper conductive surface. A cross-shaped slot is formed in the upper conductive surface. The lower surface of the dielectric includes elongated conductive strips that are aligned with the arms of the slot, and a rectangular conductive portion that is aligned with the centre of the slot. The antenna also includes a pair of feed lines, each attached to a respective one of the conductive strips.

[0005] Alternately, a linear polarization diversity antenna may have a single feed/receive line, but have a complex structure to transmit/receive the orthogonal components of the electromagnetic wave. For instance, Thudor (US 7,336,233) describes a polarization diverse antenna that comprises five slots that are arranged in a H-shaped structure on the upper surface of a dielectric substrate. A single feed line is disposed on the lower surface of the dielectric substrate, and is perpendicular to the centre slot. The antenna also includes a switching means that are positioned in the middle of each slot, except the middle slot. Similarly, Milyakh (US 7,358,916) describes a polarization diverse antenna that comprises four right-angled bent conductive strips that are disposed on a dielectric substrate. The antenna also includes a switching network comprising diodes that are formed between the ends of adjacent strips. A single feed line is connected between the diagonally opposite strips, at the bent portion thereof.

[0006] US 444 3802 discloses a planar antenna which employs a pair of closely spaced parallel ground planes

and a radiating element which is a composite aperture (hybrid slot) formed into the upper ground plane. One portion of the radiating element is a long narrow slot which may have the shape of a rectangle of high aspect ratio.

5 The other portion is an annular slot which may be circular in shape. Electromagnetic energy is conveyed to and from the slots in the upper ground plane by means of a feed conductor parallel to and sandwiched between the two ground planes. The maximum of the resulting field pattern is in the plane of the antenna and the pattern may be either directional or omnidirectional in that plane. When used as a receiving antenna, this antenna responds to both the electric and magnetic fields.

10 **[0007]** A common problem of dual-polarized antenna is the high possibility of crosstalk between the polarized components.

GENERAL

20 **[0008]** In a first aspect, this patent application describes a three-fold polarization diversity antenna that comprises a slot-loaded patch, and a radiation member that is electromagnetically coupled to the slot-loaded patch. The radiation member extends through a plane of the slot-loaded patch.

25 **[0009]** In a second aspect, this patent application describes a wireless communications device that comprises a radio transceiver section, and a three-fold polarization diversity antenna that is coupled to the radio transceiver section. The three-fold diversity antenna comprises a slot-loaded patch, and a radiation member that is electromagnetically coupled to the slot-loaded patch. The radiation member extends through a plane of the slot-loaded patch.

30 **[0010]** The radiation member may be disposed at a substantially right angle to the plane of the slot-loaded patch. The slot-loaded patch may comprise a pair of intersecting slots that extend through a planar conductive layer, with the intersecting slots being disposed at a substantially right angle to each other. The radiation member may terminate at one end within a central portion of the slot-loaded patch, such that the one end is physically isolated from the slot-loaded patch.

35 **[0011]** In one implementation, the slot-loaded patch comprises a cross-slot-shaped through-hole that extends through the planar conductive layer. The radiation member comprises a monopole that extends between a feed point and a centre of the cross-slot-shaped through-hole. The monopole may comprise a ground plane, and an elongate conductor that extends from the ground plane and terminates in the centre of the cross-slot-shaped through-hole. The ground plane may be substantially parallel to the planar conductive layer, with the elongate conductor being disposed at a substantially right angle to the planar conductive layer and the ground plane.

40 **[0012]** As will become apparent, the three-fold polarization diversity antenna has a simple compact structure.

The antenna also provides good isolation between the polarized components, and may be used in WLAN networks.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Sample embodiments of the three-fold polarization diversity antenna and the wireless communications device will now be described, with reference to the accompanying drawings, in which:

Fig. 1 is a schematic diagram depicting certain functional components of the wireless communications device, including the three-fold polarization diversity antenna;

Fig. 2a is a top perspective view of the three-fold polarization diversity antenna, depicting the slot-loaded patch, and the radiation member;

Fig. 2b is a side elevation of the three-fold polarization diversity antenna;

Fig. 3 depicts the measured return loss for a WLAN embodiment of the three-fold polarization diversity antenna;

Fig. 4 depicts the radiation pattern of the three-fold polarization diversity antenna of Fig. 3; and

Fig. 5 depicts the efficiency of the three-fold polarization diversity antenna of Fig. 3.

DETAILED DESCRIPTION

[0014] Turning now to Fig. 1, there is shown a wireless communications device 100 that is configured to operate within a wireless network. Preferably, the communications device 100 is a two-way wireless communications device. Depending on the exact functionality provided, the wireless communications device 100 may be configured as a wireless base station, a portable wireless modem, or a wireless data communication device, as examples.

[0015] As shown, the wireless communications device 100 includes a communication subsystem 102, and a data processing system 104 that is coupled to the communication subsystem 102. The communication subsystem 102 performs communication functions, and includes a wireless transmitter 106, a wireless receiver 108, and an internal antenna 200, a local oscillator (LOs) 110 and a digital signal processor (DSP) 112 connected to the transmitter 106 and the receiver 108.

[0016] Preferably, the internal antenna 200 is a wide-band antenna that is configured for use with one or more of the application bands that are available within the wireless network. More preferably, the internal antenna 200 is configured for use within a WLAN (IEEE 802.11x) network. The internal antenna 200 will be discussed in detail below, with reference to Figs. 2 to 5.

[0017] The data processing system 104 comprises a microprocessor 114, a flash memory 116 and a data port 118. The flash memory 116 includes signal processing

instructions for the DSP 112, and may also include computer processing instructions for the microprocessor 114. The computer processing instructions, when accessed from the flash memory 116 and executed by the microprocessor 114 define an operating system that controls the overall operation of the communications device 100. Alternately, the data processing system 104 may also include a volatile memory (RAM) 120. The computer processing instructions may be copied from the flash memory 116 into the RAM 120, and then accessed from the RAM 116 and executed by the microprocessor 114.

[0018] The data port 118 interfaces the wireless communications device 100 with a communications network, such as a wired or wireless local area network (LAN) or wide area network (WAN). Data packets that are received at the data processing system 104 from the communications network via the data port 118 are transferred by the operating system to the communication subsystem 102 for transmission as wireless electromagnetic signals over the wireless network. Wireless electromagnetic signals to be transmitted over the wireless network are processed by the DSP 112 and input to the transmitter 106 for digital to analog conversion, frequency up conversion, and transmission over the wireless network via the internal antenna 200.

[0019] Conversely, wireless electromagnetic signals that are received by the internal antenna 200 from the wireless network are input to the receiver 108, which performs common receiver functions such as frequency down conversion, and analog to digital (A/D) conversion, in preparation for more complex communication functions performed by the DSP 112. Data packets that are received at the data processing system 104 from the DSP 112 are transmitted by the operating system over the communications network via the data port 118.

[0020] Although the communication subsystem 102 is depicting in Fig. 1 having only one transmitter 106 and one receiver 108, the communication subsystem 102 may include additional transmitters and/or receivers, depending upon the range of frequency bands over which communication is desired. Similarly, although the communication subsystem 102 is depicted in Fig. 1 with one antenna 200, it should be understood that the wireless communications device 100 may instead comprise two or more of the antennas 200. Further, if the communication subsystem 102 includes more than one DSP 112, the signals transmitted and received by the additional transmitter(s)/receiver(s) would preferably be processed by a different DSP than the transmitter 106 and the receiver 108.

[0021] Figs. 2a and 2b depict the preferred structure of the three-fold polarization diversity antenna 200. The antenna 200 comprises a slot-loaded patch antenna structure 202, and a radiation member 204 that is electromagnetically coupled to the patch antenna structure 202. The patch antenna structure 202 comprises a conductive layer 206, and a slot-shaped aperture that extends through the conductive layer 206. The conductive

layer 206 typically is substantially planar, and may have a substantially square planar shape. Alternately, the conductive layer 206 may have rectangular, elliptical or circular planar shape. Further, the conductive layer 206 need not be planar, but may have an arcuate shape.

[0022] As shown, the slot-shaped aperture may comprise a pair of elongate linear intersecting slots 208a, 208b that extend through the conductive layer 206, between the upper and lower surfaces thereof, thereby forming a cross-slot-shaped through-hole in the conductive layer 206. Preferably, the intersecting slots 208a, 208b are disposed at a substantially right angle to each other. However, other orientations of the intersecting slots 208a, 208b may be adopted. For instance, the patch antenna structure 202 may comprise a single slot; or may comprise three linear intersecting slots oriented 120° with respect to each other.

[0023] The radiation member 204 extends through a plane of the slot-loaded patch. Preferably, the radiation member 204 is disposed at a substantially right angle to the plane of the slot-loaded patch. Further, the radiation member 204 is configured as a grounded monopole, and comprises a planar ground plane 210, and an elongate conductor 212. The elongate conductor 212 is physically isolated from the ground plane 210, and extends from the ground plane 210, terminating proximate the centre portion of the slot-shaped aperture, between the upper and lower surfaces of the conductive layer 206. With this configuration, the field distributions produced by the antenna will be symmetric. Alternately, however, for non-symmetric field distributions, the elongate conductor 212 may terminate at a position that is off-centre. Preferably, the elongate conductor 212 extends vertically upwards through the ground plane 210 towards the slot-shaped aperture, from a feed point 214 that is disposed below the ground plane 210.

[0024] The antenna 200 may include a dielectric substrate (not shown) that is disposed between the conductive layer 206 and the ground plane 210. In this implementation, the conductive layer 206 and the ground plane 210 are disposed on opposite faces of the dielectric substrate. Further, the dielectric substrate is configured with a through-hole through which the elongate conductor 212 extends between the ground plane 210 and the conductive layer 206.

[0025] As shown, the ground plane 210 may be oriented substantially parallel to the planar conductive layer 206. With this configuration, the elongate conductor 212 is disposed at a substantially right angle to the planar conductive layer 206 and the ground plane 210. Alternately, however, the planar conductive layer 206 may be inclined relative to the ground plane 210 at an angle other than a right angle.

[0026] The end of the elongate conductor 212 that is opposite the feed point 214 ("terminal end") may be disposed within the region 216 of the intersection of the intersecting slots 208a, 208b, between the upper and lower surfaces of the slot-loaded patch. Alternately, the termi-

nal end may be disposed above the upper surface of the slot-loaded patch. The terminal end of the elongate conductor 212 is physically isolated from the slot-loaded patch. As a result, the radiation member 204 is electromagnetically coupled to the slot-loaded patch.

[0027] Alternately, the radiation member 204 may be configured as a dipole that is electromagnetically coupled at the opposite ends thereof to respective patch antenna structures 202. As in the previous example, the radiation member 204 may comprise an elongate member whose opposite ends are physically isolated from the slot-loaded patches and terminate proximate the centre portion of the respective slot-shaped apertures.

[0028] As discussed above, the communication subsystem 102 may be provided with a plurality of the antennas 200. In a preferred implementation, the conductive layer 206 comprises a plurality of slot-shaped apertures that are disposed uniformly on a common planar conductive layer 206. In this variation, the antennas 200 may be disposed uniformly over the conductive layer 206, thereby providing a planar antenna array. Alternately, the conductive layer 206 may have a cylindrical configuration, with the plurality of slot-shaped apertures being disposed uniformly over the cylindrical conductive layer 206. In this latter variation, preferably each radiation member 204 is disposed at a substantially right angle to the plane of the associated slot-shaped aperture, at the centre portion of the associated slot-shaped aperture.

[0029] As is known to persons of skill in the art, the length of a conventional monopole is one-quarter of the wavelength of the fundamental. However, due to the electromagnetic coupling between the radiation member 204 and the slot-loaded patch, the length of the elongate conductor 212 is less than one-quarter of the wavelength (when the radiation member 204 is configured as a grounded monopole). As a result, the height of the antenna 200 may be less than a conventional monopole antenna having the same minimum resonant frequency. Further, the antenna 200 does not exhibit the power loss that would otherwise occur if the radiation member 204 was electrically connected to the slot-loaded patch.

[0030] As is also known to persons of skill in the art, the electric field of a conventional monopole is polarized in the direction of the monopole. Therefore, the electric field of the antenna 200 includes a vertically-polarized electric field. However, due to the electromagnetic coupling between the radiation member 204 and the slot-loaded patch, the radiation member 204 induces electric currents in the slot-loaded patch. Since the intersecting slots 208a, 208b of the slot-loaded patch are disposed at a substantially right angle to each other, the electromagnetic field produced by the antenna 200 also includes two perpendicular horizontally-polarized electric fields. As a result, the electromagnetic field produced by the antenna 200 has three orthogonal polarized electric fields (i.e. three-fold polarization diversity).

[0031] Fig. 3 depicts the measured return loss for one implementation of the antenna 200. In this implementa-

tion, the conductive layer 206 and the ground plane 210 are substantially square, and the dimensions of the antenna 200 are as follows:

$$L_1 = 75 \text{ mm}$$

$$L_2 = 23 \text{ mm}$$

$$L_3 = 28 \text{ mm}$$

$$W = 1.5 \text{ mm}$$

$$H = 10 \text{ mm}$$

where:

L_1 is the length of each side of the ground plane 210;

L_2 is the length of each side of the conductive layer 206;

L_3 is the length of each of the intersecting slots 208a, 208b;

W is the width of each of the intersecting slots 208a, 208b; and

H is the length of the elongate conductor 212.

[0032] As shown, the frequency range of the antenna 200 covers WLAN IEEE 802.11 b/g (4.9 - 6 GHz).

[0033] Fig. 4 depicts the radiation pattern of the foregoing implementation of the antenna 200, measured at 5.5 GHz. As shown, at this WLAN frequency the electromagnetic field of the antenna 200 has two perpendicular horizontally-polarized electric fields, with good isolation between the electric fields.

[0034] Fig. 5 depicts the efficiency of the foregoing implementation of the antenna 200. As shown, the antenna 200 exhibits good efficiency across the WLAN band, notwithstanding the multiple polarization diversity of the antenna 200.

Claims

1. A three-fold polarization diversity antenna comprising:

a slot-loaded patch antenna structure (202) comprising a slot (208) extending through a conductive layer (206) disposed over a ground plane (210); **characterized in that** said slot

comprises a pair of elongate linear intersecting slots (208a, 208b) with a region of intersection and

a radiation member (204) electromagnetically coupled to the slot-loaded patch, the radiation member having an elongate conductor (212) that extends between the ground plane (210) and the region (216) of intersection of the intersecting slots from a feed point (214) that is disposed below the ground plane (210), wherein in operation the diversity antenna has a vertically-polarized electric field and two horizontally-polarized electric fields induced respectively by the radiation member (204) and the slot-loaded patch antenna structure (202).

2. The three-fold polarization diversity antenna according to Claim 1, wherein the radiation member is disposed at a substantially right angle to the plane of the slot-loaded patch antenna structure.
3. The three-fold polarization diversity antenna according to Claim 1 or Claim 2, wherein the pair of intersecting slots extend through the planar conductive layer, the pair of intersecting slots being disposed at a substantially right angle to each other.
4. The three-fold polarization diversity antenna according to Claim 1, wherein the radiation member terminates at one end within a central portion of the slot-loaded patch antenna structure, the one end being physically isolated from the slot-loaded patch antenna structure.
5. The three-fold polarization diversity antenna according to Claim 1, wherein the slot comprises a cross-slot-shaped through-hole extending through the planar conductive layer.
6. The three-fold polarization diversity antenna according to Claim 5, wherein the radiation member comprises a monopole that extends between the feed point and a centre of the cross-slot-shaped through-hole.
7. The three-fold polarization diversity antenna according to Claim 5, wherein the elongate conductor terminates in a centre of the cross-slot-shaped through-hole.
8. The three-fold polarization diversity antenna according to any one of Claim 1 or Claim 7, wherein the ground plane is substantially parallel to the planar conductive layer.
9. The three-fold polarization diversity antenna according to Claim 8, wherein the elongate conductor is disposed at a substantially right angle to the planar

conductive layer and the ground plane.

10. A wireless communications device comprising:

a radio transceiver section; and
a three-fold polarization diversity antenna according to any one of Claims 1 to 9.

11. The communications device according to Claim 10, configured as a wireless base station.

Patentansprüche

1. Dreifachpolarisationsdiversitätsantenne mit:

einer Schlitzlade-Patchantennen-Struktur (202) mit einem Schlitz (208), der sich durch eine Leitschicht (206) erstreckt, die über einer Grunde-ebene (210) angeordnet ist, **dadurch gekennzeichnet dass**, der Schlitz ein Paar länglicher linearer sich schneidender Schlitze (208a, 208b) mit einem Schnittbereich aufweist, und einem Strahlungselement (204), das elektromagnetisch an den Schlitzlade-Patch gekoppelt ist, wobei das Strahlungselement einen länglichen Leiter (212) aufweist, der sich zwischen der Grunde-ebene (210) und dem Schnittbereich (216) der sich schneidender Schlitze von einem Speisepunkt (214) erstreckt, der unter der Grunde-ebene (210) angeordnet ist, wobei im Betrieb die Diversitätsantenne ein vertikal-polarisiertes elektrisches Feld und zwei horizontal-polarisierte elektrische Felder aufweist, die jeweils durch das Strahlungselement (204) und die Schlitzlade-Patchantennen-Struktur (202) induziert sind.

2. Dreifachpolarisationsdiversitätsantenne nach Anspruch 1, wobei das Strahlungselement in einem zur Ebene der Schlitzlade-Patchantennen-Struktur im Wesentlichen rechten Winkel angeordnet ist.

3. Dreifachpolarisationsdiversitätsantenne nach Anspruch 1 oder 2, wobei das Paar sich schneidender Schlitze sich durch die ebene Leitschicht erstreckt, wobei das Paar sich schneidender Schlitze in einem zueinander im Wesentlichen rechten Winkel angeordnet ist.

4. Dreifachpolarisationsdiversitätsantenne nach Anspruch 1, wobei das Strahlungselement an einem Ende in einem zentralen Teil der Schlitzlade-Patchantennen-Struktur endet, wobei das eine Ende physisch von der Schlitzlade-Patchantennen-Struktur isoliert ist.

5. Dreifachpolarisationsdiversitätsantenne nach Anspruch 1, wobei der Schlitz ein kreuzschlitzförmiges

Durchgangsloch aufweist, das sich durch die ebene Leitschicht erstreckt.

6. Dreifachpolarisationsdiversitätsantenne nach Anspruch 5, wobei das Strahlungselement ein Monopol aufweist, das sich zwischen dem Speisepunkt und einem Mittelpunkt des kreuzschlitzförmigen Durchgangslochs erstreckt.

7. Dreifachpolarisationsdiversitätsantenne nach Anspruch 5, wobei der längliche Leiter in einem Mittelpunkt des kreuzschlitzförmigen Durchgangslochs endet.

8. Dreifachpolarisationsdiversitätsantenne nach einem der Ansprüche 1 oder 7, wobei die Grunde-ebene zur ebenen Leitschicht im Wesentlichen parallel ist.

9. Dreifachpolarisationsdiversitätsantenne nach Anspruch 8, wobei der längliche Leiter in einem zur ebenen Leitschicht und der Grunde-ebene im Wesentlichen rechten Winkel angeordnet ist.

10. Drahtloskommunikationsvorrichtung mit:

einem Funk-Sende-Empfänger-Abschnitt und einer Dreifachpolarisationsdiversitätsantenne nach einem der Ansprüche 1 bis 9.

11. Kommunikationsvorrichtung nach Anspruch 10, die als Drahtlosbasisstation konfiguriert ist.

Revendications

1. Antenne de diversité de polarisation triple comprenant :

une structure d'antenne à plaque chargée par fente (202) comprenant une fente (208) s'étendant à travers une couche conductrice (206) disposée sur un plan de sol (210) ; **caractérisée en ce que** ladite fente comprend une paire de fentes d'intersection linéaires allongées (208a, 208b) avec une région d'intersection, et un élément de rayonnement (204) couplé de manière électromagnétique à la plaque chargée par fente, l'élément de rayonnement ayant un conducteur allongé (212) qui s'étend entre le plan de sol (210) et la région (216) d'intersection des fentes d'intersection à partir d'un point d'alimentation (214) qui est disposé sous le plan de sol (210), dans laquelle, en fonctionnement, l'antenne de diversité a un champ électrique polarisé verticalement et deux champs électriques polarisés horizontalement induits respectivement par l'élément de rayonnement (204) et la structure d'antenne à plaque chargée par fente

(202).

2. Antenne de diversité de polarisation triple selon la revendication 1, dans laquelle l'élément de rayonnement est disposé sensiblement en angle droit par rapport au plan de la structure d'antenne à plaque chargée par fente. 5
3. Antenne de diversité de polarisation triple selon la revendication 1 ou la revendication 2, dans laquelle la paire de fentes d'intersection s'étend à travers la couche conductrice plane, la paire de fentes d'intersection étant disposées sensiblement en angle droit l'une par rapport à l'autre. 10
15
4. Antenne de diversité de polarisation triple selon la revendication 1, dans laquelle l'élément de rayonnement se termine au niveau d'une extrémité à l'intérieur d'une partie centrale de la structure d'antenne à plaque chargée par fente, la une extrémité étant physiquement isolée de la structure d'antenne à plaque chargée par fente. 20
5. Antenne de diversité de polarisation triple selon la revendication 1, dans laquelle la fente comprend un trou de passage en forme de fente cruciforme s'étendant à travers la couche conductrice plane. 25
6. Antenne de diversité de polarisation triple selon la revendication 5, dans laquelle l'élément de rayonnement comprend un monopole qui s'étend entre le point d'alimentation et un centre du trou de passage en forme de fente cruciforme. 30
7. Antenne de diversité de polarisation triple selon la revendication 5, dans laquelle le conducteur allongé se termine dans un centre du trou de passage en forme de fente cruciforme. 35
8. Antenne de diversité de polarisation triple selon l'une quelconque des revendications 1 ou 7, dans laquelle le plan de sol est sensiblement parallèle à la couche conductrice plane. 40
9. Antenne de diversité de polarisation triple selon la revendication 8, dans laquelle le conducteur allongé est disposé sensiblement en angle droit par rapport à la couche conductrice plane et le plan de sol. 45
10. Système de communication sans fil comprenant : 50
 une section d'émetteur/récepteur radio ; et
 une antenne de diversité de polarisation triple selon l'une quelconque des revendications 1 à 9. 55
11. Dispositif de communication selon la revendication 10, configuré comme une station de base sans fil.



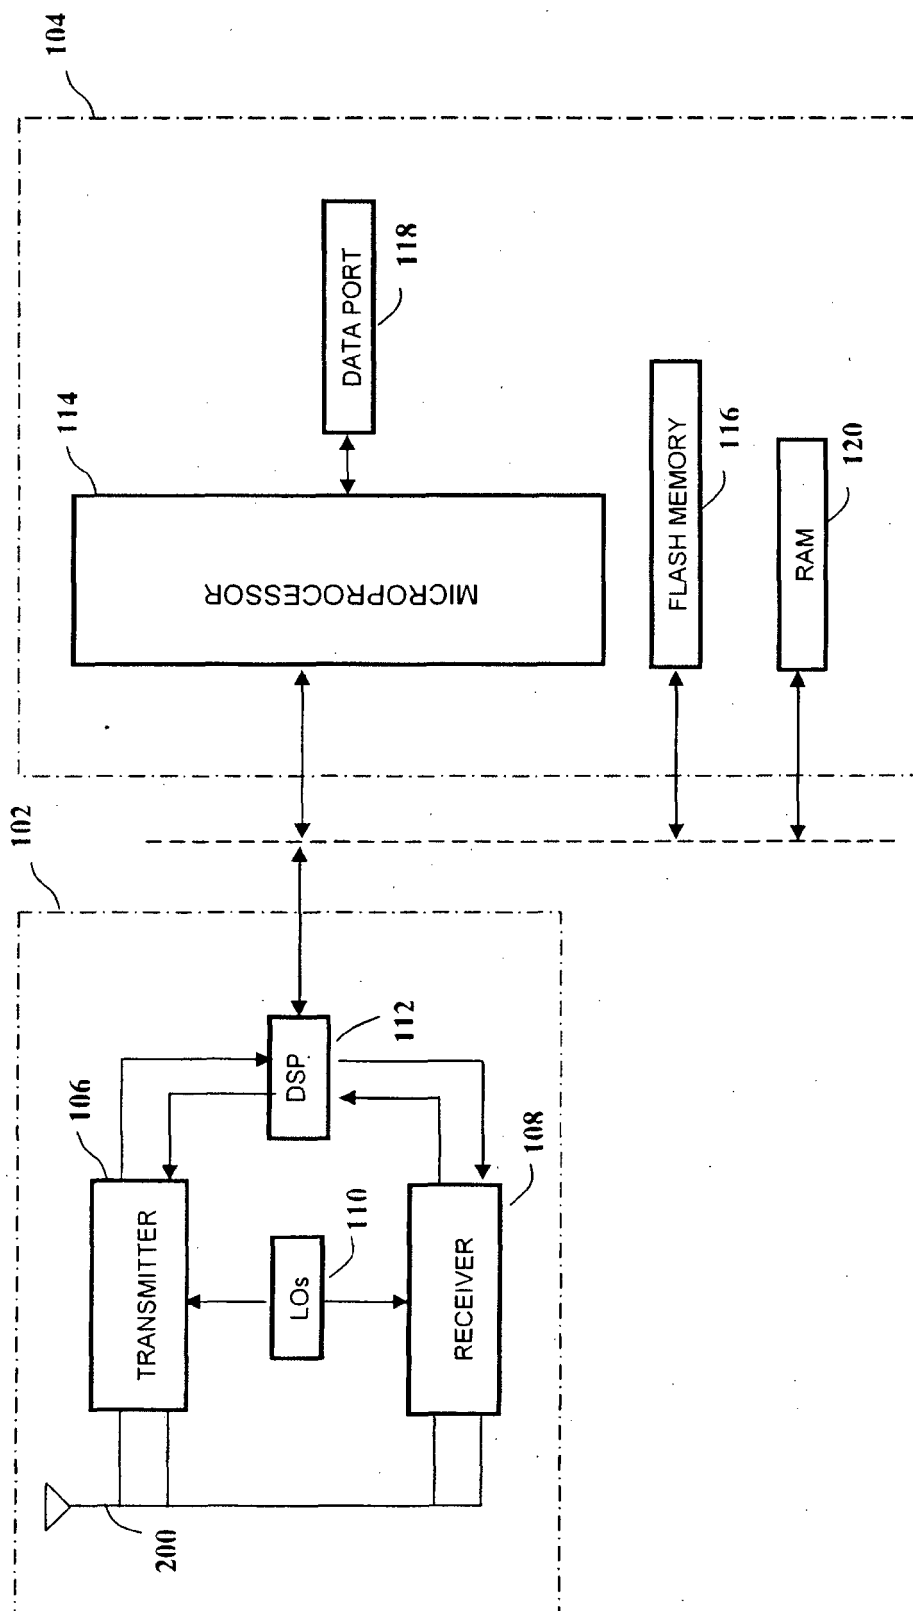


Fig. 1

100

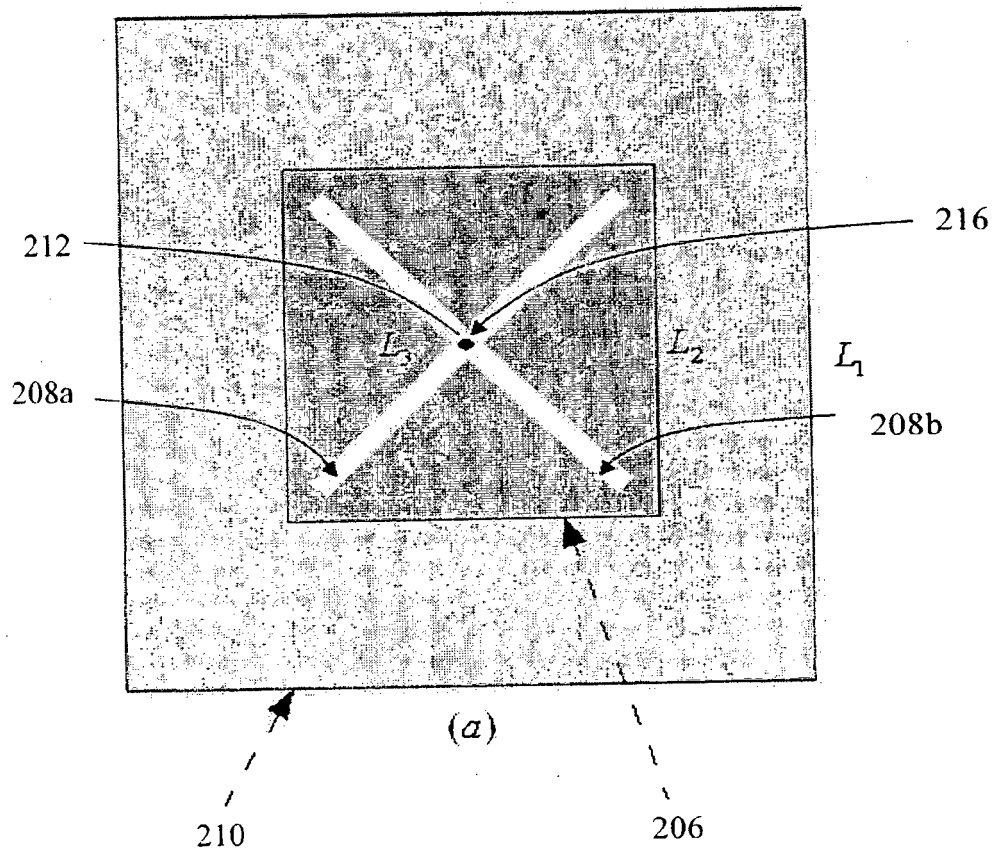

200

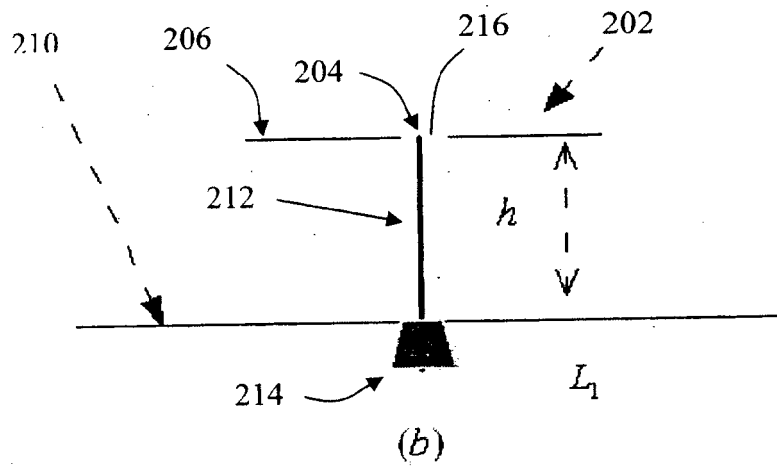

200

Fig. 2

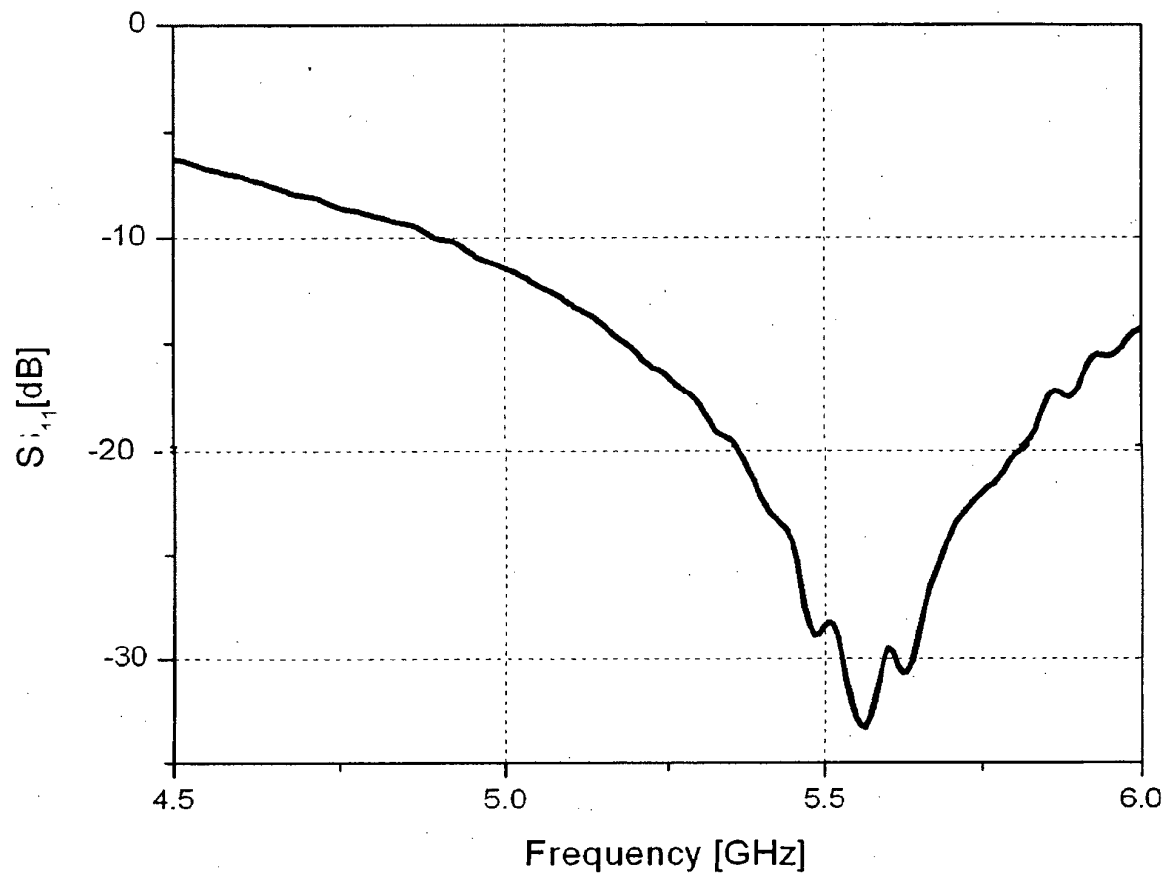


Fig. 3

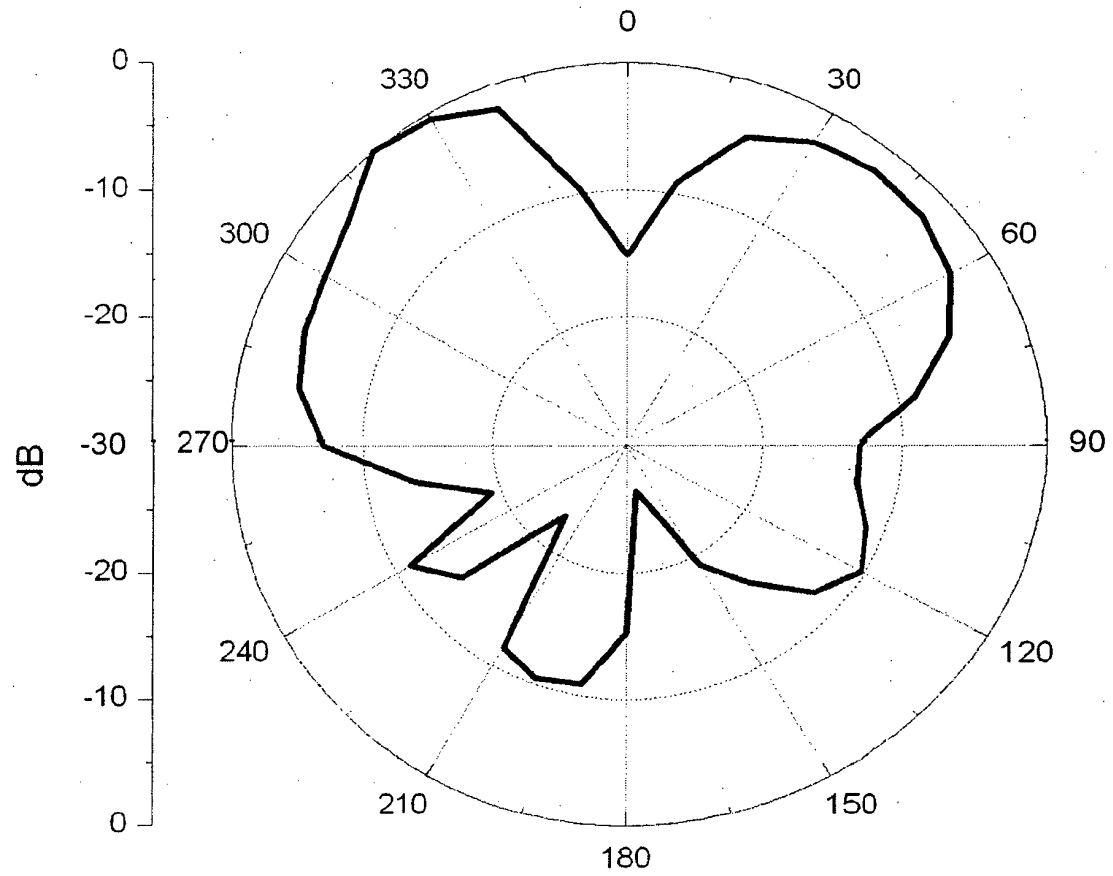


Fig. 4

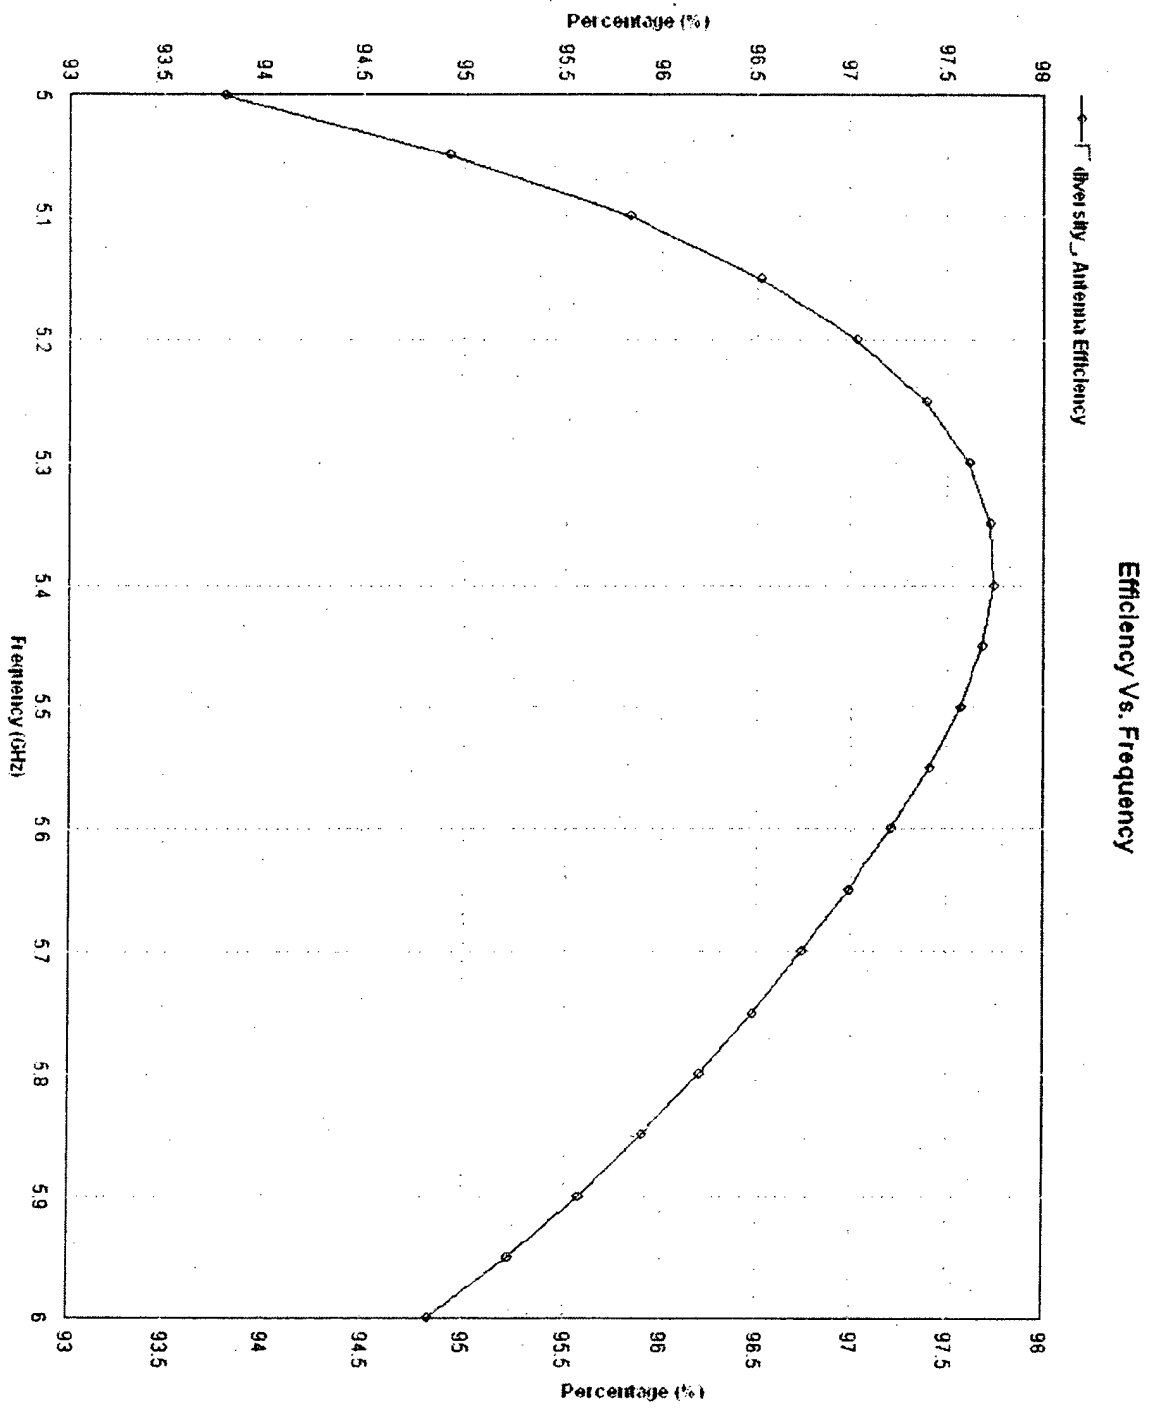


Fig. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6593891 B, Zhang **[0004]**
- US 7336233 B, Thudor **[0005]**
- US 7358916 B, Milyakh **[0005]**
- US 4443802 A **[0006]**