



(11)

EP 2 645 409 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
21.10.2020 Bulletin 2020/43

(51) Int Cl.:
H01L 21/60^(2006.01) H01L 23/485^(2006.01)

(21) Application number: **11843493.5**

(86) International application number:
PCT/JP2011/076628

(22) Date of filing: **18.11.2011**

(87) International publication number:
WO 2012/070480 (31.05.2012 Gazette 2012/22)

(54) **METHOD FOR FORMING A METAL WIRING (E.G., A BUMP) ON A SEMICONDUCTOR WAFER BY TRANSFERRING A SINTERED METAL WIRING MATERIAL FROM A METAL FILM ON A TRANSFER SUBSTRATE**

VERFAHREN ZUR HERSTELLUNG EINER METALLVERDRAHTUNG (Z.B. EINES HÖCKERS) AUF EINEM HALBLEITERWAFER DURCH TRANSFERIEREN EINES GESINTERTEN METALLVERDRAHTUNGSMATERIALS VON EINER METALLSCHICHT AUF EINEM TRANSFERSUBSTRAT

PROCÉDÉ DE FORMATION D'UN CÂBLAGE MÉTALLIQUE (PAR EXEMPLE, D'UNE BOSSE DE CONTACT) SUR UNE TRANCHE SEMI-CONDUCTRICE PAR TRANSFERT D'UN MATÉRIAU FRITTÉ DE CABLÂGE MÉTALLIQUE À PARTIR D'UN FILM MÉTALLIQUE SUR UN SUBSTRAT DE TRANSFERT

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(74) Representative: **Boult Wade Tennant LLP**
Salisbury Square House
8 Salisbury Square
London EC4Y 8AP (GB)

(30) Priority: **26.11.2010 JP 2010263135**

(43) Date of publication of application:
02.10.2013 Bulletin 2013/40

(73) Proprietor: **Tanaka Kikinzoku Kogyo K.K.**
Chiyoda-ku
Tokyo 100-6422 (JP)

(56) References cited:
EP-A1- 1 975 946 EP-A1- 2 782 123
EP-A2- 0 283 003 WO-A1-2010/101236
DE-A1-102009 018 541 JP-A- 6 267 963
JP-A- S62 214 532 JP-A- 2004 228 375
JP-A- 2005 166 739 JP-A- 2005 216 508
JP-A- 2006 260 954 US-A- 4 494 688
US-A- 4 856 185

(72) Inventors:
• **OGASHIWA, Toshinori**
Hiratsuka-shi
Kanagawa 254-0076 (JP)
• **KURITA, Masaaki**
Hiratsuka-shi
Kanagawa 254-0076 (JP)
• **NISHIMORI, Takashi**
Hiratsuka-shi
Kanagawa 254-0076 (JP)
• **KANEHIRA, Yukio**
Hiratsuka-shi
Kanagawa 254-0076 (JP)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 645 409 B1

- "CHAPTER 2: NTV-Technologie" In: MERTENS CH: "Die Niedertemperatur-Verbindungstechnik der Leistungselektronik [FORTSCHRITT-BERICHTS VDI: REIHE 21, ELEKTROTECHNIK; 365]", 2004, VDI VERLAG, DÜSSELDORF, GERMANY, XP055087239, ISBN: 978-3-18-336521-0 pages 6-36, * section 2, first paragraph * * section 2.1, first paragraph * * section 2.1, sixth paragraph * * section 2.1, penultimate paragraph * & "CHAPTER 4: Eigenschaften und Charakterisierung von NTV-Verbindungen" In: MERTENS CH: "Die Niedertemperatur-Verbindungstechnik der Leistungselektronik [FORTSCHRITT-BERICHTS VDI: REIHE 21, ELEKTROTECHNIK; 365]", 2004, VDI VERLAG, DÜSSELDORF, GERMANY, XP001526268, ISBN: 978-3-18-336521-0 pages 73-115, * section 4.2, subsection "L-Schältest", second paragraph, point 1 * * section 4.4, last paragraph *
- CHUANG CH-L ET AL: "Thermosonic Flip-Chip Bonding for Stud Bumps onto Copper Electrodes with Titanium and Silver layers", INTERNATIONAL MICROSYSTEMS, PACKAGING, ASSEMBLY AND CIRCUITS TECHNOLOGY CONFERENCE, 2007 (IMPACT 2007), 1-3 OCTOBER 2007, IEEE, PI, 1 October 2007 (2007-10-01), pages 266-269, XP031204349, DOI: 10.1109/IMPACT.2007.4433614 ISBN: 978-1-4244-1636-3
- BAIG: "Low-Temperature Sintering of Nanoscale Silver Paste for Semiconductor Device Interconnection", DISSERTATION SUBMITTED TO THE FACULTY OF THE VIRGINIA POLYTECHNIC INSTITUTE AND STATE UNIVERSITY IN PARTIAL FULFILLMENT OF THE REQUIREMENT FOR THE DEGREE OF DOCTOR OF PHILOSOPHY IN MATERIALS SCIENCE A , October 2005 (2005-10), pages 1-195, XP009166994, Retrieved from the Internet: URL:<http://scholar.lib.vt.edu/theses/available/etd-10312005-163634/>
- Goodwin F: "Chapter 3.1.10.1. Silver and Silver Alloys, Chapter 3.1.10.2. Gold and Gold Alloys. (Selection)" In: "Springer Handbook of Condensed Matter and Materials Data", 2005, Springer, DE, XP55229590, ISBN: 978-3-540-44376-6 page 342-343, 360, DOI: 10.1007/3-540-30437-1_5, * figs. 3.1-211, 3.1-248 *
- KIRSCH R G ET AL: "Interdiffusion mechanisms in Ag-Au thin-film couples", APPLIED PHYSICS LETTERS, vol. 29, no. 12, 1976, pages 772-775, XP055198762, ISSN: 0003-6951, DOI: 10.1063/1.88944
- CAI ZH ET AL: "Fabrication and adhesion performance of gold conductive patterns on silicon substrate by laser sintering", APPLIED SURFACE SCIENCE, ELSEVIER, AMSTERDAM, NL, vol. 258, no. 1, 27 August 2011 (2011-08-27), pages 478-481, XP028317179, ISSN: 0169-4332, DOI: 10.1016/J.APSUSC.2011.08.088 [retrieved on 2011-08-27]
- OGASHIWA T ET AL: "Wafer-to-wafer transportable gold particle plug for spot vacuum sealing of MEMS", 2017 19TH INTERNATIONAL CONFERENCE ON SOLID-STATE SENSORS, ACTUATORS AND MICROSYSTEMS (TRANSDUCERS), IEEE, KAOHSIUNG, TAIWAN, 18-22 JUNE 2017, 18 June 2017 (2017-06-18), pages 1304-1307, XP033131002, DOI: 10.1109/TRANSDUCERS.2017.7994295 [retrieved on 2017-07-26]
- TANAKA SH ET AL: "Electrical interconnection in anodic bonding of silicon wafer to LTCC wafer using highly compliant porous bumps made from submicron gold particles", SENSORS AND ACTUATORS A: PHYSICAL, vol. 188, 10 January 2012 (2012-01-10), pages 198-202, XP055569489, NL ISSN: 0924-4247, DOI: 10.1016/j.sna.2012.01.003
- OGASHIWA T ET AL: "Low-Temperature Bonding Technique Using Sub-Micron Au Particles", EREKUTORONIKUSU JISSO GAKKAISHI - JOURNAL OF JAPAN INSTITUTE OF ELECTRONICS PACKAGING, vol. 10, no. 7, 1 November 2007 (2007-11-01), pages 560-566, XP055569694, JP ISSN: 1343-9677, DOI: 10.5104/jiep.10.560
- TANAKA SH ET AL: "Electrical connection using submicron porous gold bumps for wafer-level packaging of mems using anodically-bondable LTCC wafer", 2011 16TH INTERNATIONAL SOLID-STATE SENSORS, ACTUATORS AND MICROSYSTEMS CONFERENCE (TRANSDUCERS'11), BEIJING, CHINA, 5-9 JUNE 2011, IEEE, PISCATAWAY, NJ, 5 June 2011 (2011-06-05), pages 342-345, XP031910806, DOI: 10.1109/TRANSDUCERS.2011.5969467 ISBN: 978-1-4577-0157-3

Remarks:

The file contains technical information submitted after the application was filed and not included in this specification

Description

TECHNICAL FIELD

5 **[0001]** The present invention relates to a method of forming a metal wiring on a transfer-receiving object such as a semiconductor wafer, a compound wafer or a MEMS wafer using a transfer substrate.

BACKGROUND ART

10 **[0002]** With the increase in packaging density of electronic parts such as semiconductor chips, the mainstream of the packaging method has shifted from conventional wire bonding methods to wireless mounting methods such as flip-chip bonding methods in which a semiconductor chip is directly mounted to a circuit substrate. In the process of producing an electronic part using this mounting method, a bump is formed on a terminal electrode on a semiconductor chip on a device wafer or an external electrode for connecting to a semiconductor chip, thereby forming a metal wiring, and face
15 down bonding the same to a substrate. Also it is common that before forming a bump, the terminal electrode is metallized to form a barrier metal layer and a bump is formed thereon.

[0003] In conventional methods of forming a bump, plating methods have been generally used. Bumps formed by a plating method are considered to be useful as an electrode because they are compact and have good electric conductivity. However, there is a concern that the formation of bumps by a plating method is insufficient for responding to miniaturization of metal wiring that is considered to develop further in the future. Thus, a method of forming a bump based on a transfer method using a transfer substrate has been proposed as in Patent Literature 1.

[0004] In the method of forming a bump with a transfer substrate, a transfer substrate in which a wiring material that will serve as a bump is previously formed on a substrate such as glass is prepared. Then the transfer substrate is put on a wafer previously metallized and the resultant is pressed and heated, thereby transferring the wiring material to the
25 wafer to form a bump. The method can transfer any wiring material on a transfer substrate to any position of a wafer by controlling pressing and heating, and therefore enables miniaturization of metal wiring, and in addition can avoid forming wiring on a defective sector of the wafer, and can even avoid wasting resources.

[0005] DE 10 2009 018541 A1 discloses a method of forming a metal wiring by using a transfer substrate for transferring a metal wiring material to a transfer-receiving object, comprising: preparing the metal wiring material as a molded article
30 through applying a metal paste composed of gold powder and a solvent on a substrate of the transfer substrate and subsequently drying and sintering the metal paste, forming an electrode film on a chip being the transfer-receiving object, superimposing the transfer substrate on the transfer-receiving object, with the transfer substrate opposed to the transfer-receiving object, and while heating, pressing the transfer substrate, thereby bonding and transferring the metal wiring material to the electrode film of the transfer-receiving object, and subsequently removing the substrate of the transfer
35 substrate.

[0006] The teaching of JP H06 267963 A is related to that of DE 10 2009 018541 A1.

Prior Art Documents

40 Patent Document

[0007] [Patent Document 1] Japanese Patent Application Laid-Open No. 5-144870

[0008] In the meantime, in the above process of forming a bump using a transfer substrate, the heating temperature at the wafer side is slightly different from the heating temperature at the transfer substrate side at the time of transfer of
45 the bump from the transfer substrate to the wafer. More specifically, the heating temperature at the wafer side is 300 to 400°C, while the heating temperature at the transfer substrate side is 100 to 200°C. The setting temperatures and the difference in the temperatures cause deformation (warpage) of the transfer substrate. In other words, as glass is often used as a transfer substrate, the glass is likely to be deformed when the heating temperature is 200°C or more. In this case, even if the heating temperature for the transfer substrate is set at a relatively low temperature, the temperature
50 of the glass substrate is likely to increase due to the transfer of heat through the bump if a high heating temperature is employed at the wafer side.

[0009] Also, in the case where a semiconductor circuit is formed on a wafer, the high temperature at the wafer side for the transfer of a bump may cause damage on the circuit. For these reasons, generally a low heating temperature is more preferred at the time of the transfer of a bump, but the heating temperature at the wafer side should not be easily
55 lowered. This is because a bump is usually formed on a transfer substrate by a plating method and in order to transfer the bump formed by plating to a wafer, it is necessary to bond the wafer and the bump sufficiently, and this necessitates high temperature heating.

SUMMARY OF THE INVENTION

Problems to be Solved by the Invention

5 [0010] Thus, the present invention provides a method of forming a metal wiring using a transfer substrate according to claim 1, the transfer substrate allowing the heating temperature at the side of the transfer-receiving object to be lower than before.

Means for Solving the Problems

10 [0011] To solve the above problem, the present inventors have conducted studies based on our technical knowledge for discovering a transfer substrate which is provided with a metal wiring material and which has a structure that enables transfer to a transfer-receiving object at a low temperature. As a result, the present inventors have found that a molded article prepared by sintering high purity and fine particle size metal powder can be bonded to a transfer-receiving object
15 at a relatively low temperature, and the molded article functions as a metal wiring, and have completed the present invention.

[0012] Accordingly, the present invention is a method according to claim 1.

[0013] In the following, the present invention will be described in detail. As described above, the transfer substrate of the method of the present invention is characterized in that as a metal wiring material (bump) to be transferred to a transfer-receiving object (wafer), a sintered body prepared by sintering a predetermined metal powder is employed. The metal wiring material composed of the sintered body is porous and different from a compact body formed by conventional plating, and has a point contact with the surface of a transfer-receiving object at the time of transfer. The present inventors consider that the point contact obtained by the porous state allows the temperature necessary for bonding to the surface of the transfer-receiving object to be low. As a result, the temperature at the side of the transfer-receiving object at the
25 time of transfer can be lower (at 300°C or lower) than before.

[0014] For the metal wiring material composed of a sintered body, the reasons why the purity and the particle size of the metal powder to be sintered are specified are as follows. For the purity, in consideration of conductivity after being formed into a bump and transferred. More specifically, when the purity is less than 99.9% by weight, necessary conductivity might not be obtained. Also, for the particle size of the metal powder, in the case of a metal powder having a particle size of more than 1.0 μm , large voids may be easily formed in the molded article and consequently necessary conductivity cannot be obtained. The better the smaller the particle size of the metal powder, but since handling of powder having a particle size of less than 0.01 μm is inefficient, the lower limit of the particle size is 0.01 μm .
30

[0015] The metal wiring material composed of a sintered body is porous and has a density of preferably 0.45 to 0.95 times the density of the original metal powder. As the sintering progresses, the metal wiring material becomes compact and obtains a density close to that of the bulk metal. A metal wiring material having a density of more than 0.95 times the density of the bulk metal is too hard for transfer to be carried out. On the other hand, a metal wiring material having a density of less than 0.45 times that of the bulk metal is not preferred as metal wiring because metal powder particles do not have sufficient contact and thus have poor conductivity.
35

[0016] The metal wiring material is composed of gold powder (present invention), silver powder, platinum powder, palladium powder, copper powder or an alloy powder of these metals (reference examples). This is because the conductivity of the bump is considered. The metal wiring material may be prepared by sintering only one of the above metal powders (gold - present invention), or a mixture of two or more of them (reference example). For example, gold powder alone may be sintered (present invention), or gold powder and palladium powder may be mixed, or gold powder and silver powder may be mixed and then sintered (reference examples).
40

[0017] The above metal wiring material is not directly formed on a substrate, and an underlying metal film is formed between the substrate and the metal wiring material. Although glass substrates are often used as the substrate, since glass has poor bonding properties to metal, direct formation of a metal wiring material on glass is likely to cause detachment at the time of handling of the transfer substrate. For this reason, an underlying metal film is formed to ensure adhesiveness to the metal wiring material. The underlying metal film is composed of any metal of gold, silver, platinum, palladium, ruthenium, rhodium, iridium, chromium, titanium, tungsten, tantalum, nickel, copper and zirconium, or an alloy thereof.
45 50

[0018] In the transfer substrate of a reference example, at least one coating layer composed of a predetermined metal may be formed on the surface of the metal wiring material (facing the transfer-receiving object). As described above, in the process of producing an electronic part by a wireless mounting method, often a terminal electrode on wafer is metallized before forming a bump to form a barrier metal layer and a bump is formed thereon. Thus, in the reference example, a coating layer is previously formed on a metal wiring material which will serve as a bump, and transfer is carried out in this state so that a barrier metal layer and a bump can be simultaneously formed. While even a metallizing treatment for forming a barrier layer is a load for a semiconductor circuit, forming a coating layer eliminate the need for the metallizing treatment of wafer and thus can reduce the load. The use of the coating layer also contributes to simpli-
55

fication of the process for forming a bump.

[0019] As described above, the metal wiring material can be transferred even if a coating layer has been formed, because as long as the coating layer has a predetermined thickness, the above-described easiness of bonding by point contact on the surface of the sintered body can be maintained. Herein, to maintain the surface state of the sintered body, the coating layer needs to have a thickness of 1 μm or less. The thinner the coating layer, the better, but when the coating layer is extremely thin, the continuity of the metal layer is difficult to be obtained. Therefore the lower limit of the thickness of the coating layer is preferably 0.003 μm .

[0020] The coating layer is composed of any metal of gold, silver, platinum, palladium, ruthenium, rhodium, iridium, chromium, titanium, tungsten, tantalum, nickel, copper and zirconium, or an alloy thereof, which is different from the metal wiring material. Also it is preferable that the coating layer has a compact and thin film structure. Regardless of the type of the coating layer, the layer may have a thickness of 1 μm or less. The coating layer may be a single layer or may have a multi-layer structure of a plurality of metals, and may have a total thickness of 1 μm or less.

[0021] The underlying metal film may have the same composition as the metal wiring material, and more preferably has a composition different from that of the metal wiring material. When the composition is the same as that of the metal wiring material, the adhesiveness between the metal wiring material and the underlying metal film may be increased, and thus the metal wiring material may remain on the substrate at the time of transfer to the transfer-receiving object. However, even the underlying metal film and the metal wiring material are composed of the same composition, the heating condition in transfer, for example, is adjusted so as to increase the adhesiveness between the metal wiring material and the transfer-receiving object, and thus remaining of the metal wiring material can be avoided. Therefore, the compositions need not always be different.

[0022] The underlying metal film has a thickness of 1 nm or more. It is preferable that the underlying metal film has a thickness of 1 to 100 nm. A thickness of less than 1 nm causes low adhesiveness between the underlying metal film and the substrate, and the adhesiveness of the metal wiring material cannot be obtained. Although the upper limit is not particularly limited, a thickness of more than 100 nm does not make difference in the effect. By adjusting the thickness of the underlying metal film in the above range, the transfer rate of the metal wiring material can be adjusted. More specifically, when the underlying metal film and the metal wiring material are composed of the same material (for example, Au is used for the underlying metal film on the glass substrate and Au powder is used for the metal wiring material), the adhesiveness between the underlying metal film and the metal wiring material is increased, and therefore by reducing the thickness of the underlying metal film, the underlying metal film can be separated from the substrate at the time of transfer. This method of separating at the time of transfer by the thinning of the underlying metal film can suppress residues of the metal wiring material and thus is more effective in adjusting the transfer rate compared to the case of increasing the thickness of the underlying metal film. When the thickness of the underlying metal film is reduced with the intention of separating at the time of transfer as herein described, the underlying metal film has a thickness of preferably 1/3 or less of the average particle size of metal powder constituting the metal wiring material.

[0023] The underlying metal film may be composed of a single layer or a plurality of layers. For example, a titanium film may be formed on a glass substrate and then a gold film may be formed thereon. Such multilayer films may be heated to allow titanium to diffuse into the outermost surface and be oxidized to form oxide.

[0024] Since Cr, W and TiW are susceptible to oxidation, when using them as a single layer, the surface may be subjected to an oxygen plasma treatment to stabilize the surface oxide film. The oxygen plasma treatment means plasma treatment in ozone or oxygen atmosphere in atmospheric or reduced pressure.

[0025] A common material of a substrate on which a metal wiring material is formed is glass or resin-reinforced glass, and silicon and metal such as Kovar may also be employed. Although the thickness of the substrate is not particularly limited, the substrate has a thickness of preferably 50 to 500 μm in consideration of its handling ability and stability of transfer.

[0026] The process for producing the transfer substrate of the present invention includes forming an underlying metal film on a substrate such as glass and then forming a metal wiring material. For forming the underlying metal film, a process selected from various thin film forming processes, namely a sputtering method, a plating method or a CVD method, is employed.

[0027] On the other hand, for the formation of the metal wiring material, the metal wiring material is formed by sintering metal powder in the present invention as described above. For forming the metal wiring material composed of metal powder, a metal paste prepared by adding an appropriate organic solvent to metal powder is used for molding. This is because the paste can be applied by a wide variety of methods and is also available for miniaturization of wiring as described later.

[0028] Preferred examples of organic solvents for the metal paste include ester alcohol, terpeneol, pine oil, butyl carbitol acetate, butyl carbitol and carbitol. Preferred examples of ester alcohol organic solvents include 2,2,4-trimethyl-3-hydroxypentaisobutyrate ($\text{C}_{12}\text{H}_{24}\text{O}_3$). This solvent is preferred because it can be dried at a relatively low temperature.

[0029] The metal paste may contain at least one resin selected from an acrylic resin, a cellulose resin and an alkyd resin in addition to the above organic solvent. The addition of such resin prevents the metal powder in the metal paste

from coagulating and makes the metal paste more homogeneous, and therefore a uniform bump can be formed. Examples of acrylic resin include methyl methacrylate polymer, examples of cellulose resin include ethyl cellulose, and examples of alkyd resin include phthalic anhydride resin. Of them, ethyl cellulose is particularly preferred.

[0030] The step of applying the metal paste is not particularly limited. For example, a mold of a bump shape may be placed on a substrate and the mold may be filled with the metal paste. Alternatively, as in the case of forming a bump by a conventional plating method, a resist may be used. As the method of applying the metal paste, various methods may be used, such as a spin coating method, a screen printing method, an ink jet method and a method comprising spreading dropped paste by a silicon rubber spatula, thereby filling pores with the paste.

[0031] After applying the metal paste, it is necessary to sinter the paste after applying and drying the metal paste. This will create a close point contact state between metal particles in the paste and between the bonding surface of a bonding member (the surface to which the paste is applied) and metal particles, and thus the shape of the metal wiring material is settled. It is required that the temperature of sintering is 80 to 300°C. This is because when the temperature is less than 80°C, no point contact is formed. On the other hand, at more than 300°C sintering progresses excessively and necking between metal particles develops to cause strong bonding, making the resultant too hard. Also, heating at more than 300°C may cause deformation of glass substrates. The heating time for sintering is preferably 30 to 120 minutes. This is because when the heating time is short, the temperature in the sintering furnace is unstable and therefore the metal powder cannot be sufficiently sintered. This is also because when the heating time is too long, productivity is lowered. The sintering is carried out without applying pressure.

[0032] In the case of forming a coating layer on the metal wiring material, various thin film forming processes such as a sputtering method, a plating method and a CVD method, may be employed as in the case of forming underlying metal.

[0033] Next, the method of forming a metal wiring on a transfer-receiving object with the transfer substrate according to the present invention is basically the same as that in a conventional transfer method. More specifically, a transfer substrate is superimposed on a transfer-receiving object (wafer) with the surface of the transfer substrate on which a metal wiring material is formed being opposed to the transfer-receiving object, and while the transfer substrate and the transfer-receiving object are heated, the metal wiring material is pressed against the transfer-receiving object to bond the metal wiring material to the transfer-receiving object, and then the transfer substrate is removed. In this method, the temperature for heating the transfer substrate is 80 to 200°C and the temperature for heating the transfer-receiving object is 80 to 300°C in the present invention.

[0034] In the present invention, the temperature for heating the transfer-receiving object is 80 to 300°C, which is lower than that in a transfer process with a conventional transfer substrate. The temperature for heating the transfer-receiving object is preferably 100 to 200°C. This is for reliable transfer of a metal wiring material from a transfer substrate and for effective prevention of overheating due to heat transfer from the transfer-receiving object to the transfer substrate. The temperature for heating the transfer substrate is preferably 100 to 200°C.

[0035] Also, in this transfer method, to press a metal wiring material against the transfer-receiving object, namely, pressurization, is essential. It is preferable that the pressure is equal to or less than the yield strength of the metal wiring material. This is because pressurization far exceeding the yield strength causes deformation of the metal wiring material and thus the predetermined height or shape cannot be obtained. Specifically the pressure is 0.1 to 1.5 times the yield strength of the metal wiring material.

[0036] It is required that an electrode film composed of a metal containing a metal constituting the metal wiring material on the transfer substrate is previously formed on the transfer-receiving object at a position where metal wiring is to be formed. This is for reliable transfer of metal wiring material. The composition, however, may not be exactly the same. For example, when the metal wiring material is composed of a mixture of gold powder and silver powder (reference example), the electrode film formed on the transfer-receiving object may be composed of gold. The electrode film may be composed of a single layer or a plurality of layers as long as the outermost layer is composed of metal of the same type as the metal wiring material.

Advantages Effect of the Invention

[0037] As described above, the transfer substrate of the method of the present invention ensures stable transfer of a metal wiring material even when the temperature for heating a transfer-receiving object is low at the time of transfer. As a result, deformation of transfer substrates due to overheating can be prevented and damage on the transfer-receiving object can be prevented.

BRIEF DESCRIPTION OF THE DRAWINGS

[0038]

Fig. 1 is a schematic view illustrating the process for forming a metal wiring according to a first embodiment.

Fig. 2 is a schematic view illustrating the process for forming a metal wiring according to a first reference example.

[0039] First embodiment: A transfer substrate was prepared by using a glass substrate and a metal wiring was formed on a Si wafer by using the transfer substrate.

(Preparation of transfer substrate)

[0040] First a Pt film was formed on a glass substrate (diameter size 100 mm, 4 inches, average thickness 500 μm) by sputtering as an underlying metal film. For the formation of the Pt film, after cleaning the glass substrate by reverse sputtering (Ar pressure: 2.8×10^{-1} Pa, RF output: 250 W, sputtering time: 60 seconds), a Pt film having a thickness of 20 nm was formed by using a Pt target in the condition of an Ar pressure of 7.0×10^{-1} Pa, a DC output of 500 W and a sputtering time of 115 seconds.

[0041] Next, by using a metal paste composed of Au powder, a metal wiring material was formed on the glass substrate. The metal paste used here was prepared by mixing gold powder having a purity of 99.95% by weight (average particle size: 0.3 μm) produced by a wet reduction method and ester alcohol (2,2,4-trimethyl-3-hydroxypentaisobutyrate ($\text{C}_{12}\text{H}_{24}\text{O}_3$)) as an organic solvent. For forming the metal wiring material, photoresist was applied to the glass substrate and through-holes were formed by using usual photolithography. Then the metal paste was dropped on the surface of the photoresist and the through-holes in the photoresist were filled with the gold paste by a spin coating method. Next the substrate to which the paste was applied was dried in a dryer kept at a temperature of 50°C or less, and then the resist was removed with an organic solvent. After removing the resist, the substrate was put in an electric furnace to sinter the gold powder, thereby forming a metal wiring material. The sintering was carried out at a temperature of 90°C for 1 hour. In this embodiment, 100 rectangular metal wiring materials (diameter dimension 50 μm , height 25 μm) were formed on the substrate at regular intervals.

(Transfer to wafer)

[0042] Wiring was formed on a Si wafer by use of the transfer substrate prepared above. Fig. 1 is a view illustrating the process. As Fig. 1 shows, the glass substrate for transfer prepared in this embodiment is set on an upper heating block by adsorption and a Si wafer (size 100 mm, 4 inches) on which wiring is to be formed is set on a lower heating block. Ti/Pt/Au (thickness 50 nm / 50 nm / 200 nm) is formed on the surface of the Si wafer as an electrode film. After setting the transfer substrate and the Si wafer, the upper heating block is lowered to allow the transfer substrate to adhere to the Si wafer. The upper heating block was heated at 150°C and the lower heating block was heated at 150°C, and the upper heating block was pressed at a pressure of 30 MPa and the state of pressing was maintained for 10 minutes. After some time, the upper heating block was raised. The pressure at this stage was set at 1.4 times the yield strength (21 MPa) of a gold powder sintered body that had been previously measured at 150°C or less.

[0043] After the upper heating block was lifted up, whether any metal wiring material remained on the transfer substrate or not was observed, and it has been found that all metal wiring materials were transferred to the Si wafer to form metal wirings without transfer leftovers. Also, the height of each transferred metal wiring was measured to examine irregularity. As a result, the irregularity was within $\pm 0.5 \mu\text{m}$, showing that the metal wirings also had a good shape.

[0044] Second embodiment: in this embodiment, transfer substrates were prepared while changing the configuration of the metal powder (metal paste) constituting the metal wiring material on the transfer substrate and the underlying metal film, and a metal wiring was formed on a Si wafer by using the respective transfer substrates. The structure of the transfer substrates prepared in this embodiment is as follows. Condition for preparing the transfer substrates are the same as those in the first embodiment except for the types of metal powder and the target materials for forming underlying metal (in the case of an underlying metal film composed of an alloy, an alloy target having the same composition was used).

[Table 1]

No.	Metal wiring material		Underlying metal film	
	Metal powder	Average particle size (μm)	Material	Film thickness (nm)
1	Au	0.01	Pt	1
2		0.3		20
3		1		100

EP 2 645 409 B1

(continued)

No.	Metal wiring material		Underlying metal film	
	Metal powder	Average particle size (μm)	Material	Film thickness (nm)
4 *	Ag	0.3	Pt	20
5 *	Pd			
6 *	Pt		Au	20
7	Au	0.3	Au	20
8			Ti	
9			Ru	
10			Pd	
11			Cr	
12			Ta	
13			Ir	
14			Au/Cr	
15			Au/Ti	
16			Pt-0.1 %Zr	
17			Au-0.1%Zr	
18			Pt	
19 *		1.2	Pt	
• All substrates were glass substrates • Sample No. 2 is the same as the first embodiment • For Samples Nos. 14 and 15, a multilayer film (Au/Cr, Au/Ti) was formed and then heated at 250°C in air for 1 hour to diffuse Cr or Ti into the Au surface and the surface was oxidized in air. • For Pt-0.1% Zr and Au-0.1% Zr, a single layer film was formed by use of an alloy target *Reference Example				

[0045] A metal wiring was formed on a Si wafer by using the respective transfer substrates above. In these tests, the metal film on the Si wafer was changed in some cases. Also the temperature for heating the lower block was changed in some cases. The results of the tests are shown in Table 2.

[Table 2]

Test No.	Transfer substrate			Si wafer	Transfer conditions		Results of transfer test	
	No.	Wiring material	Underlying metal film		heating Pressure	temperature	Transfer rate	Variation
1	1	Au	Pt	Au	80	1.5	100/100	± 0.5
2	2				150	1.0	100/100	± 0.5
3	3				300	0.1	100/100	± 0.5
4 *	4	Ag	Pt	Ag	150	1.0	100/100	± 0.5
5 *	5	Pd	Pt	Pd	250	1.0	100/100	± 0.5
6 *	6	Pt	Au	Pt	250	1.0	100/100	± 0.5

(continued)

Test No.	Transfer substrate			Si wafer	Transfer conditions		Results of transfer test	
	No.	Wiring material	Underlying metal film	Outermost surface of electrode film	heating	Pressure temperature	Transfer rate	Variation
7	7	Au	Au	Au	150	1.0	100/100	± 0.5
8	8		Ti				100/100	± 0.5
9	9		Ru				100/100	± 0.5
10	10		Pd				100/100	± 0.5
11	11		Cr				100/100	± 0.5
12	12		Ta				100/100	± 0.5
13	13		Ir				100/100	± 0.5
14	14		Au/Cr				100/100	± 0.5
15	15		Au/Ti				100/100	± 0.5
16	16		Pt-0.1%Zr				100/100	± 0.5
17	17		Au-0.1%Zr				100/100	± 0.5
18 *	1	Au	Pt	Au	70	1.5	80/100	$\pm 0.5 \mu\text{m}$ or more
19 *	19	Au	Pt	Au	300	1.5	90/100	$\pm 0.5 \mu\text{m}$ or more
- The temperature for heating the transfer substrate was 150°C. - The pressure represents (pressure for transfer substrate/yield stress of metal wiring material). *Reference Example								

[0046] Table 2 above shows that both when the metal wiring material was composed of varying types of metal powder and when the underlying metal film was changed, the transfer was perfect even at a low temperature of 300°C or less. However, although low temperature is applicable, the transfer rate is likely to be decreased when the heating temperature at the wafer side is low (Test No. 18). Also, it has been found that when a metal powder having a large particle size was used (Test No. 19), the transfer rate was inferior even if the heating temperature at the wafer side was relatively high.

[0047] First reference example: in this reference example, transfer substrates were prepared while changing the configuration of the metal powder (metal paste) constituting the metal wiring material on the transfer substrate, the underlying metal film and the coating layer, and a metal wiring was formed on a Si wafer by using the respective transfer substrates. For conditions for preparing the transfer substrates, except the metal powders and the target materials for forming underlying metal (in the case of an underlying metal film composed of an alloy, an alloy target having the same composition was used) the process was basically the same as in the first embodiment. For the formation of the coating layer, after the application and the drying of metal paste in the process of the first embodiment, a coating layer was formed on the metal paste, and subsequently the resist was removed and the metal powder was sintered. For the formation of the coating layer by a plating method, film forming was carried out by using an appropriate commercially available plating solution in recommended conditions. Alternatively the coating layer can be formed by a sputtering method also by using a commercially available sputtering target material. The structure of the transfer substrates prepared is as follows.

[Table 3]

Sample No.	Metal wiring material		Underlying metal film		Coating layer	
	Metal powder	Average particle size (μm)	Material	Film thickness (nm)	Material	Film thickness (μm)
20	Au	0.01	Pt	1	Ag (1)	0.1
21		0.3		20		
22		1		100		
23	Ag	0.3	Pt	20	Au	0.1
24	Pd					
25	Pt		Au	20		
26	Au	0.3	Au	20	Ag (1)	0.1
27			Ti			
28			Ru			
29			Pd			
30			Cr			
31			Ta			
32			Ir			
33			Au/Cr			
34			Au/Ti			
35			Pt-0.1%Zr			
36			Au-0.1%Zr			
37			Pt			
38		1.2	Pt			

(continued)

Sample No.	Metal wiring material		Underlying metal film		Coating layer	
	Metal powder	Average particle size (μm)	Material	Film thickness (nm)	Material	Film thickness (μm)
39	Au	0.3	Ti	50	Ag (2)	0.01
40 41						0.1
42					Ag (1)	0.01
43						0.1
44						1.0
45						1.1
46					Pt	0.01
47						0.1
48						1.0
49 50 51						1.1
					Ag/Pt	0.05/0.05
					Cr/Pt	0.05/0.05
	Ti/Pt	0.05/0.05				

- All substrates were glass substrates • Sample No. 21 is the same as the first embodiment
- For Samples Nos. 33 and 34, a multilayer film (Au/Cr, Au/Ti) was formed and then heated at 250°C in air for 1 hour to diffuse Cr or Ti into the Au surface and the surface was oxidized in air.
- For Pt-0.1% Zr and Au-0.1% Zr, a single layer film was formed by using an alloy target
- Coating layer: Ag(1): electroless plating, Ag(2): electroplating
- Coating layers of Au and Pt were formed by electroplating
- For Samples No. 49 to 51 a multilayer coating layer was formed (metal wiring material/Pt/(Ag, Cr, Ti))

[0048] A metal wiring was formed on a Si wafer by use of the respective transfer substrates above. In these tests, the metal film on the Si wafer was changed in some cases. Also the temperature for heating the lower block was changed in some cases. Fig. 2 is a view illustrating the process. The results of the test are shown in Table 4.

[Table 4]

Test No.	Transfer substrate				Wafer	Transfer conditions	Results of transfer test	
	Sample No.	Wiring material	Underlying metal film	Coating layer	Outermost surface of electrode film	Wafer temperature/pressure	Transfer rate	Variation
20	20	Au	Pt	Ag (1)	Au	80°C/1.5	100/100	± 0.5
21	21					150°C/1.0	100/100	± 0.5
22	22					300°C/0.1	100/100	± 0.5
23	23	Ag	Pt	Au	Ag	150°C/1.0	100/100	± 0.5
24	24	Pd	Pt		Pd	250°C/1.0	100/100	± 0.5
25	25	Pt	Au		Pt	250°C/1.0	100/100	± 0.5

(continued)

Test No.	Transfer substrate				Wafer	Transfer conditions	Results of transfer test	
	Sample No.	Wiring material	Underlying metal film	Coating layer	Outermost surface of electrode film	Wafer temperature/ pressure	Transfer rate	Variation
26	26	Au	Au	Ag (1)	Au	150°C/1.0	100/100	± 0.5
27	27		Ti				100/100	± 0.5
28	28		Ru				100/100	± 0.5
29	29		Pd				100/100	± 0.5
30	30		Cr				100/100	± 0.5
31	31		Ta				100/100	± 0.5
32	32		Ir				100/100	± 0.5
33	33		Au/Cr				100/100	± 0.5
34	34		Au/Ti				100/100	± 0.5
35	35		Pt-Zr				100/100	± 0.5
36	36		Au-Zr				100/100	± 0.5
37	39	Au	Ti	Ag (2)	Au	200°C/1.0	100/100	± 0.5
38	40			Ag (1)			100/100	± 0.5
39	41						100/100	± 0.5
40	42						100/100	± 0.5
41	43			Pt (2)			100/100	± 0.5
42	45						100/100	± 0.5
43	46						100/100	± 0.5
44	47			<u>Ag/Pt</u>			100/100	± 0.5
45	49			Cr/Pt			100/100	± 0.5
46	50			Ti/Pt			100/100	± 0.5
47	51							
48	37	Au	Pt	Ag (1)	Au	70°C/1.5	80/100	±0.5 or more
49	38			Ag (1) (1.1μm)		300°C/1.5	90/100	±0.5 or more
50	44					200°C/1.0	80/100	±0.5 or more
51	48			Pt (1.1μm)			70/100	±0.5 or more

[0049] Table 4 above shows that both when the metal wiring material was composed of varying types of metal powder and when the underlying metal film was changed, the transfer was perfect even at a low temperature of 300°C or less. However, although low temperature is applicable, the transfer rate is likely to be decreased when the heating temperature at the wafer side is low (Sample No. 48).

[0050] Also, it has been found that when a metal powder having a large particle size was used (Test No. 49), the transfer rate was inferior even if the heating temperature at the wafer side was relatively high. Further, for the coating layer, in the case of the coating layers having a thickness of more than 1 μm, the transfer rate is found to be decreased

(Test Nos. 50, 51).

[0051] Second reference example: in this reference example, a bump was formed in the same manner as in the second embodiment by use of Samples No. 39 to 51 of the first reference example, and the shear strength (bonding force) of the bump was measured. In this embodiment, two different pressures (1 MPa, 5 MPa) were set. The shear strength was measured with a bonding tester. The results are shown in Table 5.

[Table 5]

Test No.	Transfer substrate				Shear strength (MPa)	
	Sample No.	Wiring material	Underlying metal film	Coating layer	Pressing load 1 MPa	Pressing load 5 MPa
1	39	Au	Ti	Ag (2)	30	31
2	40				29	30
3	41			Ag (1)	32	35
4	42				32	34
5	43				22	28
6	44				14	18
7	45			Pt	32	33
8	46				28	29
9	47				21	23
10	48				15	17
11	49			Ag/Pt	32	34
12	50			Cr/Pt	24	25
13	51			Ti/Pt	25	26

[0052] Table 5 shows that taking into account the yield strength (21 MPa) of a gold powder sintered body, in the case of the coating layers having a thickness of more than 1 μm ((Test No. 6 (Sample No. 44) and (Test No. 10 (Sample No. 48))), the strength of the sample was insufficient with a shear strength of less than 20 MPa. All samples having a coating layer thickness of 1 μm or less had good strength. This is because as described above, the condition of the surface of the metal wiring material could not be maintained with a thick coating layer and thus bonding properties of the sintered body were decreased.

Industrial Applicability

[0053] The present invention can provide a method of forming a metal wiring on a transfer-receiving object such as a semiconductor wafer, a compound wafer or an MEMS wafer at a lower temperature than before, and thus can contribute to miniaturization of metal wiring and preservation of the quality.

Claims

1. A method of forming a metal wiring by using a transfer substrate for transferring a metal wiring material to a transfer-receiving object, comprising:

forming the transfer substrate consisting of: a substrate formed of glass, resin-reinforced glass, silicon, or Kovar; at least one metal wiring material formed on the substrate, the metal wiring material being porous; and an underlying metal film formed between the substrate and the metal wiring material and having a thickness of 1 nm or more, wherein the underlying metal film is composed of any metal of gold, silver, platinum, palladium, ruthenium, rhodium, iridium, chromium, titanium, tungsten, tantalum, nickel, copper and zirconium, or an alloy thereof, the forming the transfer substrate including forming the underlying metal film on the substrate by a sputtering method, a plating method or a CVD method and preparing the metal wiring material as a molded

article through applying a metal paste composed of gold powder having a purity of 99.9% by weight or more and an average particle size of 0.01 μm to 1.0 μm , an organic solvent and optionally at least one resin selected from an acrylic resin, a cellulose resin and an alkyd resin on the underlying metal film, the at least one resin being used to prevent the metal powder in the metal paste from coagulating and to make the metal paste more homogeneous, and subsequently drying and sintering the metal paste at a sintering temperature of 80 to 300°C without applying pressure so as to create a close point contact state between the metal particles and between the surface of the underlying metal film and the metal particles, thus settling the shape of the metal wiring, forming an electrode film on a semiconductor wafer being the transfer-receiving object, wherein the electrode film is a single layer or a multilayer and the outermost surface of the electrode film is composed of gold, and superimposing the transfer substrate on the transfer-receiving object, with the transfer substrate opposed to the transfer-receiving object, and while heating the transfer substrate at 80 to 200 °C and the transfer-receiving object at 80 to 300 °C, pressing the transfer substrate with pressure of 0.1 to 1.5 times the yield strength of the metal wiring material, thereby bonding and transferring the metal wiring material to the electrode film of the transfer-receiving object in a state of point contact with the electrode film surface during the transfer, and subsequently simultaneously removing the substrate and the underlying metal film of the transfer substrate.

Patentansprüche

1. Verfahren zum Bilden einer Metallverdrahtung unter Verwendung eines Transfersubstrats zum Übertragen eines Metallverdrahtungsmaterials auf ein Transfer-Empfangsobjekt, umfassend:

Bilden des Transfersubstrats, bestehend aus: einem Substrat, das aus Glas, harzverstärktem Glas, Silizium oder Kovar gebildet ist; mindestens einem Metallverdrahtungsmaterial, das auf dem Substrat gebildet ist, wobei das Metallverdrahtungsmaterial porös ist; und einem unterliegenden Metallfilm, der zwischen dem Substrat und dem Metallverdrahtungsmaterial gebildet ist und eine Dicke von 1 nm oder mehr aufweist, wobei der unterliegende Metallfilm aus einem beliebigen Metall unter Gold, Silber, Platin, Palladium, Ruthenium, Rhodium, Iridium, Chrom, Titan, Wolfram, Tantal, Nickel, Kupfer und Zirkonium oder einer Legierung davon besteht, wobei das Bilden des Transfersubstrats umfasst: Bilden des unterliegenden Metallfilms auf dem Substrat durch ein Sputterverfahren, ein Abscheideverfahren oder ein CVD-Verfahren und das Vorbereiten des Metallverdrahtungsmaterials als einen geformten Gegenstand durch Aufbringen einer Metallpaste, die aus Goldpulver mit einer Reinheit von 99,9 Gew.-% oder mehr und einer durchschnittlichen Teilchengröße von 0,01 μm bis 1.0 μm , einem organischen Lösungsmittel und gegebenenfalls mindestens einem Harz, ausgewählt aus einem Acrylharz, einem Celluloseharz und einem Alkydharz, besteht, auf den unterliegenden Metallfilm, wobei das mindestens eine Harz verwendet wird, um zu verhindern, dass das Metallpulver in der Metallpaste koagulierte, und um die Metallpaste homogener zu machen, und anschließendes Trocknen und Sintern der Metallpaste bei einer Sintertemperatur von 80 bis 300°C ohne Anwendung von Druck, um einen Zustand des engen Punktkontaktes zwischen den Metallteilchen und zwischen der Oberfläche des unterliegenden Metallfilms und den Metallteilchen zu erzeugen, wodurch die Form der Metallverdrahtung festgelegt wird,

Bilden eines Elektrodenfilms auf einem Halbleiterwafer, der das Transfer-Empfangsobjekt ist, wobei der Elektrodenfilm eine Einzelschicht oder eine Mehrschicht ist und die äußerste Oberfläche des Elektrodenfilms aus Gold besteht, und

Auflegen des Transfersubstrats auf das Transfer-Empfangsobjekt, wobei das Transfersubstrat dem Transfer-Empfangsobjekt gegenüberliegt und wobei das Transfersubstrat auf 80 bis 200 °C und das Transfer-Empfangsobjekt auf 80 bis 300 °C erhitzt wird,

Pressen des Transfersubstrats mit einem Druck der 0,1- bis 1,5-fachen Streckgrenze des Metallverdrahtungsmaterials, wodurch das Metallverdrahtungsmaterial mit dem Elektrodenfilm des Transfer-Empfangsobjekts in einem Zustand des Punktkontakts mit der Elektrodenfilmoberfläche während des Transfers verbunden und übertragen wird, und anschließendes gleichzeitiges Entfernen des Substrats und des unterliegenden Metallfilms des Transfersubstrats.

Revendications

1. Procédé de formation d'un câblage métallique en utilisant un substrat de transfert pour transférer un matériau de câblage métallique sur un objet de réception de transfert, comprenant les étapes consistant à :

former le substrat de transfert comprenant : un substrat formé de verre, de verre renforcé de résine, de silicium

ou de Kovar ; au moins un matériau de câblage métallique formé sur le substrat, le matériau de câblage métallique étant poreux ; et un film métallique sous-jacent formé entre le substrat et le matériau de câblage métallique et ayant une épaisseur de 1 nm ou plus, dans lequel le film métallique sous-jacent est composé d'un quelconque métal parmi l'or, l'argent, le platine, le palladium, le ruthénium, le rhodium, l'iridium, le chrome, le titane, le tungstène, le tantale, le nickel, le cuivre et le zirconium, ou un alliage de ceux-ci, la formation du substrat de transfert comprenant la formation du film métallique sous-jacent sur le substrat par un procédé de pulvérisation cathodique, un procédé de placage ou un procédé de dépôt chimique en phase vapeur, CVD, et préparer le matériau de câblage métallique sous la forme d'un article moulé par application d'une pâte métallique composée de poudre d'or ayant une pureté de 99,9 % en poids ou plus et une taille de particule moyenne de 0,01 μm à 1,0 μm , d'un solvant organique et facultativement d'au moins une résine choisie parmi une résine acrylique, une résine cellulosique et une résine alkyde sur le film métallique sous-jacent, la au moins une résine étant utilisée pour empêcher la poudre métallique dans la pâte métallique de coaguler et pour rendre la pâte métallique plus homogène, puis séchage et frittage de la pâte métallique à une température de frittage de 80 à 300°C sans appliquer de pression de manière à créer un état de contact ponctuel proche entre les particules métalliques et entre la surface du film métallique sous-jacent et les particules métalliques, en réglant ainsi la forme du câblage métallique, former un film d'électrode sur une plaquette semi-conductrice qui est l'objet de réception de transfert, dans lequel le film d'électrode est une couche unique ou une multicouche et la surface la plus extérieure du film d'électrode est composée d'or, et superposer le substrat de transfert sur l'objet de réception de transfert, avec le substrat de transfert opposé à l'objet de réception de transfert, et tout en chauffant le substrat de transfert de 80 à 200°C et l'objet de réception de transfert de 80 à 300°C, presser le substrat de transfert avec une pression de 0,1 à 1,5 fois la limite d'élasticité du matériau de câblage métallique, en liant ainsi et en transférant le matériau de câblage métallique au film d'électrode de l'objet de réception de transfert dans un état de contact ponctuel avec la surface de film d'électrode pendant le transfert, puis retirer simultanément le substrat et le film métallique sous-jacent du substrat de transfert.

Fig. 1


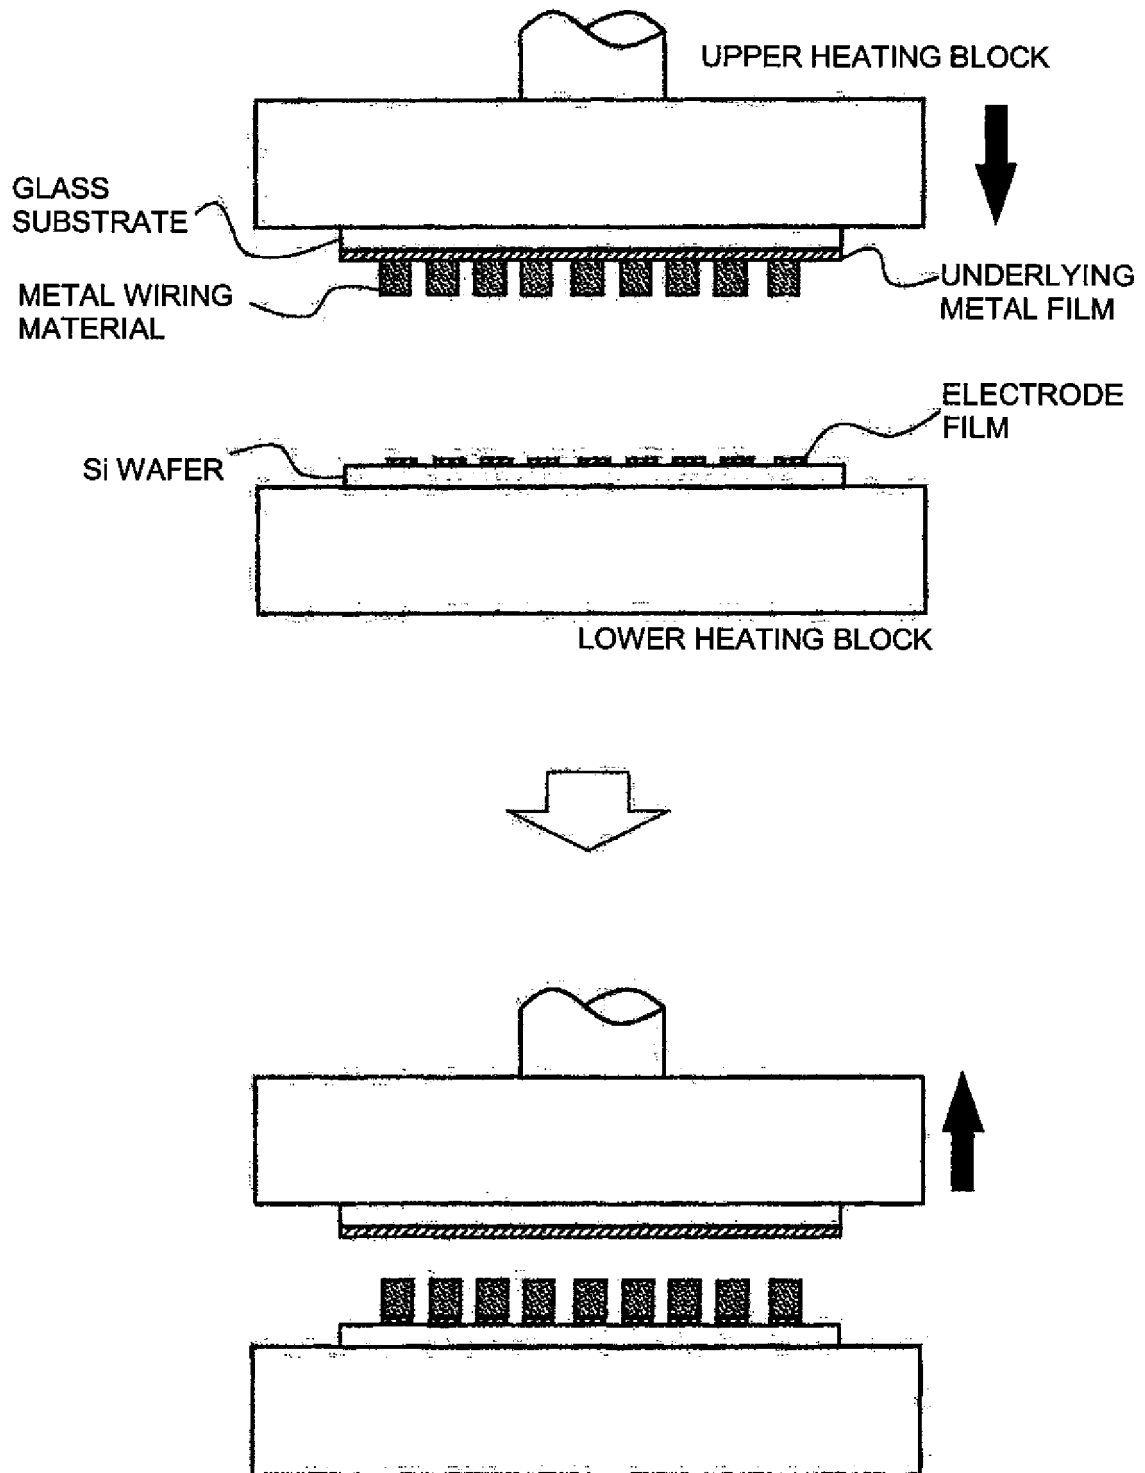


Fig. 2

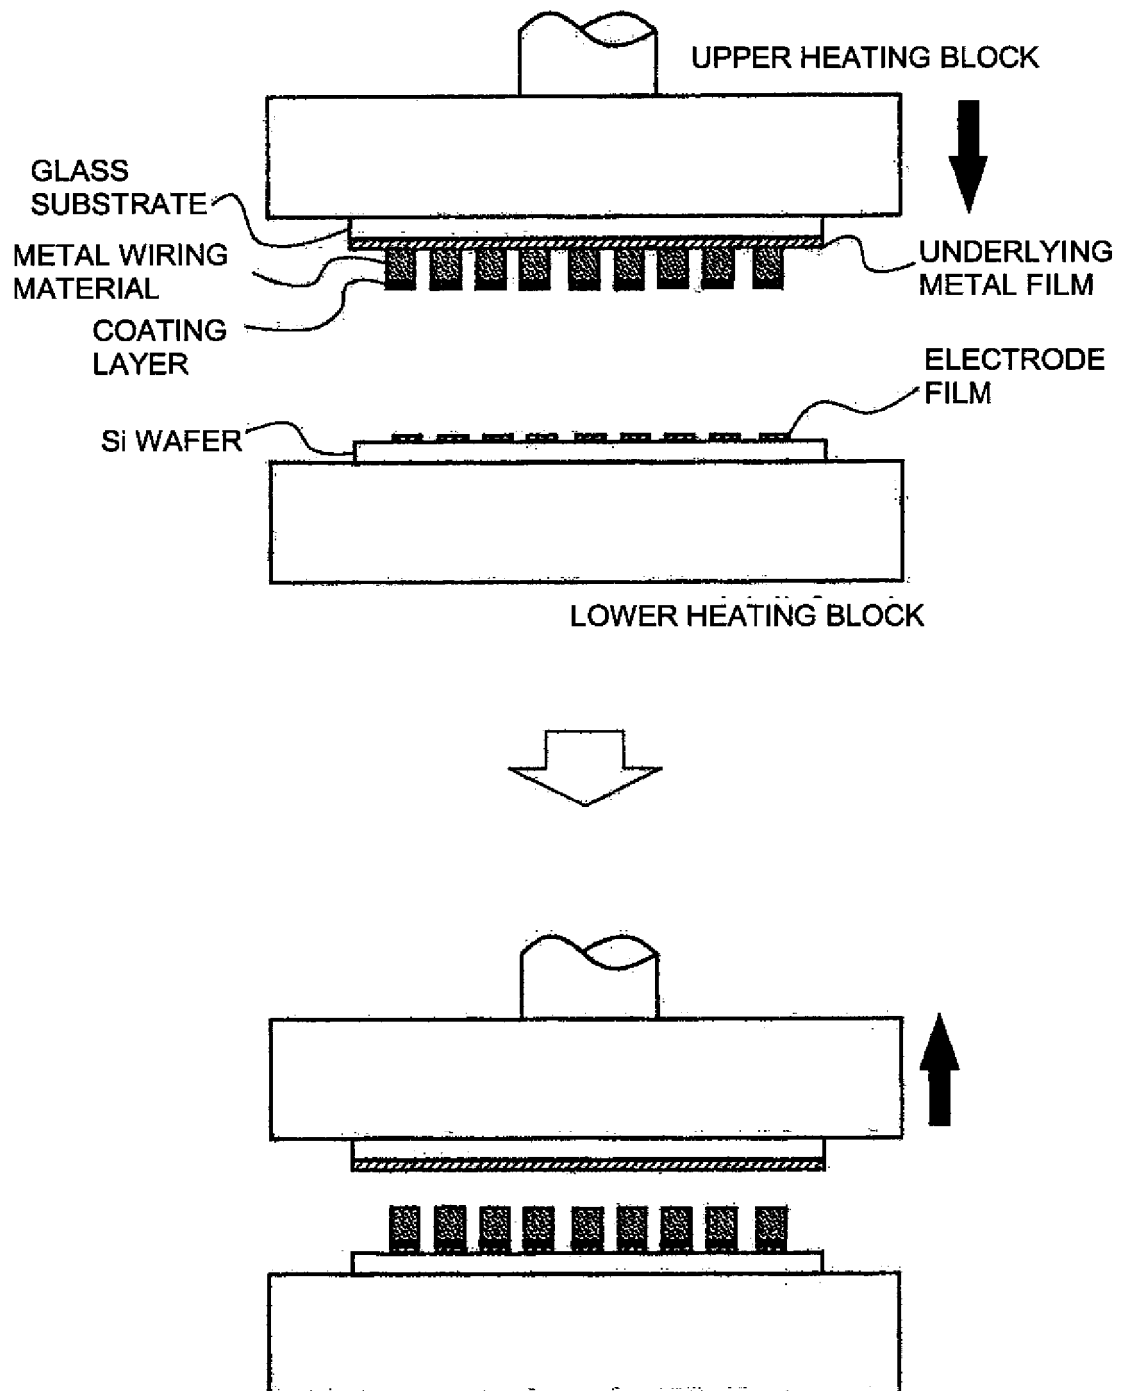

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 102009018541 A1 [0005] [0006]
- JP H06267963 A [0006]
- JP 5144870 A [0007]