



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
09.07.2014 Bulletin 2014/28

(51) Int Cl.:
H04W 24/10 (2009.01)

(21) Application number: **12839400.4**

(86) International application number:
PCT/CN2012/081974

(22) Date of filing: **26.09.2012**

(87) International publication number:
WO 2013/053288 (18.04.2013 Gazette 2013/16)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventor: **LI, Yuanjie**
Shenzhen, Guangdong 578129 (CN)

(30) Priority: **09.10.2011 CN 201110302787**

(74) Representative: **Lord, Michael**
Gill Jennings & Every LLP
The Broadgate Tower
20 Primrose Street
London EC2A 2ES (GB)

(71) Applicant: **Huawei Technologies Co., Ltd**
Shenzhen, Guangdong 518129 (CN)

(54) **UPLINK TRANSMIT POWER DETERMINATION METHOD AND USER EQUIPMENT**

(57) Embodiments of the present invention provide an uplink transmission power determining method and a user equipment. A user equipment determines a transmission situation of at least one of: a PUCCH, a PUSCH, and an SRS on another cell except a secondary cell in a subframe corresponding to a preamble to be transmitted on the secondary cell, so that the user equipment can

determine an uplink transmission power of the user equipment according to the determined transmission situation, thereby solving a problem that it is not provided in the prior art that how a user equipment determines an uplink transmission power of the user equipment when random access is executed through a secondary cell.

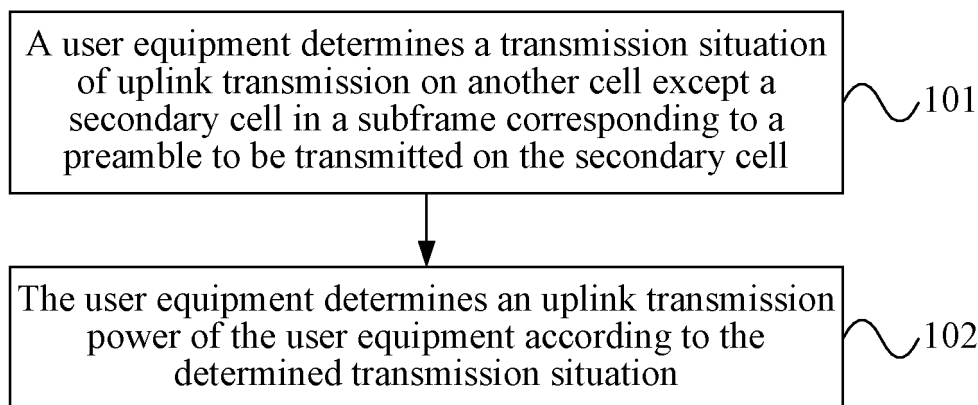


FIG. 1

Description

[0001] This application claims priority to Chinese Patent Application No. 201110302787.3, filed with the Chinese Patent Office on October 9, 2011 and entitled "UPLINK TRANSMISSION POWER DETERMINING METHOD AND USER EQUIPMENT", which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] Embodiments of the present invention relate to communications technologies, and in particular, to an uplink transmission power determining method and a user equipment.

BACKGROUND

[0003] In a wireless communications system having a feature of cell aggregation (Carrier Aggregation, CA for short), a user equipment may communicate with a base station through multiple cells. Generally speaking, in the prior art, a user equipment may execute random access through a primary cell to achieve uplink synchronization. However, transmission paths through which an uplink signal of the user equipment is sent to the base station through different cells may be different, for example, an uplink signal sent by the user equipment to the base station through some cells may need to pass through a relay node, but an uplink signal sent to the base station through other cells may not need to pass through a relay node, so that the user equipment cannot achieve uplink synchronization by executing random access only through a primary cell, and random access further needs to be executed through a secondary cell to achieve uplink synchronization.

[0004] However, it is not provided in the prior art that how a user equipment determines an uplink transmission power of the user equipment when random access is executed through a secondary cell.

SUMMARY

[0005] Embodiments of the present invention provide an uplink transmission power determining method and a user equipment, so as to enable a user equipment to determine an uplink transmission power of the user equipment when random access is executed through a secondary cell.

[0006] In one aspect, an uplink transmission power determining method is provided, which includes:

determining, by a user equipment, a transmission situation of at least one of: a PUCCH, a PUSCH, and an SRS on another cell except a secondary cell in a subframe corresponding to a preamble to be transmitted on the secondary cell; and
determining, by the user equipment, an uplink transmission power of the user equipment according to the determined transmission situation.

[0007] In another aspect, a user equipment is provided, which includes:

a cell determining unit, configured to determine a transmission situation of at least one of: a PUCCH, a PUSCH, and an SRS on another cell except a secondary cell in a subframe corresponding to a preamble to be transmitted on the secondary cell; and
a power determining unit, configured to determine an uplink transmission power of the user equipment according to the determined transmission situation.

[0008] In can be seen from the foregoing technical solutions that, in the embodiments of the present invention, a user equipment determines a transmission situation of at least one of: a PUCCH, a PUSCH, and an SRS on another cell except a secondary cell in a subframe corresponding to a preamble to be transmitted on the secondary cell, so that the user equipment can determine an uplink transmission power of the user equipment according to the determined transmission situation, thereby solving a problem that it is not provided in the prior art that how a user equipment determines an uplink transmission power of the user equipment when random access is executed through a secondary cell.

BRIEF DESCRIPTION OF DRAWINGS

[0009] To describe the technical solutions in the embodiments of the present invention or in the prior art more clearly, the following briefly introduces the accompanying drawings required for describing the embodiments or the prior art. Apparently, the accompanying drawings in the following description show merely some embodiments of the present

invention, and persons of ordinary skill in the art may still derive other drawings from these accompanying drawings without creative efforts.

FIG. 1 is a schematic flow chart of an uplink transmission power determining method provided in an embodiment of the present invention; and

FIG. 2 is a schematic structural diagram of a user equipment provided in another embodiment of the present invention.

DESCRIPTION OF EMBODIMENTS

[0010] To make the objectives, technical solutions, and advantages of the embodiments of the present invention more comprehensible, the following clearly and completely describes the technical solutions in the embodiments of the present invention with reference to the accompanying drawings in the embodiments of the present invention. Apparently, the embodiments to be described are merely a part rather than all of the embodiments of the present invention. All other embodiments obtained by persons of ordinary skill in the art based on the embodiments of the present invention without creative efforts shall fall within the protection scope of the present invention.

[0011] The technical solutions of the present invention can be applied in various wireless communications networks, such as: a global system for mobile communications (Global System for Mobile Communications, GSM for short), a general packet radio service (General Packet Radio Service, GPRS for short) network, a code division multiple access (Code Division Multiple Access, CDMA for short) network, a wideband code division multiple access (Wideband Code Division Multiple Access, WCDMA for short) network, a time division-synchronous code division multiple access (Time Division-Synchronous Code Division Multiple Access, TD-SCDMA for short) network, a long term evolution (Long Term Evolution, LTE for short) network or a long term evolution advanced (LTE Advanced, LTE-A for short) network, and subsequent evolved networks. The terms "network" and "system" are interchangeable.

[0012] A base station, for example, may be a base station (Base Transceiver Station, BTS for short) in a GSM network, a GPRS network, or a CDMA network, or may be a base station (NodeB) in a WCDMA network, or may be an evolved Node B (Evolved Node B, eNB for short) eNB in an LTE network or an LTE-A network.

[0013] FIG. 1 is a schematic flow chart of an uplink transmission power determining method provided in an embodiment of the present invention, and as shown in FIG. 1, the uplink transmission power determining method in this embodiment may include the following steps.

[0014] 101: A user equipment determines a transmission situation of uplink transmission on another cell except a secondary cell in a subframe corresponding to a preamble to be transmitted on the secondary cell.

[0015] The transmission situation of the uplink transmission may include a transmission situation of at least one of: a physical uplink control channel (Physical Uplink Control CHannel, PUCCH for short), a physical uplink shared channel (Physical Uplink Shared CHannel, PUSCH for short), and a sounding reference signal (Sounding Reference Signal, SRS for short).

[0016] 102: The user equipment determines an uplink transmission power of the user equipment according to the determined transmission situation.

[0017] In an embodiment provided in the present invention, if the transmission situation determined by the user equipment is that no PUCCH, PUSCH, or SRS needs to be transmitted on another cell in the subframe corresponding to the preamble to be transmitted on the secondary cell, the user equipment may determine a first transmission power of the preamble according to a maximum allowable power of the secondary cell, a target received power of the preamble, and a target path loss of the secondary cell, where the first transmission power of the preamble may be a smallest value between a sum of the target received power of the preamble and the target path loss of the secondary cell and the maximum allowable power of the secondary cell, that is, the user equipment may determine the first transmission power of the preamble according to Formula (1):

$$P_{PRACH}(i) = \min \{ P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c \} \quad (1)$$

where i represents a subframe, that is, the subframe corresponding to the preamble; c represents a cell; $P_{PRACH}(i)$ represents the first transmission power of the preamble; $P_{CMAX,c}(i)$ represents the maximum allowable power of the secondary cell, that is, the maximum allowable power of the secondary cell in the subframe i ; $PREAMBLE_RECEIVED_TARGET_POWER$ represents the target received power of the preamble; and PL_c represents the target path loss of the secondary cell.

[0018] In another embodiment provided in the present invention, if the transmission situation determined by the user equipment is that at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell, the

user equipment may determine a second transmission power of the preamble according to Formula (1), where $P_{PRACH}(i)$ represents the second transmission power of the preamble.

[0019] If that the user equipment determines that at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell is that the PUCCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell, the user equipment may determine a first transmission power of the PUCCH according to a transmission power of the PUCCH obtained by the user equipment by performing uplink power control, a maximum allowable power, and the second transmission power of the preamble, where the first transmission power of the PUCCH may be a smallest value among a difference between the maximum allowable power and the second transmission power of the preamble and the transmission power of the PUCCH obtained by the user equipment by performing uplink power control, that is, the user equipment may determine the first transmission power of the PUCCH according to Formula (3):

$$P_{PUCCH}(i) = \min \{P_{PUCCH_0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (3)$$

where $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{PUCCH_0}(i)$ represents the transmission power of the PUCCH obtained by the user equipment by performing uplink power control; $P_{CMAX}(i)$ represents the maximum allowable power, that is, a maximum allowable power of a subframe i ; and $P_{PRACH}(i)$ represents the second transmission power of the preamble.

[0020] If the user equipment determines that in addition to the PUCCH, the PUSCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell, the user equipment may determine a transmission power of the PUSCH, which may be marked as a first transmission power of the PUSCH, according to the maximum allowable power, the first transmission power of the PUCCH, and the second transmission power of the preamble, where the first transmission power of the PUSCH may be smaller than or equal to the maximum allowable power minus the first transmission power of the PUCCH and the second transmission power of the preamble, that is, the user equipment may determine the first transmission power of the PUSCH according to Formula (4):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (4)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the first transmission power of the PUSCH, that is, a sum of transmission powers of the PUSCH of all cells; $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble. Or, the user equipment may determine a transmission power of the PUSCH, which may be marked as a second transmission power of the PUSCH, according to Formula (5) and Formula (6):

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (5)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i))\} \quad (6)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the second transmission power of the PUSCH, that is, a sum of transmission powers of the PUSCH of cells except a cell bearing uplink signaling; $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{CMAX}(i)$ rep-

represents the maximum allowable power; $P_{PRACH}(i)$ represents the second transmission power of the preamble; and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing the uplink signaling and is obtained by the user equipment by performing uplink power control.

[0021] If that the user equipment determines that at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell is that the PUSCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell, the user equipment may determine a transmission power of the PUSCH, which may be marked as a third transmission power of the PUSCH, according to Formula (7):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PRACH}(i)) \quad (7)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the third transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble. Or, the user equipment may determine a transmission power of the PUSCH, which may be marked as a fourth transmission power of the PUSCH, according to Formula (8) and Formula (9):

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PRACH}(i)) \quad (8)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (9)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the fourth transmission power of the PUSCH, that is, a sum of transmission powers of the PUSCH of cells except a cell bearing uplink signaling; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the second transmission power of the preamble; and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing the uplink signaling and is obtained by the user equipment by performing uplink power control.

[0022] In another embodiment provided in the present invention, if the transmission situation determined by the user equipment is that a PUCCH needs to be transmitted on another cell in a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell, the user equipment may determine a transmission power of the preamble, which may be marked as a third transmission power of the preamble, according to Formula (1); and determine that a transmission power of the PUCCH is 0, which may be marked as a second transmission power of the PUCCH. Or, the user equipment may further determine that a transmission power of the PUCCH is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control, where the determined transmission power of the PUCCH may be marked as a third transmission power of the PUCCH; and determine that a transmission power of the preamble is 0, which may be marked as a fourth transmission power of the preamble. Or, the user equipment may further determine a transmission power of the preamble, which may be marked as a fifth transmission power of the preamble, according to Formula (1), where $P_{PRACH}(i)$ represents the fifth transmission power of the preamble; and determine a transmission power of the PUCCH, which may be marked as a fourth transmission power of the PUCCH, according to Formula (12):

$$P_{PUCCH}(i) = \min \{P_{PUCCH_0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (12)$$

where $P_{PUCCH}(i)$ represents the fourth transmission power of the PUCCH; $P_{PUCCH_0}(i)$ represents the transmission

power of the PUCCH obtained by the user equipment by performing uplink power control; $P_{CMAX}(i)$ represents a maximum allowable power; and $P_{PRACH}(i)$ represents the fifth transmission power of the preamble. Or, the user equipment may further determine that a transmission power of the PUCCH is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control, where the determined transmission power of the PUCCH may be marked as a fifth transmission power of the PUCCH; and determine a transmission power of the preamble, which may be marked as a sixth transmission power of the preamble, according to Formula (13):

$$P'_{PRACH}(i) = \min \{P_{PRACH}(i), (P_{CMAX}(i) - P_{PUCCH}(i))\} \quad (13)$$

where $P'_{PRACH}(i)$ represents the sixth transmission power of the preamble; $P_{PRACH}(i)$ represents the third transmission power of the preamble; $P_{PUCCH}(i)$ represents the fifth transmission power of the PUCCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

[0023] If the user equipment determines that a PUSCH needs to be transmitted on another cell in the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell in addition to that a PUSCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell, the user equipment may further determine that a transmission power of the PUSCH is 0, which may be marked as a fifth transmission power of the PUSCH. Or, the user equipment may further determine that a transmission power of the PUSCH is a transmission power of the PUSCH obtained by the user equipment by performing uplink power control, where the determined transmission power of the PUSCH may be marked as a sixth transmission power the PUSCH. Or, the user equipment may further determine a transmission power of the PUSCH, which may be marked as a seventh transmission power of the PUSCH, according to Formula (14); or determine a transmission power of the PUSCH, which may be marked as an eighth transmission power of the PUSCH, according to Formula (15) and Formula (16):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (14)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the seventh transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the third transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the fifth transmission power of the preamble;

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (15)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i))\} \quad (16)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the eighth transmission power of the PUSCH, that is, a sum of transmission powers of the PUSCH of cells except a cell bearing uplink signaling; $P_{PUCCH}(i)$ represents the third transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the fifth transmission power of the preamble, and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing the uplink signaling and is obtained by the user equipment by performing uplink power control. Or, the user equipment may determine that a transmission power of the PUSCH is a transmission power of the PUSCH obtained by the user equipment by performing uplink power control, where the determined transmission power of the PUSCH may be marked as a ninth transmission power of the PUSCH; and determine a transmission power of the preamble, which may be marked as a seventh transmission power of the

preamble, according to Formula (17):

$$P'_{PRACH}(i) = \min \left\{ P_{PRACH}(i), \left(P_{CMAX}(i) - P_{PUCCH}(i) - \sum_c w(i) \cdot P_{PUSCH,c}(i) \right) \right\} \quad (17)$$

where $P'_{PRACH}(i)$ represents the seventh transmission power of the preamble;

[0024] $P_{PRACH}(i)$ represents the third transmission power of the preamble; $w(i)$ represents a weighting factor, and its

value range is [0, 1]; c represents a cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the ninth transmission power of the PUSCH;

$P_{PUCCH}(i)$ represents the fifth transmission power of the PUCCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

[0025] In another embodiment provided in the present invention, if the transmission situation determined by the user equipment is that a PUSCH needs to be transmitted on another cell in a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell, the user equipment may further determine a transmission power of the preamble, which may be marked as an eighth transmission power of the preamble, according to Formula (1), where $P_{PRACH}(i)$ represents the eighth transmission power of the preamble; and determine that a transmission power of the PUSCH is 0, which may be marked as a tenth transmission power of the PUSCH. Or, the user equipment may further determine that a transmission power of the PUSCH is a transmission power of the PUSCH obtained by the user equipment by performing uplink power control, where the determined transmission power of the PUSCH may be marked as an eleventh transmission power of the PUSCH; and determine that a transmission power of the preamble is 0, which may be marked as a ninth transmission power of the preamble. Or, the user equipment may further determine a transmission power of the preamble, which may be marked as a tenth transmission power of the preamble, according to Formula (1), where $P_{PRACH}(i)$ represents the tenth transmission power of the preamble; and determine a transmission power of the PUSCH, which may be marked as a twelfth transmission power of the PUSCH, according to Formula (20), or determine a transmission power of the PUSCH, which may be marked as a thirteenth transmission power of the PUSCH, according to Formula (21) and Formula (22):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PRACH}(i)) \quad (20)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the twelfth transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the tenth transmission power of the preamble; and

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PRACH}(i)) \quad (21)$$

$$P_{PUSCH,j}(i) = \min \{ P_{PUSCH,j=0}(i), (P_{CMAX}(i) - P_{PRACH}(i)) \} \quad (22)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$

represents the thirteenth transmission power of the PUSCH, that is, a sum of transmission powers of the PUSCH of cells except a cell bearing uplink signaling; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the tenth transmission power of the preamble; and $P_{PUSCH,j=0}(i)$ represents a transmission power that is of a PUSCH bearing the uplink signaling and is obtained by the user equipment by performing uplink power control. Or, the user equipment may further determine that a transmission power of the PUSCH is a transmission power of the PUSCH

obtained by the user equipment by performing uplink power control, where the determined transmission power of the PUSCH may be marked as a thirteenth transmission power of the PUSCH; and determine a transmission power of the preamble according to Formula (23), where the transmission power may be marked as an eleventh transmission power of the preamble:

$$P'_{PRACH}(i) = \min \left\{ P_{PRACH}(i), \left(P_{CMAX}(i) - \sum_c w(i) \cdot P_{PUSCH,c}(i) \right) \right\} \quad (23)$$

where $P'_{PRACH}(i)$ represents the eleventh transmission power of the preamble; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the eighth transmission power of the preamble; $P_{PUSCH,c}(i)$ represents the thirteenth transmission power of the PUSCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

[0026] In another embodiment provided in the present invention, if the transmission situation determined by the user equipment is that an SRS needs to be transmitted on another cell in the subframe corresponding to the preamble to be transmitted on the secondary cell, and if a transmission power of the preamble is not 0, the user equipment determines that a transmission power of the SRS is 0.

[0027] In this embodiment, a user equipment determines a transmission situation of at least one of: a PUCCH, a PUSCH, and an SRS on another cell except a secondary cell in a subframe corresponding to a preamble to be transmitted on the secondary cell, so that the user equipment can determine an uplink transmission power of the user equipment according to the determined transmission situation, thereby solving a problem that it is not provided in the prior art that how a user equipment determines an uplink transmission power of the user equipment when random access is executed through a secondary cell.

[0028] It should be noted that, for the foregoing method embodiments, for a purpose of brevity of description, the methods are described as a combination of a series of actions, but persons skilled in the art should know that, the present invention is not limited to a sequence of the actions, because some steps may be performed in another sequence or concurrently according to the present invention. Next, persons skilled in the art should also know that, the embodiments described in the specification are all exemplary embodiments, and the related actions and modules are not necessarily required in the present invention.

[0029] In the foregoing embodiments, description for the embodiments has its own emphasis, and for a part that is not described in detail in a certain embodiment, reference may be made to relevant description in other embodiments.

[0030] FIG. 2 is a schematic structural diagram of a user equipment provided in another embodiment of the present invention. As shown in FIG. 2, the user equipment in this embodiment may include a cell determining unit 21 and a power determining unit 22. The cell determining unit 21 is configured to determine a transmission situation of uplink transmission on another cell except a secondary cell in a subframe corresponding to a preamble to be transmitted on the secondary cell. The transmission situation of the uplink transmission may be a transmission situation of at least one of: a PUCCH, a PUSCH, and an SRS. The power determining unit 22 is configured to determine an uplink transmission power of the user equipment according to the determined transmission situation.

[0031] Functions of the user equipment in the embodiment corresponding to FIG. 1 may be implemented by the user equipment provided in this embodiment.

[0032] In an embodiment of the present invention, if the transmission situation determined by the cell determining unit 21 is that no PUCCH, PUSCH, or SRS needs to be transmitted on another cell in the subframe corresponding to the preamble to be transmitted on the secondary cell, the power determining unit 22 may determine a first transmission power of the preamble according to Formula (1):

$$P_{PRACH}(i) = \min \{ P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c \} \quad (1)$$

where i represents a subframe, that is, the subframe corresponding to the preamble; c represents a cell; $P_{PRACH}(i)$ represents the first transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell; $PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell.

[0033] In another embodiment of the present invention, if the transmission situation determined by the cell determining unit 21 is that at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe

except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell, the power determining unit 22 may specifically determine a second transmission power of the preamble according to Formula (1), where $P_{PRACH}(i)$ represents the second transmission power of the preamble.

[0034] In another embodiment of the present invention, if the transmission situation determined by the cell determining unit 21 is that a PUCCH needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell, the power determining unit 22 in this embodiment may further determine a first transmission power of the PUCCH according to Formula (3):

$$P_{PUCCH}(i) = \min \{P_{PUCCH_0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (3)$$

where $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{PUCCH_0}(i)$ represents a transmission power of the PUCCH obtained by the user equipment by performing uplink power control; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble.

[0035] If the transmission situation determined by the cell determining unit 21 further includes that a PUSCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell, the power determining unit 22 in this embodiment may further determine a first transmission power of the PUSCH according to Formula (4):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (4)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the first transmission power of the PUSCH, that is, a sum of transmission powers of the PUSCH of all cells; $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble. Or, the power determining unit 22 in this embodiment may further determine a second transmission power of the PUSCH according to Formula (5) and Formula (6):

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (5)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i))\} \quad (6)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the second transmission power of the PUSCH, that is, a sum of transmission powers of the PUSCH of cells except a cell bearing uplink signaling; $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the second transmission power of the preamble; and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing the uplink signaling and is obtained by the user equipment by performing uplink power control.

[0036] In another embodiment of the present invention, if the transmission situation determined by the cell determining unit 21 is that a PUSCH needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell, the power determining unit 22 in this embodiment may further determine a third transmission power of the PUSCH according to Formula (7):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PRACH}(i)) \quad (7)$$

where $w(i)$ represents a weighting factor, and its value range is $[0, 1]$; c represents a cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the third transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble. Or, the power determining unit 22 in this embodiment may further determine a fourth transmission power of the PUSCH according to Formula (8) and Formula (9):

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PRACH}(i)) \quad (8)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (9)$$

where $w(i)$ represents a weighting factor, and its value range is $[0, 1]$; c represents a cell; $\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the fourth transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the second transmission power of the preamble; and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing uplink signaling and is obtained by the user equipment by performing uplink power control.

[0037] In another embodiment of the present invention, the transmission situation determined by the cell determining unit 21 in this embodiment is that a PUCCH needs to be transmitted on another cell in a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell, and the power determining unit 22 in this embodiment may specifically determine a third transmission power of the preamble according to Formula (1); and determine that a second transmission power of the PUCCH is 0, where $P_{PRACH}(i)$ represents the third transmission power of the preamble. Or, the power determining unit 22 in this embodiment may specifically determine a third transmission power of the PUCCH, where the third transmission power is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control; and determine that a fourth transmission power of the preamble is 0. Or, the power determining unit 22 in this embodiment may specifically determine a fifth transmission power of the preamble according to Formula (1), where $P_{PRACH}(i)$ represents the fifth transmission power of the preamble; and determine a fourth transmission power of the PUCCH according to Formula (12):

$$P_{PUCCH}(i) = \min \{P_{PUCCH_0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (12)$$

where $P_{PUCCH}(i)$ represents the fourth transmission power of the PUCCH; $P_{PUCCH_0}(i)$ represents the transmission power of the PUCCH obtained by the user equipment by performing uplink power control; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the fifth transmission power of the preamble. Or, the power determining unit 22 in this embodiment may specifically determine a fifth transmission power of the PUCCH, where the fifth transmission power is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control; and determine a sixth transmission power of the preamble according to Formula (13):

$$P'_{PRACH}(i) = \min \{P_{PRACH}(i), (P_{CMAX}(i) - P_{PUCCH}(i))\} \quad (13)$$

where $P'_{PRACH}(i)$ represents the sixth transmission power of the preamble; $P_{PRACH}(i)$ represents the third transmission power of the preamble; $P_{PUCCH}(i)$ represents the fifth transmission power of the PUCCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

[0038] In another embodiment of the present invention, if the transmission situation determined by the cell determining

unit 21 in this embodiment may further include that a PUSCH needs to be transmitted on another cell in a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell, the power determining unit 22 in this embodiment may further determine that a fifth transmission power of the PUSCH is 0. Or, the power determining unit 22 in this embodiment may further determine a sixth transmission power of the PUSCH, where the sixth transmission power is a transmission power of the PUSCH obtained by the user equipment by performing uplink power control. Or, the power determining unit 22 in this embodiment may further determine a seventh transmission power of the PUSCH according to Formula (14), or determine an eighth transmission power of the PUSCH according to Formula (15) and Formula (16):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (14)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the seventh transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the third transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the fifth transmission power of the preamble;

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (15)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i))\} \quad (16)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the eighth transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the third transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the fifth transmission power of the preamble, and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing uplink signaling and is obtained by the user equipment by performing uplink power control. Or, the power determining unit 22 in this embodiment may specifically determine a ninth transmission power of the PUCCH, where the ninth transmission power is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control; and determine a seventh transmission power of the preamble according to Formula (17):

$$P'_{PRACH}(i) = \min \left\{ P_{PRACH}(i), \left(P_{CMAX}(i) - P_{PUCCH}(i) - \sum_c w(i) \cdot P_{PUSCH,c}(i) \right) \right\} \quad (17)$$

where $P'_{PRACH}(i)$ represents the seventh transmission power of the preamble; $P_{PRACH}(i)$ represents the third transmission power of the preamble; $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the ninth transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the fifth transmission power of the PUCCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

[0039] In another embodiment of the present invention, if the transmission situation determined by the cell determining unit 21 is that a PUSCH needs to be transmitted on another cell in a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell, the power determining unit 22 in this embodiment may specifically determine an eighth transmission power of the preamble according to Formula (1), where $P_{PRACH}(i)$ represents the eighth transmission power of the preamble; and determine that a tenth transmission power of the PUSCH is 0. Or, the power determining unit 22 in this embodiment may specifically determine an eleventh transmission power of the PUSCH,

where the eleventh transmission power is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control; and determine that a ninth transmission power of the preamble is 0. Or, the power determining unit 22 in this embodiment may specifically determine a tenth transmission power of the preamble according to Formula (1), where $P_{PRACH}(i)$ represents the tenth transmission power of the preamble; and determine a twelfth transmission power of the PUSCH according to Formula (20) or determine a thirteenth transmission power of the PUSCH according to Formula (21) and Formula (22):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PRACH}(i)) \quad (20)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the twelfth transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the tenth transmission power of the preamble; and

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PRACH}(i)) \quad (21)$$

$$P_{PUSCH,j}(i) = \min \{ P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PRACH}(i)) \} \quad (22)$$

where $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the thirteenth transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the tenth transmission power of the preamble; and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing uplink signaling and is obtained by the user equipment by performing uplink power control. Or, the power determining unit 22 in this embodiment may specifically determine a thirteenth transmission power of the PUSCH, where the thirteenth transmission power is a transmission power of the PUSCH obtained by the user equipment by performing uplink power control; and determine an eleventh transmission power of the preamble according to Formula (23):

$$P'_{PRACH}(i) = \min \left\{ P_{PRACH}(i), \left(P_{CMAX}(i) - \sum_c w(i) \cdot P_{PUSCH,c}(i) \right) \right\} \quad (23)$$

where $P'_{PRACH}(i)$ represents the eleventh transmission power of the preamble; $P_{PRACH}(i)$ represents the eighth transmission power of the preamble; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the thirteenth transmission power of the PUSCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

[0040] Optionally, the transmission situation determined by the cell determining unit 21 in this embodiment further includes that an SRS needs to be transmitted on another cell in the subframe corresponding to the preamble to be transmitted on the secondary cell, and if a transmission power of the preamble is not 0, the power determining unit 22 in this embodiment may further determine that a transmission power of the SRS is 0.

[0041] In this embodiment, a cell determining unit of a user equipment determines a transmission situation of at least one of: a PUCCH, a PUSCH, and an SRS on another cell except a secondary cell in a subframe corresponding to a preamble to be transmitted on the secondary cell, so that the power determining unit can determine an uplink transmission power of the user equipment according to the determined transmission situation, thereby solving a problem that it is not provided in the prior art that how a user equipment determines an uplink transmission power of the user equipment when

random access is executed through a secondary cell.

[0042] It may be clearly understood by persons skilled in the art that, for the purpose of convenient and brief description, for a detailed working process of the foregoing system, apparatus, and unit, reference may be made to a corresponding process in the foregoing method embodiments, and details are not described herein again.

[0043] In several embodiments provided in the present application, it should be understood that the disclosed system, apparatus, and method may be implemented in other manners. For example, the apparatus embodiment described in the foregoing is merely exemplary. For example, the unit division is merely logical function division and may be other division in actual implementation. For example, multiple units or components may be combined or integrated into another system, or some features may be ignored or not performed. In addition, the displayed or discussed mutual couplings or direct couplings or communication connections may be implemented through some interfaces. The indirect couplings or communication connections between the apparatuses or units may be implemented in electronic, mechanical, or other forms.

[0044] The units described as separate parts may or may not be physically separate, and parts displayed as units may or may not be physical units, may be located in one position, or may be distributed on multiple network units. A part or all of the units may be selected according to an actual need to achieve the objectives of the solutions of the embodiments.

[0045] In addition, functional units in the embodiments of the present invention may be integrated into one processing unit, or each of the units may exist alone physically, or two or more units are integrated into one unit. The integrated unit may be implemented in the form of hardware, or may be implemented in the form of hardware plus a software functional unit.

[0046] The foregoing integrated unit implemented in the form of a software functional unit may be stored in a computer readable storage medium. The foregoing software functional unit is stored in a storage medium, and includes several instructions used to instruct a computer device (which may be a personal computer, a server, or a network device) to perform the steps of the methods in the embodiments of the present invention. The foregoing storage medium includes: any medium that can store program code, such as a USB flash drive, a removable hard disk, a read-only memory (Read-Only Memory, ROM for short), a random access memory (Random Access Memory, RAM for short), a magnetic disk, or an optical disc.

[0047] Finally, it should be noted that the foregoing embodiments are merely intended for describing the technical solutions of the present invention rather than limiting the present invention. Although the present invention is described in detail with reference to the foregoing embodiments, persons of ordinary skill in the art should understand that they may still make modifications to the technical solutions described in the foregoing embodiments, or make equivalent replacements to some technical features thereof; however, these modifications or replacements do not make the essence of corresponding technical solutions depart from the spirit and scope of the technical solutions in the embodiments of the present invention.

Claims

1. An uplink transmission power determining method, comprising:

determining, by a user equipment, a transmission situation of at least one of: a PUCCH, a PUSCH, and an SRS on another cell except a secondary cell in a subframe corresponding to a preamble to be transmitted on the secondary cell; and
determining, by the user equipment, an uplink transmission power of the user equipment according to the determined transmission situation.

2. The method according to claim 1, wherein the transmission situation determined by the user equipment comprises that no PUCCH, PUSCH, or SRS needs to be transmitted on another cell in the subframe corresponding to the preamble to be transmitted on the secondary cell; and the determining, by the user equipment, an uplink transmission power of the user equipment according to the determined transmission situation comprises:

determining, by the user equipment, a first transmission power of the preamble according to Formula (1):

$$P_{PRACH}(i) = \min \{ P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c \} \quad (1)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the first transmission power of the preamble; $P_{CMAX,c}(i)$

represents a maximum allowable power of the secondary cell;

PREAMBLE_RECEIVED_TARGET_POWER represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell.

3. The method according to claim 1, wherein the transmission situation determined by the user equipment comprises that at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell; and the determining, by the user equipment, an uplink transmission power of the user equipment according to the determined transmission situation comprises:

determining, by the user equipment, a second transmission power of the preamble according to Formula (2):

$$P_{PRACH}(i) = \min \{ P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c \} \quad (2)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the second transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell;

PREAMBLE_RECEIVED_TARGET_POWER represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell.

4. The method according to claim 3, wherein that the at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell specifically comprises that the PUCCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell; and the determining, by the user equipment, an uplink transmission power of the user equipment according to the determined transmission situation further comprises:

determining, by the user equipment, a first transmission power of the PUCCH according to Formula (3):

$$P_{PUCCH}(i) = \min \{ P_{PUCCH_0}(i), (P_{CMAX}(i) - P_{PRACH}(i)) \} \quad (3)$$

wherein $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{PUCCH_0}(i)$ represents a transmission power of the PUCCH obtained by the user equipment by performing uplink power control; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble.

5. The method according to claim 4, wherein that the at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell further comprises that the PUSCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell; and the determining, by the user equipment, an uplink transmission power of the user equipment according to the determined transmission situation further comprises:

determining, by the user equipment, a first transmission power of the PUSCH according to Formula (4):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (4)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the first transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble; or determining, by the user equipment, a second transmission power of the PUSCH according to Formula (5) and Formula (6):

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (5)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i))\} \quad (6)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the second transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the second transmission power of the preamble; and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing uplink signaling and is obtained by the user equipment by performing uplink power control.

6. The method according to claim 3, wherein that the at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell specifically comprises that the PUSCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell; and the determining, by the user equipment, an uplink transmission power of the user equipment according to the determined transmission situation further comprises:

determining, by the user equipment, a third transmission power of the PUSCH according to Formula (7):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PRACH}(i)) \quad (7)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the third transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble; or determining, by the user equipment, a fourth transmission power of the PUSCH according to Formula (8) and Formula (9):

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PRACH}(i)) \quad (8)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (9)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the fourth transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the second transmission power of the preamble; and $P_{PUSCH,j,0}(i)$ represents a transmission power that is of a PUSCH bearing uplink signaling and is obtained by the user equipment by performing uplink power control.

7. The method according to claim 1, wherein the transmission situation determined by the user equipment comprises that a PUCCH needs to be transmitted on another cell in a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell; and the determining, by the user equipment, an uplink transmission power of the user equipment according to the determined transmission situation comprises:

determining, by the user equipment, a third transmission power of the preamble according to Formula (10), and determining, by the user equipment, that a second transmission power of the PUCCH is 0:

$$P_{PRACH}(i) = \min \{P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c\} \quad (10)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the third transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell; $PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell; or determining, by the user equipment, a third transmission power of the PUCCH, wherein the third transmission power is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control, and determining, by the user equipment, that a fourth transmission power of the preamble is 0; or determining, by the user equipment, a fifth transmission power of the preamble according to Formula (11), and determining, by the user equipment, a fourth transmission power of the PUCCH according to Formula (12):

$$P_{PRACH}(i) = \min \{P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c\} \quad (11)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the fifth transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell; $PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell;

$$P_{PUCCH}(i) = \min \{P_{PUCCH,0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (12)$$

wherein $P_{PUCCH}(i)$ represents the fourth transmission power of the PUCCH; $P_{PUCCH,0}(i)$ represents a transmission power of the PUCCH obtained by the user equipment by performing uplink power control; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the fifth transmission power of the preamble; or determining, by the user equipment, a fifth transmission power of the PUCCH, wherein the fifth transmission power is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control, and determining, by the user equipment, a sixth transmission power of the preamble according to Formula (13):

$$P'_{PRACH}(i) = \min \{P_{PRACH}(i), (P_{CMAX}(i) - P_{PUCCH}(i))\} \quad (13)$$

wherein $P'_{PRACH}(i)$ represents the sixth transmission power of the preamble; $P_{PRACH}(i)$ represents the third transmission power of the preamble; $P_{PUCCH}(i)$ represents the fifth transmission power of the PUCCH; and

$P_{CMAX}(i)$ represents the maximum allowable power.

8. The method according to claim 7, wherein the transmission situation determined by the user equipment further comprises that a PUSCH needs to be transmitted on the another cell in the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell; and the determining, by the user equipment, an uplink transmission power of the user equipment according to the determined transmission situation further comprises:

determining, by the user equipment, that a fifth transmission power of the PUSCH is 0; or
determining, by the user equipment, a sixth transmission power the PUSCH, wherein the sixth transmission power is a transmission power of the PUSCH obtained by the user equipment by performing uplink power control; or
determining, by the user equipment, a seventh transmission power of the PUSCH according to Formula (14), or determining an eighth transmission power of the PUSCH according to Formula (15) and Formula (16):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (14)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the seventh transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the third transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the fifth transmission power of the preamble;

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (15)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i))\} \quad (16)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$

represents the eighth transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the third transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the fifth transmission power of the preamble, and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing uplink signaling and is obtained by the user equipment by performing uplink power control; or

determining, by the user equipment, a ninth transmission power of the PUSCH, wherein the ninth transmission power is a transmission power of the PUSCH obtained by the user equipment by performing uplink power control, and determining, by the user equipment, a seventh transmission power of the preamble according to Formula (17):

$$P'_{PRACH}(i) = \min \left\{ P_{PRACH}(i), \left(P_{CMAX}(i) - P_{PUCCH}(i) - \sum_c w(i) \cdot P_{PUSCH,c}(i) \right) \right\} \quad (17)$$

wherein $P'_{PRACH}(i)$ represents the seventh transmission power of the preamble; $P_{PRACH}(i)$ represents the third transmission power of the preamble; $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a

cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the ninth transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the fifth

transmission power of the PUCCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

9. The method according to claim 1, wherein the transmission situation determined by the user equipment comprises that a PUSCH needs to be transmitted on another cell in a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell; and the determining, by the user equipment, an uplink transmission power of the user equipment according to the determined transmission situation comprises:

determining, by the user equipment, an eighth transmission power of the preamble according to Formula (18), and determining, by the user equipment, that a tenth transmission power of the PUSCH is 0:

$$P_{PRACH}(i) = \min \{P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c\} \quad (18)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the eighth transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell; $PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell; or determining, by the user equipment, an eleventh transmission power of the PUSCH, wherein the eleventh transmission power is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control, and determining, by the user equipment, that a ninth transmission power of the preamble is 0; or determining, by the user equipment, a tenth transmission power of the preamble according to Formula (19); and determining, by the user equipment, a twelfth transmission power of the PUSCH according to Formula (20), or determining a thirteenth transmission power of the PUSCH according to Formula (21) and Formula (22):

$$P_{PRACH}(i) = \min \{P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c\} \quad (19)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the tenth transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell; $PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell;

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PRACH}(i)) \quad (20)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the twelfth transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the tenth transmission power of the preamble;

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PRACH}(i)) \quad (21)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (22)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the thirteenth transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the tenth transmission power of the preamble; and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing uplink signaling and is obtained by the user

equipment by performing uplink power control; or
determining, by the user equipment, a thirteenth transmission power of the PUSCH, wherein the thirteenth
transmission power is a transmission power of the PUSCH obtained by the user equipment by performing uplink
power control, and determining, by the user equipment, an eleventh transmission power of the preamble ac-
cording to Formula (23):

$$P'_{PRACH}(i) = \min \left\{ P_{PRACH}(i), \left(P_{CMAX}(i) - \sum_c w(i) \cdot P_{PUSCH,c}(i) \right) \right\} \quad (23)$$

wherein $P'_{PRACH}(i)$ represents the eleventh transmission power of the preamble; $P_{PRACH}(i)$ represents the eighth
transmission power of the preamble; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the thirteenth transmission power of
the PUSCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

10. The method according to any one of claims 1 to 9, wherein the transmission situation determined by the user
equipment further comprises that an SRS needs to be transmitted on another cell in the subframe corresponding
to the preamble to be transmitted on the secondary cell; and
the determining, by the user equipment, an uplink transmission power of the user equipment according to the
determined transmission situation further comprises:

if a transmission power of the preamble is not 0, determining, by the user equipment, that a transmission power
of the SRS is 0.

11. A user equipment, comprising:

a cell determining unit, configured to determine a transmission situation of at least one of: a PUCCH, a PUSCH,
and an SRS on another cell except a secondary cell in a subframe corresponding to a preamble to be transmitted
on the secondary cell; and
a power determining unit, configured to determine an uplink transmission power of the user equipment according
to the determined transmission situation.

12. The user equipment according to claim 11, wherein the transmission situation determined by the cell determining
unit comprises that no PUCCH, PUSCH, or SRS needs to be transmitted on another cell in the subframe corre-
sponding to the preamble to be transmitted on the secondary cell; and
the power determining unit is specifically configured to determine a first transmission power of the preamble according
to Formula (1):

$$P_{PRACH}(i) = \min \{ P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c \} \quad (1)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the first transmission power of the preamble; $P_{CMAX,c}(i)$
represents a maximum allowable power of the secondary cell;
 $PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c repre-
sents a target path loss of the secondary cell.

13. The user equipment according to claim 11, wherein the transmission situation determined by the cell determining
unit comprises that at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a
subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary
cell; and the power determining unit is specifically configured to determine a second transmission power of the
preamble according to Formula (2):

$$P_{PRACH}(i) = \min \{ P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c \} \quad (2)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the second transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell; $PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell.

14. The user equipment according to claim 13, wherein that the at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell specifically comprises that the PUCCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell; and the power determining unit is further configured to determine a first transmission power of the PUCCH according to Formula (3):

$$P_{PUCCH}(i) = \min \{ P_{PUCCH_0}(i), (P_{CMAX}(i) - P_{PRACH}(i)) \} \quad (3)$$

wherein $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{PUCCH_0}(i)$ represents a transmission power of the PUCCH obtained by the user equipment by performing uplink power control; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble.

15. The user equipment according to claim 14, wherein that the at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell further comprises that the PUSCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell; and the power determining unit is further configured to determine a first transmission power of the PUSCH according to Formula (4):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (4)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the first transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble; or the power determining unit is further configured to determine a second transmission power of the PUSCH according to Formula (5) and Formula (6):

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (5)$$

$$P_{PUSCH,j}(i) = \min \{ P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \} \quad (6)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the second transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the first transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the second transmission power of the preamble; and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH

bearing uplink signaling and is obtained by the user equipment by performing uplink power control.

16. The user equipment according to claim 13, wherein that the at least one of: a PUCCH, a PUSCH, and an SRS needs to be transmitted on another cell in a subframe except a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell specifically comprises that the PUSCH needs to be transmitted on the another cell in the subframe except the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell; and the power determining unit is further configured to determine a third transmission power of the PUSCH according to Formula (7):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PRACH}(i)) \quad (7)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the third transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the second transmission power of the preamble; or the power determining unit is further configured to determine a fourth transmission power of the PUSCH according to Formula (8) and Formula (9):

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PRACH}(i)) \quad (8)$$

$$P_{PUSCH,j}(i) = \min \{ P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PRACH}(i)) \} \quad (9)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the fourth transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the second transmission power of the preamble; and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing uplink signaling and is obtained by the user equipment by performing uplink power control.

17. The user equipment according to claim 11, wherein the transmission situation determined by the cell determining unit comprises that a PUCCH needs to be transmitted on another cell in a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell; and the power determining unit is specifically configured to determine a third transmission power of the preamble according to Formula (10), and determine that a second transmission power of the PUCCH is 0:

$$P_{PRACH}(i) = \min \{ P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c \} \quad (10)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the third transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell; $PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell; or the power determining unit is specifically configured to determine a third transmission power of the PUCCH, wherein the third transmission power is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control, and determine that a fourth transmission power of the preamble is 0; or the power determining unit is specifically configured to determine a fifth transmission power of the preamble according

to Formula (11), and determine a fourth transmission power of the PUCCH according to Formula (12):

$$P_{PRACH}(i) = \min \{P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c\} \quad (11)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the fifth transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell; $PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell.

$$P_{PUCCH}(i) = \min \{P_{PUCCH_0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (12)$$

wherein $P_{PUCCH}(i)$ represents the fourth transmission power of the PUCCH; $P_{PUCCH}(i)$ represents a transmission power of the PUCCH obtained by the user equipment by performing uplink power control; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the fifth transmission power of the preamble; or the power determining unit is specifically configured to determine a fifth transmission power of the PUCCH, wherein the fifth transmission power is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control, and determine a sixth transmission power of the preamble according to Formula (13):

$$P'_{PRACH}(i) = \min \{P_{PRACH}(i), (P_{CMAX}(i) - P_{PUCCH}(i))\} \quad (13)$$

wherein $P'_{PRACH}(i)$ represents the sixth transmission power of the preamble; $P_{PRACH}(i)$ represents the third transmission power of the preamble; $P_{PUCCH}(i)$ represents the fifth transmission power of the PUCCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

18. The user equipment according to claim 17, wherein the transmission situation determined by the cell determining unit further comprises that a PUSCH needs to be transmitted on the another cell in the first subframe among the subframes corresponding to the preamble to be transmitted on the secondary cell; and the power determining unit is further configured to determine that a fifth transmission power of the PUSCH is 0; or the power determining unit is further configured to determine a sixth transmission power the PUSCH, wherein the sixth transmission power is a transmission power of the PUSCH obtained by the user equipment by performing uplink power control; or the power determining unit is further configured to determine a seventh transmission power of the PUSCH according to Formula (14), or determine an eighth transmission power of the PUSCH according to Formula (15) and Formula (16):

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (14)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the seventh transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the third transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the fifth transmission power of the preamble;

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PUCCH}(i) - P_{PRACH}(i)) \quad (15)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PUCCH}(i) - P_{PRACH}(i))\} \quad (16)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the eighth transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the third transmission power of the PUCCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the fifth transmission power of the preamble, and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing uplink signaling and is obtained by the user equipment by performing uplink power control; or the power determining unit is further configured to determine a ninth transmission power of the PUSCH, wherein the ninth transmission power is a transmission power of the PUSCH obtained by the user equipment by performing uplink power control, and determine a seventh transmission power of the preamble according to Formula (17):

$$P'_{PRACH}(i) = \min \left\{ P_{PRACH}(i), \left(P_{CMAX}(i) - P_{PUCCH}(i) - \sum_c w(i) \cdot P_{PUSCH,c}(i) \right) \right\} \quad (17)$$

wherein $P'_{PRACH}(i)$ represents the seventh transmission power of the preamble; $P_{PRACH}(i)$ represents the third transmission power of the preamble; $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a

cell; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the ninth transmission power of the PUSCH; $P_{PUCCH}(i)$ represents the fifth transmission power of the PUCCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

19. The user equipment according to claim 11, wherein the transmission situation determined by the cell determining unit comprises that a PUSCH needs to be transmitted on another cell in a first subframe among subframes corresponding to the preamble to be transmitted on the secondary cell; and the power determining unit is specifically configured to determine an eighth transmission power of the preamble according to Formula (18), and determine that a tenth transmission power of the PUSCH is 0:

$$P_{PRACH}(i) = \min \{P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c\} \quad (18)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the eighth transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell;

$PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell; or

the power determining unit is specifically configured to determine an eleventh transmission power of the PUSCH, wherein the eleventh transmission power is a transmission power of the PUCCH obtained by the user equipment by performing uplink power control, and determine that a ninth transmission power of the preamble is 0; or

the power determining unit is specifically configured to determine a tenth transmission power of the preamble according to Formula (19); and determine a twelfth transmission power of the PUSCH according to Formula (20), or determine a thirteenth transmission power of the PUSCH according to Formula (21) and Formula (22):

$$P_{PRACH}(i) = \min \{P_{CMAX,c}(i), PREAMBLE_RECEIVED_TARGET_POWER + PL_c\} \quad (19)$$

wherein i represents a subframe; $P_{PRACH}(i)$ represents the tenth transmission power of the preamble; $P_{CMAX,c}(i)$ represents a maximum allowable power of the secondary cell;

$PREAMBLE_RECEIVED_TARGET_POWER$ represents a target received power of the preamble; and PL_c represents a target path loss of the secondary cell;

$$\sum_c w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PRACH}(i)) \quad (20)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the twelfth transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; and $P_{PRACH}(i)$ represents the tenth transmission power of the preamble;

$$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i) \leq (P_{CMAX}(i) - P_{PUSCH,j}(i) - P_{PRACH}(i)) \quad (21)$$

$$P_{PUSCH,j}(i) = \min \{P_{PUSCH,j_0}(i), (P_{CMAX}(i) - P_{PRACH}(i))\} \quad (22)$$

wherein $w(i)$ represents a weighting factor, and its value range is [0, 1]; c represents a cell;

$\sum_{c \neq j} w(i) \cdot P_{PUSCH,c}(i)$ represents the thirteenth transmission power of the PUSCH; $P_{CMAX}(i)$ represents the maximum allowable power; $P_{PRACH}(i)$ represents the tenth transmission power of the preamble; and $P_{PUSCH,j_0}(i)$ represents a transmission power that is of a PUSCH bearing uplink signaling and is obtained by the user equipment by performing uplink power control; or
the power determining unit is specifically configured to determine a thirteenth transmission power of the PUSCH, wherein the thirteenth transmission power is a transmission power of the PUSCH obtained by the user equipment by performing uplink power control, and determine an eleventh transmission power of the preamble according to Formula (23):

$$P'_{PRACH}(i) = \min \left\{ P_{PRACH}(i), \left(P_{CMAX}(i) - \sum_c w(i) \cdot P_{PUSCH,c}(i) \right) \right\} \quad (23)$$

wherein $P'_{PRACH}(i)$ represents the eleventh transmission power of the preamble; $P_{PRACH}(i)$ represents the eighth transmission power of the preamble; $\sum_c w(i) \cdot P_{PUSCH,c}(i)$ represents the thirteenth transmission power of the PUSCH; and $P_{CMAX}(i)$ represents the maximum allowable power.

- 20.** The user equipment according to any one of claims 11 to 19, wherein the transmission situation determined by the cell determining unit comprises that an SRS needs to be transmitted on another cell in the subframe corresponding to the preamble to be transmitted on the secondary cell; and
the power determining unit is further configured to, if a transmission power of the preamble is not 0, determine that a transmission power of the SRS is 0.

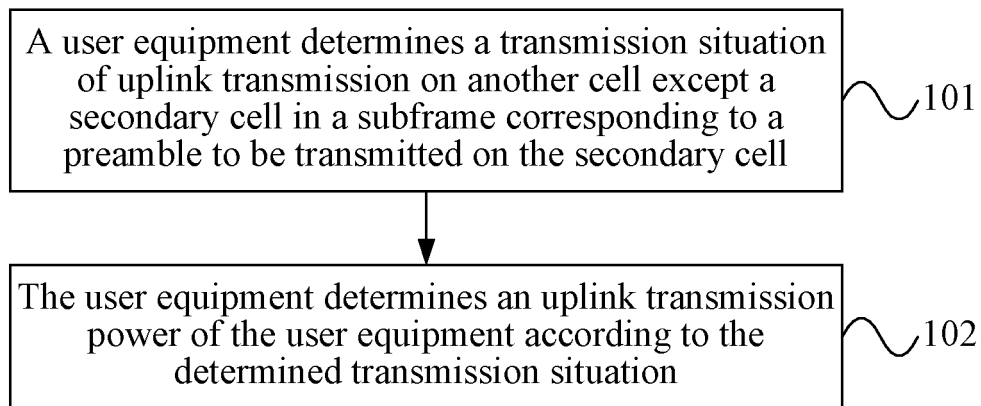


FIG. 1

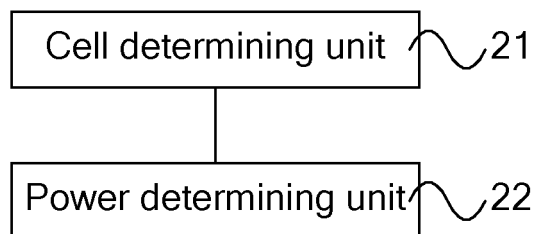


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/081974

A. CLASSIFICATION OF SUBJECT MATTER

H04W 24/10 (2009.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H04W, H04L, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI,EPODOC,CNKI,IEEE,CNPAT: carrier, aggregation, pcell, scell, power, uplink, cell, PUCCH, PUSCH, SRS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 102123437 A (CHINA ACAD. TELECOM TECHNOLOGY MII.) 13 Jul. 2011 (13.07.2011) description, page 3, paragraph [0010] to page 7, paragraph [0003]	1,11
A	CN 102104905 A (CHINA ACAD. TELECOM TECHNOLOGY MII.)22 Jun. 2011 (22.06.2011) the whole document	1-20
A	EP 2362699 A1(NOKIA CORP. et al.) 31 Aug. 2011 (31.08.2011) the whole document	1-20

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&”document member of the same patent family

Date of the actual completion of the international search

03 Dec. 2012 (03.12.2012)

Date of mailing of the international search report

03 Jan. 2013 (03.01.2013)

Name and mailing address of the ISA
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No. (86-10)62019451

Authorized officer

YUAN, Min

Telephone No. (86-10)62413574

Form PCT/ISA /210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2012/081974

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 102123437 A	13.07.2011	WO 20121166443 A1	07.09.2012
CN 102104905 A	22.06.2011	WO 2012019566 A1	16.02.2012
EP 2362699 A1	31.08.2011	None	

Form PCT/ISA/210 (patent family annex) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201110302787 [0001]