



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.10.2019 Bulletin 2019/44

(51) Int Cl.:
G02F 1/295^(2006.01)

(21) Application number: **19170718.1**

(22) Date of filing: **23.04.2019**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **PUCKETT, Matthew Wade**
Morris Plains, NJ New Jersey 07950 (US)
• **KRUEGER, Neil A.**
Morris Plains, NJ New Jersey 07950 (US)

(74) Representative: **Houghton, Mark Phillip**
Patent Outsourcing Limited
Cornerhouse
1 King Street
Bakewell
Derbyshire DE45 1DZ (GB)

(30) Priority: **27.04.2018 US 201862663897 P**
20.03.2019 US 201916359789

(71) Applicant: **Honeywell International Inc.**
Morris Plains, NJ New Jersey 07950 (US)

(54) **OPTICAL PHASED ARRAY BASED ON EMITTERS DISTRIBUTED AROUND PERIMETER**

(57) An emitter configuration layout for an optical phased array comprises a plurality of emitters arranged around a perimeter, and a plurality of waveguides, with

each of the waveguides respectively coupled to one of the emitters. The plurality of emitters are operative to generate a single far-field peak.

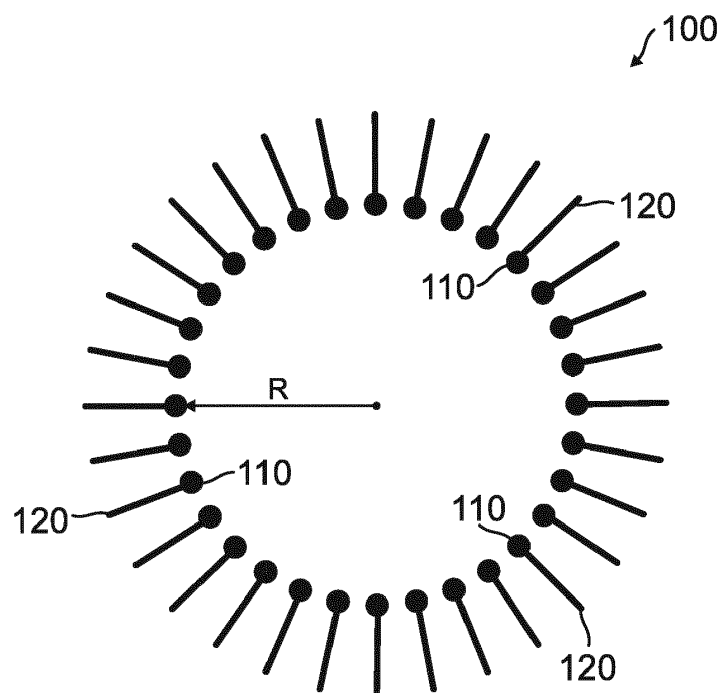


FIG. 1

Description**BACKGROUND**

[0001] There are numerous applications for which it is desirable to steer the direction of emission of a beam of light without the use of any moving parts. To this end, efforts have been made to design chip-scale optical phased arrays based on integrated photonics components. While breakthroughs have been made in one-dimensional beam steering and, to a lesser extent, two-dimensional beam steering, improvements in these technologies are still needed.

[0002] For example, a major limitation currently faced by two-dimensional beam steering is the inability to space individual emitters of an array ($N \times N$) close enough to one another, which ideally should be at one-half wavelength ($\lambda/2$). This results from the requirement for optically isolated waveguides to propagate among the emitters. This limitation translates to a limited steering range, as well as an increased number of emitted beams and a reduced power level in the beam of interest.

SUMMARY

[0003] An emitter configuration layout for an optical phased array comprises a plurality of emitters arranged around a perimeter, and a plurality of waveguides, with each of the waveguides respectively coupled to one of the emitters. The plurality of emitters are operative to generate a single far-field peak.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] Features of the present invention will become apparent to those skilled in the art from the following description with reference to the drawings. Understanding that the drawings depict only typical embodiments and are not therefore to be considered limiting in scope, the invention will be described with additional specificity and detail through the use of the accompanying drawings, in which:

Figure 1 is a schematic diagram of a circular emitter configuration layout for an optical phased array, according to one embodiment;

Figures 2A-2C are emission profiles from numerically generated simulations corresponding to the emitter configuration layout of Figure 1;

Figure 3 is a schematic diagram of a circular emitter configuration layout for an optical phased array, according to another embodiment;

Figures 4A-4C are emission profiles from numerically generated simulations corresponding to the emitter configuration layout of Figure 3;

Figure 5 is a schematic diagram of a circular emitter configuration layout for an optical phased array, according to a further embodiment;

Figures 6A-6C are emission profiles from numerically generated simulations corresponding to the emitter configuration layout of Figure 5;

Figure 7 is a schematic diagram of a circular emitter configuration layout for an optical phased array, according to another embodiment;

Figures 8A-8C are emission profiles from numerically generated simulations corresponding to the emitter configuration layout of Figure 7;

Figure 9 is a schematic diagram of an emitter configuration layout for an optical phased array, according to an alternative embodiment;

Figures 10A-10C are emission profiles from numerically generated simulations corresponding to the emitter configuration layout of Figure 9;

Figure 11 is a schematic diagram of an emitter configuration layout for an optical phased array, according to another alternative embodiment;

Figures 12A-12C are emission profiles from numerically generated simulations corresponding to the emitter configuration layout of Figure 11;

Figure 13 is a schematic diagram of an emitter configuration layout for an optical phased array, according to a further alternative embodiment; and

Figures 14A and 14B are emission profiles from numerically generated simulations corresponding to the emitter configuration layout of Figure 13.

DETAILED DESCRIPTION

[0005] In the following detailed description, embodiments are described in sufficient detail to enable those skilled in the art to practice the invention. It is to be understood that other embodiments may be utilized without departing from the scope of the invention. The following detailed description is, therefore, not to be taken in a limiting sense.

[0006] Various emitter configurations for optical phased arrays are disclosed herein. The emitter configurations include a plurality of emitters arranged around a perimeter, and a plurality of waveguides that are each respectively coupled to one of the emitters. In some embodiments, the emitters can be arranged around the perimeter such that none of the waveguides are located between any of the emitters. The emitter configurations are operative to generate a single far-field peak.

[0007] The emitters can be arranged in various geometric patterns or shapes around the perimeter. In principle, the perimeter can encompass a variety of different shapes. In some embodiments, performance is enhanced for perimeter shapes possessing greater levels of radial symmetry. For example, the emitters can form a circular pattern around the perimeter, an elliptical pattern around the perimeter, a semi-circular pattern around the perimeter, or the like.

[0008] The present approach solves the problem of prior emitter arrays by rearranging the emitters around a perimeter. For example, instead of positioning the emitters in an NxN array configuration, the present emitters can be spaced equidistant along the perimeter, such as in a circular arrangement with a given radius. In such embodiments, there is no requirement for waveguides to pass among the emitters, and so the emitters can be placed much closer together than in conventional optical phased arrays.

[0009] An optical phased array based on the present emitter configurations can be fabricated using integrated optical waveguides through standard fabrication processes. For example, the waveguide design can include a 1xN splitter, N phase modulators (which may operate based on one of a number of effects), and a configuration of grating-assisted emitters. Driving electrodes for phase shifters can be included in the fabrication.

[0010] To operate an optical phased array device with the present emitter configuration, laser light is injected into an input waveguide facet. The phases of the N waveguide arms are controlled to control the direction of emission of the emitted beam.

[0011] Simulations have verified that various circular emitter configurations result in an improved steering range for the emitted beam, as well as better transfer of optical power into the single beam of interest.

[0012] The present emitter configurations can be implemented in various integrated photonics applications, light detection and ranging (LiDAR) systems, free-space optical communication systems, or the like.

[0013] Further details of various embodiments are described hereafter with reference to the drawings.

[0014] Figure 1 illustrates an emitter configuration layout 100 for an optical phased array, according to one embodiment. The emitter configuration layout 100 includes a plurality of emitters 110 each with a given emitter spot size, and arranged in a circular pattern, with a given radius (R), around a perimeter. The emitters 110 are each coupled to a respective waveguide 120. In this embodiment, there are no waveguides between each of the emitters 110, which provides for a reduced pitch.

[0015] Figures 2A-2C are emission profiles from numerically generated simulations corresponding to emitter configuration layout 100. Figure 2A is a near-field emission profile 200 for 36 emitters in a circular configuration having a radius (R) of 13.5 μm . Figure 2B is a far-field emission profile 210 of the light generated by the 36 emitters with no steering of a central lobe, and Figure 2C is

a far-field emission profile 220 of the light generated by the 36 emitters with steering of the central lobe. As shown in Figures 2B and 2C, a single peak (central lobe) is generated in the far-field by the circular configuration.

[0016] Figure 3 illustrates an emitter configuration layout 300 for an optical phased array, according to another embodiment. The emitter configuration layout 300 includes a plurality of emitters 310 arranged in a circular pattern, with a given radius (R), around a perimeter. The emitter configuration layout 300 has a reduced number of emitters compared to the embodiment of Figure 1. The emitters 310 are each coupled to a respective waveguide 320. As shown in Figure 3, there are no waveguides between each of the emitters 310.

[0017] Figures 4A-4C are emission profiles from numerically generated simulations corresponding to emitter configuration layout 300. Figure 4A is a near-field emission profile 400 for 25 emitters in a circular configuration having a radius of 13.5 μm . Figure 4B is a far-field emission profile 410 of the light generated by the 25 emitters with no steering of a central lobe, and Figure 4C is a far-field emission profile 420 of the light generated by the 25 emitters with steering of the central lobe. Note that for this reduced number of emitters, the quality of the far-field emission at emission angles sufficiently different from the central lobe is decreased.

[0018] Figure 5 illustrates an emitter configuration layout 500 for an optical phased array, according to a further embodiment. The emitter configuration layout 500 includes a plurality of emitters 510 arranged in a circular pattern, with a given radius (R), around a perimeter. The emitter configuration layout 500 has a reduced emitter spot size compared to the emitter spot size of the embodiment of Figure 1. The emitters 510 are each coupled to a respective waveguide 520. As shown in Figure 5, there are no waveguides between each of the emitters 510. Reducing the emitter spot size gives a wider steering range.

[0019] Figures 6A-6C are emission profiles from numerically generated simulations corresponding to emitter configuration layout 500. Figure 6A is a near-field emission profile 600 for 36 emitters in a circular configuration having a radius of 13.5 μm . Figure 6B is a far-field emission profile 610 of the light generated by the 36 emitters with no steering of a central lobe, and Figure 6C is a far-field emission profile 620 of the light generated by the 36 emitters with steering of the central lobe.

[0020] Figure 7 illustrates an emitter configuration layout 700 for an optical phased array, according to another embodiment. The emitter configuration layout 700 includes a plurality of emitters 710 arranged in a circular pattern, with a given radius (R), around a perimeter. The emitter configuration layout 700 has an increased configuration radius compared to the embodiment of Figure 1. The emitters 710 are each coupled to a respective waveguide 720. As shown in Figure 7, there are no waveguides between each of the emitters 710.

[0021] Figures 8A-8C are emission profiles from nu-

merically generated simulations corresponding to emitter configuration layout 700. Figure 8A is a near-field emission profile 800 for 64 emitters in a circular configuration having a radius of 27 μm . Figure 8B is a far-field emission profile 810 of the light generated by the 64 emitters with no steering of a central lobe, and Figure 8C is a far-field emission profile 820 of the light generated by the 64 emitters with steering of the central lobe. As shown in Figures 8B and 8C, increasing the configuration radius decreases the central spot size and reduces the spacing of the fringes around the central lobe in the far-field.

[0022] Figure 9 illustrates an emitter configuration layout 900 of an optical phased array, according to a further embodiment. The emitter configuration layout 900 includes a plurality of emitters in a dual ring configuration, including an outer ring of emitters 910a arranged in a circular pattern with first radius (R_1), and an inner ring of emitters 910b arranged in a circular pattern with a second radius (R_2) that is less than the first radius. The emitters 910a are each coupled to a respective waveguide 920a, and the emitters 910b are each coupled to a respective waveguide 920b. The outer ring of emitters 910a are each positioned so as to be offset from the inner ring of emitters 910b, such that the waveguides 920b coupled to the inner ring of emitters 910b respectively extend between a pair of adjacent outer ring emitters 910a.

[0023] Figures 10A-10C are emission profiles from numerically generated simulations corresponding to emitter configuration layout 900. Figure 10A is a near-field emission profile 1000 for 72 emitters in a dual ring configuration, with an inner radius (R_2) of 10.8 μm . Figure 10B is a far-field emission profile 1010 of the light generated by the 72 emitters with no steering of a central lobe, and Figure 10C is a far-field emission profile 1020 of the light generated by the 72 emitters with steering of the central lobe. As shown in Figures 10B and 10C, the dual ring configuration suppresses the fringes around the central lobe in the far-field.

[0024] While two concentric rings of emitters are shown in the embodiment of Figure 9, it should be understood that three or more concentric rings of emitters can be used in alternative embodiments, to provide for even greater fringe suppression.

[0025] Figure 11 illustrates an emitter configuration layout 1100 of an optical phased array, according to an alternative embodiment. The emitter configuration layout 1100 comprises a plurality of emitters arranged to have two independent polarizations, including a first set of emitters 1110a having a first polarization and a second set of emitters 1110b have a second polarization that is different than the first polarization. In one embodiment, the first set of emitters 1110a are arranged in a first semi-circular pattern, and the second set of emitters 1110b are arranged in a second semi-circular pattern that faces the first semi-circular pattern. The emitters 1110a are each coupled to a respective waveguide 1120a, and the emitters 1110b are each coupled to a respective waveguide 1120b.

[0026] Figures 12A-12C are emission profiles from numerically generated simulations corresponding to emitter configuration layout 1100. Figure 12A is a near-field emission profile 1210 for one half of a 36 emitter configuration having a radius of 13.5 μm , in which the emitters have a first polarization. Figure 12B is a near-field emission profile 1220 for the other half of the 36 emitter configuration, in which the emitters have a second polarization that is different than the first polarization. Figure 12C is a far-field emission profile 1230 of the light generated by the 36 emitter configuration, including a first lobe 1240 generated by the emitters with the first polarization (Fig. 12A), and a second lobe 1250 generated by the emitters with the second polarization (Fig. 12B).

[0027] While the two beams corresponding to first lobe 1240 and second lobe 1250 are separate beams possessing orthogonal polarization states, these two beams can be made to track each other, such that the beams overlap in the far-field. The orthogonal polarization states prevent interference between the two beams. This enables the two beams to contain and transmit separate data streams, such as polarization multiplexed data, while minimizing cross-talk between the data streams.

[0028] Figure 13 illustrates an emitter configuration layout 1300 of an optical phased array, according to a further alternative embodiment. The emitter configuration layout 1300 comprises a plurality of emitters arranged to have two independent phase gradients in a circular pattern. A first set of emitters 1310a have a first phase gradient and are alternatingly arranged with a second set of emitters 1310b having a second phase gradient that is different than the first phase gradient. The emitters 1310a are each coupled to a respective waveguide 1320a, and the emitters 1310b are each coupled to a respective waveguide 1320b.

[0029] Figures 14A and 14B are emission profiles from numerically generated simulations corresponding to emitter configuration layout 1300. Figure 14A is a near-field emission profile 1410 for a 36 emitter configuration having a radius of 13.5 μm , in which the emitters have alternating independent phase gradients. Figure 14B is a far-field emission profile 1420 of the light generated by the 36 emitter configuration, including a first lobe 1430 and a second lobe 1440. In this implementation, the beams corresponding to first lobe 1430 and second lobe 1440 are two separate beams that can be independently steered and controlled.

Example Embodiments

[0030]

Example 1 includes an emitter configuration layout for an optical phased array, comprising: a plurality of emitters arranged around a perimeter; and a plurality of waveguides, each of the waveguides respectively coupled to one of the emitters; wherein the plurality of emitters are operative to generate a single

far-field peak.

Example 2 includes the emitter configuration layout of Example 1, wherein the plurality of emitters are arranged in a circular pattern around the perimeter.

Example 3 includes the emitter configuration layout of Example 1, wherein the plurality of emitters are arranged in an elliptical pattern around the perimeter.

Example 4 includes the emitter configuration layout of Example 1, wherein the plurality of emitters are arranged in a semi-circular pattern around the perimeter.

Example 5 includes the emitter configuration layout of any of Examples 1-4, wherein the plurality of emitters are arranged around the perimeter such that none of the waveguides are located between any of the emitters.

Example 6 includes the emitter configuration layout of any of Examples 1-2, wherein the plurality of emitters are arranged in at least two concentric rings, including an outer ring of emitters arranged in a circular pattern with a first radius, and at least one inner ring of emitters arranged in a circular pattern with a second radius that is less than the first radius.

Example 7 includes the emitter configuration layout of Example 6, wherein the outer ring of emitters are each positioned so as to be offset from the inner ring of emitters, such that the waveguides coupled to the inner ring of emitters respectively extend between a pair of adjacent outer ring emitters.

Example 8 includes the emitter configuration layout of any of Examples 6-7, wherein the plurality of emitters arranged in at least two concentric rings suppress fringes around a central lobe in the far-field.

Example 9 includes the emitter configuration layout of any of Examples 1-8, wherein the plurality of emitters are implemented in an integrated photonics application, a light detection and ranging (LiDAR) system, or a free-space optical communication system.

Example 10 includes an optical phased array, comprising: a plurality of emitters arranged around a perimeter, wherein the plurality of emitters include a first set of emitters having a first polarization, and a second set of emitters having a second polarization that is different than the first polarization; and a plurality of waveguides, each of the waveguides respectively coupled to one of the emitters.

Example 11 includes the optical phased array of Example 10, wherein the plurality of emitters are ar-

ranged in a circular pattern around the perimeter.

Example 12 includes the optical phased array of Example 11, wherein the first set of emitters are arranged in a first semi-circular pattern, and the second set of emitters are arranged in a second semi-circular pattern that faces the first semi-circular pattern.

Example 13 includes the optical phased array of any of Examples 10-12, wherein a far-field emission profile of light generated by the plurality of emitters includes a first lobe generated by the first set of emitters with the first polarization, and a second lobe generated by the second set of emitters with the second polarization.

Example 14 includes the optical phased array of Example 13, wherein each beam corresponding to the first lobe and the second lobe are separate beams possessing orthogonal polarization states, wherein each beam is configurable to track the other beam such that the beams overlap in the far-field.

Example 15 includes the optical phased array of Example 14, wherein the orthogonal polarization states prevent interference between the beams.

Example 16 includes an optical phased array, comprising: a plurality of emitters arranged around a perimeter, wherein the plurality of emitters include a first set of emitters having a first phase gradient and a second set of emitters having a second phase gradient that is different than the first phase gradient, the first set of emitters alternatingly arranged with the second set of emitters around the perimeter; and a plurality of waveguides, each of the waveguides respectively coupled to one of the emitters.

Example 17 includes the optical phased array of Example 16, wherein the plurality of emitters are arranged in a circular pattern around the perimeter.

Example 18 includes the optical phased array of any of Examples 16-17, wherein a far-field emission profile of light generated by the plurality of emitters includes a first lobe generated by the first set of emitters with the first phase gradient, and a second lobe generated by the second set of emitters with the second phase gradient.

Example 19 includes the optical phased array of Example 18, wherein each beam corresponding to the first lobe and the second lobe are separate beams that are independently steerable and controllable.

[0031] The present invention may be embodied in other specific forms without departing from its essential characteristics. The described embodiments are to be con-

sidered in all respects only as illustrative and not restrictive. The scope of the invention is therefore indicated by the appended claims rather than by the foregoing description. All changes that come within the meaning and range of equivalency of the claims are to be embraced within their scope.

Claims

1. An emitter configuration layout for an optical phased array, comprising:
 - a plurality of emitters arranged around a perimeter; and
 - a plurality of waveguides, each of the waveguides respectively coupled to one of the emitters;
 - wherein the plurality of emitters are operative to generate a single far-field peak.
2. The emitter configuration layout of claim 1, wherein the plurality of emitters are arranged in a circular pattern around the perimeter.
3. The emitter configuration layout of claim 1, wherein the plurality of emitters are arranged in an elliptical pattern around the perimeter.
4. The emitter configuration layout of claim 1, wherein the plurality of emitters are arranged in a semi-circular pattern around the perimeter.
5. The emitter configuration layout of claim 1, wherein the plurality of emitters are arranged around the perimeter such that none of the waveguides are located between any of the emitters.
6. The emitter configuration layout of claim 1, wherein the plurality of emitters are arranged in at least two concentric rings, including an outer ring of emitters arranged in a circular pattern with a first radius, and at least one inner ring of emitters arranged in a circular pattern with a second radius that is less than the first radius.
7. The emitter configuration layout of claim 6, wherein the outer ring of emitters are each positioned so as to be offset from the inner ring of emitters, such that the waveguides coupled to the inner ring of emitters respectively extend between a pair of adjacent outer ring emitters.
8. The emitter configuration layout of claim 6, wherein the plurality of emitters arranged in at least two concentric rings suppress fringes around a central lobe in the far-field.

9. The emitter configuration layout of claim 1, wherein the plurality of emitters are implemented in an integrated photonics application, a light detection and ranging (LiDAR) system, or a free-space optical communication system.

10. An optical phased array, comprising:

a plurality of emitters arranged around a perimeter, wherein the plurality of emitters comprise:

a first set of emitters having a first polarization, and a second set of emitters having a second polarization that is different than the first polarization; or
 a first set of emitters having a first phase gradient and a second set of emitters having a second phase gradient that is different than the first phase gradient, the first set of emitters alternatingly arranged with the second set of emitters around the perimeter; and

a plurality of waveguides, each of the waveguides respectively coupled to one of the emitters.

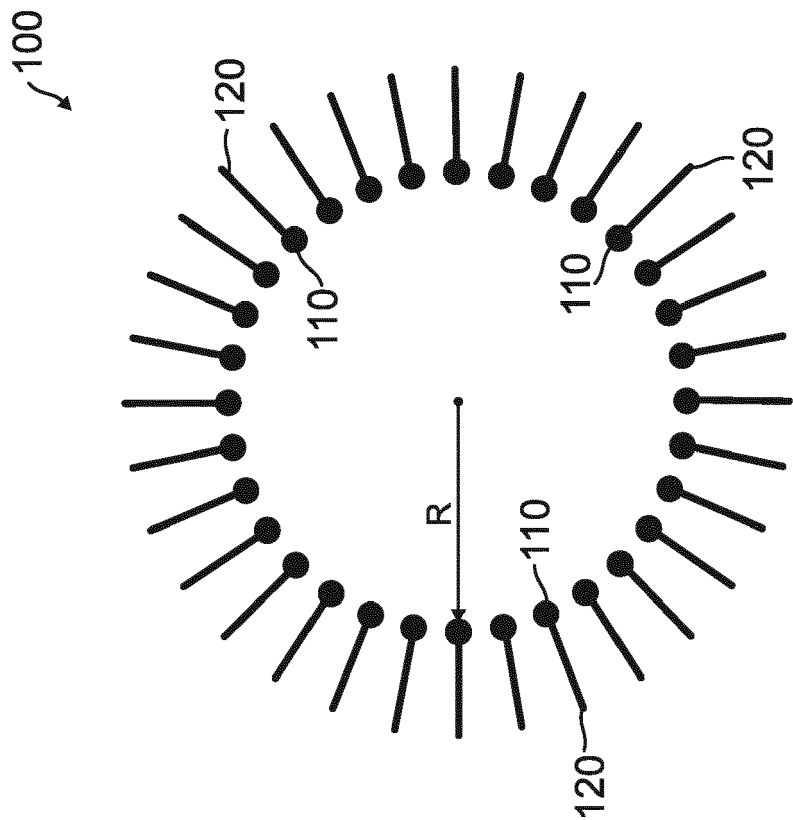
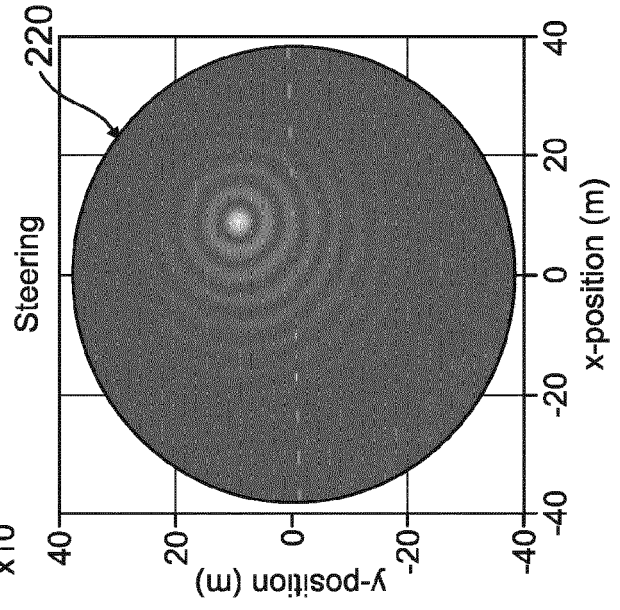
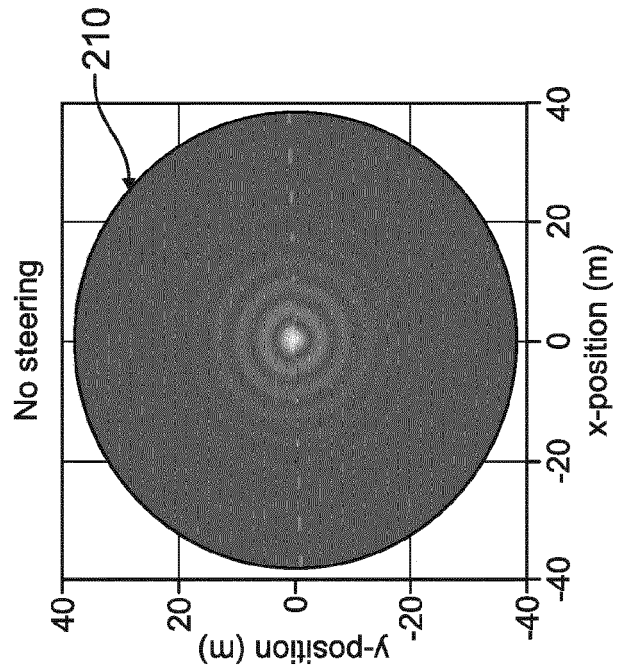
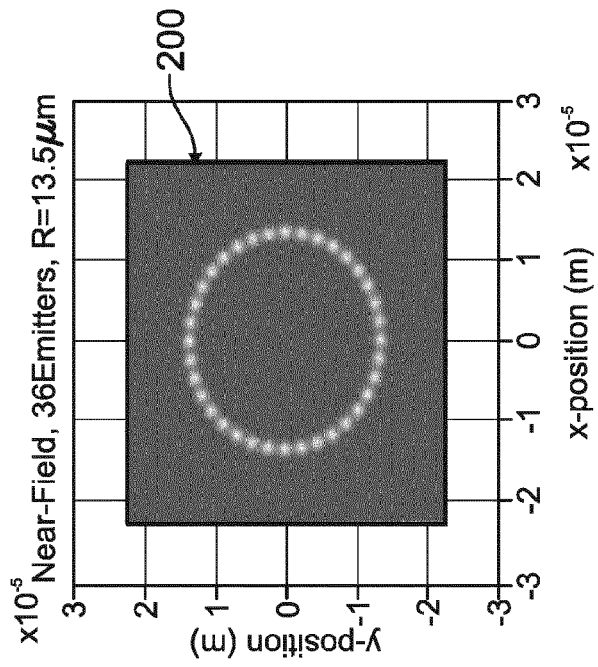


FIG. 1



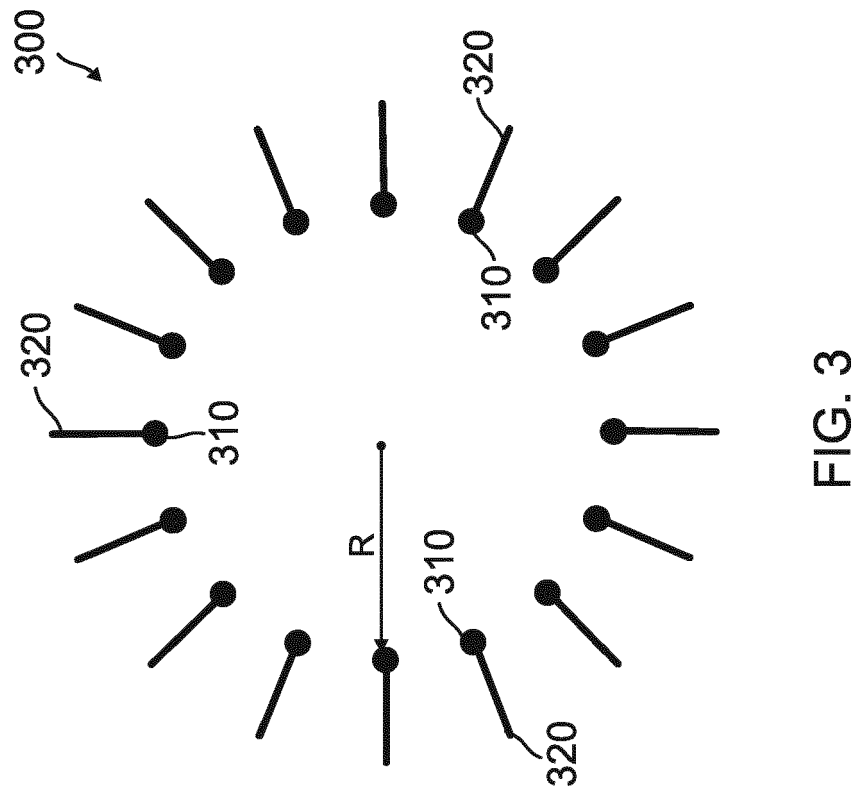
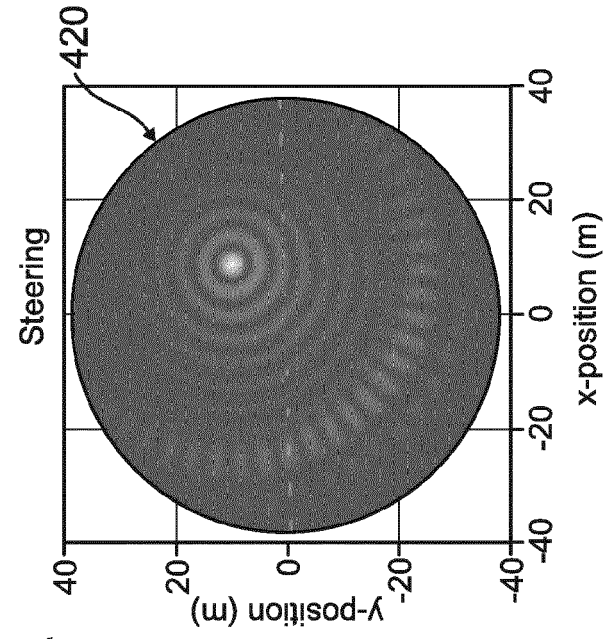
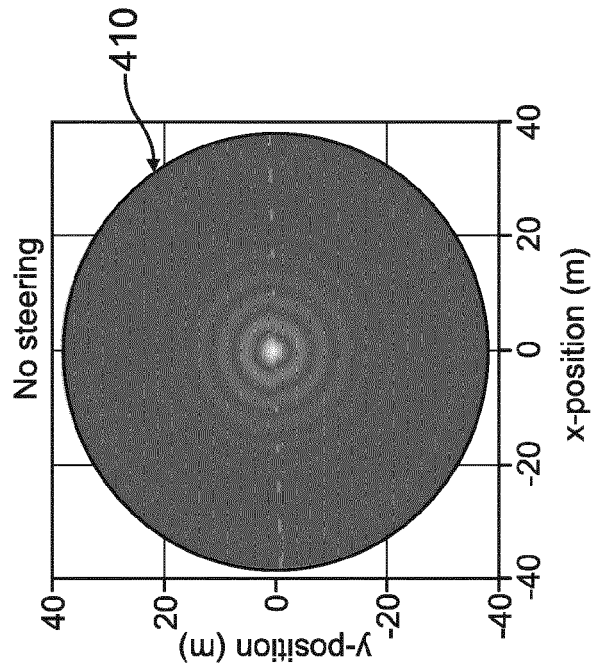
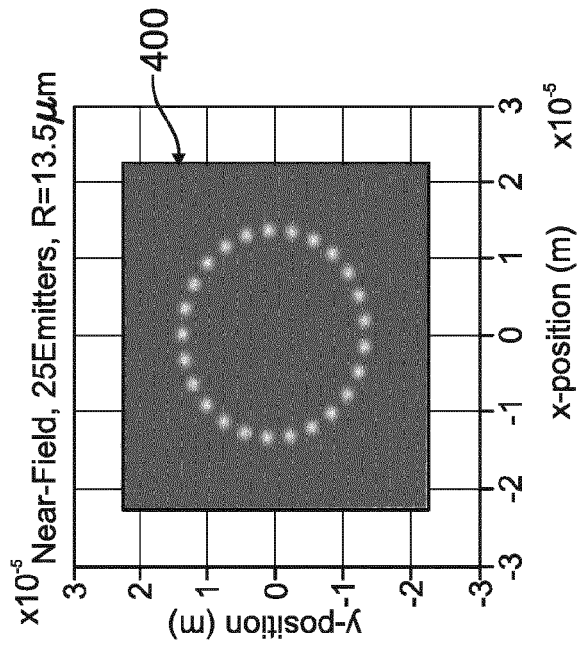
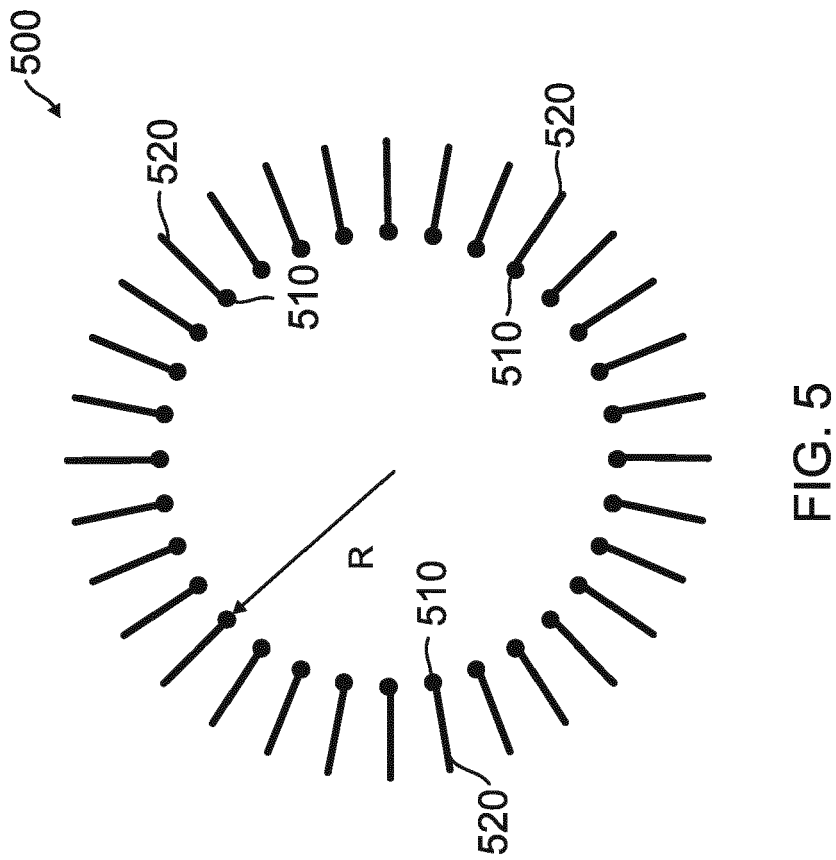


FIG. 3





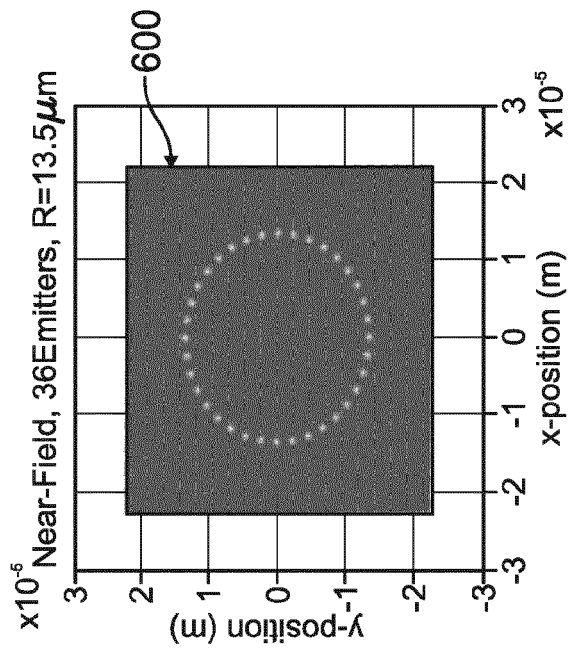


FIG. 6A

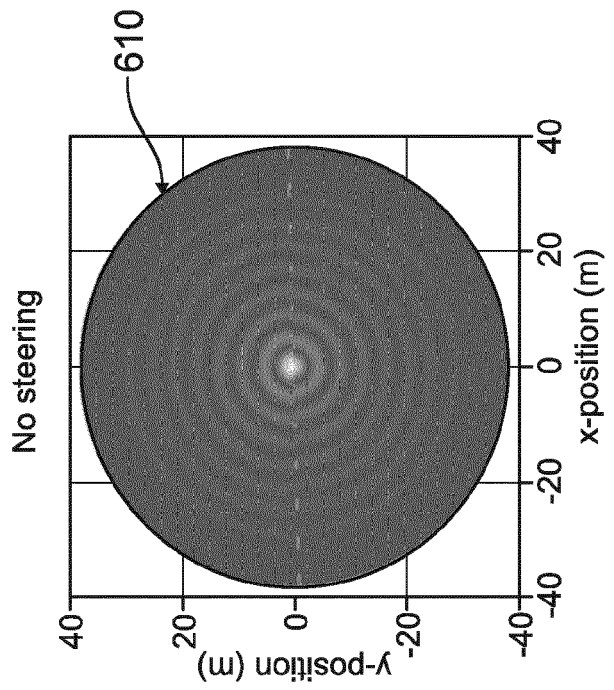


FIG. 6B

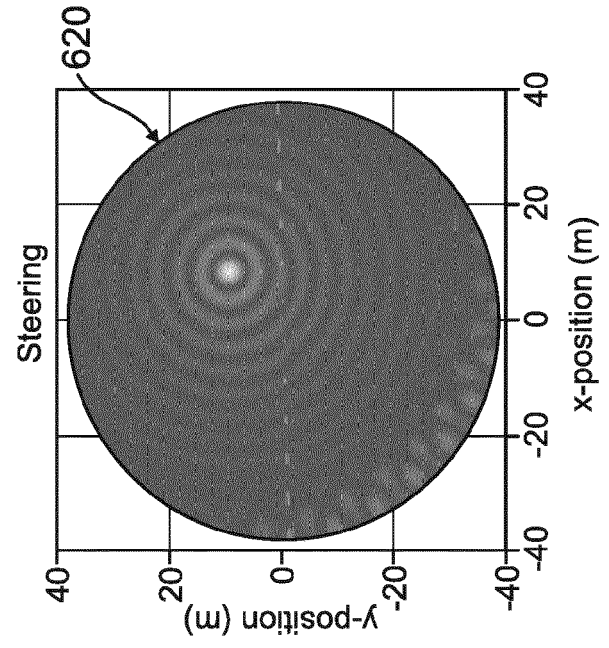


FIG. 6C

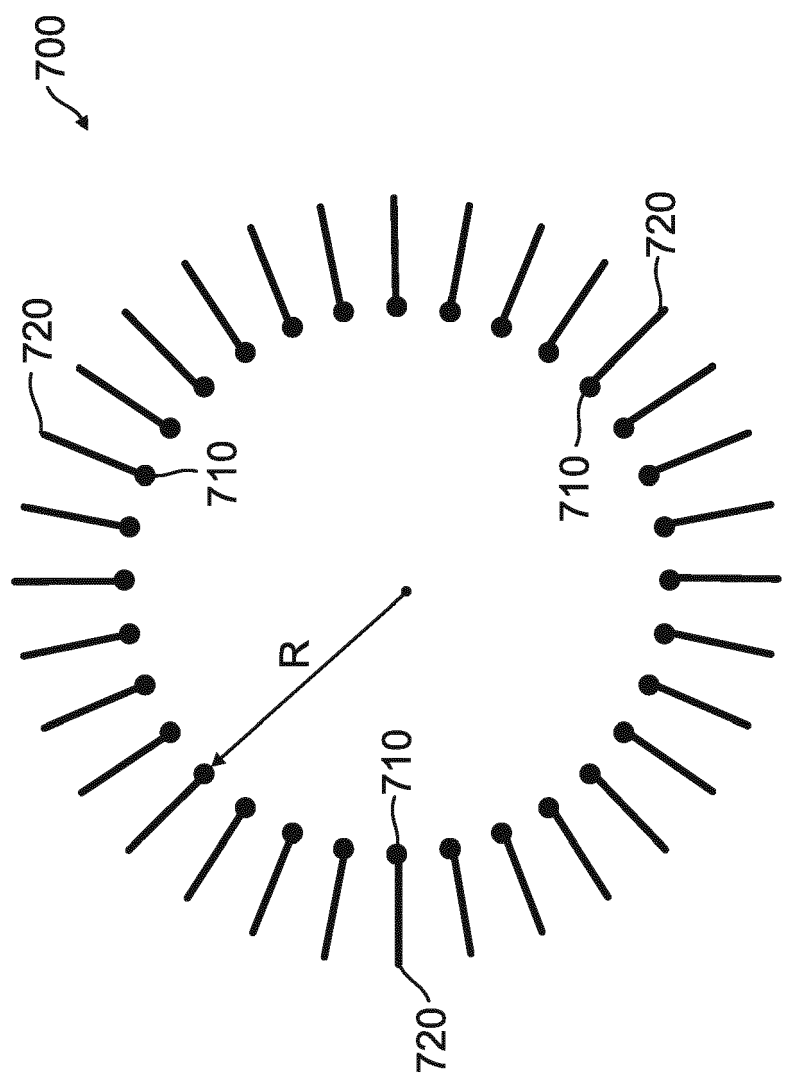


FIG. 7

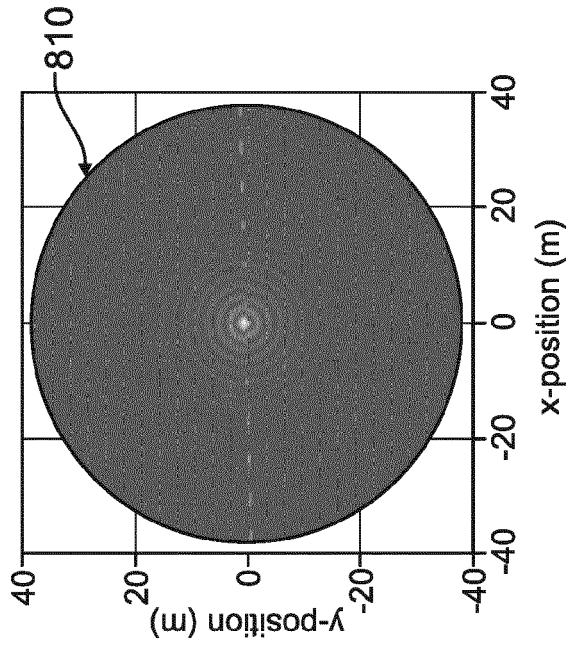
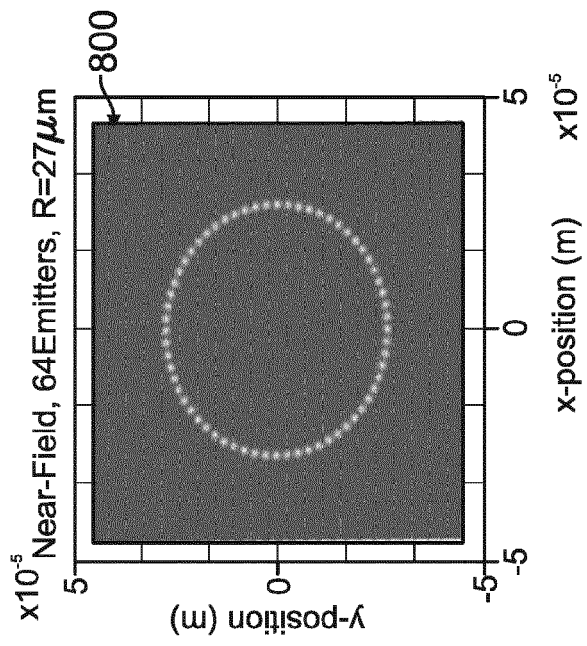


FIG. 8B

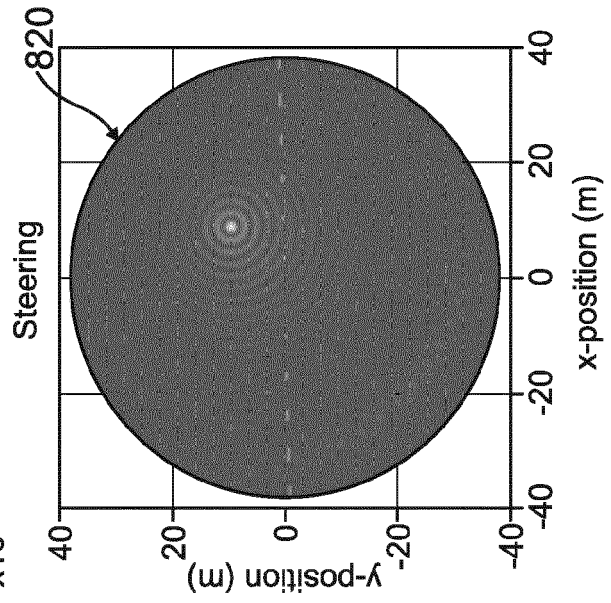


FIG. 8C

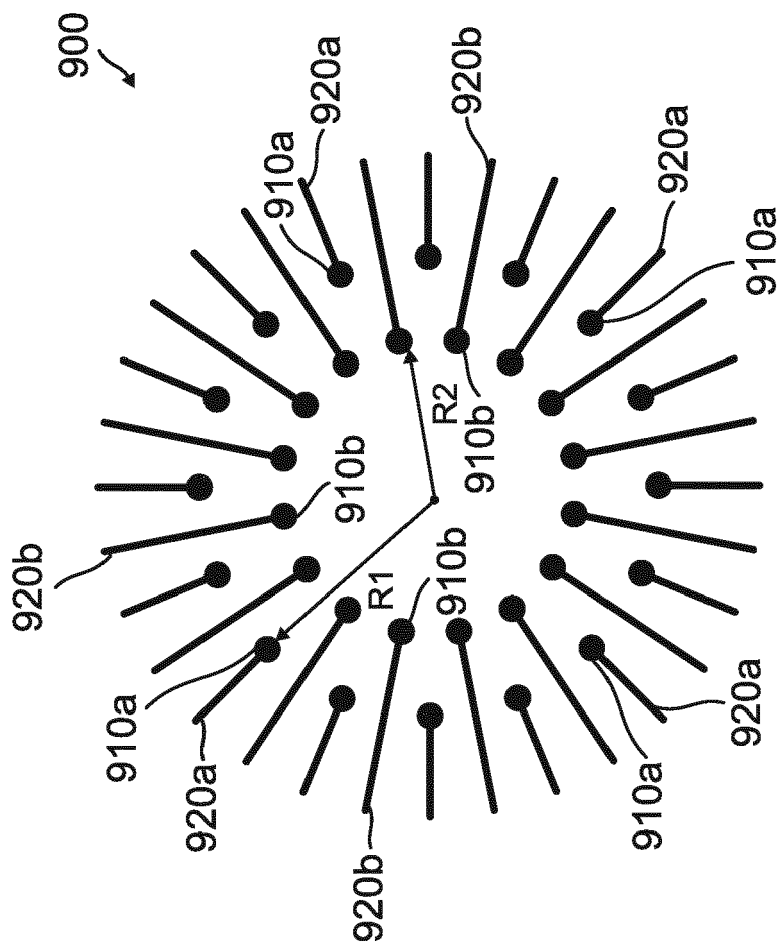
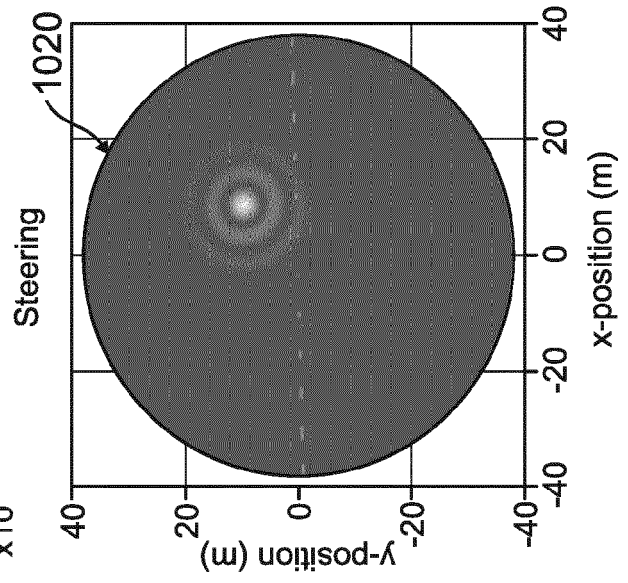
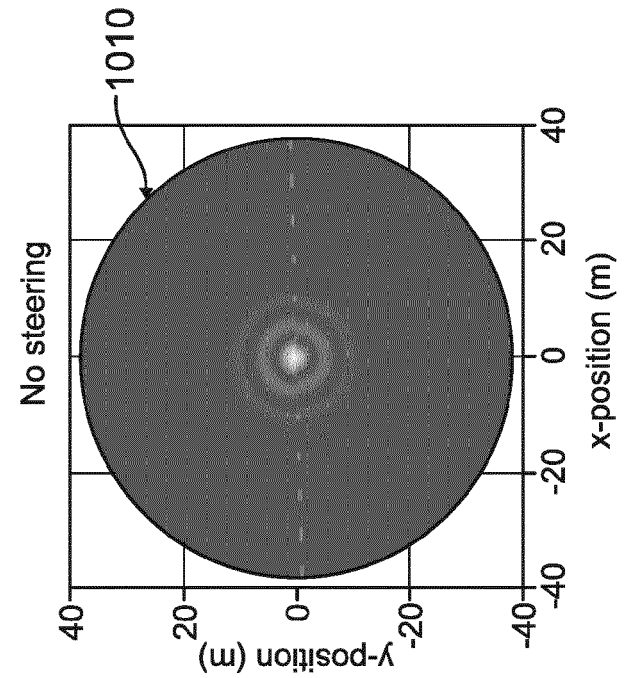
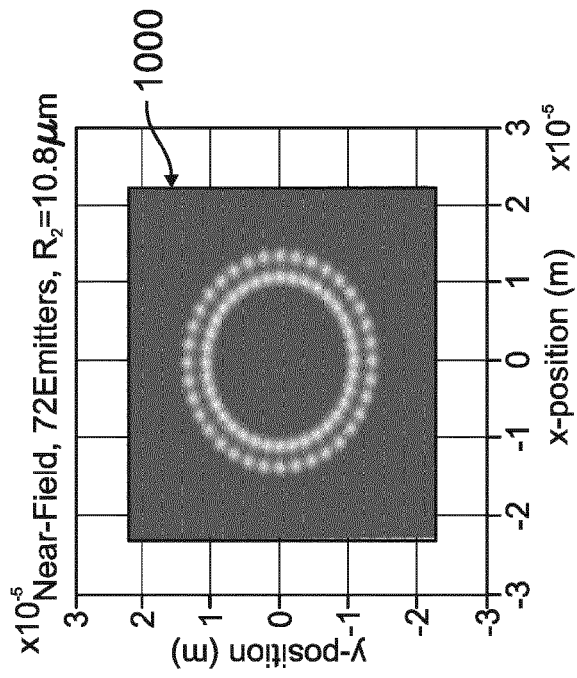


FIG. 9



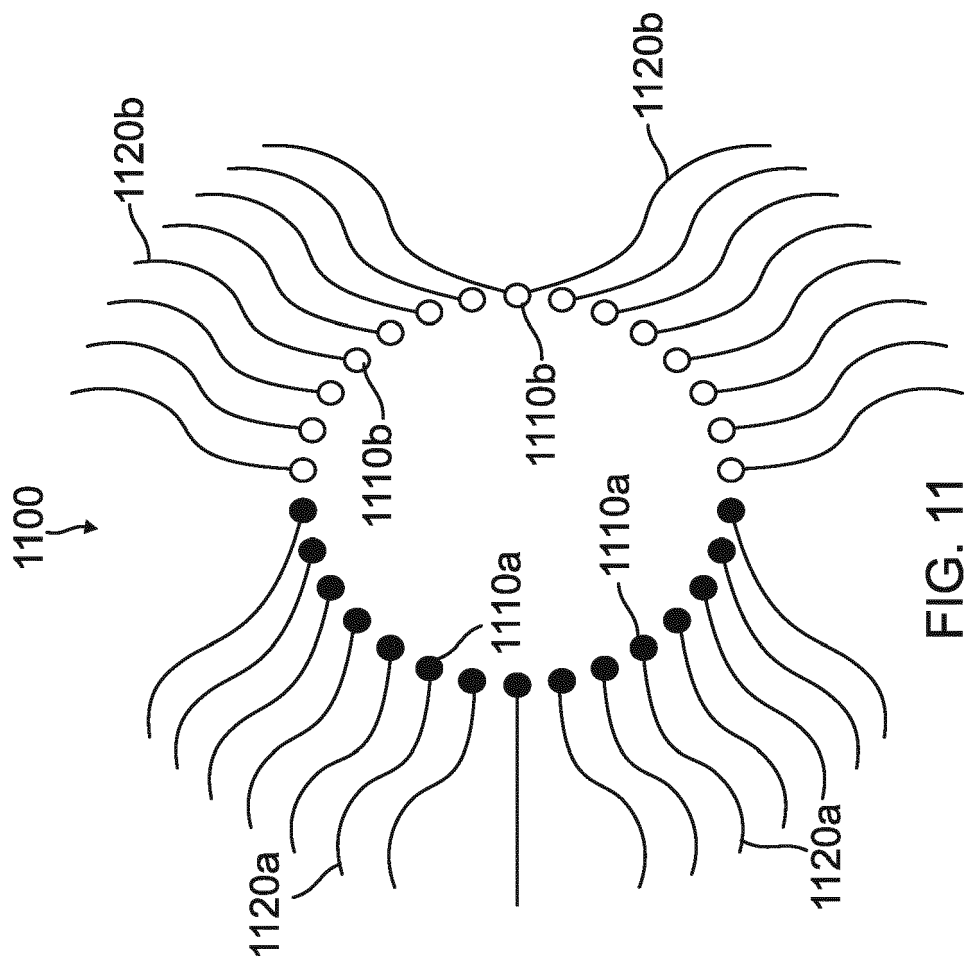
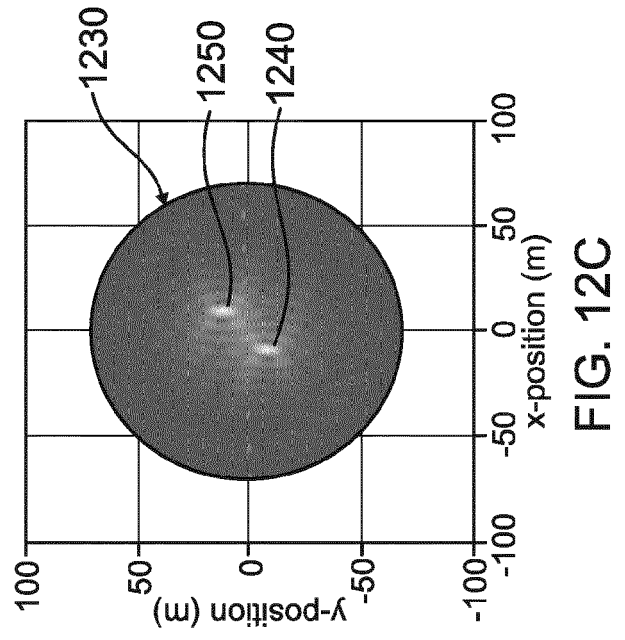
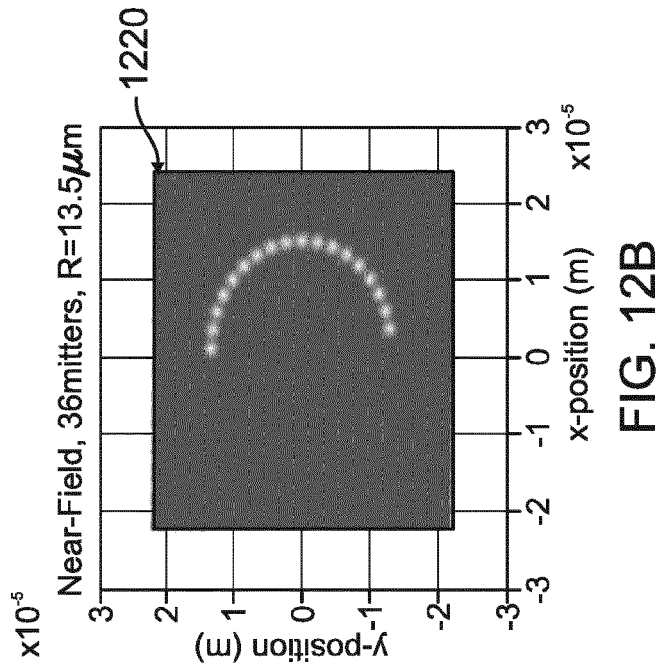
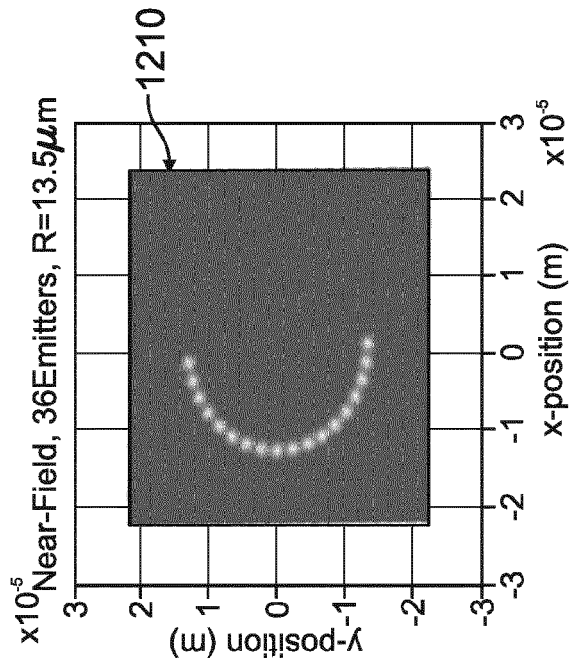


FIG. 11



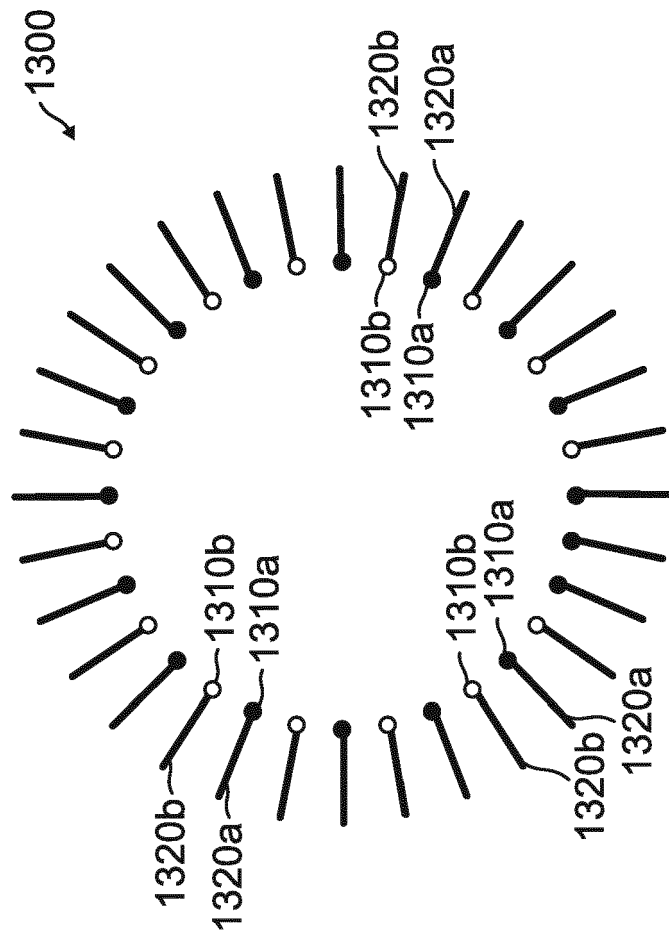


FIG. 13

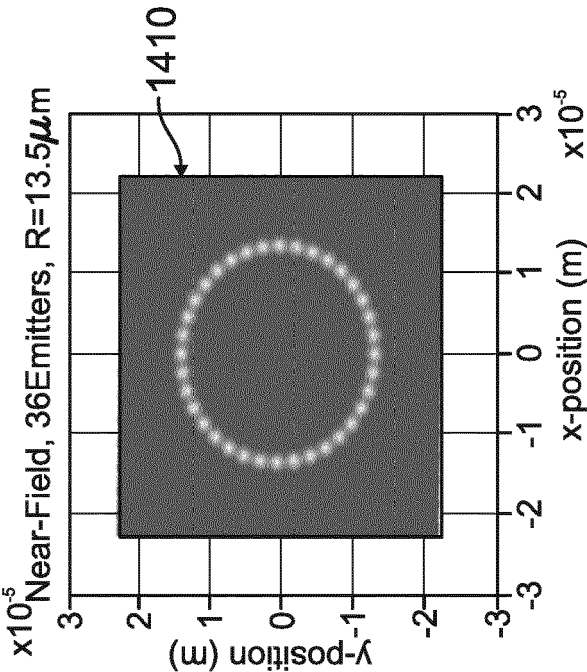


FIG. 14A

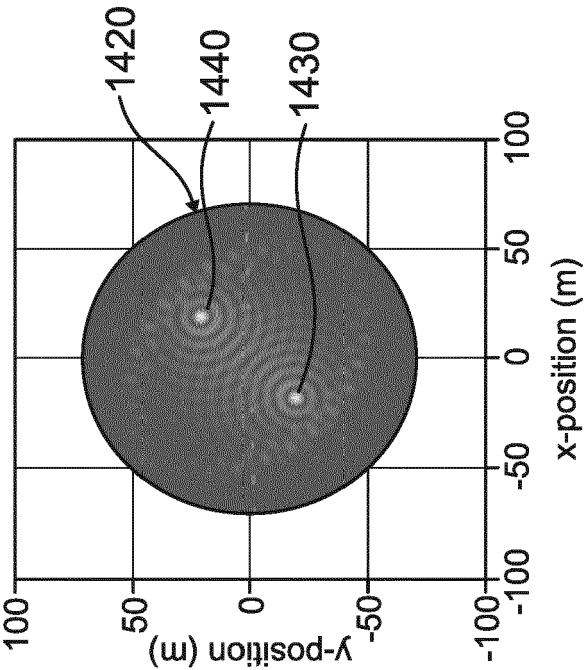


FIG. 14B