



(11) **EP 3 920 662 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**08.12.2021 Bulletin 2021/49**

(51) Int Cl.:  
**H05B 6/06 (2006.01)**

(21) Application number: **21177817.0**

(22) Date of filing: **04.06.2021**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**KH MA MD TN**

(72) Inventors:  
• **Gallivanoni, Andrea**  
**21024 Cassinetta di Biandronno (VA) (IT)**  
• **Pastore, Cristiano Vito**  
**21024 Cassinetta di Biandronno (VA) (IT)**  
• **Inderst, Federica**  
**21024 Cassinetta di Biandronno (VA) (IT)**

(30) Priority: **05.06.2020 US 202016946098**  
**05.06.2020 US 202016946101**

(74) Representative: **Spina, Alessandro**  
**Whirlpool EMEA SpA**  
**Via Carlo Pisacane, 1**  
**20016 Pero (MI) (IT)**

(71) Applicant: **Whirlpool Corporation**  
**Benton Harbor, MI 49022 (US)**

(54) **SYSTEM AND METHOD FOR IDENTIFYING COOKWARE ITEMS PLACED ON AN INDUCTION COOKTOP**

(57) A method is provided for identifying cookware items (30, 32, 34) placed on top of an induction cooktop (10) having a plurality of coils (20<sub>1</sub>-20<sub>n</sub>). The method includes the following steps: acquire coverage factor information for each coil (20<sub>1</sub>-20<sub>n</sub>) and collect it into a matrix; identify all local maxima in the matrix; find the coordinates of each of the local maxima as follows: when the local maxima is a single coil (20<sub>1</sub>-20<sub>n</sub>), the coordinates are those of the coil center, and when the local maxima is a

region of contiguous coils (20<sub>1</sub>-20<sub>n</sub>), the coordinates are those of a centroid of the region; calculate distances from each coil (20<sub>1</sub>-20<sub>n</sub>) to each of the coordinates of the identified local maxima; determine a minimum among the distances; classify the coils (20<sub>1</sub>-20<sub>n</sub>) in clusters, based on the distances from the local maxima; and use the identified coil (20<sub>1</sub>-20<sub>n</sub>) clustering to estimate the position, shape, size, and orientation of the cookware items (30, 32, 34).

**EP 3 920 662 A1**

**Description**

**BACKGROUND OF THE DISCLOSURE**

5 **[0001]** The present disclosure generally relates to a system and method for identifying cookware items placed on an induction cooktop.

**SUMMARY OF THE DISCLOSURE**

10 **[0002]** According to one aspect of the present disclosure, a method is provided for identifying cookware items placed on top of an induction cooktop having a plurality of coils, comprising the following steps: a) acquire information related to the coverage factor for each coil and collect it into a coverage factor matrix; b) identify all local maxima in the coverage factor matrix; c) find the coordinates of each of the local maxima as follows: i) when the local maxima is a single coil, the coordinates are those of a center of a single coil, and ii) when the local maxima is a region of contiguous coils, the coordinates are those of a centroid of the region; d) calculate distances from each coil to each of the coordinates of the identified local maxima; e) for each coil, determine a minimum among the distances; f) classify the coils in clusters, based on the distances from the local maxima; and g) use the identified coil clustering to estimate the position, shape, size, and orientation of the cookware items.

20 **[0003]** According to another aspect of the present disclosure, an induction cooktop system is provided comprising: an induction cooktop including a plurality of inductive coils; a power supply for supplying power to selected ones of the plurality of inductive coils; and a controller for identifying cookware items placed on top of the induction cooktop, estimating the position, shape, size, and orientation of the cookware items, and controlling the amount of power supplied to the selected ones of the plurality of inductive coils, the controller being programmed to perform at least the following steps: a) acquire information related to the coverage factor for each coil and collect it into a coverage factor matrix; b) identify all local maxima in the coverage factor matrix; c) find the coordinates of each of the local maxima as follows: i) when the local maxima is a single coil, the coordinates are those of a center of a single coil, and ii) when the local maxima is a region of contiguous coils, the coordinates are those of a centroid of the region; d) calculate distances from each coil to each of the coordinates of the identified local maxima; e) for each coil, determine a minimum among the distances; f) classify the coils in clusters, based on the distances from the local maxima; and g) use the identified coil clustering to estimate the position, shape, size, and orientation of the cookware items.

30 **[0004]** According to yet another aspect of the present disclosure, a method is provided for identifying cookware items placed on top of an induction cooktop having a plurality of coils, comprising the following steps: a) acquire information related to the coverage factor for each coil and collect it into a coverage factor matrix; b) identify all local maxima in the coverage factor matrix; c) find the coordinates of each of the local maxima as follows: i) when the local maxima is a single coil, the coordinates are those of a center of a single coil, and ii) when the local maxima is a region of contiguous coils, calculating the coordinates of a centroid of the region using the formulas:

40 
$$x_c = \frac{1}{N} \sum_{k=1}^N x_i \cdot c_i$$

45 
$$y_c = \frac{1}{N} \sum_{k=1}^N y_i \cdot c_i$$

where  $x_c, y_c$  are the coordinates of the centroid,  $N$  is the number of coils considered in the calculation for this particular centroid,  $x_i, y_i$  are the coordinates of the  $i$ th coil, and  $c_i$  the coverage factor for the  $i$ th coil; d) calculate distances from a center of each coil to each of the coordinates of the identified local maxima; e) for each coil, determine a minimum among the distances; f) classify the coils in clusters, based on the distances from the local maxima; and g) use the identified coil clustering to estimate the position, shape, size, and orientation of the cookware items.

50 **[0005]** These and other features, advantages, and objects of the present disclosure will be further understood and appreciated by those skilled in the art by reference to the following specification, claims, and appended drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

55 **[0006]** In the drawings:

FIG. 1 is a top view of an induction cooktop having an array of coils;

FIG. 2A is a top view of the induction cooktop of FIG. 1 shown with two cookware items thereon with the coverage factors of each coil indicated;

FIG. 2B is a top view of the induction cooktop of FIG. 1 shown with an incorrect estimate of the size, shape, orientation, and position of the cookware items shown in FIG. 2A;

FIG. 3 is an electrical circuit diagram in block form of an induction cooktop system using the induction cooktop of FIG. 1;

FIG. 4 is a flow chart of an algorithm executed by the controller in FIG. 3;

FIG. 5 is a top view of the induction cooktop of FIG. 1 showing neighboring coils;

FIG. 6A is a top view of the induction cooktop of FIG. 1 shown with local maxima identified;

FIG. 6B is a top view of the induction cooktop of FIG. 1 shown with centroids of the local maxima identified;

FIG. 6C is a top view of the induction cooktop of FIG. 1 shown with a correct estimate of the size, shape, orientation, and position of the cookware items shown in FIG. 2A;

FIG. 7 is a top view of the induction cooktop of FIG. 1 shown with four cookware items thereon with the coverage factors of each coil indicated;

FIG. 8 is a top view of the induction cooktop of FIG. 1 shown with the groups of coils used for the determination of the local maxima;

FIG. 9 is a top view of the induction cooktop of FIG. 1 shown with centroids of the local maxima identified;

FIG. 10 is a top view of the induction cooktop of FIG. 1 shown with the association of each coil with the closest local maxima for the determination of the clusters; and

FIG. 11 is a top view of the induction cooktop of FIG. 1 shown with the coil clusters and the corresponding estimation of the cookware items.

**[0007]** The components in the figures are not necessarily to scale, emphasis instead being placed upon illustrating the principles described herein.

## DETAILED DESCRIPTION

**[0008]** The present illustrated embodiments reside primarily in combinations of method steps and apparatus components related to an induction cooktop. Accordingly, the apparatus components and method steps have been represented, where appropriate, by conventional symbols in the drawings, showing only those specific details that are pertinent to understanding the embodiments of the present disclosure so as not to obscure the disclosure with details that will be readily apparent to those of ordinary skill in the art having the benefit of the description herein. Further, like numerals in the description and drawings represent like elements.

**[0009]** For purposes of description herein, the terms "upper," "lower," "right," "left," "rear," "front," "vertical," "horizontal," and derivatives thereof shall relate to the disclosure as oriented in FIG. 1. Unless stated otherwise, the term "front" shall refer to the surface of the element closer to an intended viewer, and the term "rear" shall refer to the surface of the element further from the intended viewer. However, it is to be understood that the disclosure may assume various alternative orientations, except where expressly specified to the contrary. It is also to be understood that the specific devices and processes illustrated in the attached drawings, and described in the following specification are simply exemplary embodiments of the inventive concepts defined in the appended claims. Hence, specific dimensions and other physical characteristics relating to the embodiments disclosed herein are not to be considered as limiting, unless the claims expressly state otherwise.

**[0010]** The terms "including," "comprises," "comprising," or any other variation thereof, are intended to cover a non-exclusive inclusion, such that a process, method, article, or apparatus that comprises a list of elements does not include only those elements but may include other elements not expressly listed or inherent to such process, method, article, or apparatus. An element preceded by "comprises a ..." does not, without more constraints, preclude the existence of additional identical elements in the process, method, article, or apparatus that comprises the element.

**[0011]** The method described below aims at determining the position, size, shape, and orientation of a number of cookware items such as pots, placed over a flexible induction cooktop. This information can be later used in order to display, on a user interface, the cookware items recognized by the system, so that the user can select a desired first power level for each cookware item. Furthermore, the system can use the first power level selected by the user to derive a second power level for each coil belonging to a cluster associated with the corresponding cookware item, in order to control the power delivered to each of the said coils. FIG. 1 shows an induction cooktop 10 characterized by having a large number of coils  $20_1-20_n$ , whose dimensions are typically smaller than the size of a cookware item, and these coils  $20_1-20_n$  are distributed next to each other to form mono-dimensional or bi-dimensional arrays.

**[0012]** When conventional cookware item detection techniques are applied to each individual coil  $20_1-20_n$ , either a discrete YES/NO or a continuous coverage factor information is available for each coil  $20_1-20_n$ , but unfortunately this information is not sufficient to determine the number, position, size, shape, and orientation of cookware items laid over the induction cooktop 10.

5 [0013] Regarding conventional pan detection techniques, ES2362839 / EP2242328 from Bosch Siemens essentially proposes to generate a first image whose "pixels" are representing the coverage factor in response of the overlying pots. Then it proposes to identify a cohesive (i.e. contiguous) area made of neighboring cells having a coverage factor larger than a predetermined threshold. Finally, it is proposed to apply a separation algorithm aimed at differentiating whether the contiguous area corresponds to one pot or to multiple pots close to each other. The proposed method in ES2362839 / EP2242328 is known to provide inaccurate results whenever the heating cell dimension is not sufficiently small compared to the size of the pot.

[0014] It is also known to first determine a cell covered by a pot and then perform a selective search in a neighborhood of that cell, through a set of additional sensors. An example of this method is disclosed in EP2112865.

10 [0015] FIG. 2A shows actual cookware items 30 and 32 placed on top of a flexible induction cooktop 10. FIG. 2B shows a single elliptical pot 34 is incorrectly identified instead of two circular ones, since the cookware items 30 and 32 are too close to each other. The number inside each coil displays the corresponding coverage factor. In particular cases, when the cookware items 30 and 32 are really close to each other, the set of activated coils can be confused with the one activated by an oval pot 34. The objective of the present method is to provide a method for cookware item identification and estimation able to identify individual cookware items 30 and 32 as distinct items.

15 [0016] FIG. 3 shows a block diagram of the basic electrical components of an induction cooktop system 5. A controller 100, such as a microprocessor or the like, is coupled to each of the coils  $20_1-20_n$  of the induction cooktop 10 and to a power supply 102 and a user interface 104. In general, the controller 100 will respond to activation of an input on the user interface 104 to detect the presence, size, shape, orientation, and position of any cookware items 30 and 32 on the induction cooktop 10 using the method described below. Once the size, shape, orientation, and position of any cookware items 30 and 32 are identified, the controller 100 will control the power supply 102 to supply an appropriate power level to the coils  $20_1-20_n$  underlying the cookware items 30 and 32 in order to heat food in the cookware items 30 and 32.

20 [0017] The user interface 104 may be any conventional user interface and may include various inputs such as temperature settings and timers or the like.

25 [0018] A method 200 described herein is shown in FIG. 4 and may be implemented as an algorithm executed by the controller 100. The method 200 has a preliminary step 202 in the acquisition of a matrix of information related to the coverage factors, each element of the matrix corresponding to one coil  $20_1-20_n$ . The particular manner in which the controller 100 determines the coverage factor of each coil  $20_1-20_n$  is not described herein insofar as any known technique may be used. The coverage factor matrix is then processed according to the described method to identify the different cookware items.

30 [0019] The coverage factor for each coil is defined as the degree of coverage of the coil when coupled to an overlying cookware item. This coverage factor for each of the coils can be derived through a pan detection system and particularly by measuring the electromagnetic coupling between the coil and the overlying cookware. In this case, to each of the inductors can be assigned a value indicative of the coverage, for instance a percentage value, starting from an electrical measurable variable linked with the electromagnetic coupling of the inductor in question, with one or more of the overlying cookware items. The electrical variable that can be preferably measured is the complex impedance at the leads of the coil. It is also understood that other information related to the coverage factor can be used instead, such as, but not limited to, inductance, resistance, or power factor.

35 [0020] However, any other variable linked with the fraction of the area of the coil that is covered by an overlying cookware item, can also be used as a coverage factor.

40 [0021] From the above it follows that collect information related to a coverage factor thus means to collect information indicative of a degree of overlap between a cookware item and coil, and preferably to measure one or more electrical variables related to the electromagnetic coupling between the overlying cookware item and the coil; In FIG. 2 and following, this fraction is expressed as a percentage.

45 [0022] This method 200 may be referred to herein as a *pseudoVoronoi* method that is based on the Voronoi diagram for the partition of the plane into distinct regions: given a predetermined group of starting points called seeds, for each seed there is a region comprising all points in the plane closer to that seed than to any other.

50 [0023] The method 200 presupposes that the coverage factors of the coils  $20_1-20_n$  have already been acquired, and therefore takes as input a coverage factor matrix containing the coverage factors of each individual coil  $20_1-20_n$  in the induction cooktop 10 in step 202. As described further below, the method 200 uses the local maxima of the coverage factor matrix as starting points, and clusters the coils  $20_1-20_n$  in regions closest to each of the local maxima. The coverage factor is indicative of a degree of overlap or electrical coupling between a cookware item 30, 32, 34 and a coil  $20_1-20_n$  for each coil  $20_1-20_n$ .

55 [0024] The surface of the cooktop 10 is associated with a coordinate system apt to describe a 2D surface, for example, but not limited to, a Cartesian coordinate system with origin in the lower left corner of the cooktop surface, with the x axis oriented horizontally towards the right and the y axis oriented vertically towards the back.

[0025] The next step 204 of the algorithm is the identification of the local maxima in the coverage factor matrix, carried

out by comparing the coverage factor of each coil  $20_1-20_n$  with that of all adjacent coils  $20_1-20_n$ . It is important to remember that the coverage factor is stored in the coverage factor matrix for ease of processing, and does not reflect the physical arrangement of the coils  $20_1-20_n$ ; therefore, adjacent coils  $20_1-20_n$  are not simply those neighboring in the same column or row in the coverage factor matrix, but one may take into account the so-called adjacency matrix. The adjacency matrix describes, for each pair of coils  $20_1-20_n$ , whether they are adjacent or not, and depends only on the geometry of the induction cooktop 10 and the arrangement of the coils  $20_1-20_n$ , and is therefore fixed from the point of view of the algorithm. In particular, for the current geometry the adjacency matrix describes a triangular grid, in which each coil  $20_1-20_n$  is, in general, adjacent to its six closest neighbors, as shown in FIG. 5. For coils  $20_1-20_n$  placed near the side or on the corner, the number of adjacent neighbors is lower.

**[0026]** In FIG. 5, each coil  $20_1-20_n$  indicated by a large dot is adjacent to its, at most, six closest neighbors, indicated by the smaller dots and connected via line segments. Coils  $20_1-20_n$  on the sides or on the corners have fewer adjacent neighbors.

**[0027]** In the simplest case, a local maximum corresponds to the coverage factor of one coil that is higher than to the coverage factors of its adjacent coils  $20_1-20_n$ . In more complex cases, it is possible that two or more adjacent coils  $20_1-20_n$  all have the same coverage factor, while all remaining adjacent coils have a lower coverage factor; in actual embodiments, a predefined tolerance band around the maximum coverage factor is used in order to take into consideration coils whose coverage factor might be lower than the maximum due to tolerances, electrical noise, and the like. In this situation, it is necessary to first identify all the coils  $20_1-20_n$  that have the corresponding coverage factor, or whose coverage factors fall into the aforementioned tolerance band, and that form a single, contiguous region. For instance, the tolerance band could be in the order of 5 %. This distinction is used in the calculation of the coordinates of the local maxima. In other words, when the coverage factors of adjacent coils  $20_1-20_n$  are within a predefined range, i.e. in the tolerance band above, the region of contiguous coils of step comprises said coils  $20_1-20_n$ . An example of the two cases is shown in FIG. 6A: the simple case on the left, and the more complex case on the right.

**[0028]** The algorithm then calculates the coordinate of each local maximum in step 206. In the simple case listed above, the local maximum coordinates are simply those of the center of the corresponding coil  $20_1-20_n$ . In the other case, the coordinates are calculated as those of the centroid of the identified contiguous region, using the formulas:

$$x_c = \frac{1}{N} \sum_{i=1}^N x_i \cdot c_i$$

$$y_c = \frac{1}{N} \sum_{i=1}^N y_i \cdot c_i$$

where  $x_c$ ,  $y_c$  are the coordinates of the centroid,  $N$  is the number of coils considered in the calculation for this particular centroid,  $x_i$ ,  $y_i$  are the coordinates of the  $i$ th coil, and  $c_i$  the coverage factor for the  $i$ th coil. An example is shown in FIG. 6B, where the larger dots represent the calculated centroids for each local maximum.

**[0029]** Once the local maxima have been identified and their coordinates calculated, they are treated as the seeds of the Voronoi partition of the plane; in a non-limiting example, the partition considers only the coil centers as points to be clustered. To do that, in step 208 the algorithm calculates, for each coil, the distance between its center and each of the local maxima identified in step 206. The minimum distance is identified in step 210, and each coil is assigned to the closest identified local maximum, thus clustering the coils into distinct groups around the local maxima in step 212. An example is shown in FIG. 6C.

**[0030]** In the particular example shown, the controller 100 identifies two different coil clusters 40 and 42, indicated by different hatching. Each coil cluster 40 and 42 corresponds to one of the cookware items 30 and 32 placed on the induction cooktop 10, indicated by the thick-bordered circles. Each cluster of coil clusters 40 and 42 is used to identify the cookware items 30 and 32; in particular, it is used to estimate the center position, the shape, the size, and the orientation in step 214.

**[0031]** For each cluster, the centroid is identified by calculating the weighted sum of the coordinates of the centers of all the coils belonging to said cluster, wherein the weights are the coverage factors of each coil:

$$x_0 = \frac{\sum_{i=1}^N x_i \cdot c_i}{\sum_{i=1}^N c_i}$$

$$y_0 = \frac{\sum_{i=1}^N y_i \cdot c_i}{\sum_{i=1}^N c_i}$$

5 where  $x_0, y_0$  are the coordinates of the centroid,  $N$  is the number of coils considered in the calculation for this particular centroid, i.e. the number of coils belonging to the cluster,  $x_i, y_i$  are the coordinates of the  $i$ th coil, and  $c_i$  the coverage factor for the  $i$ th coil. The centroid coordinates calculated here are used as the estimation for the center position of the corresponding cookware item.

10 **[0032]** In order to estimate the size of each cookware item, one possible way is to first calculate the weighted area of the corresponding cluster. One possible way of performing this calculation is to sum the areas of all coils belonging to the cluster, adjusted by a factor that takes into account the empty areas between coils, weighted by the corresponding coverage factors:

$$A_{cluster} = \sum_{i=1}^N K \cdot A_{coil} \cdot c_i$$

20 where  $A_{cluster}$  is the area estimation for the cluster,  $N$  is the number of coils belonging to the cluster,  $K$  is an adjusting factor,  $A_{coil}$  is the area of the  $i$ th coil, and  $c_i$  is the coverage factor for the  $i$ th coil. The information on the area of the cluster can be used to estimate the radius of the cookware item, in case the cookware item is circular:

$$r = \sqrt{\frac{A_{cluster}}{\pi}}$$

25 where  $r$  is the estimation for the radius of the cookware item, and  $A_{cluster}$  is the area estimation for the cluster just calculated.  
 30 **[0033]** Another possible way to estimate the size of each cookware item, is first calculate the second moments of area and the product of inertia. One possible way of performing this calculation is to consider cartesian axes, passing through the center of the cookware item, and parallel to the axes of the reference coordinate system defined in §0036. The moments can be calculated as:

$$I_{xx} = \sum_{i=1}^N c_i \cdot \left[ I_{x_{coil}} + A_{coil} (y_{c_i} - y_0)^2 \right]$$

$$I_{yy} = \sum_{i=1}^N c_i \cdot \left[ I_{y_{coil}} + A_{coil} (x_{c_i} - x_0)^2 \right]$$

$$I_{xy} = \sum_{i=1}^N c_i \cdot \left[ I_{xy_{coil}} + A_{coil} (x_{c_i} - x_0) (y_{c_i} - y_0) \right]$$

50 where  $I_{xx}$  is the second moment of area relative to the x-axis,  $I_{yy}$  is the second moment of area relative to the y-axis, and  $I_{xy}$  is equivalent to the product of inertia;  $I_{x_{coil}}$  is the second moment of area for the coils shape relative to the x-axis,  $I_{y_{coil}}$  is the second moment of area for the coil shape relative to the y-axis, and  $I_{xy_{coil}}$  is the equivalent to the product of inertia for the coils shape;  $A_{coil}$  is the area of each coil,  $x_{c_i}$  is the x coordinate for the center of the  $i$ th coil, and  $y_{c_i}$  is the y coordinate for the center of the  $i$ th coil,  $x_0$  is the x coordinate for the estimated center of the cookware item,  $y_0$  is the y coordinate for the estimated center of the cookware item, and  $c_i$  is the coverage factor for the  $i$ th coil.

55 **[0034]** Next step is to calculate the principal moments and the angle of rotation; the principal moments are oriented along the main directions of the shape, and can be calculated as:

$$I_{I,II} = \frac{I_{xx} + I_{yy}}{2} \pm \sqrt{\left(\frac{I_{xx} - I_{yy}}{2}\right)^2 + I_{xy}^2}$$

$$\theta = \frac{1}{2} \arctan \arctan \left( -\frac{2I_{xy}}{I_{xx} - I_{yy}} \right)$$

5  
10 where  $I_I$  and  $I_{II}$  are the principal moments, and  $\theta$  is the rotation angle of the cookware item relative to the axes of the reference coordinate system.

**[0035]** Finally, using the calculated principal moments, it is possible to estimate the major and minor semiaxes of the cookware item, in case the cookware item is elliptical:

$$a = \sqrt[4]{\frac{4}{\pi} I_I \sqrt{\frac{I_I}{I_{II}}}}$$

$$b = \sqrt[4]{\frac{4}{\pi} I_{II} \sqrt{\frac{I_{II}}{I_I}}}$$

15  
20  
25 where  $a$  is the major semiaxis and  $b$  is the minor semiaxis of the cookware item.

**[0036]** A typical method to estimate the shape is to consider the ratio between the two semiaxes  $a$  and  $b$  just calculated: if the two values of  $a$  and  $b$  are the same, the ratio is 1 and the shape is circular; if they are different, the ratio is other than 1 and the shape is elliptical. Due to the uncertainty in the estimation and calculation of the values of the major and minor semiaxes, it is typical to compare the ratio  $a/b$  with a predefined threshold, and if the ratio is larger than this threshold consider the shape as elliptical, whereas if the ratio is smaller than this threshold the shape is considered as circular.

**[0037]** For efficiency reasons, it may be advantageous to limit this process to coils whose coverage factor is higher than a predefined threshold, since coils with a small coverage factor would have a negligible contribution either to the identification of the position, shape, size, and orientation of a cookware item, or to the heating of the cookware item itself.

30  
35 **[0038]** In the following paragraphs, another example of the method operation is detailed, applied to the pots placed on top of the cooktop as shown in FIG. 7. FIG. 7 shows 4 pots placed on the cooktop, in particular two of the pots are actually touching each other.

**[0039]** FIG. 8 shows the separate groups of coils used to determine the local maxima, in either the simple case where a single coil represents a local maximum of the coverage factor, and the more complex case with a contiguous region of coils having the same value, within a predefined threshold.

40 **[0040]** FIG. 9 shows the actual location of the local maxima, calculated from the groups of coils identified and shown in FIG. 8.

**[0041]** FIG. 10 shows, for each coil whose coverage factor exceeds a predefined threshold, which is the closest local maxima. In this case, as a non-limiting example, the distance is calculated from the center of each coil to the location of the local maxima. All the coils which are shown as connected to the same local maxima will then be grouped in the same cluster.

**[0042]** FIG. 11 finally shows the coil clusters, as determined in FIG.10, with the corresponding estimated cookware items.

45 **[0043]** Once the geometrical characteristics of the cookware item have been estimated, namely center position, shape, size, and orientation, the system can use this information to display a visual representation of the cookware items on the user interface 104.

**[0044]** The user can then select a first power level input for at least one of the identified cookware items, said first power level input being set by a user through the user interface 104, or any other means.

50 **[0045]** The system will then assign a second power level to each coil belonging to a cluster derived from the first power level input received from the user, said second power level being determined and set by the controller; this second power level can be set in many different ways. A non-limiting example is to divide the first power level equally among all the coils belonging to the cluster, for example if the first power level is 1200 W and the cluster is composed of 6 coils, the second power level for each coil would be 200 W. Another non-limiting example would be to determine the second power

level proportionally to the coverage factor. Other criteria are easily determinable by people skilled in the art.

**[0046]** Finally, the system will control the power delivery to the coils belonging to the identified coil cluster corresponding to the selected cookware item, in order to deliver the first power level requested by the user to the selected cookware item.

**[0047]** Compared to known solutions, clustering of coils allows to discriminate between adjacent cookware items directly, with no need to further process an area previously identified as it happens e.g. in the case of EP2242328 and EP2112865.

**[0048]** It will be understood by one having ordinary skill in the art that construction of the described disclosure and other components is not limited to any specific material. Other exemplary embodiments of the disclosure disclosed herein may be formed from a wide variety of materials, unless described otherwise herein.

**[0049]** For purposes of this disclosure, the term "coupled" (in all of its forms, couple, coupling, coupled, etc.) generally means the joining of two components (electrical or mechanical) directly or indirectly to one another. Such joining may be stationary in nature or movable in nature. Such joining may be achieved with the two components (electrical or mechanical) and any additional intermediate members being integrally formed as a single unitary body with one another or with the two components. Such joining may be permanent in nature or may be removable or releasable in nature unless otherwise stated.

**[0050]** It is also important to note that the construction and arrangement of the elements of the disclosure as shown in the exemplary embodiments is illustrative only. Although only a few embodiments of the present innovations have been described in detail in this disclosure, those skilled in the art who review this disclosure will readily appreciate that many modifications are possible (e.g., variations in sizes, dimensions, structures, shapes and proportions of the various elements, values of parameters, mounting arrangements, use of materials, colors, orientations, etc.) without materially departing from the novel teachings and advantages of the subject matter recited. For example, elements shown as integrally formed may be constructed of multiple parts or elements shown as multiple parts may be integrally formed, the operation of the interfaces may be reversed or otherwise varied, the length or width of the structures and/or members or connector or other elements of the system may be varied, the nature or number of adjustment positions provided between the elements may be varied. It should be noted that the elements and/or assemblies of the system may be constructed from any of a wide variety of materials that provide sufficient strength or durability, in any of a wide variety of colors, textures, and combinations. Accordingly, all such modifications are intended to be included within the scope of the present innovations. Other substitutions, modifications, changes, and omissions may be made in the design, operating conditions, and arrangement of the desired and other exemplary embodiments without departing from the spirit of the present innovations.

**[0051]** According to a first aspect of the present disclosure, a method of identifying cookware items placed on top of an induction cooktop having a plurality of coils, includes the following steps: a) collect information related to a coverage factor indicative of a degree of overlap between a cookware item and a coil for each coil and store it into a coverage factor matrix; b) identify one or more local maxima in the coverage factor matrix, wherein said local maxima correspond to the coverage factor of one or more coils that is or are higher than the coverage factors of adjacent coils; c) identify coordinates of each of the local maxima as follows, wherein said coordinates are referred to a geometric coordinate system of said induction cooktop: i. when the local maxima is associated with a single coil, the coordinates are those of a center of a single coil, and ii. when the local maxima is associated with a region of contiguous coils, the coordinates are those of a centroid of the region; d) calculate distances from each coil to each of the coordinates of the identified local maxima; e) for each coil, determine a minimum among the distances; f) group the coils in clusters, based on the distances from the local maxima; and g) use the coil clusters to estimate the position, shape, size, and orientation of the cookware items.

**[0052]** According to the first aspect of the present disclosure, step d) includes calculating the distance from a center of each coil to the coordinates of the identified local maxima.

**[0053]** According the first aspect or any single or combination of intervening aspects of the present disclosure, step c)ii) includes calculating the coordinates of the centroid of the region using the formulas:

$$x_c = \frac{1}{N} \sum_{k=1}^N x_i \cdot c_i$$

$$y_c = \frac{1}{N} \sum_{k=1}^N y_i \cdot c_i$$

where  $x_c$ ,  $y_c$  are the coordinates of the centroid,  $N$  is the number of coils considered in the calculation for this particular centroid,  $x_i$ ,  $y_i$  are the coordinates of the  $i$ th coil, and  $c_i$  is a quantity proportional to the coverage factor for the  $i$ th coil.

**[0054]** According to the first aspect or any single or combination of intervening aspects of the present disclosure, the

position estimated at step g) corresponds to the coordinates of the centroid of the cluster of coils.

**[0055]** According to the first aspect or any single or combination of intervening aspects of the present disclosure, the size of a cookware item estimated at step g) is calculated based on a sum the areas of all coils belonging to a cluster, said sum being weighted by using the coverage factors of the coils belonging to said cluster.

**[0056]** According to the first aspect or any single or combination of intervening aspects of the present disclosure, step g) entails calculating with respect to the geometric coordinate system of the induction cooktop: the second moments of area and the product of inertia of each cluster; the principal moments and their angles of rotation; the major and minor semi-axes of the cookware item.

**[0057]** According to the first aspect or any single or combination of intervening aspects of the present disclosure, estimation of the shape at step g) is based on a ratio between the major and minor semi-axes of the cookware item.

**[0058]** According to the first aspect or any single or combination of intervening aspects of the present disclosure, estimation of the orientation of a cookware item is based on said angle of rotation.

**[0059]** According to the first aspect or any single or combination of intervening aspects of the present disclosure, the method further includes the following steps: h) receiving a first power level input for at least one of the identified cookware items, said first power level input being set by a user through a user interface; i) assigning a second power level to each coil belonging to a cluster derived from the first power level input received at step h), said second power level being determined and set by the controller; and j) controlling power delivery to the identified coil clusters associated with each cookware item.

**[0060]** According to the first aspect or any single or combination of intervening aspects of the present disclosure, the method further includes a step of displaying identified cookware items on a user interface.

**[0061]** According to a second aspect of the present disclosure, an induction cooktop system includes: an induction cooktop including a plurality of inductive coils; a power supply for supplying power to selected ones of the plurality of inductive coils; and a controller configured to perform the following steps: a) collect information related to a coverage factor indicative of a degree of overlap between a cookware item and a coil for each coil and store it into a coverage factor matrix; b) identify one or more local maxima in the coverage factor matrix, wherein said local maxima correspond to the coverage factor of one or more coils that is or are higher than the coverage factors of adjacent coils; c) identify coordinates of each of the local maxima as follows, wherein said coordinates are referred to a geometric coordinate system of said induction cooktop: i. when the local maxima is associated with a single coil, the coordinates are those of a center of a single coil, and ii. when the local maxima is associated with a region of contiguous coils, the coordinates are those of a centroid of the region; d) calculate distances from each coil to each of the coordinates of the identified local maxima; e) for each coil, determine a minimum among the distances; f) group the coils in clusters, based on the distances from the local maxima; and g) use the coil clusters to estimate the position, shape, size, and orientation of the cookware items.

**[0062]** According to the second aspect of the present disclosure, the user interface is adapted to display at least one among the position, size, shape and orientation of the cookware.

**[0063]** According to the second aspect or any single or combination of intervening aspects of the present disclosure, the system further includes the step of h) supplying power to the coils underlying the cookware items.

**[0064]** According to the second aspect or any single or combination of intervening aspects of the present disclosure, step b) includes identifying all local maxima in the coverage factor matrix by comparing the coverage factor of each coil with that of all adjacent coils.

**[0065]** According to the second aspect or any single or combination of intervening aspects of the present disclosure, step b) includes identifying all local maxima in the coverage factor matrix by comparing the coverage factor of each coil with that of all adjacent coils.

**[0066]** According to a third aspect of the present disclosure, a method of identifying cookware items placed on top of an induction cooktop having a plurality of coils, includes the following steps: a) acquire coverage factor information for each coil and collect it into a coverage factor matrix; b) identify all local maxima in the coverage factor matrix; c) find the coordinates of each of the local maxima as follows: i) when the local maxima is a single coil, the coordinates are those of a center of a single coil, and ii) when the local maxima is a region of contiguous coils, calculating the coordinates of a centroid of the region using the formulas:

$$x_c = \frac{1}{N} \sum_{k=1}^N x_i \cdot c_i$$

$$y_c = \frac{1}{N} \sum_{k=1}^N y_i \cdot c_i$$

where  $x_c, y_c$  are the coordinates of the centroid,  $N$  is the number of coils considered in the calculation for this particular centroid,  $x_i, y_i$  are the coordinates of the  $i$ th coil, and  $c_i$  the coverage factor for the  $i$ th coil; d) calculate distances from a center of each coil to each of the coordinates of the identified local maxima; e) for each coil, determine a minimum among the distances; f) classify the coils in clusters, based on the distances from the local maxima; and g) use the identified coil clustering to estimate the position, shape, size, and orientation of the cookware items.

[0067] According to the third aspect of the present disclosure, the method further includes the step of h) supplying power to the coils underlying the cookware items.

[0068] According to the third aspect or any single or combination of intervening aspects of the present disclosure, step b) includes identifying all local maxima in the coverage factor matrix by comparing the coverage factor of each coil with that of all adjacent coils.

[0069] It will be understood that any described processes or steps within described processes may be combined with other disclosed processes or steps to form structures within the scope of the present disclosure. The exemplary structures and processes disclosed herein are for illustrative purposes and are not to be construed as limiting.

## Claims

1. A method of identifying cookware items (30, 32, 34) placed on top of an induction cooktop (10) having a plurality of coils (20<sub>1</sub>-20<sub>n</sub>), comprising the following steps:

a) collect information related to a coverage factor indicative of a degree of overlap between a cookware item (30, 32, 34) and a coil (20<sub>1</sub>-20<sub>n</sub>) for each coil (20<sub>1</sub>-20<sub>n</sub>) and store it into a coverage factor matrix;

b) identify one or more local maxima in the coverage factor matrix, wherein said local maxima correspond to the coverage factor of one or more coils (20<sub>1</sub>-20<sub>n</sub>) that is or are higher than the coverage factors of adjacent coils (20<sub>1</sub>-20<sub>n</sub>);

c) identify coordinates of each of the local maxima as follows, wherein said coordinates are referred to a geometric coordinate system of said induction cooktop (10):

i. when the local maxima is associated with a single coil (20<sub>1</sub>-20<sub>n</sub>), the coordinates are those of a center of a single coil (20<sub>1</sub>-20<sub>n</sub>), and

ii. when the local maxima is associated with a region of contiguous coils (20<sub>1</sub>-20<sub>n</sub>), the coordinates are those of a centroid of the region;

d) calculate distances from each coil (20<sub>1</sub>-20<sub>n</sub>) to each of the coordinates of the identified local maxima;

e) for each coil (20<sub>1</sub>-20<sub>n</sub>), determine a minimum among said distances;

f) define clusters of coils, wherein each cluster is associated to a local maximum, and wherein each cluster contains coils (20<sub>1</sub>-20<sub>n</sub>) whose distance from said local maximum has been identified as the minimum distance in step (e); and

g) use the coil clusters to estimate at least one of position, shape, size, and orientation of the cookware items (30, 32, 34).

2. The method of claim 1, wherein, when the coverage factors of adjacent coils (20<sub>1</sub>-20<sub>n</sub>) are within a predefined range, the region of contiguous coils of step c)ii) comprises said coils (20<sub>1</sub>-20<sub>n</sub>).

3. The method of claim 1 or 2, wherein step d) includes calculating the distance from a center of each coil (20<sub>1</sub>-20<sub>n</sub>) to the coordinates of the identified local maxima.

4. The method of claim 1, wherein step c)ii) includes calculating the coordinates of the centroid of the region using the formulas:

$$x_c = \frac{1}{N} \sum_{k=1}^N x_i \cdot c_i$$

$$y_c = \frac{1}{N} \sum_{k=1}^N y_i \cdot c_i$$

Wherein:

$x_c, y_c$  are the coordinates of the centroid,

$N$  is the number of coils ( $20_1-20_n$ ) considered in the calculation for this particular centroid,  $x_i, y_i$  are the coordinates of the  $i$ th coil ( $20_1-20_n$ ), and

$c_i$  is a quantity proportional to the the coverage factor for the  $i$ th coil ( $20_1-20_n$ ).

5  
10  
**5.** The method of any one of claims 4, wherein the position estimated at step g) corresponds to the coordinates of the centroid of the cluster of coils ( $20_1-20_n$ ).

**6.** The method of any one of claims 1-5, wherein the size of a cookware item (30, 32, 34) estimated at step g) is calculated based on a sum the areas of all coils ( $20_1-20_n$ ) belonging to a cluster, said sum being weighted by using the coverage factors of the coils ( $20_1-20_n$ ) belonging to said cluster.

15  
**7.** The method of any one of claims 1-6, wherein step g) entails calculating with respect to the geometric coordinate system of the induction cooktop (10):

- the second moments of area and the product of inertia of each cluster;

- the principal moments and their angles of rotation;

20  
- the major and minor semiaxes of the cookware item (30, 32, 34).

**8.** The method of claim 7, wherein estimation of the shape at step g) is based on a ratio between the major and minor semiaxes of the cookware item (30, 32, 34).

25  
**9.** The method of claim 7 or 8, wherein estimation of the orientation of a cookware item (30, 32, 34) is based on said angle of rotation.

**10.** The method of any one of claims 1-9, further comprising the following steps:

30  
h) receiving a first power level input for at least one of the identified cookware items (30, 32, 34), said first power level input being set by a user through a user interface (104);

i) assigning a second power level to each coil ( $20_1-20_n$ ) belonging to a cluster, said second power level deriving from the first power level input received at step h) and being determined and set by a controller (100); and

35  
j) controlling power delivery to the identified coil clusters associated with each cookware item (30, 32, 34).

**11.** The method of any one of the preceding claims, further comprising a step of displaying identified cookware items (30, 32, 34) on a user interface (104).

40  
**12.** An induction cooktop system (5) comprising:

an induction cooktop (10) including a plurality of inductive coils ( $20_1-20_n$ );

a power supply (102) for supplying power to selected ones of the plurality of inductive coils ( $20_1-20_n$ ); and

a controller (100) configured to carry out the method of any one of the preceding claims.

45  
**13.** The induction cooktop system (5) of claim 12, wherein the user interface (104) is adapted to display at least one among the position, size, shape and orientation of the cookware items (30, 32, 34), as identified through the method of claim 1.

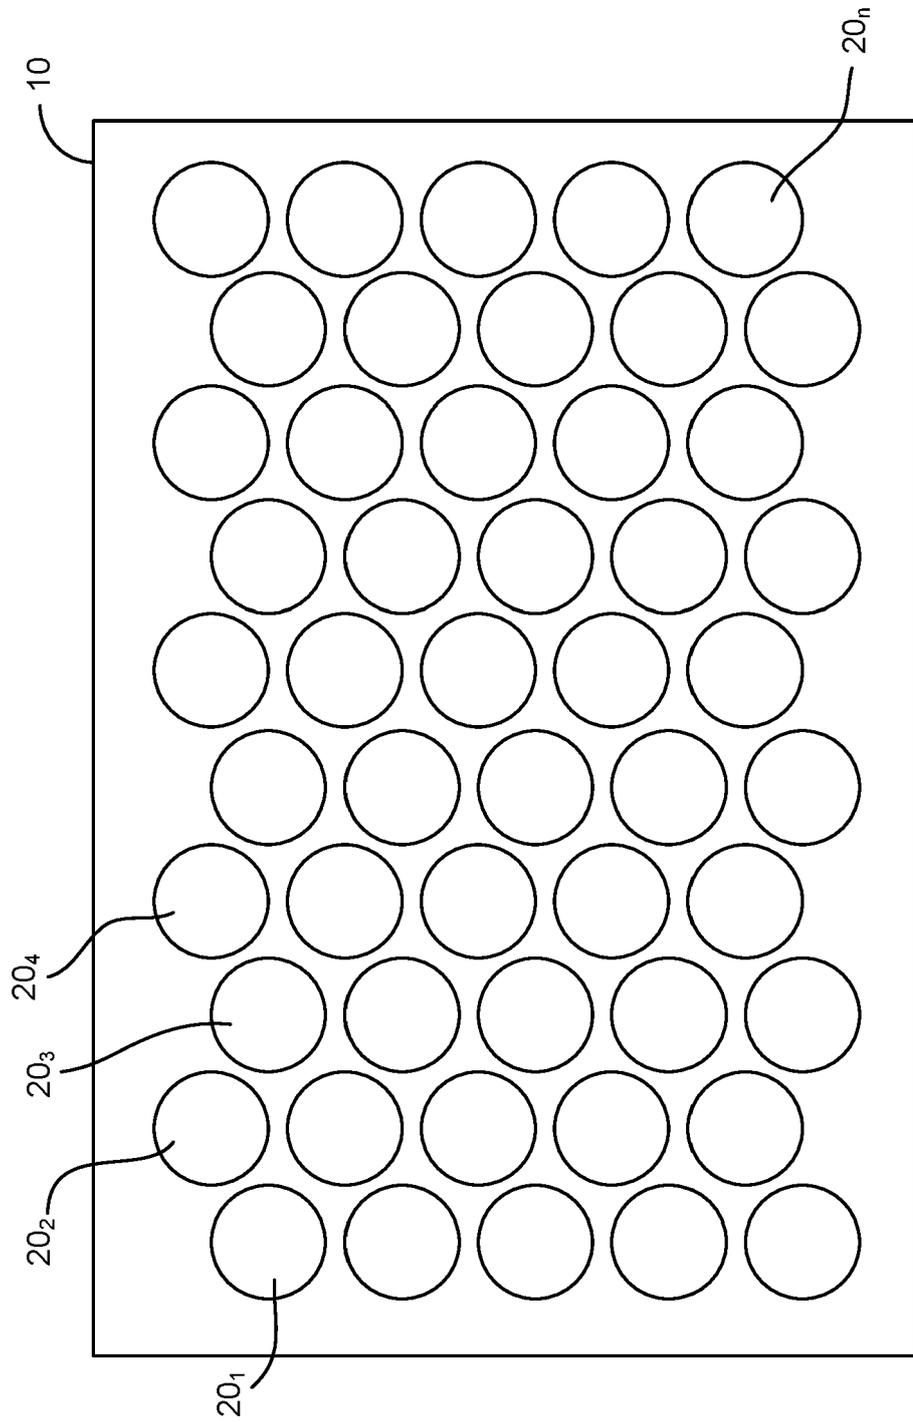


FIG. 1



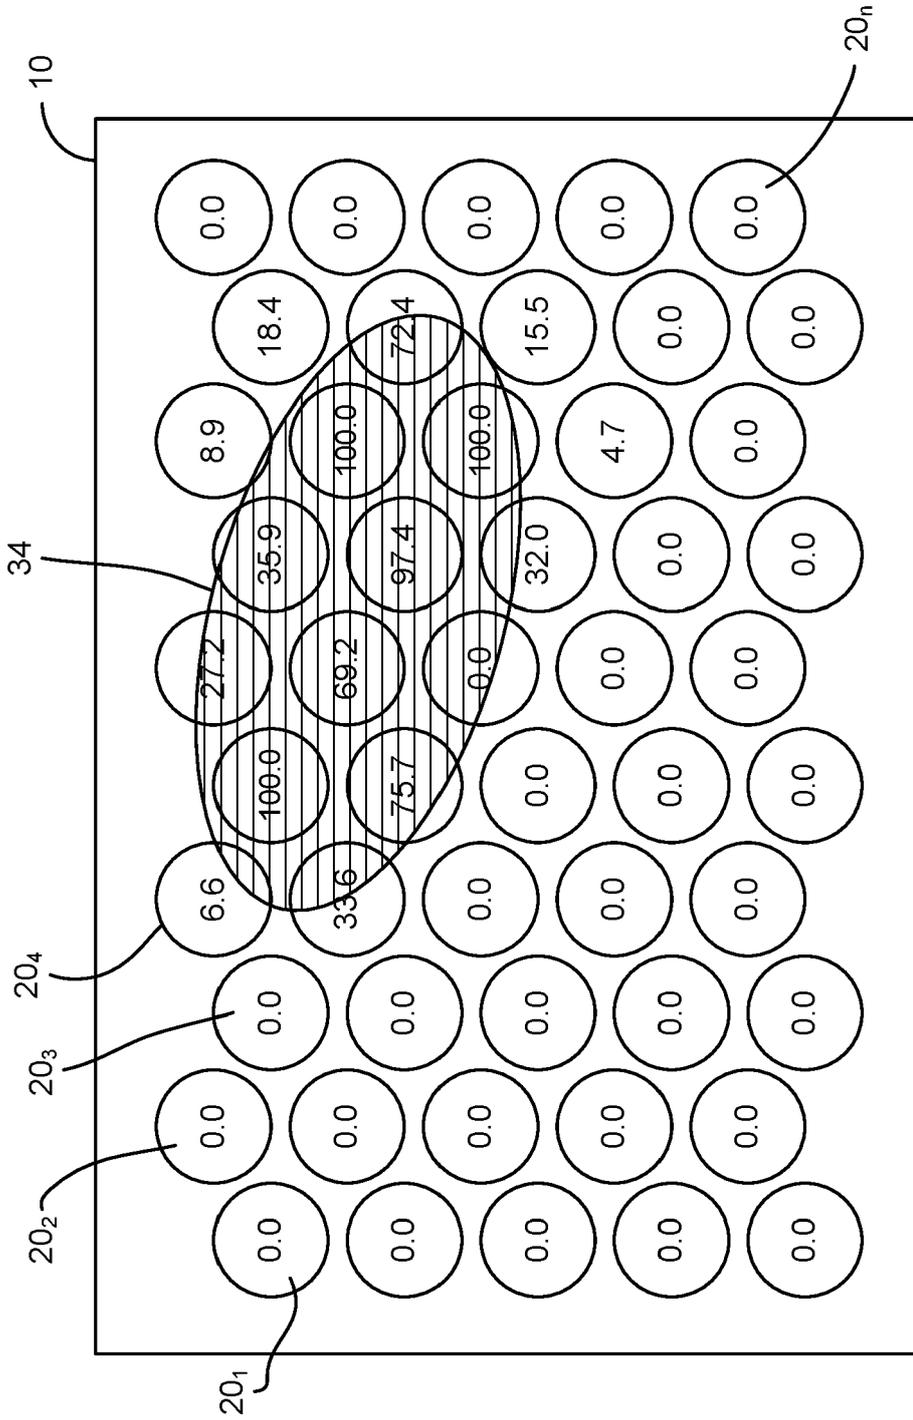


FIG. 2B

5

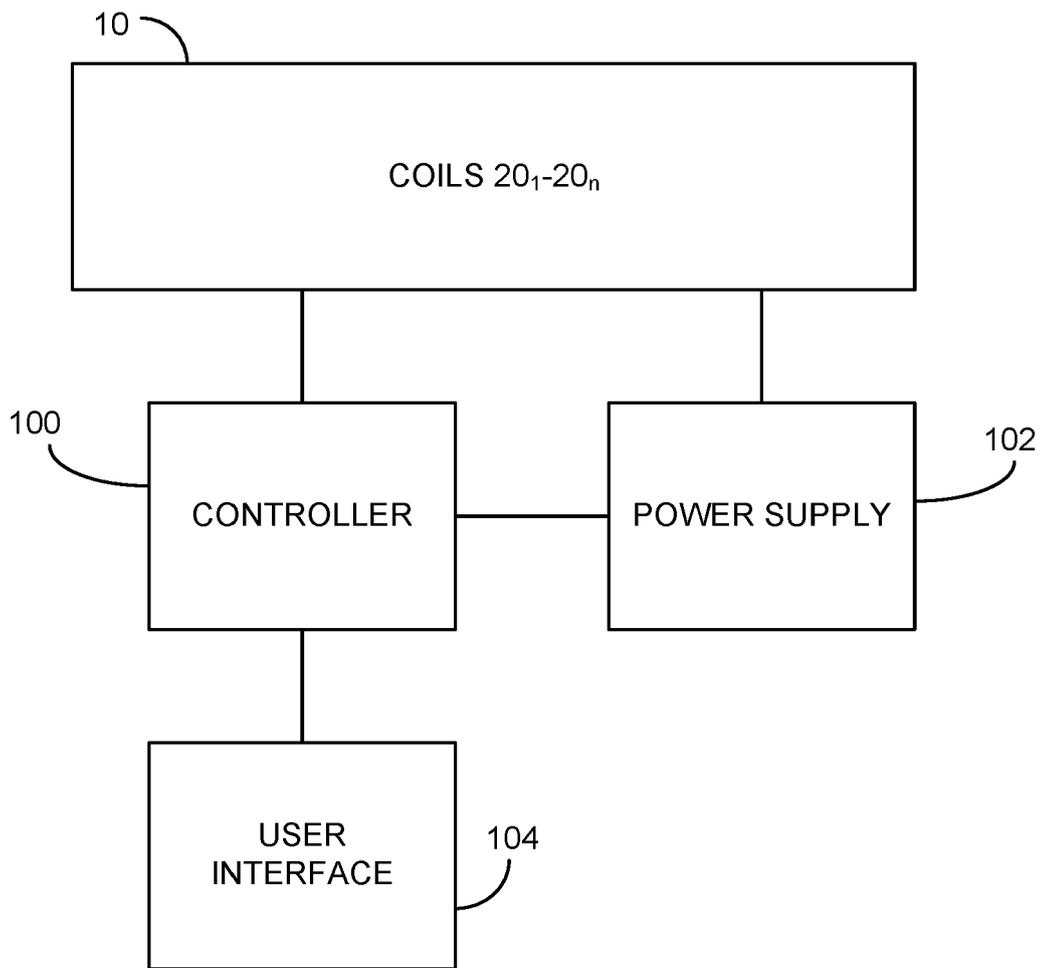


FIG. 3

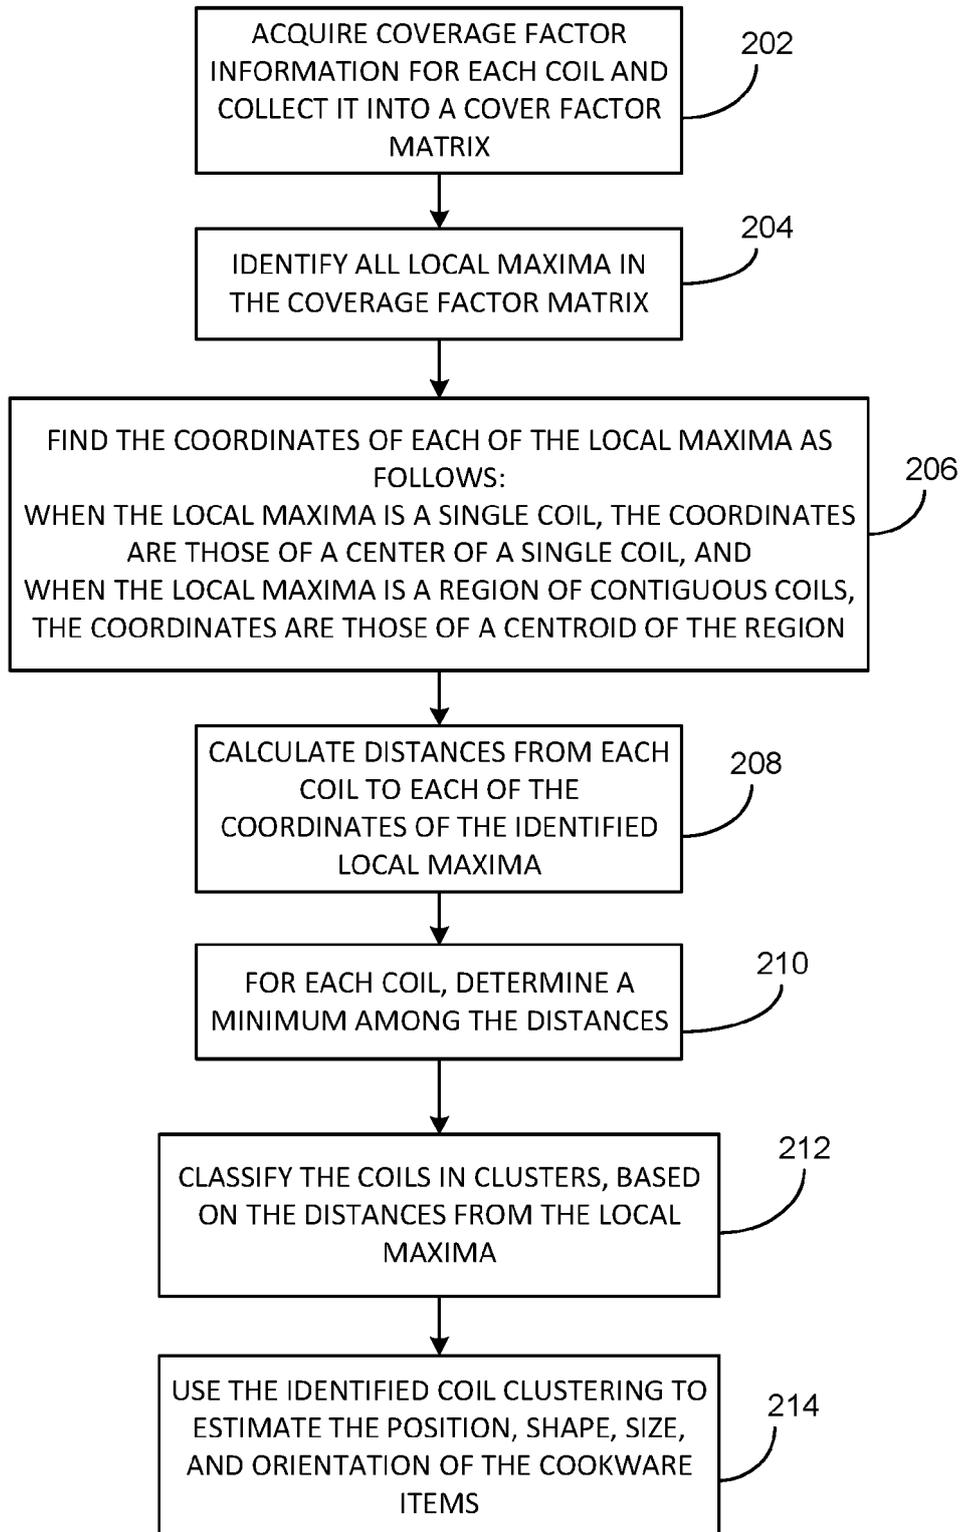
200

FIG. 4

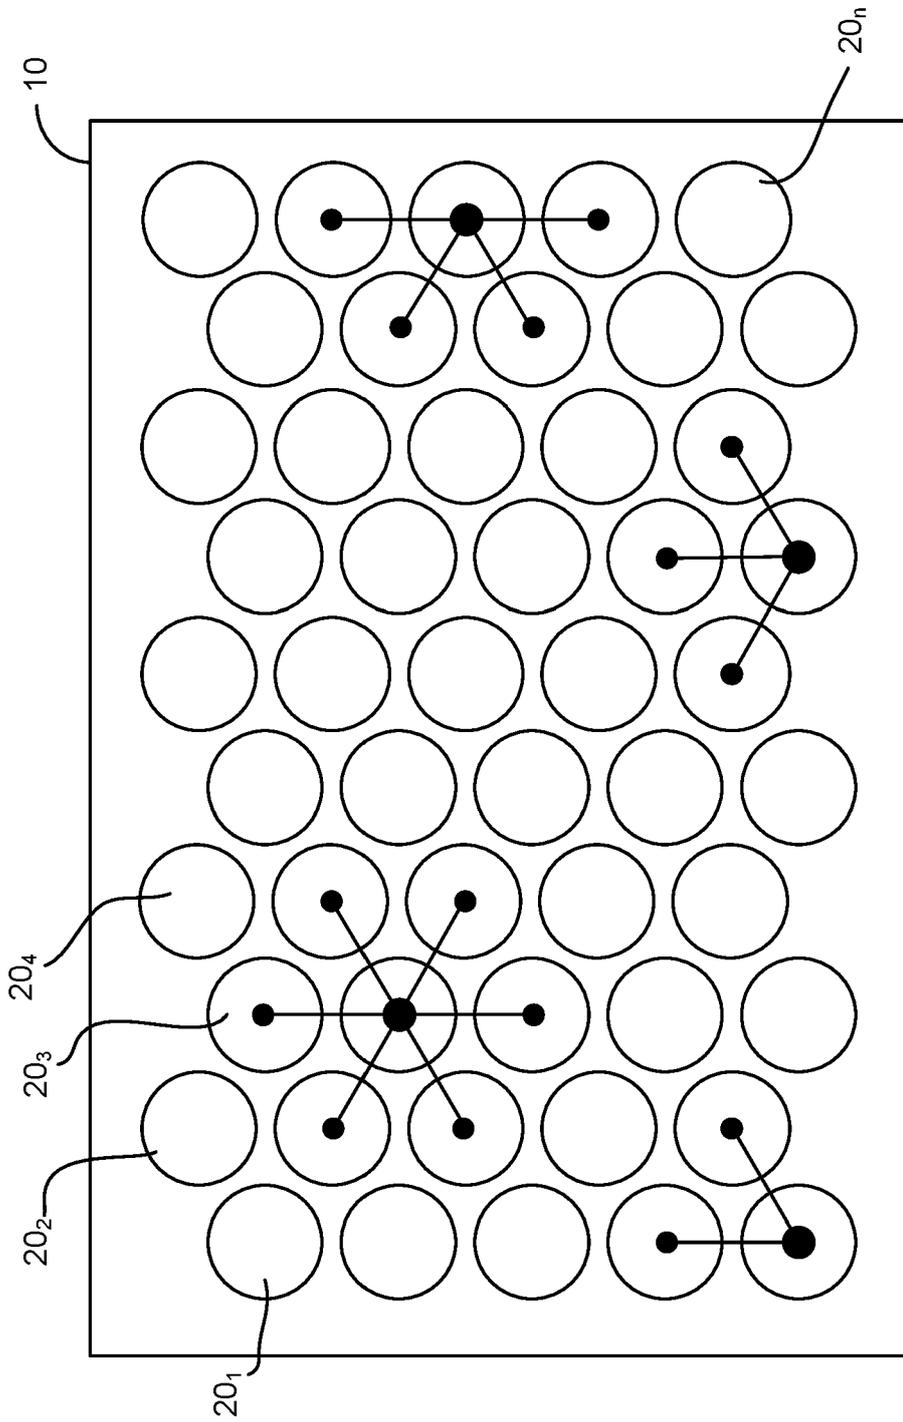


FIG. 5

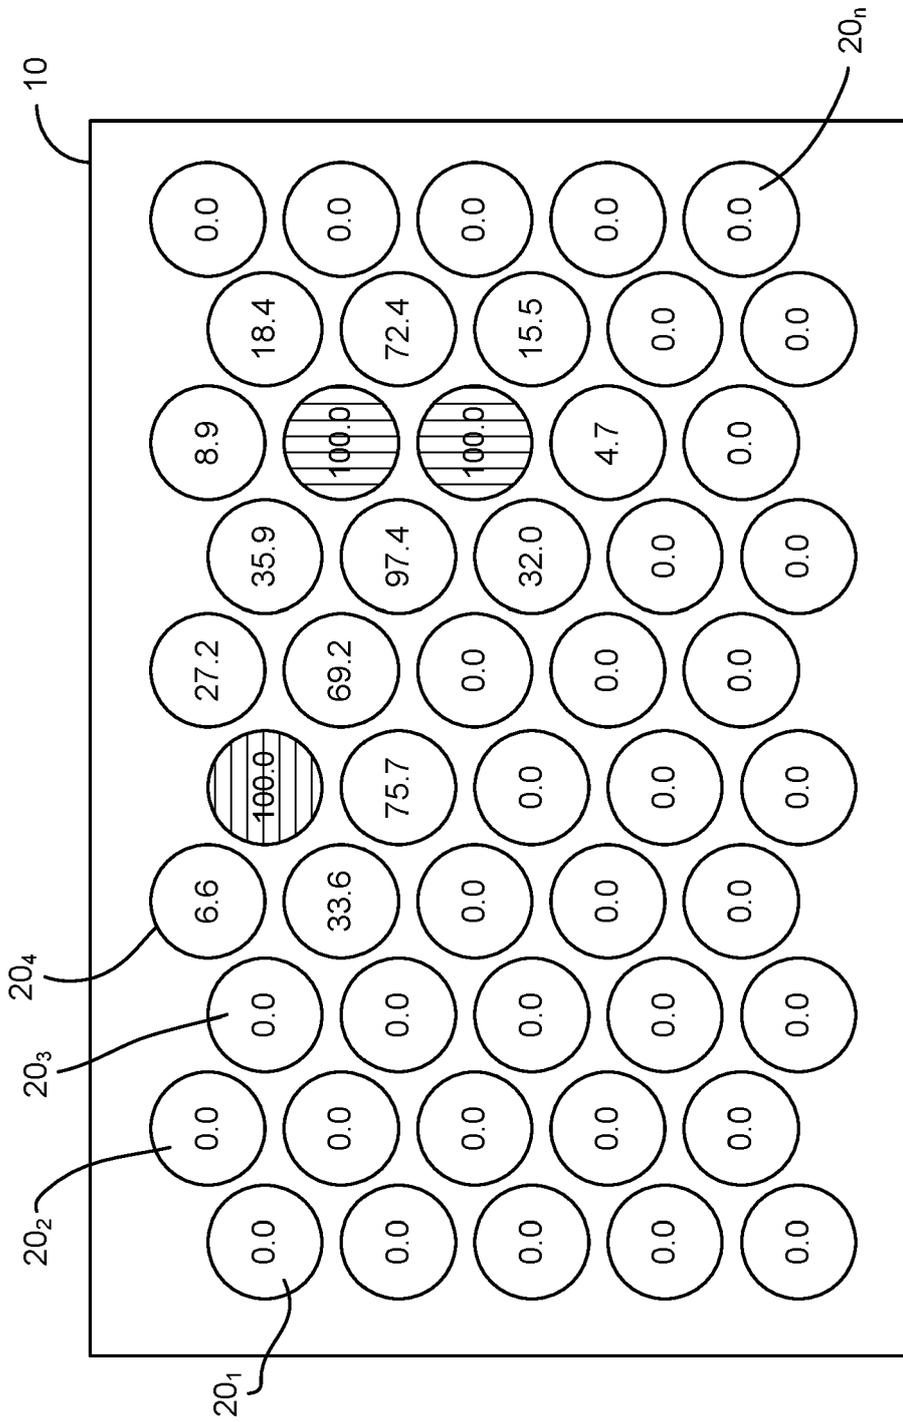


FIG. 6A

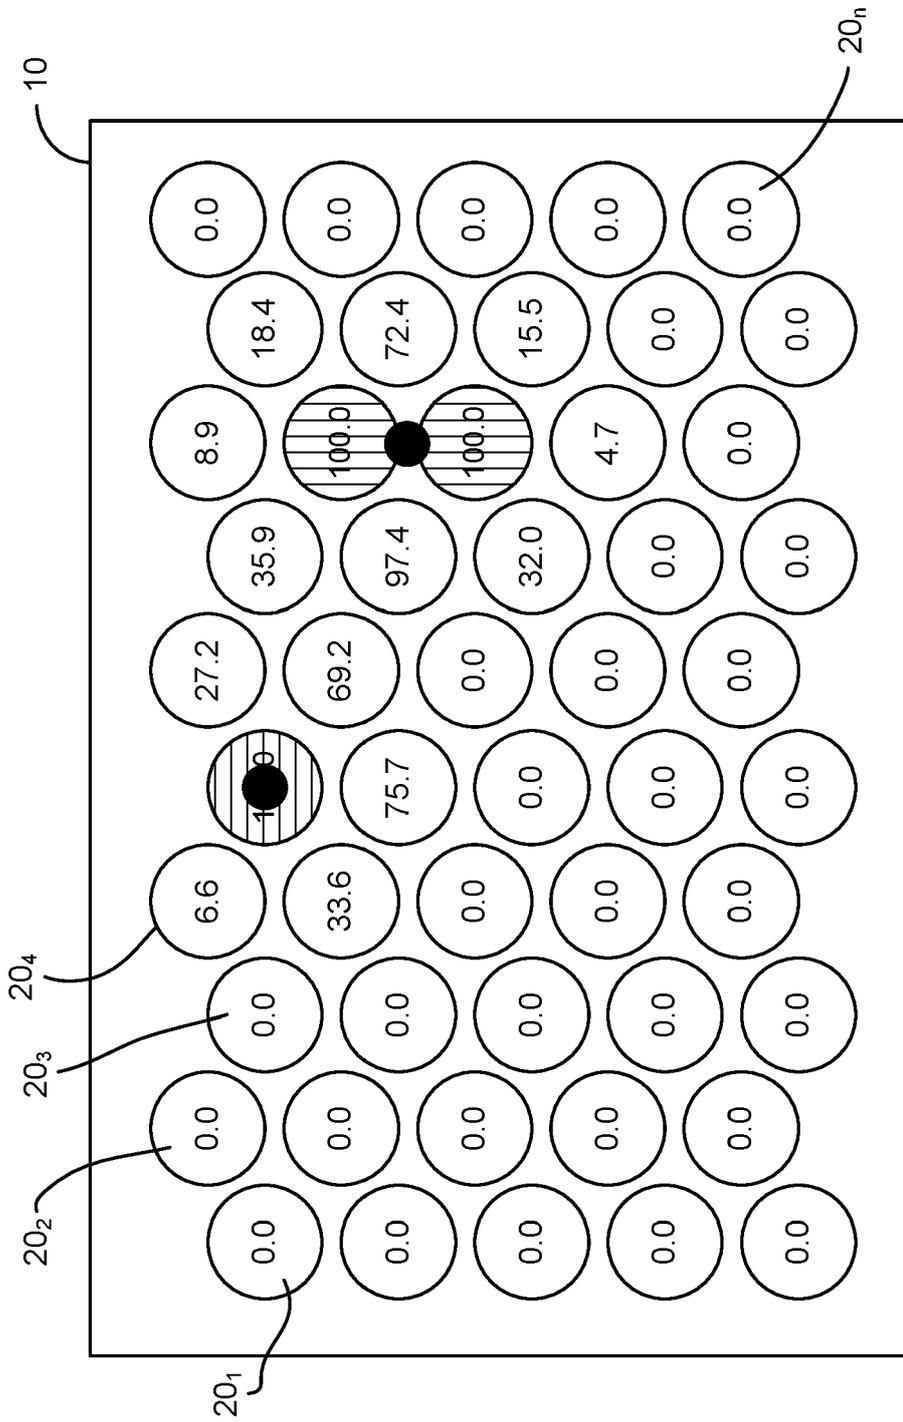


FIG. 6B



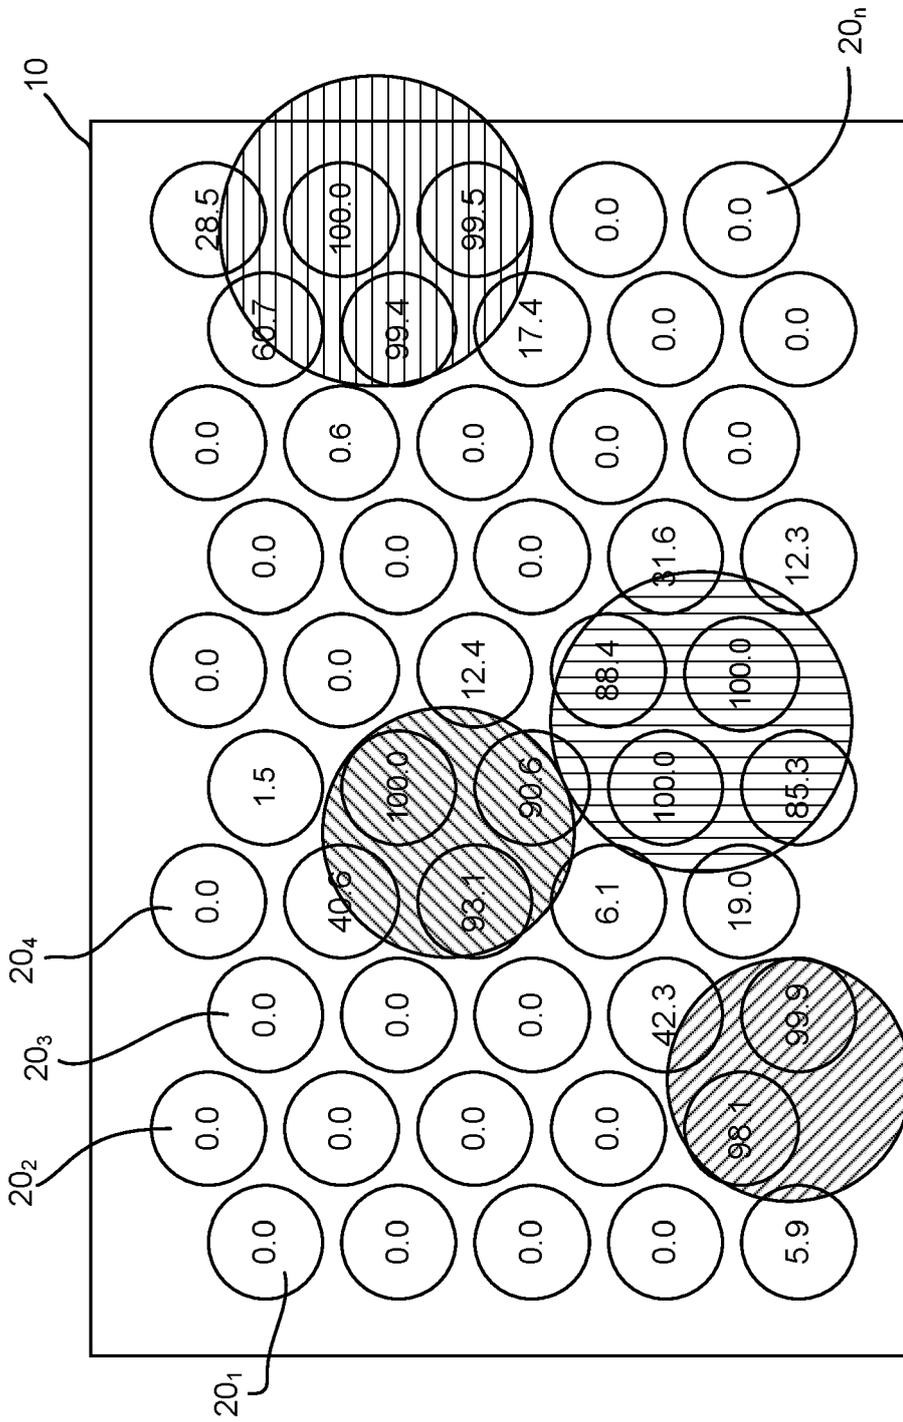


FIG. 7



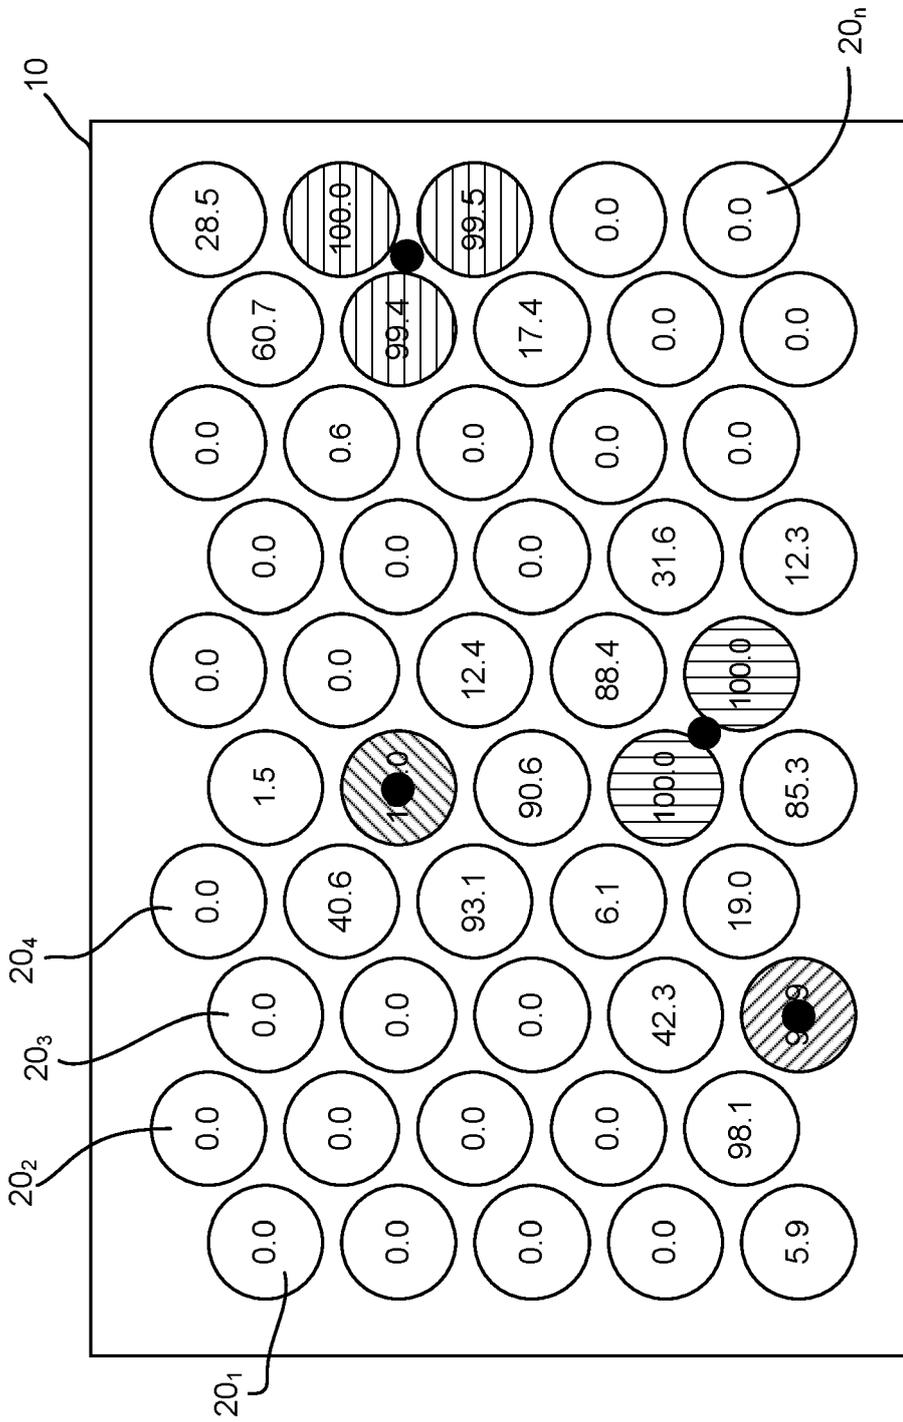


FIG. 9

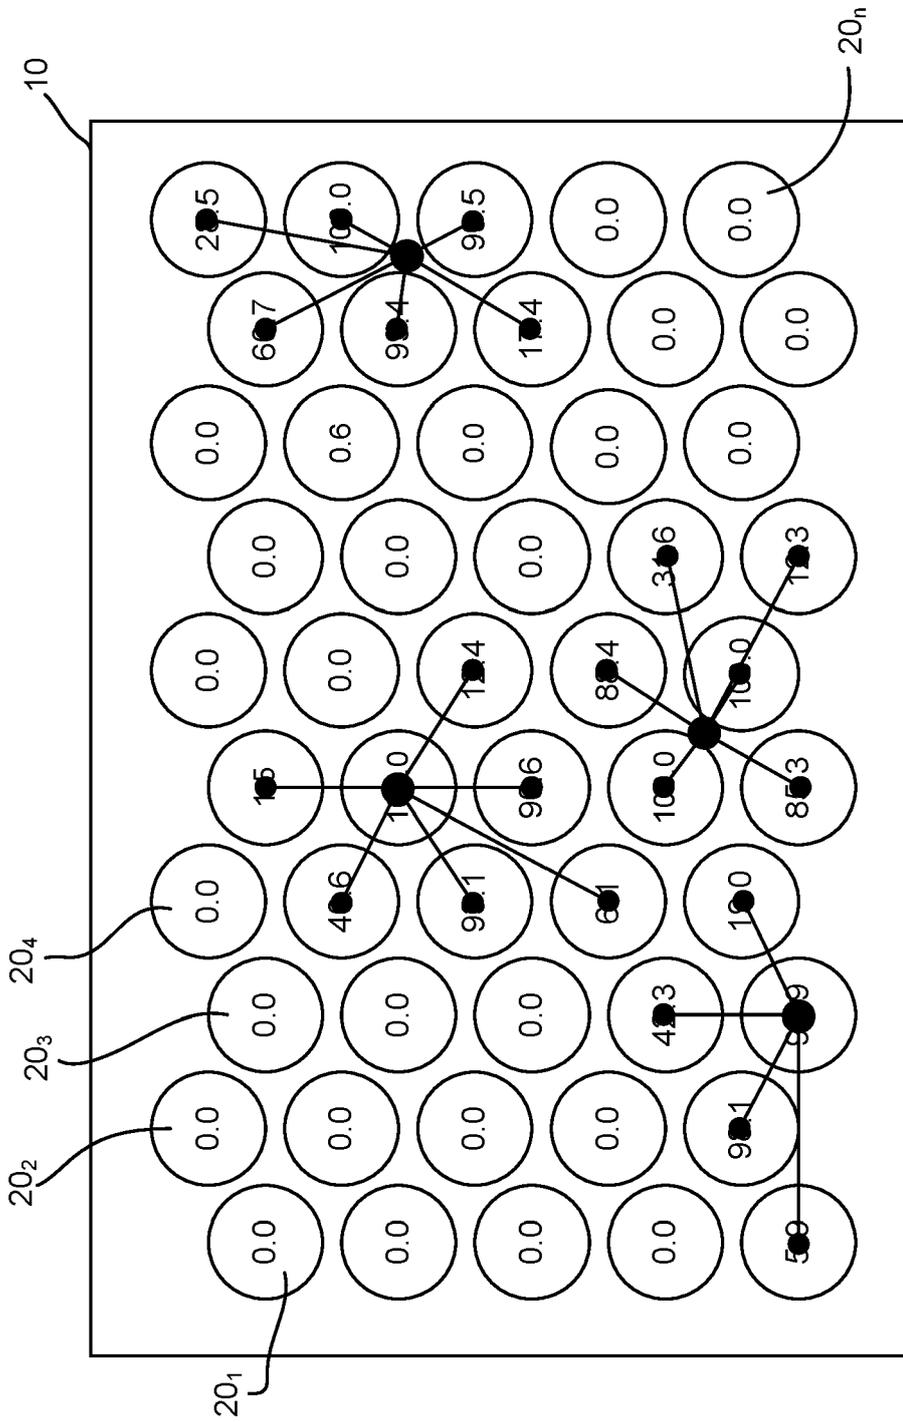


FIG. 10

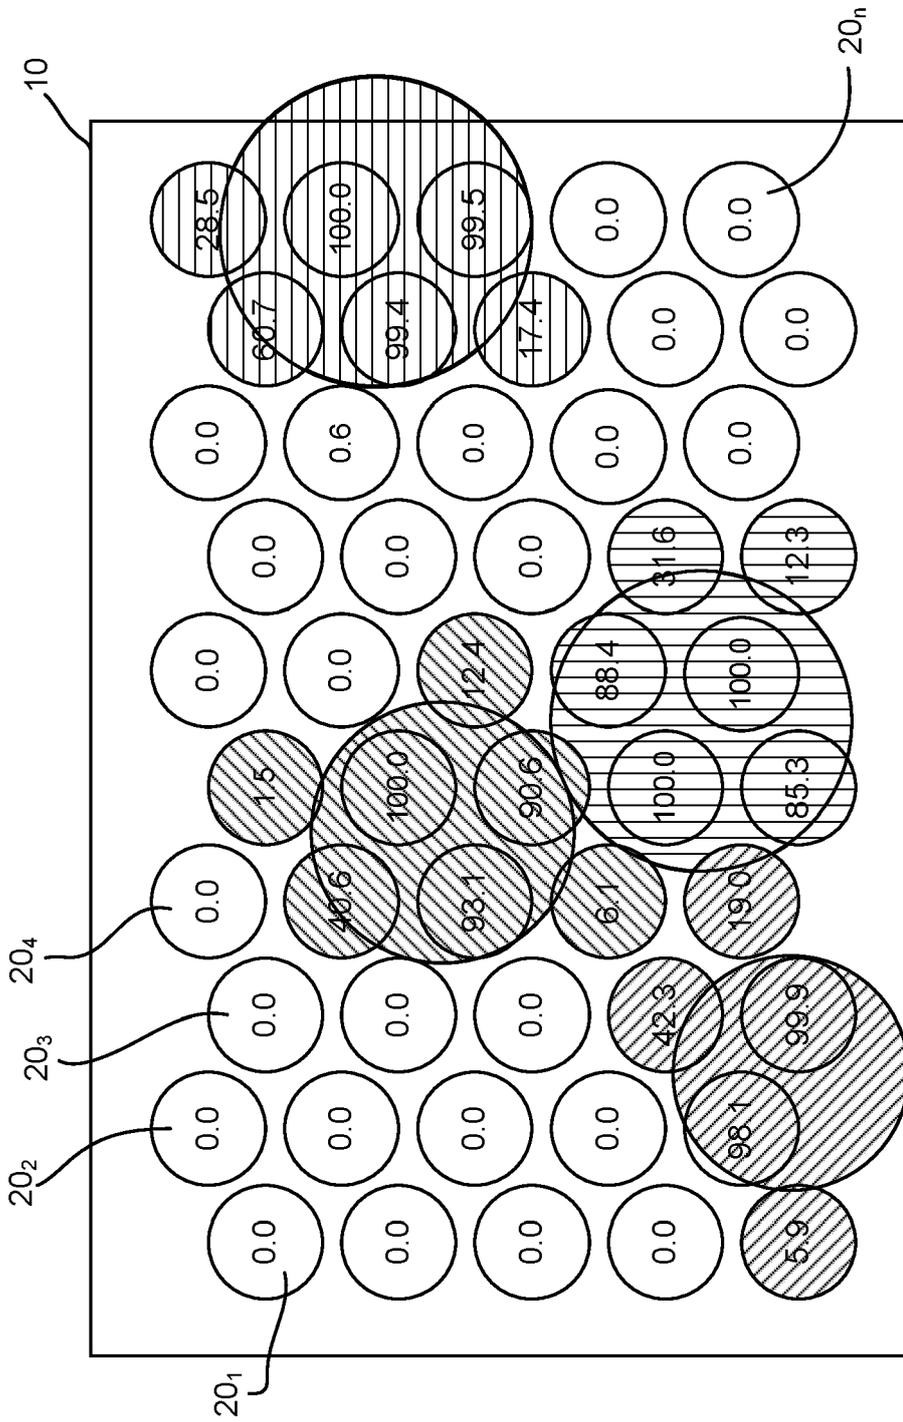


FIG. 11



EUROPEAN SEARCH REPORT

Application Number  
EP 21 17 7817

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	EP 2 112 865 A2 (FAGORBRANDT SAS [FR]) 28 October 2009 (2009-10-28) * figures 1,7 *	1-13	INV. H05B6/06
A,D	EP 2 242 328 A2 (BSH BOSCH SIEMENS HAUSGERAETE [DE]) 20 October 2010 (2010-10-20) * paragraphs [0026] - [0033]; figures 2-5 *	1-13	
A	EP 2 242 329 B1 (BSH HAUSGERÄTE GMBH [DE]) 29 July 2015 (2015-07-29) * paragraphs [0034] - [0037]; figures 1-7 *	1-13	
			TECHNICAL FIELDS SEARCHED (IPC)
			H05B
The present search report has been drawn up for all claims			
Place of search <b>Munich</b>		Date of completion of the search <b>14 October 2021</b>	Examiner <b>Pierron, Christophe</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

1  
EPO FORM 1503 03.02 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 21 17 7817

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-10-2021

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2112865 A2	28-10-2009	AT 440478 T	15-09-2009
		EP 1688018 A1	09-08-2006
		EP 2112864 A2	28-10-2009
		EP 2112865 A2	28-10-2009
		EP 2112866 A2	28-10-2009
		EP 2112867 A2	28-10-2009
		ES 2331887 T3	19-01-2010
		ES 2538156 T3	17-06-2015
		ES 2538181 T3	17-06-2015
		ES 2538183 T3	17-06-2015
		FR 2863039 A1	03-06-2005
		PL 1688018 T3	29-01-2010
		US 2007164017 A1	19-07-2007
		US 2010243642 A1	30-09-2010
WO 2005064992 A1	14-07-2005		
EP 2242328 A2	20-10-2010	EP 2242328 A2	20-10-2010
		ES 2362839 A1	14-07-2011
		ES 2387642 T3	27-09-2012
EP 2242329 B1	29-07-2015	EP 2242329 A2	20-10-2010
		ES 2363666 A1	11-08-2011
		ES 2545327 T3	10-09-2015

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- ES 2362839 [0013]
- EP 2242328 A, Bosch [0013] [0047]
- EP 2112865 A [0014] [0047]