



(11) **EP 3 985 889 A1**

(12) **EUROPEAN PATENT APPLICATION**

- (43) Date of publication: **20.04.2022 Bulletin 2022/16**
- (21) Application number: **21213906.7**
- (22) Date of filing: **23.09.2016**
- (51) International Patent Classification (IPC):
H04B 17/26 ^(2015.01) **H04B 17/309** ^(2015.01)
H04L 5/00 ^(2006.01)
- (52) Cooperative Patent Classification (CPC):
H04B 17/26; H04B 17/309; H04L 5/0048;
H04B 17/24; H04B 17/382

- (84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
- (30) Priority: **25.09.2015 US 201562232899 P**
- (62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
16770753.8 / 3 353 914
- (71) Applicant: **Telefonaktiebolaget LM Ericsson (publ)**
164 83 Stockholm (SE)
- (72) Inventors:
 - **Yang, Yu**
17062 Solna (SE)
 - **Mukherjee, Amitav**
Elk Grove, 95757 (US)

- **Cheng, Jung-Fu**
Freemont, 94539 (US)
 - **Falahati, Sorour**
11229 Stockholm (SE)
 - **Chen Larsson, Daniel**
22649 Lund (SE)
 - **Koorapaty, Havish**
Saratoga, 95070 (US)
- (74) Representative: **Ericsson Patent Development**
Torshamnsgatan 21-23
164 80 Stockholm (SE)

Remarks:
This application was filed on 10.12.2021 as a divisional application to the application mentioned under INID code 62.

(54) **METHOD AND USER EQUIPMENT FOR PERFORMING CHANNEL STATE MEASUREMENTS**

(57) The invention refers to determining a channel state performed at a user device, UE (12), of a mobile network, comprising performing (S22) a reference signal received power measurement, RSRP, on cell specific reference symbols, CRS, or on Channel State Information Reference Signals, CSI-RS, in a current subframe, and comparing the RSRP to an average value of a set measurements of previously received subframes, determining (S21) a plurality of subframes to be used for channel state measurements by excluding those subframes where the comparing yields a power difference exceeding a certain threshold, and generating the channel state information by determining an average of a plurality of RSRPs of the subframes to be used for channel state measurements; the invention further refers to a corresponding UE (12), and to a corresponding computer program.

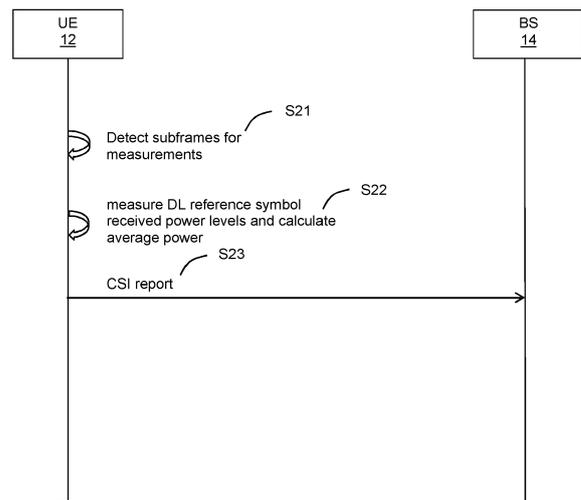


FIG. 5

EP 3 985 889 A1

Description

Technical Field

[0001] The present disclosure generally relates to communicating on unlicensed spectrum. More specifically, and without limitation, devices and methods are provided for channel state information measurements on unlicensed carriers.

Background

[0002] In a typical cellular system, also referred to as a wireless communications network or as radio access network, wireless (communication) terminals, also known as mobile stations or user equipments (UEs) communicate via a radio access network, RAN, to one or more core networks. The radio access network may comprise access points, AP, or base stations, BS that communicate with the user equipments, UEs, by means of radio signals and provide access to the core network.

[0003] The Third Generation Partnership Project, 3GPP, has established a plurality of generations of mobile communication standards. The Universal Mobile Telecommunications System, UMTS, is a third generation mobile communication system, which evolved from the Global System for Mobile Communications, GSM, to provide mobile communication services based on Wideband Code Division Multiple Access, WCDMA, access technology. Long-Term Evolution, LTE, often being referred to as fourth generation, has been specified to increase the capacity and speed using a different radio interface together with core network improvements.

[0004] LTE uses orthogonal frequency division multiplexing, OFDM, in the downlink and Discrete Fourier Transform (DFT)-spread OFDM, also being referred to as single-carrier frequency-division multiple access (SC-FDMA) in the uplink. The basic LTE downlink physical resource can thus be seen as a time-frequency grid, where each resource element corresponds to one OFDM subcarrier during one OFDM symbol interval. The uplink subframe has the same subcarrier spacing as the downlink and the same number of SC-FDMA symbols in the time domain as OFDM symbols in the downlink. In the time domain, LTE downlink transmissions are organized into radio frames of 10 ms, each radio frame consisting of ten subframes of length $T_{\text{subframe}} = 1$ ms. Each subframe comprises two slots of duration 0.5 ms each, and the slot numbering within a frame ranges from 0 to 19. For normal cyclic prefix, one subframe consists of 14 OFDM symbols. The duration of each symbol is approximately 71.4 μs .

[0005] The resource allocation in LTE is typically described in terms of resource blocks, where a resource block corresponds to one slot in the time domain and 12 contiguous subcarriers in the frequency domain. A pair of two adjacent resource blocks in time direction is known as a resource block pair. Resource blocks are numbered

in the frequency domain, starting with 0 from one end of the system bandwidth.

[0006] Downlink transmissions are dynamically scheduled, i.e., in each subframe the base station transmits control information about which terminals data is transmitted to and upon which resource blocks the data is transmitted, in the current downlink subframe. The downlink subframe also contains common reference symbols, which are known to the receiver and used for coherent demodulation of e.g. the control information.

[0007] Conventionally, the spectrum licensed by mobile carriers for cellular networks (e.g., Long-Term Evolution, LTE) and the unlicensed spectrum used for wireless local-area networks (WLANs) have been largely independent. As the number of mobile nodes and the data rates per mobile node increase, there has been a growing interest in smaller cells transmitting LTE channels in bands (or carriers) of the unlicensed spectrum.

[0008] Examples of unlicensed spectrum bands are the commonly-called "WiFi bands" around 2.4 GHz, 5 GHz and 60 GHz. These are free to use provided that certain regulatory constraints are fulfilled when transmitting on them. These bands are not dedicated to a specific radio-access technology (RAT).

[0009] Licensed-Assisted Access via LTE (LAA-LTE) has recently been proposed for LTE co-existence on unlicensed carriers with, e.g., WLAN. This means that a user equipment (UE) is connected to an LTE network on a licensed spectrum, also being referred to as primary carrier. In addition, it can also be connected to the same network on an unlicensed spectrum, also being referred to as secondary carrier.

[0010] A possibility to reliably utilize the unlicensed spectrum is to transmit essential control signals and channels on a licensed carrier. Thus, a UE may be connected to a Primary Cell in the licensed band (PCell) and one or more Secondary Cells in the unlicensed band. Such Secondary Cell will also being referred to as licensed-assisted access secondary cell (LAA SCell).

[0011] Data transmission on an unlicensed band is to be typically controlled by a Listen-Before-Talk (LBT) mechanism. In typical deployments of WLAN, carrier sense multiple access with collision avoidance (CSMA/CA) is used for medium access. This means that the channel is sensed to perform a clear channel assessment (CCA), and a transmission is initiated only if the channel is declared as Idle. In case the channel is declared as Busy, the transmission is essentially deferred until the channel is deemed to be Idle. When the range of several base stations or access points (APs) using the same frequency overlap, this means that all transmissions related to one AP might be deferred in case a transmission on the same frequency to or from another AP which is within range can be detected. Effectively, this means that if several APs are within range, they will have to share the channel in time, and the throughput for the individual APs may be severely degraded. An exemplary illustration of the listen-before-talk (LBT) mechanism is shown in **Fig.**

1.

[0012] In cellular communication systems, downlink, DL, pilots, reference signals (RS) or so-called cell specific reference symbols (CRS) of predefined and known characteristics are regularly transmitted by the infrastructure access points or base stations of the radio access network to the user equipments. The reference signals are used (e.g. measured) by both idle and active user equipments, e.g. for the purpose of mobility measurements, cell association, and channel estimation for certain transmission modes.

[0013] According to 3GPP Technical Specification 36.213, current version 12.5.0, in the following being referred to as TS 36.213, the UE shall perform a periodic and/or an aperiodic reporting of channel state indicators. This information may be used by the radio access network for scheduling decisions (e.g. comprising a selection of a modulation and coding scheme, MCS, to be used by the UE for transmitting a certain transport block, and a resource block, RB, allocation to the UE) to ensure an efficient usage of radio resources.

[0014] According to 3GPP TS 36.213, section 7.2, the CSI to be reported by the UE comprises a so-called Channel Quality Indicator, CQI, and may comprise further indicators such as a so-called Pre-coding Matrix Indicator, PMI, and a so-called Rank Indicator, RI. The UE shall report to the radio terminating node (eNB) of the radio access network, the highest wideband CQI value within the range of suitable CQI values matching to the instantaneous radio conditions experienced by the UE given the receiver capabilities of the UE, resulting into a block error rate, BLER, equal or below 10%. The BLER therein may represent a ratio of a number of erroneous data blocks and a corresponding total number of received data blocks. The radio access network will use the reported CQI value as one input to its scheduling algorithm. As defined in above-cited TS 36.213, Table 7.2.3-1, there are 15 CQI values from 0 to 15 each associated to a certain efficiency, wherein the efficiency increases with the value.

[0015] Such CSI measurements may be based on Channel State Information Reference Signals (CSI-RS) or on CRS. Channel State Information Interference Measurement (CSI-IM) can be used for interference measurements in so-called transmission mode 10. Furthermore, CRS or discovery reference signals (DRS) can be used as basis for radio resource management (RRM) measurement quantities such as RSRP and RSRQ, while CSI-RS may be utilized for RSRP. Within current LTE specifications, the UE may average CRS-based measurements across multiple subframes, as well as average CSI-RS and CSI-IM measurements across different CSI-RS and CSI-IM occasions, and for RRM measurements to be averaged across multiple DRS occasions. Reference signal received power (RSRP) is defined as the linear average over the power contributions (in [W]) of the resource elements that carry cell-specific reference signals within the considered measurement frequency

bandwidth. The RSRQ is defined as the ratio $N \times \text{RSRP} / (\text{E-UTRA carrier RSSI})$, where N is the number of RBs of the E-UTRA carrier RSSI measurement bandwidth. The measurements in the numerator and denominator shall be made over the same set of resource blocks. Carrier Received Signal Strength Indicator (RSSI), comprises the linear average of the total received power (in [W]) observed only in certain OFDM symbols of measurement subframes, in the measurement bandwidth, over N number of resource blocks by the UE from all sources, including co-channel serving and non-serving cells, adjacent channel interference, thermal noise etc. If higher layers indicate measurements based on DRS, RSSI is measured from all OFDM symbols of the DL part of the subframes in the configured DRS occasions.

[0016] Patent application US 2014/286280 A1 discloses a method for measuring state of channel quality, wherein CSI-RS are intermittently transmitted by the eNB to the UE; the UE may notify the UE of the configured cycle or pattern.

[0017] 3GPP draft document R1-152011 drafted by Ericsson and titled "further discussion on support of CSI Measurement and reporting from LAA" discloses to limit in an LAA environment as discussed above CSI-RS and CSI-IM measurements to a single CSI-RS and CSI-IM occasion and not allow averaging over time in order to avoid mis measurement in a case that two different transmitting entities, either eNB, UEs, ST or APs collide over the air and both grab the channel.

[0018] It is an insight of the present application that CSI, RRM measurements, and/or any other measurements that rely on DL reference signals or on other channels across multiple subframes according to the prior art may result in an insufficient accuracy of measurements at the UE CSI determination associated to LAA.

Summary

[0019] It is an object of the invention to mitigate problems described above.

[0020] This object is achieved by the independent claims. Advantageous embodiments are described in the dependent claims and by the following description.

Brief Description of the Drawings

[0021] The accompanying drawings illustrate several aspects of the disclosure, and together with the description serve to explain the principles of the disclosure.

Fig. 1 illustrates an exemplary LBT mechanism associated to LAA;

Fig. 2 illustrates an exemplary LAA SCell DL frame;

Fig. 3 illustrates a radio network comprising an access point or eNB communicating to a UE by means

of a PCell and an SCell;

Fig. 4 illustrates a first sequence of messages and steps performed by a wireless device and a base station for channel state measurements;

Fig. 5 illustrates a second sequence of messages and steps performed by a wireless device and a base station for channel state measurements;

Fig. 6 is a block diagram of structural units of the wireless device according to some embodiments of the present application;

Fig. 7 is a block diagram of functional units of the wireless device according to some embodiments of the present application;

Fig. 8 is a block diagram of structural units of the base station according to some embodiments of the present application; and

Fig. 9 is a block diagram of functional units of the base station according to some embodiments of the present application.

Detailed Description

[0022] As shown in **Fig. 3** the example network may include one or more instances of wireless communication devices 12 (e.g. conventional user equipments (UE), or machine type communication (MTC) or machine-to-machine (M2M) equipments) and one or more radio access nodes. In the following example, the wireless communication devices 12 are being referred to as UEs and the radio access node 14 will be referred to as eNodeB or eNB 14.

[0023] The UE 12 may be connected to a Primary Cell in the licensed band (PCell) and one or more Secondary Cells in the unlicensed band. Such Secondary Cell will also be referred to as licensed-assisted access secondary cell (LAA SCell).

[0024] The eNB 14 is capable of communicating with UE 12 along with any additional elements suitable to support communication between wireless communication devices or between a wireless communication device and another communication device (such as a landline telephone). Although the illustrated UE 12 may represent communication devices that include any suitable combination of hardware and/or software, these devices may, in particular embodiments represent devices such as the example wireless communication device illustrated in greater detail by Fig. 6 and Fig. 7. Similarly, although the illustrated eNB 14 may represent a network node that include any suitable combination of hardware and/or software, this node may, in particular embodiments, represent a device such as the example base station illustrated in greater detail by Fig. 8 and Fig. 9. It should be under-

stood that the cellular communications network may include any number of radio access nodes serving any number of wireless communication devices. The eNB 14 is further connected to a core network (not shown).

[0025] **Fig. 2** shows an exemplary LAA DL frame comprising 10 subframes, wherein some of the subframes may not be used for DL transmission of the eNB due to occupancy by non LTE devices (LBT failed). By way of the shown example, subframes #0, #1, #5, #6, and #9 thus may not be used for channel measurements in the UE.

[0026] In an embodiment depicted in **Fig. 4**, in first step S11, the eNB sends an indication to the UE indicative of a plurality of time intervals or time slots that may be used for channel measurements. With the example of **Fig. 2**, the eNB may send identifiers of subframes #2, #3, #4, #7, and #8 of frame n.

[0027] Alternatively, the eNB may send an indication of time intervals that may not be used for channel measurements.

[0028] In a second step S12, the UE performs a channel measurement within the time intervals to be used for channel measurement, wherein each (time interval) measurement is associated to one of these time intervals.

[0029] In a third step S13, the UE may provide a measurement result to the eNB, wherein the measurement result may be function of the plurality of these measurements. The function may be an averaging function determining an average over the plurality of the time interval measurements.

[0030] A time interval may be an OFDM symbol duration, a subframe or transmission time interval (TTI), or any suitable time interval.

[0031] In an embodiment the indication sent by the eNB comprises a plurality of identifiers identifying explicit time intervals (e.g. a plurality of subframe identifiers) to be used for measurements. Additionally or alternatively, the indication comprises a set of time intervals (subframes) or a range of valid subframes over which a measurement may be performed. The range of valid subframes may include subframes in which the UE was not scheduled for Physical Downlink Shared Channel (PDSCH) reception.

[0032] A range of valid subframes may span within a download (DL) transmit burst, or across distinct DL transmit bursts. The eNB may also indicate a subset of symbols out of the set of symbols within the valid subframes on which measurement averaging should be performed.

[0033] The measurement may be performed according to a CSI metric such as CQI. Another example is a RSSI measurement. The subframes valid as measurement subframes for averaging may be related in time to the DL reference subframe for which the CSI represents the quality of the channel.

[0034] In an embodiment the indication is transmitted to the UE over a physical downlink control channel (PDCCH) by means of Downlink Control Information (DCI) that may further provide to the UE information such as

UL scheduling grants. Thereto, one or a plurality of new fields may be in the DCI of resource grants.

[0035] Alternatively, the indication may be transmitted by means of aperiodic CSI requests or may be broadcasted in the common search space of control channels.

[0036] In an embodiment, the eNB 14 optimizes a scheduling of UEs 12 with higher-order modulated data (e.g. 64QAM or 256QAM) to reduce a variation of power across subframes.

[0037] In a further embodiment UEs scheduled with higher order modulation are grouped together within the same burst. Further the UEs may be down-selected based on which higher order modulations that are scheduled, e.g. between 64QAM or 256QAM. As an example, UEs with higher-order modulated data may be served in the same subframe(s) of a DL burst, such that the remaining subframes of the burst are of the same power. In another example, UEs with higher-order modulated data are served on a licensed carrier.

[0038] In an embodiment the eNB avoids scheduling higher-order modulated data in subframes, where the UE expects a presence of reference signals (CSI-RS and/or CSI/IM). The eNB may (explicitly or implicitly) indicate to the UE that higher-order modulated data is not scheduled in these subframes.

[0039] In an embodiment, as depicted in Fig. 5, the UE 12 autonomously determines which DL subframes are to be used for channel measurements.

[0040] Thereto, in a first step S21, the UE may detect time intervals wherein an estimated received power deviates from the measured received power (e.g. by detecting that the power difference between the estimated received power and the measured power exceeds a certain power threshold) and exclude such time intervals from the channel measurements.

[0041] In a second step S22, the UE may perform measurements as described in step S11 of Fig. 4.

[0042] In a third step S23, similarly to step S13 of Fig. 4, the UE may provide a measurement result to the eNB, wherein the measurement result may be function of the plurality of these measurements. The function may be an averaging function determining an average over the plurality of the time interval measurements.

[0043] In an embodiment, the estimated received power is determined based on a set of previous received subframes (e.g. an average of certain number of previous received subframes).

[0044] In an embodiment, the UE 12 performs an RSRP measurement on the CRS or CSI-RS and compares this to an average value of a set of previously received subframes. If the power difference is too large (exceeds a certain or defined threshold), the subframe is excluded from averaging.

[0045] In an embodiment, a subframe in which the UE 12 is scheduled with higher-order modulated data is excluded from the set of subframes over which measurements are averaged.

[0046] In another example, measurement averaging

at UE 12 is performed taking into account a power back-off when the UE is scheduled with higher-order modulated data. For example, some scaling/calibration can be performed based on the power back-off due to higher-order modulation, to include these subframes together with subframes without power back-off, when averaging measurements.

[0047] In an embodiment, the UE 12 autonomously determines whether power variation has occurred based on the number of SCells within a TTI for which it is scheduled to receive data, or the number of SCells on which it has detected the presence of CRS or an initial signal. Measurement averaging may then performed across subframes which had the same estimated number of active SCells.

[0048] In an embodiment, measurement averaging at the UE 12 is performed while taking into account the number of SCells within a TTI for which it is scheduled to receive data, or the number of SCells on which it has detected the presence of CRS or an initial signal. For example, some scaling/calibration can be performed based on the number of SCells when doing measurement averaging.

[0049] In an embodiment, the eNB 14 may avoid scheduling higher-order modulated data in subframes where the UE expects the presence of CSI-RS and/or CSI/IM, so that the UE 12 may assume that higher-order modulated data are not scheduled in the subframes. If this scheduling constraint is applied for all CSI-RS/IM transmissions from eNB, additional explicit signaling for this purpose may not be needed.

[0050] As shown in Fig. 6, the example wireless communication device or UE 12 includes a baseband unit 120, a radio unit 121 and one or a plurality of antennas 122. The baseband unit 120 is coupled to the radio unit 121. The baseband unit 120 comprises a device processor 1201 and a device memory 1202. The radio unit 121 comprises a transceiver 1210 that is coupled to the one or a plurality of antennas 122. The transceiver comprises a transmission circuit TX 1211 and a receiver circuit RX 1212. In particular embodiments, some or all of the functionality described above as being provided by UEs, MTC or M2M devices, and/or any other types of wireless communication devices may be provided by the device processor 1201 executing instructions stored on a computer-readable medium, such as the device memory 1202. Alternative embodiments of the wireless communication device may include additional components beyond those shown here that may be responsible for providing certain aspects of the device's functionality, including any of the functionality described above and/or any functionality necessary to support the solution described above.

[0051] As shown in Fig. 7, the example UE 12 includes the following exemplary functional units:

- a subframe determination module 124 adapted identify a plurality of time intervals or time slots that may be used for channel measurements. Such identifica-

tion may be performed autonomously by the UE as describe above or by an evaluation of indication messages received from the eNB;

- a measurement module 125 adapted for performing channel measurements (CSI measurements) within the time intervals identified to be used for channel measurement;
- a measurement reporting module 126 adapted to perform measurement (CQI) reporting to the eNB as configured by the network.

[0052] As shown in **Fig. 8**, the example network node or eNB 14 includes a node processor 141, a node memory 142, a node transceiver 143, one or a plurality of node antennas 144 and a network interface 145. The node processor 141 is coupled to the node memory 142, to the network interface 145 and the node transceiver 143 that is coupled to the one or the plurality of node antennas 144. The node transceiver 143 comprises a transmission circuit TX 1431 and a receiver circuit RX 1432. In particular embodiments, some or all of the functionality described above as being provided by a base station, a node B, an enhanced node B, and/or any other type of network node may be provided by the node processor executing instructions stored on a computer-readable medium, such as the node memory 142. Alternative embodiments of the radio access node may include additional components responsible for providing additional functionality, including any of the functionality identified above and/or any functionality necessary to support the solution described above.

[0053] As shown in **Fig. 9**, the example eNB 14 includes the following exemplary functional units:

- a time interval indication module 146 adapted to generate an information comprising an indication a plurality of time intervals or time slots that may be used for channel measurements, the information to be sent to the UE;
- a CSI report evaluation module 147 adapted for evaluation a measurement report (CSI report) received from the UE.

[0054] In the following some considerations and proposals are presented, that may be based or supplement the previous description and/or provide some further aspects.

[0055] CSI feedback based on CSI-RS and CSI-IM: The CSI-RS framework is a UE specific framework, i.e. a specific UE is not aware of other UEs CSI-RS. Furthermore, the CSI-RS are currently configured by a specific periodicity and offset. In addition, there are three CSI processes defined for CSI measurements. How many CSI processes the UE supports is a UE capability. The UEs not measuring on the CSI-RS would be configured

with ZP (zero power)-CSI-RS at those occasions and the PDSCH/EPDCCH mapping should function without any evident drawbacks. The same approach is also used for CSI-IM.

[0056] In a first scenario it is considered to allowing aperiodic presence of CSI-RS. In this scenario the eNB may indicate to the UE in some form that the CSI-RS is present in the corresponding subframe. This may need to be done for both ZP (zero power)-CSI-RS and NZP (non-zero-power)-CSI-RS. Further the same principle may apply for CSI-IM as well. For every UE that is scheduled in DL, the eNB may indicate ZP-CSI-RS for all the used REs. Currently the amount of available CSI-RS configurations may be too large to be included in a DCI message.

[0057] Therefore, a simple and reliable approach is that the UE assumes that the ZP CSI-RS, NZP-CSI-RS and CSI-IM are configured and transmitted periodically as in Rel-12. Thus not only the risk on different assumptions between eNB and UEs is avoided but also the DCI message capacity or an allowable number of CSI-RS configurations are not compromised. At the same time the UE may only perform measurements on NZP CSI-RS and CSI-IM if the eNB has been successful with the LBT; due to this an availability of such resource may in practice be aperiodic.

[0058] Thus, according to this embodiment, ZP-CSI-RS, NZP-CSI-RS and CSI-IM are periodically configured, whereas NZP-CSI-RS and CSI-IM are aperiodically present (subject to LBT).

[0059] In an embodiment, with respect to a periodicity of the CSI-RS occasion, the UE is to be configured with a rather short periodicity of CSI-RS per CSI process as the eNB can not guarantee to succeed with LBT or occupy the channel for a longer duration corresponding to CSI-RS configuration periodicity. More specifically, there may be a relationship between the transmission burst used by the eNB and the CSI-RS configuration. If the periodicity of the CSI-RS can ensure that a single CSI-RS occasion is within a transmission burst from the eNB, the CSI-RS can then occur at any time occasion within the transmission burst. The currently defined CSI-RS periodicities are 5, 10, 20, 40 and 80 ms. Two of the considered transmission duration values in the LAA discussion so far are 4 and 10 ms. A CSI-RS with a periodicity of 5 ms can be supported with a transmission duration of 10 ms. This assumes that the CSI-RS can occur in any subframe within the transmission duration. It is to be noted that DwPTS does not support CSI-RS configurations so that, if the last DL subframe is corresponding to a DwPTS subframe, a CSI-RS configuration for such a subframe may be defined. For a transmission duration of 4 ms, a new and tighter periodicity of CSI-RS may be introduced. This is to ensure that there is a CSI-RS occasion available for the UE to measure on. The UEs not measuring on the CSI-RS would be configured with ZP-CSI-RS at those occasions and the PDSCH/EPDCCH mapping should function without any evident drawbacks.

The same approach can also be used for CSI-IM. Thus, according to such embodiment is proposed to introduce a CSI-RS periodicity (e.g. of 4 ms).

[0060] For aperiodic CSI reporting, when the UL grant is sent on the SCell that also triggers the aperiodic CSI report, it is easy for the eNB to ensure that CSI-RS is transmitted together with the UL grant. If, however, the UL grant indicates an aperiodic CSI-RS report for a different cell than the one the UL grant is sent on, it may not be possible to transmit NZP CSI-RS in the configured subframe for CSI-RS. One possible reason could be that after the eNB has occupied the channel due to the very short processing time available between the successful LBT on the carrier for which reporting is to be done and the transmission time of the UL grant on a different carrier. Another possibility is that the eNB has failed to access the channel due to unsuccessful LBT. In such cases the eNB would discard the corresponding aperiodic CSI report and it preferred that the UE does not affect other measurements with such noisy measurements. It may further be possible that the UE implicitly detects the presence of the CSI-RS for such situations.

[0061] A further aspect to be considered refers to a feasibility of interpolating CSI measurements across time. Within the current LTE design it is allowed for the UE to average CSI-RS and CSI-IM measurements across different CSI-RS and CSI-IM occasions. A further important aspect is to support in a good manner 64QAM and 256QAM in DL for PDSCH transmission. It may be advantageous to allow power back-off values from the maximum transmission power when the eNB schedules these higher modulation orders. Further, in a multi-carrier scenario it may be beneficial to vary the output power depending on the number of carriers that succeeded in LBT or is operated for the current TTI. If the UE would be able to measure CSI-RS in multiple subframes for which the allocated power was different from the eNB side, it may be very difficult from the eNB to utilise the CSI report as it will not be known at the eNB how the UE has constructed it. Hence, one solution is that the UE should not autonomously interpolate measurements between different NZP-CSI-RS and CSI-IM occasions, unless indicated by the eNB to do so. Since the eNB has complete knowledge of any variations in its DL transmit power, it may indicate to the UE which and how many CSI-RS occasions are suitable for measurement averaging. Alternatively, it can indicate to the UE whether higher-order modulation has been employed in the subframes where the UE expects the presence of CSI-RS and/or CSI-IM, after which the UE can either avoid measurement interpolation or take this information into account when constructing the CSI report. Thus, according to this embodiment, the UE is configured to perform CSI measurement only in the CSI reference resource. It is further configured to average CSI measurements only across different CSI reference resources, if explicitly indicated by the eNB.

[0062] Due to the LBT and limited channel occupancy

time and unpredictability of the channel condition in the unlicensed spectrum, it may be preferable to update the CSI reporting as soon as possible; it may further be preferable to minimize a delay between the trigger for aperiodic report and the presence of the CSI-RS (if available due to LBT). It would be possible for the UE to always measure and simply report based on the latest measurement. Alternatively, the UE is configured to only perform the measurement when it is supposed to report CSI for a specific cell. Thereto in an embodiment it is proposed that an aperiodic CSI report for an indicated LAA SCell triggered by an UL grant is based on the NZP-CSI-RS and CSI-IM in the same subframe as the UL grant subframe. Such embodiment may have the advantage to provide for significant power saving in the UE.

[0063] CSI feedback based on CRS: One important aspect with regard to CRS-based CSI feedback is how the UE detects the presence of the CRS. Given the design target of being able to perform a single shot DRS measurement based on CRS, it should therefore be possible for the UE to implicitly detect CRS for the purpose of CSI feedback. If it is found that this is not possible, the same mechanism as proposed for CSI-RS can be re-used.

[0064] Similar as for CSI-RS based CSI measurement the UE cannot assume the same power on the CRS between different subframes. Hence for CRS-based CSI feedback the UE should not interpolate CRS measurements between different subframes, unless explicitly indicated by the eNB.

[0065] Thereto in an embodiment the UE may be configurable to autonomously detect a presence of CRS for the purpose of CSI feedback.

[0066] Further, the UE may be configured such that CSI measurements are only performed in the CSI reference resource and are not to be averaged across different CSI reference resources, unless indicated or commanded by the eNB.

[0067] Considerations about a periodicity of CSI reporting (periodic versus aperiodic CSI reporting):

It may be assumed that the interference conditions are very variable on an LAA SCell over time. At the same time, considered scenarios may be low mobility scenarios. The underlying spatial properties and channel quality (if the interference conditions are excluded) is hence rather static over time. Moreover, it may be assumed that the LAA SCell will mainly be used to expand the data rate, i.e. if the eNB has large amount of DL data to schedule to the UEs the eNB will utilise the LAA SCells. Consequently, the LAA SCell will be used for a significant amount of time before the eNB has emptied its transmission buffer.

[0068] Due to this, it may be unlikely that the eNB will activate LAA SCells without scheduling data on them for a long period of time.

[0069] Periodic CSI reports are mainly used to get a good starting point for the link adaptation. When data is being continuously scheduled, the resolution of the pe-

riodic CSI report is not good enough for reliable scheduling of high data rate. In addition, the reliable transmission of reference signals for CSI in a periodic manner on the unlicensed band will not be possible due to the potential lack of access to the channel. Moreover, the interference conditions may be very varying over a short amount of time in the unlicensed spectrum as the amount of available spectrum maybe very large. Therefore, it is desirable to support a lightweight aperiodic CSI report, e.g. wideband-only aperiodic CSI report to maintain a reasonable aperiodic CSI payload.

Abbreviation Explanation

[0070]

CCA	Clear Channel Assessment
CRS	Cell-Specific Reference Signal
CQI	Channel Quality Indicator
CSI	Channel State Information
DCI	Downlink Control Information
DL	Downlink
DRS	Discovery Reference Signal
eNB	evolved NodeB, base station
UE	User Equipment
UL	Uplink
LAA	Licensed-Assisted Access
RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
RS	Reference Signal
RSSI	Received Signal Strength Indicator
SCell	Secondary Cell
LBT	Listen-before-talk
LTE-U	LTE in Unlicensed Spectrum
PDCCH	Physical Downlink Control Channel
PUSCH	Physical Uplink Shared Channel
RRM	Radio Resource Management
UCI	Uplink Control Information

List of Embodiments

[0071]

1. A method for determining a channel state performed at a user device, UE (12), of a radio access network, comprising:

- determining (S11, S21) one or a plurality of time intervals that may be used for channel measurements,
- performing (S12, S22) a plurality of signal power measurements associated each to one of the time intervals to be used for channel measurement, and
- generating a channel state information as a function of the plurality of the signal power meas-

urements.

2. The method of the preceding embodiment, comprising:

- providing (S12, S23) the channel state information to an access node (14) providing the UE (12) access to the radio access network.

3. The method of anyone of the preceding embodiments, wherein generating the channel state information as a function of the plurality of the signal power measurements comprises determining an average of the plurality of the signal power measurements.

4. The method of anyone of the preceding embodiments, wherein the UE (12) determines the one or the plurality of time intervals to be used for channel measurement by evaluating an estimated received signal power and a measured received power of the respective interval(s).

5. The method of the preceding embodiment, wherein the one or the plurality of time intervals to be used for channel measurement are determined by detecting that a power difference between an estimated received signal power and a measured received power associated of the respective intervals does not exceed a certain power threshold.

6. The method of anyone of the preceding embodiments, wherein the UE (12) performs a reference signal received power measurement, RSRP, on cell specific reference symbols, CRS, or on Channel State Information Reference Signals, CSI-RS in a current subframe, and compares the RSRP to an average value of a set measurements of previously received subframes.

7. The method of the preceding embodiment, wherein if a power difference exceeds a certain threshold, the measurement of the current subframe is excluded from averaging.

8. The method of anyone of the preceding embodiments, wherein the UE (12) determines the time intervals to be used for channel measurement by determining whether a power variation due to a varying number of licensed-assisted access secondary cells for which the UE (12) is scheduled to receive data, does not exceed a determined threshold.

9. The method of anyone of the preceding embodiments 1-7, wherein the UE (12) determines the time intervals to be used for channel measurement by determining whether a power variation due to a varying number of licensed-assisted access secondary

cells for which the UE (12) is scheduled to receive data or on which it has detected a presence of Cell-Specific Reference Signals, does not exceed a determined threshold.

10. The method of anyone of the preceding embodiments 1-3, wherein the UE (12) determines the one or the plurality of time intervals by evaluating a message received from the eNB (14).

11. The method of the preceding embodiment, wherein the message comprises an indication of time intervals that may be used for received signal power measurements.

12. The method of anyone of the preceding embodiments, wherein channel state information is being determined on a radio channel associated to an LTE unlicensed band being controlled by a Listen-Before-Talk, LBT, mechanism.

13. The method of anyone of the preceding embodiments, wherein the one or a plurality of time intervals are orthogonal frequency division multiplexing, OFDM, symbol intervals.

14. A method performed at a network node, eNB (14), of a radio access network adapted for communicating with a UE (12), comprising:

- generating (S11) an information comprising an indication a plurality of time intervals that may be used for received signal power measurements to be sent to the UE (12), and
- evaluating a measurement report received from the UE (12), wherein the report comprises received signal power measurements associated each to one of the time intervals.

15. The method of the preceding embodiment, wherein the eNB (14) utilizes a secondary carrier, wherein one or a plurality of subframes of this carrier cannot be used for transmitting data by the eNB, and wherein the message comprises identifiers of these sub carriers.

16. A user equipment, UE (12), adapted to perform any of the embodiments 1-13.

17. A user equipment, UE (12), comprising:

- a determination module (124) adapted for determining one or a plurality of time intervals that may be used for channel measurements, and
- a measurement module (125) adapted for performing a plurality of signal power measure-

ments associated each to one of the time intervals to be used for channel measurements, and adapted for generating a channel state information as a function of the plurality of the signal power measurements.

18. The UE (12) of the preceding embodiment, being configured to providing (S12, S23) the channel state information to an access node (14) providing the UE (12) access to the radio access network.

19. The UE (12) of anyone of the preceding embodiments 17-18, being configured to generating the channel state information as a function of the plurality of the signal power measurements comprises determining an average of the plurality of the signal power measurements.

20. The UE (12) of anyone of the preceding embodiments 17-19, being configured to determine the one or the plurality of time intervals to be used for channel measurement by evaluating an estimated received signal power and a measured received power.

21. The UE (12) of the preceding embodiment, being configured to determining the one or the plurality of time intervals to be used for channel measurement by detecting that a power difference between an estimated received signal power and a measured received power associated of the respective intervals does not exceed a certain power threshold.

22. The UE (12) of anyone of the preceding embodiments 17-21, configured to performing a reference signal received power measurement, RSRP, on cell specific reference symbols, CRS, or on Channel State Information Reference Signals, CSI-RS in a current subframe, and to comparing the RSRP to an average value of a set RSRP measurements of previously received subframes.

23. The UE (12) of the preceding embodiment, configured to excluding the current subframe from averaging, if a power difference exceeds a certain threshold.

24. The UE (12) of anyone of the preceding embodiments 17-23, configured to determining the time intervals to be used for channel measurement by determining whether a power variation due to a varying number of licensed-assisted access secondary cells for which the UE (12) is scheduled to receive data does not exceed a determined threshold.

25. The UE (12) of anyone of the preceding embodiments 17-24, configured to determining the time intervals to be used for channel measurement by determining whether a power variation due to a varying

number of licensed-assisted access secondary cells for which the UE (12) is scheduled to receive data or on which it has detected a presence of Cell-Specific Reference Signals does not exceed a determined threshold.

5

26. The UE (12) of anyone of the preceding embodiments 17-19, configured to determining the one or the plurality of time intervals by evaluating a message received from the eNB (14).

10

27. A network node, eNB (14), of a radio access network adapted to perform a method of any of the embodiments 13-14.

15

28. A network node, eNB (14) of a radio access network adapted for communicating with a UE over a communication channel, comprising:

- a time interval indication module (146) adapted to generate an information comprising an indication a plurality of time intervals that may be used for received signal power measurements, and
- a channel state evaluation module (147) adapted for an evaluation of a measurement report received from the UE (12), wherein the report comprises received signal power measurements signal power measurements associated each to one of the time intervals.

20

25

30

29. A computer program comprising instructions which, when executed on at least one processor of the UE (12), cause the at least one processor to carry out the method according to any one of embodiments 1-13.

35

30. A computer program comprising instructions which, when executed on at least one processor of the network node (14), cause the at least one processor to carry out the method according to any one of embodiments 14-15.

40

31. A user equipment, UE (12), for operation in a radio access network, comprising:

45

- at least one transceiver (1210);
- at least one processor (1201); and
- memory (1202) containing software executable by the at least one processor (1201), whereby the UE (12) is configured to:

50

55

- determining (S11, S21) one or a plurality of time intervals that may be used for channel measurements,

- performing (S12, S22) a plurality of signal power measurements associated each to one of the time intervals to be used for channel measurement, and

- generating a channel state information as a function of the plurality of the signal power measurements.

32. A network node, eNB (14), for operation in a radio access network, comprising:

- at least one transceiver (143);
- at least one processor (141); and
- memory (142) containing software executable by the at least one processor (141), whereby the eNB (14) is configured to:

- generating (S11) an information comprising an indication a plurality of time intervals that may be used for received signal power measurements to be sent to a UE (12), and

- evaluating a measurement report received from the UE (12), wherein the report comprises received signal power measurements associated each to one of the time intervals.

Claims

1. A method for determining a channel state performed at a user device, UE (12), of a radio access network, comprising:

- performing a reference signal received power measurement, RSRP, on cell specific reference symbols, CRS, or on Channel State Information Reference Signals, CSI-RS, in a current subframe, and comparing the RSRP to an average value of a set measurements of previously received subframes,
- determining (S11, S21) a plurality of subframes to be used for channel state measurements by excluding those subframes where the comparing yields a power difference exceeding a certain threshold, and
- generating the channel state information by determining an average of a plurality of RSRPs of the subframes to be used for channel state measurements.

2. The method of the preceding claim, comprising:

- providing (S12, S23) the channel state infor-

mation to an access node (14) providing the UE (12) access to the radio access network.

3. The method of anyone of the preceding claims, wherein channel state information is being determined on a radio channel associated to an LTE unlicensed band being controlled by a Listen-Before-Talk, LBT, mechanism. 5
4. The method of anyone of the preceding claims, wherein the one or a plurality of subframes are orthogonal frequency division multiplexing, OFDM, symbol intervals. 10
5. A user equipment, UE (12), adapted to perform any of the claims 1-4. 15
6. A computer program comprising instructions which, when executed on at least one processor of the UE (12), cause the at least one processor to carry out the method according to any one of claims 1-4. 20

25

30

35

40

45

50

55

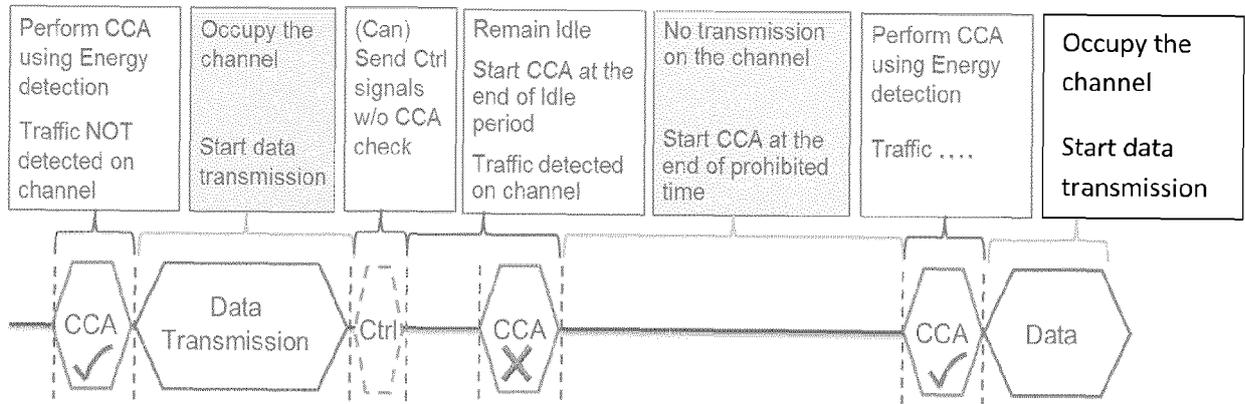


FIG. 1

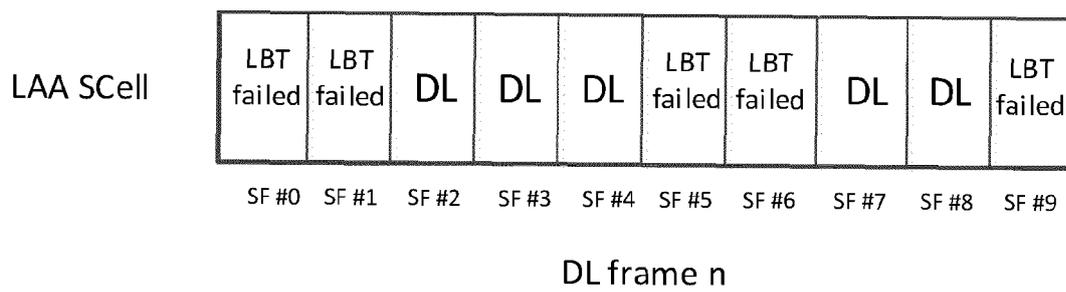


FIG. 2

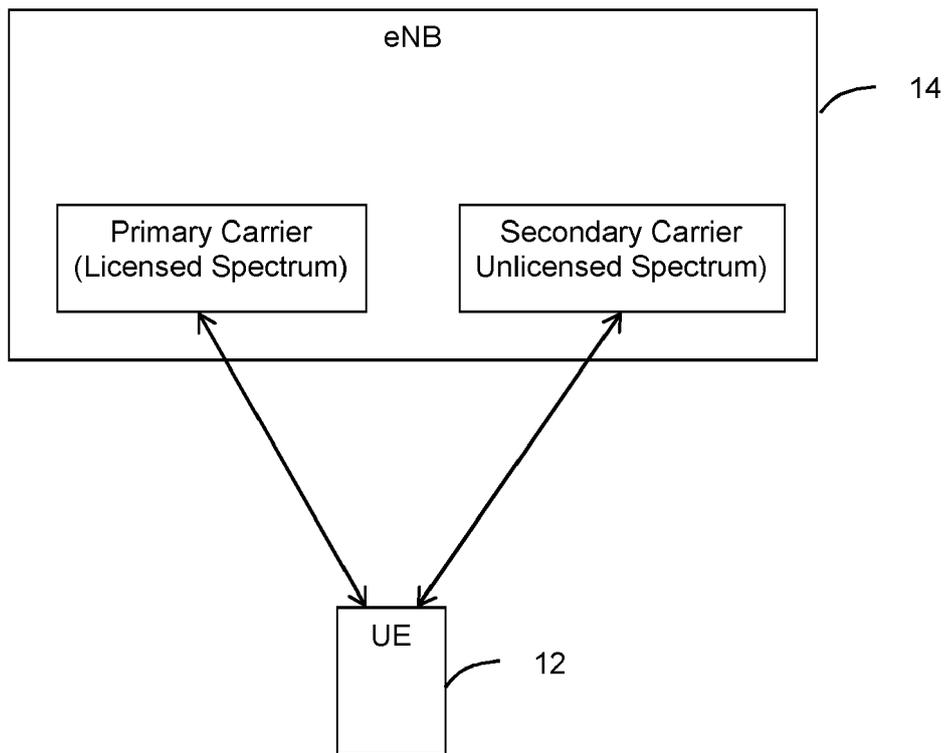


FIG. 3

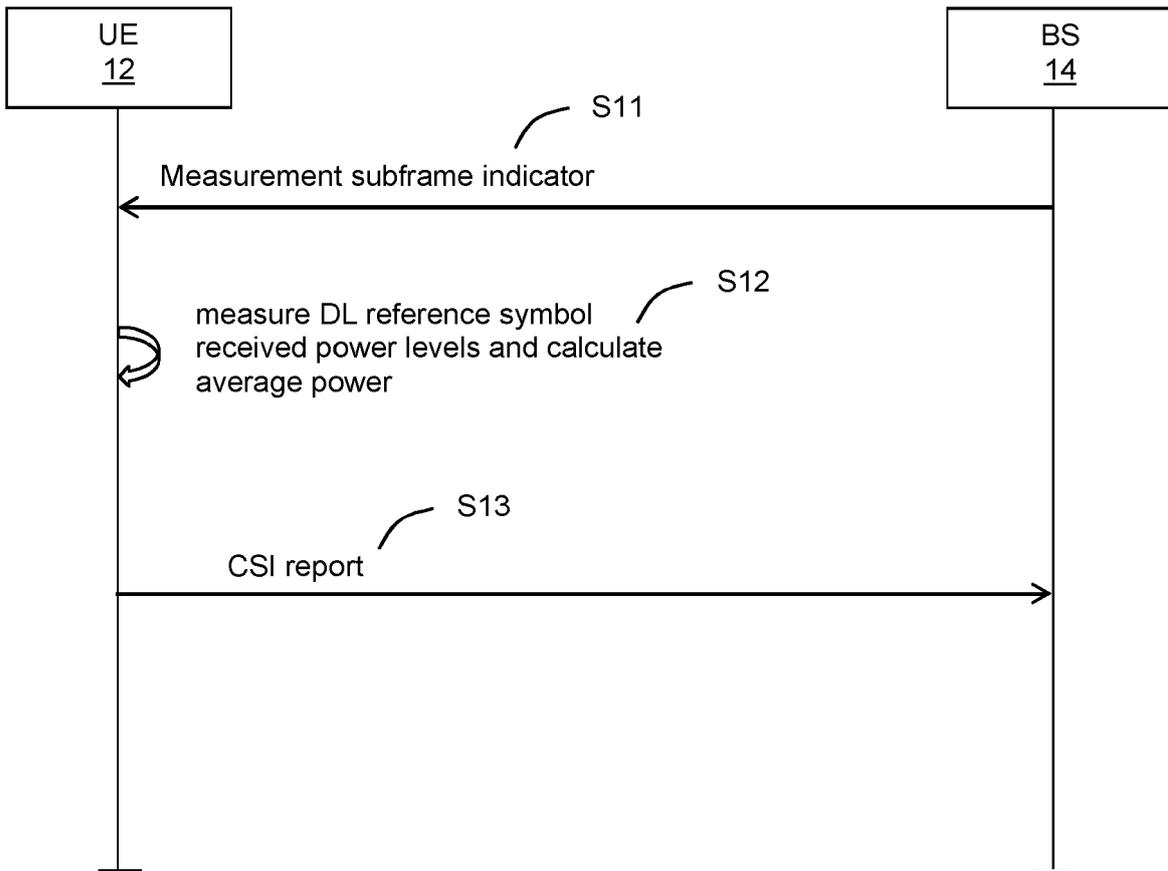


FIG. 4

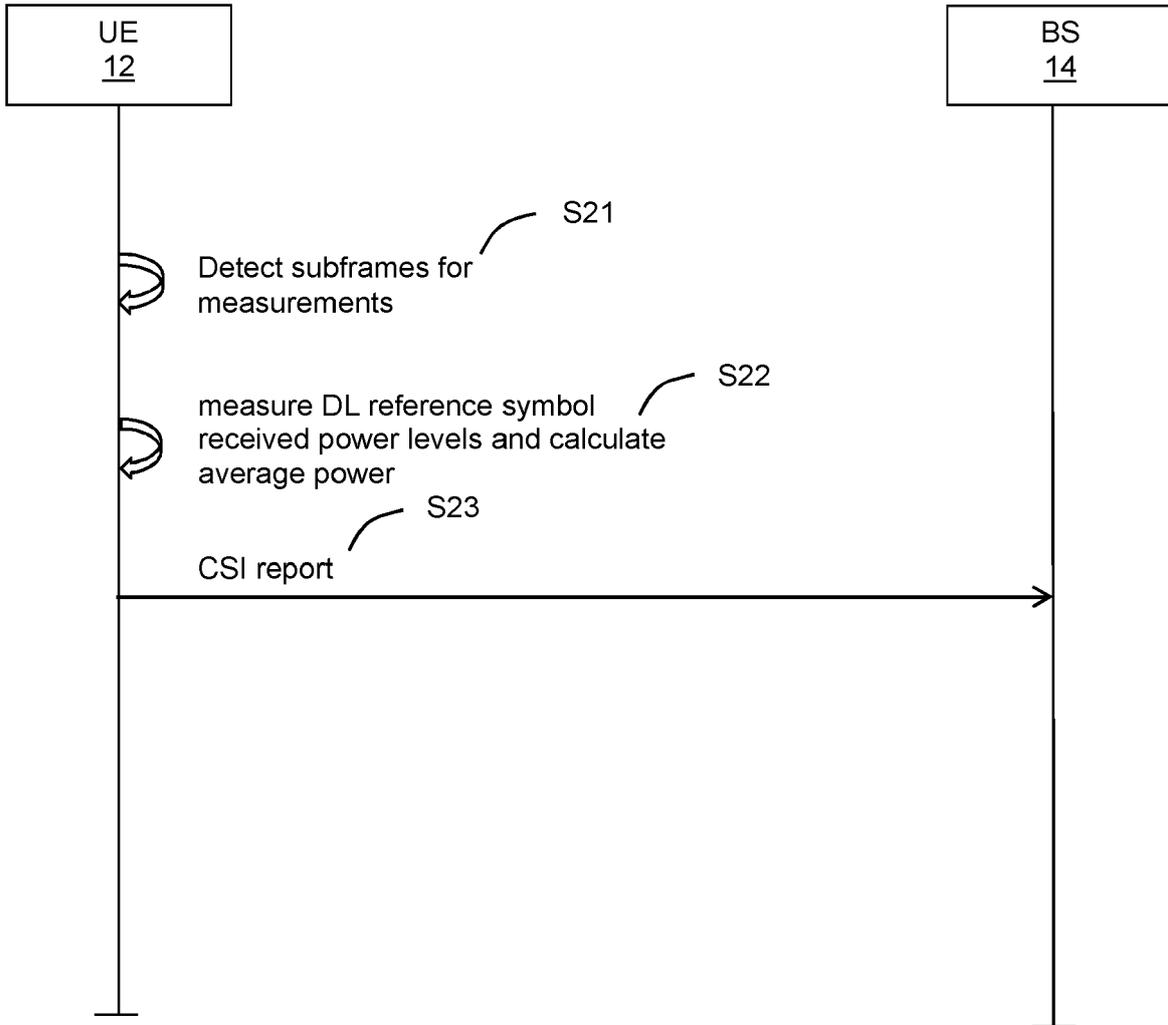


FIG. 5

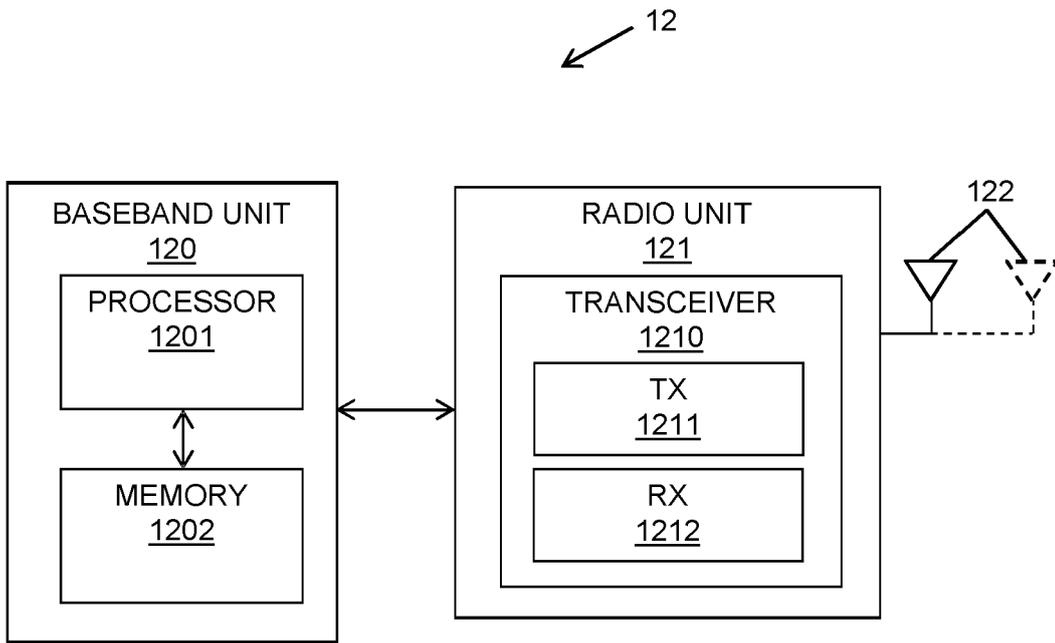


FIG. 6

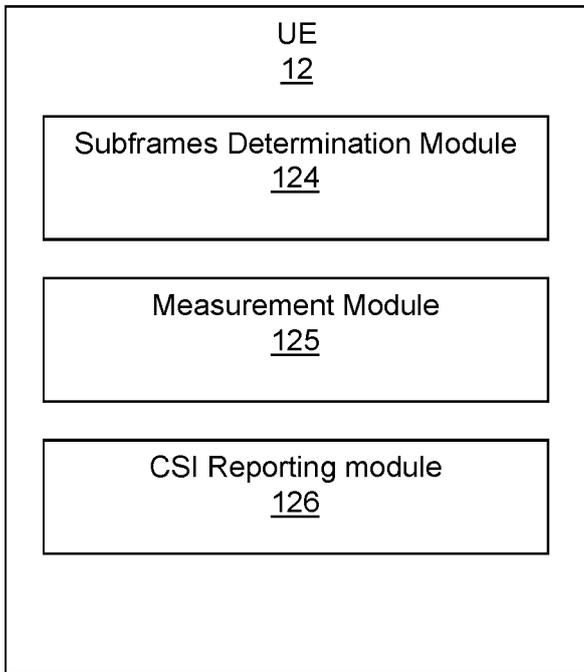


FIG. 7

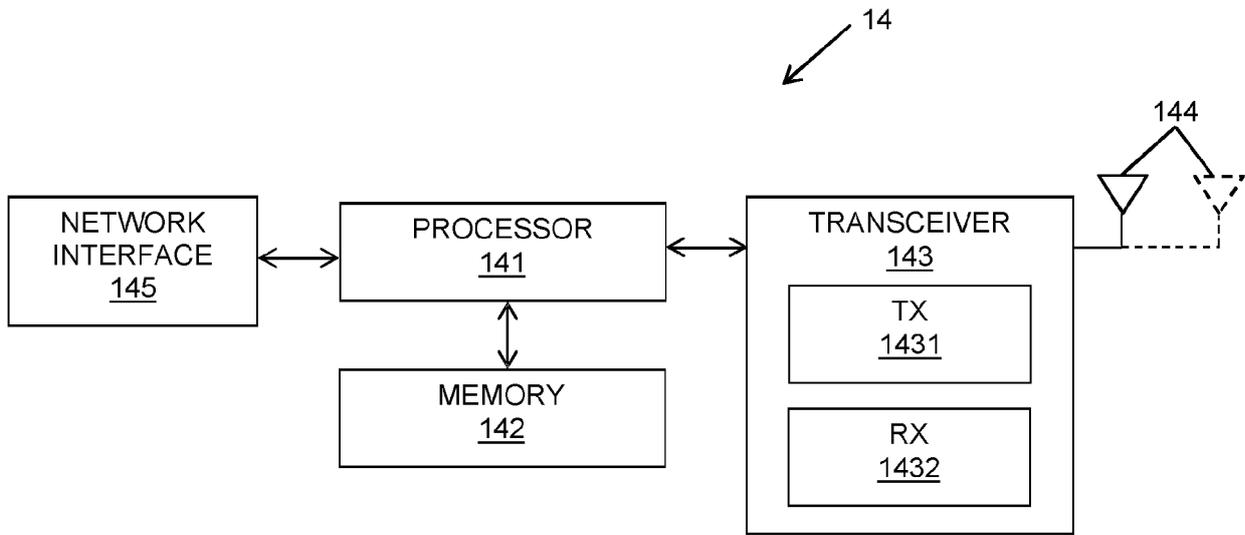


FIG. 8

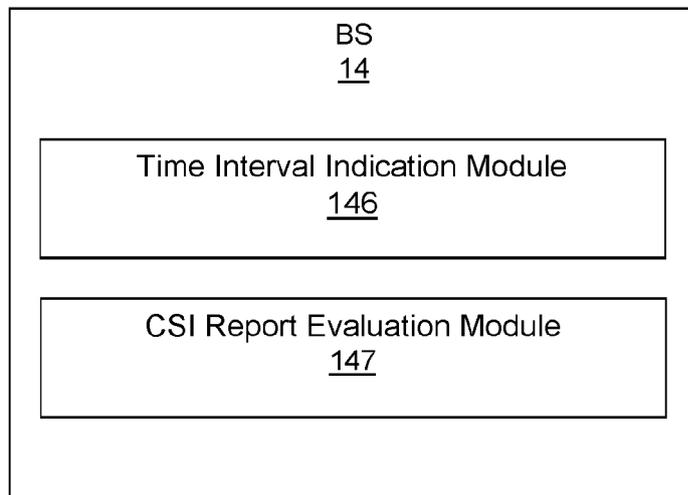


FIG. 9



EUROPEAN SEARCH REPORT

Application Number
EP 21 21 3906

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A, D	<p>US 2014/286280 A1 (SEO HANBYUL [KR] ET AL) 25 September 2014 (2014-09-25) * claims 1-18 * * figures 2,9 * * paragraph [0085] - paragraph [0086] * * paragraph [0093] - paragraph [0095] *</p> <p>-----</p>	1-6	<p>INV. H04B17/26 H04B17/309</p> <p>ADD. H04L5/00</p>
A, D	<p>ERICSSON: "Further discussion on support of CSI Measurement and Reporting for LAA", 3GPP DRAFT; R1-152011, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE</p> <p>/</p> <p>vol. RAN WG1, no. Belgrade, Serbia; 20150420 - 20150424 19 April 2015 (2015-04-19), XP050934860, Retrieved from the Internet: URL: http://www.3gpp.org/ftp/tsg_ran/WG1_RL1/TSGR1_80b/Docs/R1-152011.zip [retrieved on 2015-04-19] * the whole document *</p> <p>-----</p>	1-6	<p>TECHNICAL FIELDS SEARCHED (IPC)</p> <p>H04B H04L</p>
2		The present search report has been drawn up for all claims	
Place of search The Hague		Date of completion of the search 25 February 2022	Examiner Boetzel, Ulrich
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p>		<p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>.....</p> <p>& : member of the same patent family, corresponding document</p>	

EPO FORM 1503 03:82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 21 21 3906

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-02-2022

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014286280 A1	25-09-2014	KR 20140088146 A	09-07-2014
		US 2014286280 A1	25-09-2014
		WO 2013055126 A1	18-04-2013

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2014286280 A1 [0016]

Non-patent literature cited in the description

- **ERICSSON**. further discussion on support of CSI Measurement and reporting from LAA. 3GPP draft document R1-152011 [0017]