

(19)



(11)

EP 3 524 961 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:

14.08.2019 Bulletin 2019/33

(51) Int Cl.:

G01N 15/08 (2006.01)

(21) Application number: **17901567.2**

(86) International application number:

PCT/CN2017/084348

(22) Date of filing: **15.05.2017**

(87) International publication number:

WO 2018/171026 (27.09.2018 Gazette 2018/39)

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

Designated Validation States:

MA MD

• **WANG, Tianbao**

**Lanzhou
Gansu 730060 (CN)**

• **ZHAI, Xiangnan**

**Lanzhou
Gansu 730060 (CN)**

• **SHEN, Yanshun**

**Lanzhou
Gansu 730060 (CN)**

• **ZHANG, Guohai**

**Lanzhou
Gansu 730060 (CN)**

• **GUO, Yu**

**Lanzhou
Gansu 730060 (CN)**

• **FENG, Xiaopeng**

**Lanzhou
Gansu 730060 (CN)**

• **LIANG, Yuanyue**

**Lanzhou
Gansu 730060 (CN)**

• **XIE, Xiaoling**

**Lanzhou
Gansu 730060 (CN)**

(30) Priority: **23.03.2017 CN 201710177786**

(71) Applicant: **Tianhua Institute of Chemical**

**Machinery and
Automation Co., Ltd.
Lanzhou, Gansu 730060 (CN)**

(72) Inventors:

- **ZHAO, Xu
Lanzhou
Gansu 730060 (CN)**
- **ZHANG, Wanyao
Lanzhou
Gansu 730060 (CN)**
- **TAN, Yongpeng
Lanzhou
Gansu 730060 (CN)**

(74) Representative: **Høiberg P/S**

**Adelgade 12
1304 Copenhagen K (DK)**

(54) **TEST DEVICE AND TEST METHOD FOR ROTARY PRESSURIZED FILTER AND METHOD FOR DESIGNING FILTER**

(57) The present invention relates to a rotary pressure filter testing apparatus, a testing method and a design method thereof. The apparatus comprises a stabilizer tank; a buffer tank connected to the stabilizer tank; a filter frame disposed beneath the buffer tank, and connected to the buffer tank; a liquid receiving tank disposed beneath the filter frame; an electronic balance disposed at bottom of the liquid receiving tank; and a seconds counter. The testing method is to add a certain amount of calculated testing tank into the filter frame, then introduce a gas with a certain pressure into the stabilizer tank, fill the filter frame through the buffer tank, then open a

valve at bottom of the filter frame, measure a mass of discharged mother liquid in the filter frame, measure time of the filtering process, and sample and analyze the filtered filter cake and the mother liquid according to actual needs; subsequently, perform cleaning and drying processes sequentially according to such method. The present invention largely reduces the testing costs, and meanwhile, actual working conditions can be simulated more accurately, thereby obtaining accurate and reliable design data.

EP 3 524 961 A1

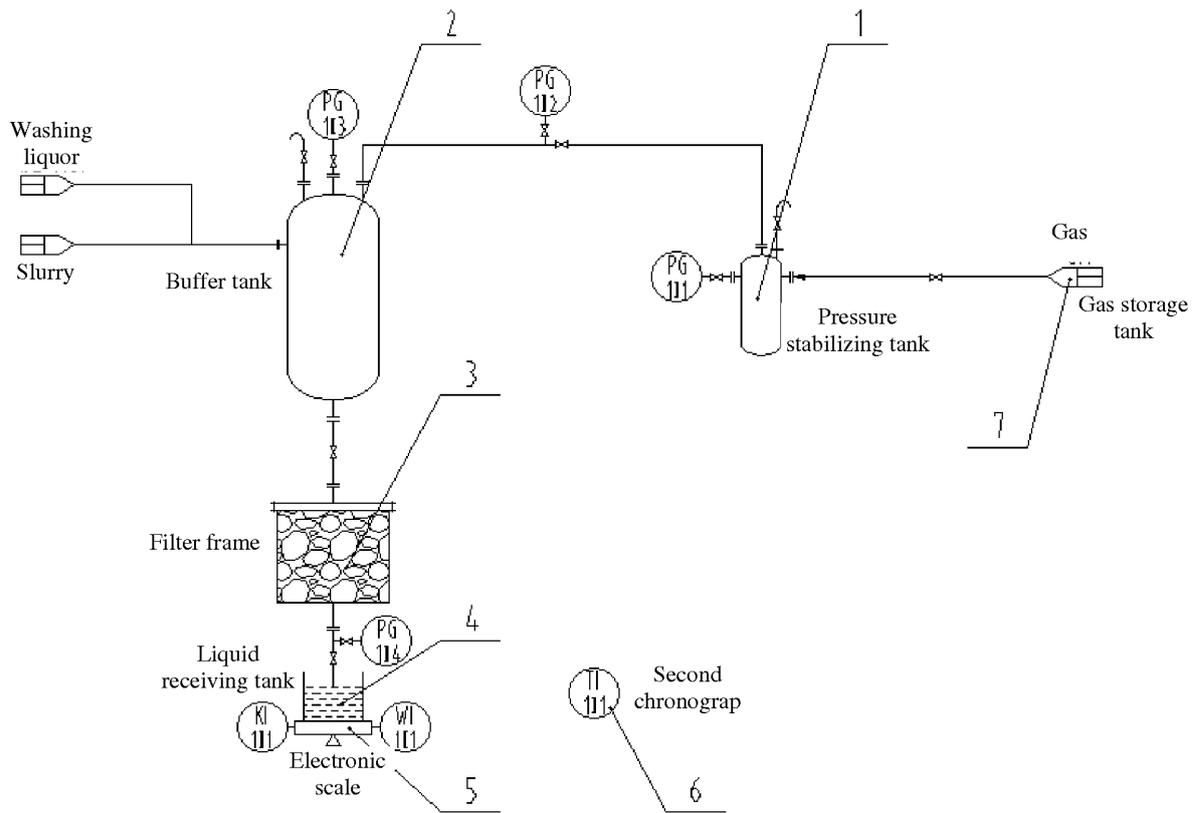


Figure 1

DescriptionFIELD OF THE INVENTION

[0001] The present invention relates to a field of a rotary pressure filter used in production and preparation of PTA (pure terephthalic acid), in particular to a testing device, a testing method and a designing method for the rotary pressure filter.

RELATED ART

[0002] A rotary pressure filter is widely used in many applications, especially highly demanded in the PTA industry. Differences in material characteristics significantly affect design and module selection of a pressure filter. Conventionally, in order to test material characteristics during design and module selection of the rotary pressure filter, a small-sized testing device for the rotary pressure filter is required. The conventional testing device is designed and manufactured according to a large-sized industrial rotary pressure filter exactly and is merely scaled down in volume. The conventional testing device includes all the components of the large-sized industrial rotary pressure filter, such as a driving system. Accordingly, the testing device has a complex structure and a high manufacturing cost. With such a conventional testing device, the testing procedure is much complex and takes a high cost. In addition, due to special characteristics of some materials, washing and drying processes may have to be performed for many times. However, since the small-sized testing device for the rotary pressure filter is small in volume, it is impossible to provide enough function zones in structure. Thus, it is impossible to perform the washing and drying processes many times for simulating requirements of the materials exactly, or to obtain accurate design parameters for special materials.

SUMMARY OF THE INVENTION

[0003] One object of the present invention is to provide a testing device, a testing method and a designing method for a rotary pressure filter, to solve the drawbacks of the small-sized rotary pressure filter testing device in the prior art which is incapable of obtaining accurate test parameters of slurry.

[0004] In order to achieve the above object, the present invention provides a testing device for a rotary pressure filter, comprising:

a pressure stabilizing tank;
a buffer tank connected to the pressure stabilizing tank through a first pipe;
a filtering frame disposed under the buffer tank, and connected to the buffer tank through a second pipe;
a liquid receiving tank disposed under the filtering frame, a valve being disposed under the liquid re-

ceiving tank; and
an electronic scale disposed at the bottom of the liquid receiving tank.

[0005] In order to achieve the above object, the present invention further provides a testing method for a rotary pressure filter, comprising:

a first step of opening a feeding inlet of a buffer tank, feeding slurry into the buffer tank, and conveying the slurry to a filtering frame;

a second step of opening a gas valve at a gas inlet of the buffer tank, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank through a pressure stabilizing tank, opening a valve at the bottom of the filtering frame to perform filtering, measuring filtering time, measuring a mass of expelled filtrate at the same time, closing the valve at the bottom of the filtering frame and the gas valve upon the filtrate in the filtering frame is expelled to an extent that the level of the filtrate is flush with an upper surface of a filter cake, draining the gas out of the filtering frame, and then sampling the filtrate to analyze content of components and impurities contained in the filtrate;

a third step of inputting washing liquor into the filtering frame through the buffer tank to wash the slurry, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank through the pressure stabilizing tank and then into the filtering frame through the buffer tank during the washing process, opening the valve at the bottom of the filtering frame, measuring a mass of expelled washing filtrate via an electronic scale until the mass of the expelled washing filtrate is equal to the mass of the input washing liquor, measuring the washing time, and sampling the washing filtrate to analyze content of components and impurities contained in the washing filtrate;

a fourth step of introducing a dry gas at a pressure of 0.01-2.0Mpa into the pressure stabilizing tank and then into the filtering frame through the buffer tank, then opening the valve at the bottom of the filtering frame, measuring a mass of expelled liquor via the electronic scale, measuring the drying time, and then sampling the dried filtrate to analyze content of components and impurities contained in the dried filtrate; and

a fifth step of opening the filtering frame, measuring the thickness of the filter cake, and then sampling the filter cake to analyze moisture content of the filter cake as well as content of components and impurities contained in the filter cake

[0006] In order to achieve the above object, the present invention further provides a a rotary pressure filter, comprising:

a first step of opening a feeding inlet of a buffer tank, feeding slurry into the buffer tank, and conveying the

slurry to a filtering frame;
 a second step of opening a gas valve at a gas inlet of the buffer tank, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank through a pressure stabilizing tank, opening a valve at the bottom of the filtering frame to perform filtering, measuring filtering time, measuring a mass of expelled filtrate at the same time, closing the valve at the bottom of the filtering frame and the gas valve upon the filtrate in the filtering frame is expelled to an extent that the level of the filtrate is flush with an upper surface of a filter cake, draining the gas out of the filtering frame, and then sampling the filtrate to analyze content of components and impurities contained in the filtrate;
 a third step of inputting washing liquor into the filtering frame through the buffer tank to wash the slurry, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank through the pressure stabilizing tank and then into the filtering frame through the buffer tank during the washing process, opening the valve at the bottom of the filtering frame, measuring a mass of expelled washing filtrate via an electronic scale until the mass of the expelled washing filtrate is equal to the mass of the input washing liquor, measuring the washing time, and sampling the washing filtrate to analyze content of components and impurities contained in the washing filtrate;
 a fourth step of introducing a dry gas at a pressure of 0.01-2.0Mpa into the pressure stabilizing tank and then into the filtering frame through the buffer tank, then opening the valve at the bottom of the filtering frame, measuring a mass of expelled liquor via the electronic scale, measuring the drying time, and then sampling the dried filtrate to analyze content of components and impurities contained in the dried filtrate;
 and
 a fifth step of opening the filtering frame, measuring the thickness of the filter cake, and then sampling the filter cake to analyze moisture content of the filter cake as well as content of components and impurities contained in the filter cake.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Fig. 1 is a structural diagram of a testing device for a rotary pressure filter according to the present invention.

Reference Signs List:

[0008]

- 1 pressure stabilizing tank
- 2 buffer tank
- 3 filtering frame
- 4 liquid receiving tank
- 5 electronic scale
- 6 chronograph

7 gas storage tank

DETAILED DESCRIPTION OF THE INVENTION

[0009] Fig. 1 is a flow diagram of a testing device for a rotary pressure filter according to the present invention. As shown in Fig. 1, the testing device for the rotary pressure filter according to the present invention may comprise:

- 10 a pressure stabilizing tank 1;
- a buffer tank 2 connected to the pressure stabilizing tank 1 through a first pipe;
- 15 a filtering frame 3 disposed under the buffer tank 2 and connected to the buffer tank 2 through a second pipe, a valve being disposed under the filter frame 3;
- a liquid receiving tank 4 disposed under the filtering frame 3; and
- 20 an electronic scale 5 disposed at the bottom of the liquid receiving tank 4.

[0010] Further, the testing device for the rotary pressure filter according to the present invention may comprise a chronograph 6 for measuring the time for performing filtering, washing and drying processes.

[0011] Further, the pressure stabilizing tank 1 is connected to a gas storage tank 7 in which nitrogen gas, compressed air or other inert gases are stored. The gas storage tank 7 may be a gas source with a fixed pressure.

[0012] Further, the present invention provides a testing method for the rotary pressure filter, comprising:

- 35 Step 1: opening a feeding inlet of the buffer tank 2, feeding slurry into the buffer tank 2, and conveying the slurry to the filtering frame 3;
- Step 2: opening a gas valve at a gas inlet of the buffer tank 2, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank 2 through the pressure stabilizing tank 1, opening the valve at the bottom of the filtering frame 3 to perform filtering, measuring filtering time t , measuring a mass m of expelled filtrate at the same time, closing the valve at the bottom of the filtering frame 3 and the gas valve upon the filtrate in the filtering frame 3 is expelled to an extent that the level of the filtrate is flush with an upper surface of a filter cake, draining the gas out of the filtering frame 3, and then sampling the filtrate to analyze content of components and impurities contained in the filtrate;
- 50 Step 3: inputting washing liquor into the filtering frame 3 through the buffer tank 2 to wash a filter case, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank 2 through the pressure stabilizing tank 1 and then into the filtering frame 3 during the washing process, opening the valve at the bottom of the filtering frame 3, measuring a mass of expelled washing filtrate via the electronic scale 5 until the mass of the expelled washing filtrate is equal to the

mass of the input washing liquor, measuring the washing time, and then sampling the washing filtrate to analyze content of components and impurities contained in the washing filtrate;

Step 4: introducing a dry gas at a pressure of 0.01-2.0Mpa into the buffer tank 2 through the pressure stabilizing tank 1 and then into the filtering frame 3, opening the valve at the bottom of the filtering frame 3, measuring a mass of expelled liquid via the electronic scale 5, measuring the drying time, and then sampling the dried filtrate to analyze content of components and impurities contained in the dried filtrate; and

Step 5: opening the filtering frame 3, measuring the thickness of the filter cake, and then sampling the filter cake to analyze moisture content of the filter cake as well as content of components and impurities contained in the filter cake.

[0013] Here, the slurry may be CTA slurry, PTA slurry, catalyst slurry, pulverized coal slurry or any other suspensions in which solid and liquid may be freely separated by sediment. The gas may be nitrogen gas, compressed air or an inert gas.

[0014] Here, as necessary, the filtering process in Step 2 may be performed once or many times. As necessary, the washing process in Step 3 may be performed once or many times. As necessary, the drying process in Step 4 may be performed once or many times. Further, the order of the filtering process in Step 2, the washing process in Step 3, and the drying process in Step 4 may be exchanged depending on the specific process. Preferably, the washing process in Step 3 may be performed for many times.

[0015] The filtering frame 3 may have a circle shape or a rectangular shape. The filtering frame 3 may be filled with a filter holder wrapped with filter cloth, or other filter media. The pressure stabilizing tank 1 may be a pressure reducing valve or other pressure stabilizing devices. Alternately, the buffer tank 2 may be other feeding buffer devices. Alternately, the electronic scale 5 may be other weight measuring devices. Alternately, the chronograph 6 may be other timing devices.

[0016] Further, the present invention provides a designing method for the rotary pressure filter, comprising:

Step 1: opening a feeding inlet of a buffer tank, feeding slurry into the buffer tank, and conveying the slurry to a filtering frame;

Step 2: opening a gas valve at a gas inlet of the buffer tank 2, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank 2 through the pressure stabilizing tank 1, opening the valve at the bottom of the filtering frame 3 to perform filtering, measuring filtering time t, measuring a mass m of expelled filtrate at the same time, closing the valve at the bottom of the filtering frame 3 and the gas valve upon the filtrate in the filtering frame 3 is expelled to an

extent that the level of the filtrate is flush with an upper surface of a filter cake, draining the gas out of the filtering frame 3, and then sampling the filtrate to analyze content of components and impurities contained in the filtrate;

Step 3: inputting washing liquor into the filtering frame 3 through the buffer tank 2 to wash a filter case, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank 2 through the pressure stabilizing tank 1 and then into the filtering frame 3 during the washing process, opening the valve at the bottom of the filtering frame 3, measuring a mass of expelled washing filtrate via the electronic scale 5 until the mass of the expelled washing filtrate is equal to the mass of the input washing liquor, measuring the washing time, and then sampling the washing filtrate to analyze content of components and impurities contained in the washing filtrate;

Step 4: introducing a dry gas at a pressure of 0.01-2.0Mpa into the buffer tank 2 through the pressure stabilizing tank 1 and then into the filtering frame 3, opening the valve at the bottom of the filtering frame 3, measuring a mass of expelled liquid via the electronic scale 5, measuring the drying time, and then sampling the dried filtrate to analyze content of components and impurities contained in the dried filtrate; and

Step 5: opening the filtering frame 3, measuring the thickness of the filter cake, and then sampling the filter cake to analyze moisture content of the filter cake as well as content of components and impurities contained in the filter cake.

[Examples]

[0017]

1) A feeding inlet of the buffer tank 2 was opened while other valves were closed. Then, CTA slurry of 11.26 kg was fed into the buffer tank 2 and then conveyed to the filtering frame 3.

2) A gas valve at a gas inlet of the buffer tank 2 was open so that nitrogen gas at a preset pressure of 0.5Mpa may be introduced into the buffer tank 2 through the pressure stabilizing tank 1 and then into the filtering frame 3. A valve at the bottom of the filtering frame 3 was opened for performing filtering. The time t of the filtering process was measured as 33.6s. The mass m of the expelled filtrate was measured as 4.63kg. Upon the filtrate in the filtering frame 3 was expelled to an extent that the level of the filtrate was flush with an upper surface of a filter cake, the valve at the bottom of the filtering frame 3 and the gas valve for nitrogen gas were closed. Then, the nitrogen gas was drained out of the filtering frame 3. Then, the filtrate was sampled to analyze content of acetic acid as well as content of the impurities such as cobalt and manganese contained in the filtrate.

3) A washing liquor of 1.87kg which was previously prepared by mixing acetic acid with water at acetic acid concentrations of 45%, 23%, 11% and 0%, respectively, was inputted into the filtering frame 3 through the buffer tank 2, to wash the filter cake. During the washing process, nitrogen gas at a preset pressure of 0.5Mpa may be introduced into the buffer tank 2 through the pressure stabilizing tank 1 and then into the filtering frame 3. A valve at the bottom of the filtering frame 3 was opened. During the washing process, the mass of the expelled washing liquor was measured via the electronic scale 5 until the mass of the expelled washing filtrate is equal to the mass of the input washing liquor. The time of the washing process was measured. The washing process was performed for 4 times in total. The mass of the expelled filtrate was identical in each of the four washing processes, i.e., 1.87kg. The washing time was 7.5s, 6.3s, 5.4s and 4.8s, respectively. The washing filtrate expelled in each of the four washing processes was sampled to analyze content of acetic acid as well as content of the impurities such as cobalt and manganese contained in the washing filtrate.

4) A dry gas at a preset pressure of 0.5Mpa was introduced into the buffer tank 2 through the pressure stabilizing tank 1 and then into the filtering frame 3. Then, the valve at the bottom of the filtering frame 3 was opened. The mass of the expelled liquid was measured as 2.1kg via the electronic scale 5. The time of the drying process was measured as 11s. The dried filtrate was sampled to analyze content of acetic acid as well as content of the impurities such as cobalt and manganese contained in the dried filtrate.

5) The filtering frame 3 was opened. The thickness of the filter cake was measured as 150mm. Further, the filter cake was sampled to analyze the moisture content of the filter cake as 15%, and also to analyze content of acetic acid as well as content of the impurities such as cobalt and manganese contained in the filter cake.

[0018] As compared with the prior art, the present invention has the following advantages.

1) The present invention has a short testing process and a simple structure by employing a simple testing method. The core component in the testing device for the rotary pressure filter according to the present invention is the filtering frame which may be a small part on a drum of the rotary pressure filter. Therefore, a simple structure and low manufacturing cost may be obtained. On the other hand, the core component in a conventional testing device is the testing device for the rotary pressure filter which is designed and manufactured according to a large-sized industrial rotary pressure filter exactly, is merely scaled down

in volume and includes all of the components of the large-sized industrial rotary pressure filter, such as a driving system, resulting in a complex structure and high manufacturing cost.

2) The present invention is capable of completely simulating all the processes actually performed by the equipments according to the material characteristics, such as a filtering process, different times of washing processes, and different times of drying processes, and enabling to obtain reliable design parameters such as filtering capability, washing effects, and drying effects. When the testing device for the rotary pressure filter according to the present invention is used for performing a test, all the processes are independent and intermittent, and do not influence each other. Further, the testing results from all the processes may be analyzed and evaluated independently. Therefore, the obtained results may be accurate and reliable. On the other hand, a conventional testing device for the rotary pressure filter has certain limitations during testing. That is, the conventional testing device runs continuously like an industrial machine such that the testing effects of each process could not be obtained directly. Further, all the processes are performed sequentially and associated with each other. Therefore, the processes may influence each other, making it impossible to obtain accurate and reliable results.

3) The present invention may simplify a complex testing process. That is, testing device for the rotary pressure filter according to the present invention may connect a series of simple units sequentially so as to simulate one or several working processes performed in a complex device completely and really, and may obtain accurate and reliable results.

4) The present invention may well meet the requirements in the industrial design, and may be applied to test the rotary pressure filters for PTA, CTA or other materials.

5) The present invention is capable of testing the parameters of materials, i.e., measuring the analysis parameters of the filtrate and the filter cake by the steps of filtering, washing and drying, such as content of acetic acid and content of the impurities such as cobalt and manganese contained in CTA materials. Moreover, the testing of the material parameters according to the present invention may be used for the module selection and design in the manufacturing process of rotary pressure filters.

[0019] Of course, the invention may have other embodiments. Those skilled in the art can make various corresponding changes and modifications according to the invention without departing from the spirit and essence of the invention, but such changes and modifications shall be incorporated in the protection scope of the appended claims of the invention.

Claims

1. A testing device for a rotary pressure filter, comprising:
- a pressure stabilizing tank;
 - a buffer tank connected to the pressure stabilizing tank through a first pipe;
 - a filtering frame disposed under the buffer tank, and connected to the buffer tank through a second pipe;
 - a liquid receiving tank disposed under the filtering frame, a valve being disposed under the liquid receiving tank; and
 - an electronic scale disposed at the bottom of the liquid receiving tank.
2. The testing device for the rotary pressure filter according to claim 1, further comprising a chronograph for time measurement.
3. The testing device for the rotary pressure filter according to claim 1, wherein the pressure stabilizing tank is connected to a gas storage tank.
4. A testing method for a rotary pressure filter, comprising:
- a first step of opening a feeding inlet of a buffer tank, feeding slurry into the buffer tank, and conveying the slurry to a filtering frame;
 - a second step of opening a gas valve at a gas inlet of the buffer tank, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank through a pressure stabilizing tank, opening a valve at the bottom of the filtering frame to perform filtering, measuring filtering time, measuring a mass of expelled filtrate at the same time, closing the valve at the bottom of the filtering frame and the gas valve upon the filtrate in the filtering frame is expelled to an extent that the level of the filtrate is flush with an upper surface of a filter cake, draining the gas out of the filtering frame, and then sampling the filtrate to analyze content of components and impurities contained in the filtrate;
 - a third step of inputting washing liquor into the filtering frame through the buffer tank to wash the slurry, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank through the pressure stabilizing tank and then into the filtering frame through the buffer tank during the washing process, opening the valve at the bottom of the filtering frame, measuring a mass of expelled washing filtrate via an electronic scale until the mass of the expelled washing filtrate is equal to the mass of the input washing liquor, measuring the washing time, and sampling the washing filtrate to analyze content of components and impurities contained in the washing filtrate;
 - a fourth step of introducing a dry gas at a pressure of 0.01-2.0Mpa into the pressure stabilizing tank and then into the filtering frame through the buffer tank, then opening the valve at the bottom of the filtering frame, measuring a mass of expelled liquor via the electronic scale, measuring the drying time, and then sampling the dried filtrate to analyze content of components and impurities contained in the dried filtrate; and
 - a fifth step of opening the filtering frame, measuring the thickness of the filter cake, and then sampling the filter cake to analyze moisture content of the filter cake as well as content of components and impurities contained in the filter cake.
5. The testing method for the rotary pressure filter according to claim 4, wherein the slurry is a suspension in which solid and liquid may be freely separated by sediment.
6. The testing method for the rotary pressure filter according to claim 4, wherein the slurry is CTA slurry, PTA slurry, catalyst slurry or pulverized coal slurry.
7. The testing method for the rotary pressure filter according to claim 4, wherein the gas is nitrogen gas, compressed air or an inert gas.
8. The testing method for the rotary pressure filter according to claim 4, wherein the filtering process in the second step is performed once or many times; the washing process in the third step is performed once or many times; the drying process in the fourth step is performed once or many times, and wherein, the order of the filtering process in the second step, the washing process in the third step, and the drying process in the fourth step can be exchanged.
9. The testing method for the rotary pressure filter according to claim 4, wherein the pressure stabilizing tank is a pressure reducing valve.
10. A designing method for a rotary pressure filter, comprising:
- a first step of opening a feeding inlet of a buffer tank, feeding slurry into the buffer tank, and conveying the slurry to a filtering frame;
 - a second step of opening a gas valve at a gas inlet of the buffer tank, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank through a pressure stabilizing tank, opening a

valve at the bottom of the filtering frame to perform filtering, measuring filtering time, measuring a mass of expelled filtrate at the same time, closing the valve at the bottom of the filtering frame and the gas valve upon the filtrate in the filtering frame is expelled to an extent that the level of the filtrate is flush with an upper surface of a filter cake, draining the gas out of the filtering frame, and then sampling the filtrate to analyze content of components and impurities contained in the filtrate;

a third step of inputting washing liquor into the filtering frame through the buffer tank to wash the slurry, introducing a gas at a pressure of 0.01-2.0Mpa into the buffer tank through the pressure stabilizing tank and then into the filtering frame through the buffer tank during the washing process, opening the valve at the bottom of the filtering frame, measuring a mass of expelled washing filtrate via an electronic scale until the mass of the expelled washing filtrate is equal to the mass of the input washing liquor, measuring the washing time, and sampling the washing filtrate to analyze content of components and impurities contained in the washing filtrate;

a fourth step of introducing a dry gas at a pressure of 0.01-2.0Mpa into the pressure stabilizing tank and then into the filtering frame through the buffer tank, then opening the valve at the bottom of the filtering frame, measuring a mass of expelled liquor via the electronic scale, measuring the drying time, and then sampling the dried filtrate to analyze content of components and impurities contained in the dried filtrate; and

a fifth step of opening the filtering frame, measuring the thickness of the filter cake, and then sampling the filter cake to analyze moisture content of the filter cake as well as content of components and impurities contained in the filter cake.

45

50

55

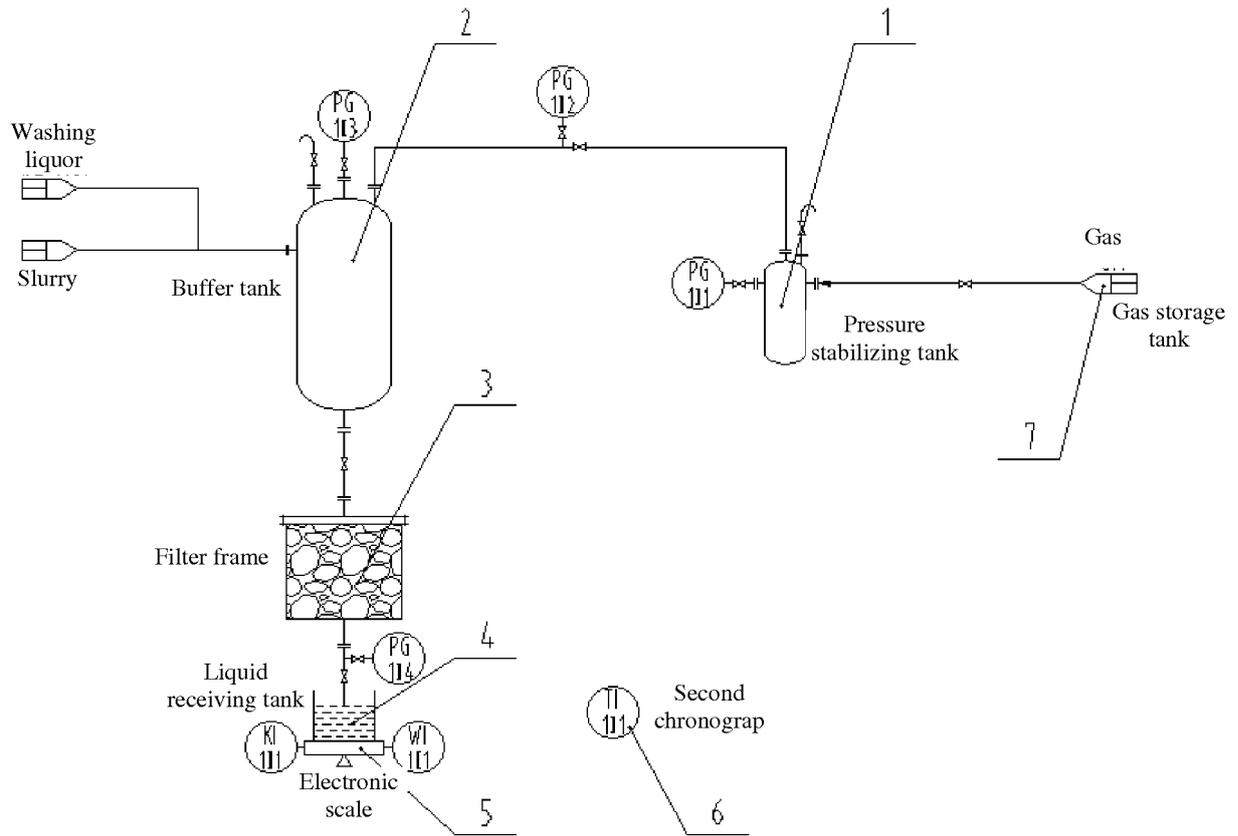


Figure 1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2017/084348

| | | |
|---|--|-----------------------|
| A. CLASSIFICATION OF SUBJECT MATTER | | |
| G01N 15/08 (2006.01) i | | |
| According to International Patent Classification (IPC) or to both national classification and IPC | | |
| B. FIELDS SEARCHED | | |
| Minimum documentation searched (classification system followed by classification symbols) | | |
| G01N | | |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched | | |
| Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) | | |
| WPI, CPRSABS, CNKI, CNTXT: 过滤, 压滤, 缓冲, 称, 测试, 实验, 试验, 检测; cn104884151, cn102861472, cn1596145, cn102614692 | | |
| C. DOCUMENTS CONSIDERED TO BE RELEVANT | | |
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| X | 李发军, “旋转压滤机系列压力下各级间过滤速率的试验研究”, 中国优秀硕士学位论文全文数据库, 工程科技 I 辑, no. S2, 15 December 2011 (15.12.2011), ISSN: 1674-0246, pages 21-22, (LI, Fajun, “The Experimental Research on the Multi-Stage Filtration Flow under Pressure Variation in the Series of Dynamic Rotary Vane Press Filter”, Science-Engineering (A), China Master’s Theses Full-Text Database) | 1-3 |
| A | 李发军, “旋转压滤机系列压力下各级间过滤速率的试验研究”, 中国优秀硕士学位论文全文数据库, 工程科技 I 辑, no. S2, 15 December 2011 (15.12.2011), ISSN: 1674-0246, pages 21-22, (LI, Fajun, “The Experimental Research on the Multi-Stage Filtration Flow under Pressure Variation in the Series of Dynamic Rotary Vane Press Filter”, Science-Engineering (A), China Master’s Theses Full-Text Database) | 4-10 |
| A | CN 1596145 A (TETRA LAVAL HOLDINGS & FINANCE S.A.), 16 March 2005 (16.03.2005), entire document | 1-10 |
| A | CN 102614692 A (BLACK WHIRLWIND ENGINEERING MACHINERY DEVELOPMENT CO., LTD.), 01 August 2012 (01.08.2012), entire document | 1-10 |
| A | CN 102861472 A (WENZHOU UNIVERSITY), 09 January 2013 (09.01.2013), entire document | 1-10 |
| <input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex. | | |
| * Special categories of cited documents: | “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention | |
| “A” document defining the general state of the art which is not considered to be of particular relevance | “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone | |
| “E” earlier application or patent but published on or after the international filing date | “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art | |
| “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | “&” document member of the same patent family | |
| “O” document referring to an oral disclosure, use, exhibition or other means | | |
| “P” document published prior to the international filing date but later than the priority date claimed | | |
| Date of the actual completion of the international search | Date of mailing of the international search report | |
| 05 December 2017 | 25 December 2017 | |
| Name and mailing address of the ISA State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088, China Facsimile No. (86-10) 62019451 | Authorized officer SHI, Xiaoben Telephone No. (86-10) 62084048 | |

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2017/084348

5
10
15
20
25
30
35
40
45
50
55

| C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|---|--|-----------------------|
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| A | WO 2014095302 A1 (GRUNDFOS HOLDING AS), 26 June 2014 (26.06.2014), entire document | 1-10 |

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2017/084348

5

10

15

20

25

30

35

40

45

50

55

| Patent Documents referred in the Report | Publication Date | Patent Family | Publication Date |
|--|------------------|-------------------|-------------------|
| CN 1596145 A | 16 March 2005 | EP 1448289 A1 | 25 August 2004 |
| | | MX PA04005154 A | 17 February 2005 |
| | | CA 2467582 A1 | 05 June 2003 |
| | | EA 005732 B1 | 30 June 2005 |
| | | WO 03045530 A1 | 05 June 2003 |
| | | BR 0214556 A | 09 November 2004 |
| | | JP 4226475 B2 | 18 February 2009 |
| | | CN 1262329 C | 05 July 2006 |
| | | EA 200400750 A1 | 30 December 2004 |
| | | US 2005000894 A1 | 06 January 2005 |
| | | SE 521186 C2 | 07 October 2003 |
| | | AU 2002353730 A1 | 10 June 2003 |
| | | JP 2005510343 A | 21 April 2005 |
| | | US 7320760 B2 | 22 January 2008 |
| | | SE 0104020 A | 31 May 2003 |
| CN 102614692 A | 01 August 2012 | CN 102614692 B | 27 November 2013 |
| CN 102861472 A | 09 January 2013 | None | |
| WO 2014095302 A1 | 26 June 2014 | EP 2745916 A1 | 25 June 2014 |
| | | CN 104884151 A | 02 September 2015 |
| | | SG 11201503267 B | 31 January 2014 |
| | | IN 201503301 P1 | 09 October 2015 |
| | | SG 11201503267 A1 | 28 May 2015 |

Form PCT/ISA/210 (patent family annex) (July 2009)