



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.08.2019 Bulletin 2019/33

(51) Int Cl.:
F02C 7/28 ^(2006.01) **F01D 11/00** ^(2006.01)
F16J 15/34 ^(2006.01)

(21) Application number: **19166883.9**

(22) Date of filing: **16.10.2014**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventors:

- **MARET, Alexander J.**
Chapel Hill, NC North Carolina 27514 (US)
- **MILLER, Jonathan Logan**
Ware, MA Massachusetts 01082 (US)

(30) Priority: **22.10.2013 US 201361894015 P**

(74) Representative: **Dehns**
St. Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
14856274.7 / 3 060 782

(71) Applicant: **United Technologies Corporation**
Farmington, CT 06032 (US)

Remarks:
This application was filed on 02-04-2019 as a divisional application to the application mentioned under INID code 62.

(54) **PILOTED RETAINING PLATE FOR A FACE SEAL ARRANGEMENT**

(57) A retaining plate (120, 220, 300) for a face seal (100, 200) comprises a main retaining plate body (310) comprising a ring defining an axis; an axial step (128, 260, 330) in said retaining plate body

(310); a seal overlap (126, 270, 340) extending radially inward from said axial step (128, 260, 330); and a plurality of retainer flanges (122, 222, 320) extending radially outward from said retaining plate body (310).

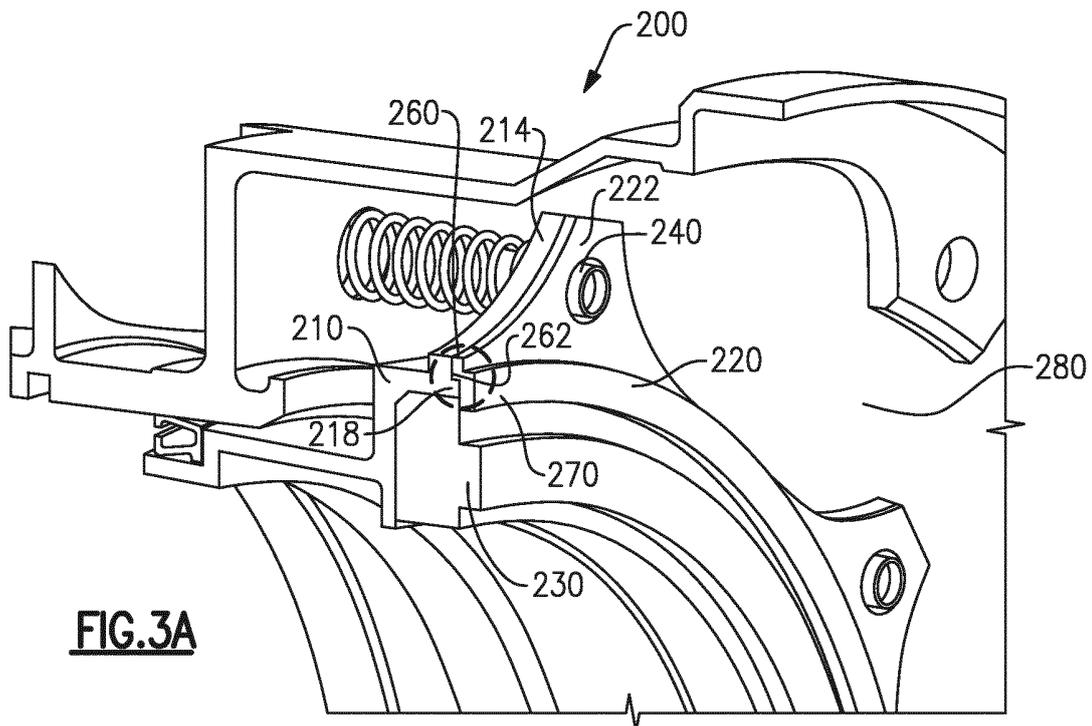


FIG.3A

Description

BACKGROUND OF THE INVENTION

[0001] The present disclosure relates generally to a face seal for a gas turbine engine and more particularly to a retaining plate for the same.

[0002] High performance gas turbine engines include main shaft bearing compartments and employ seals to prevent cooling/lubricating oil from escaping from the bearing compartments into the rest of the engine. One type of seal commonly used for this function is a face seal. Face seals enable the engine, and bearing compartments within the engine, to function properly with minimal impact on a Thrust Specific Fuel Consumption (TSFC), the Thermal Management System (TMS), and the lubrication system of the gas turbine engine.

[0003] In some face seals, a component, such as a retaining plate, is utilized to maintain the sealing element in position within the face seal. Existing retaining plates include a large overlap between the retaining plate and a seal element in order to ensure that a full 360 degree arc of the seal element is covered by the retaining plate. The overlap between the retaining plate and the seal element is referred to as a "seal overlap". When the gas turbine engine includes particularly small gapping and/or physical space and geometry requirements, a large seal overlap can disqualify the existing retaining ring based carbon seal designs.

SUMMARY OF THE INVENTION

[0004] A face seal assembly according to an exemplary embodiment of this disclosure, among other possible things includes a seal carrier defining an axis and having a pilot flange disposed circumferentially about the axis, a seal element disposed at least partially in the seal carrier, a retaining plate connected to one axial end of the seal carrier, the retaining plate having an axial step disposed circumferentially about the retaining plate, and the axial step is interfaced with the pilot flange.

[0005] In a further embodiment of the foregoing face seal, the seal element is a graphitic carbon face seal.

[0006] A further embodiment of the foregoing face seal includes a gap between the axial step and the pilot flange, such that the seal element is loose fit to the pilot flange.

[0007] In a further embodiment of the foregoing face seal, the retaining plate further includes a plurality of radially outward retainer flanges and the seal carrier comprises a plurality of radially outward carrier flanges, and each of the retainer flanges corresponds to one of the carrier flanges.

[0008] A further embodiment of the foregoing face seal includes a coil spring guide connecting each carrier flange to the corresponding retainer flange.

[0009] In a further embodiment of the foregoing face seal, the axial step includes a pilot surface facing radially inward and facing the pilot flange.

[0010] In a further embodiment of the foregoing face seal, the retaining plate further comprises a seal overlap, and the seal overlap radially covers the seal element on a full 360 degree arc.

[0011] In a further embodiment of the foregoing face seal, a radial length of the seal overlap is greater than a maximum possible radial misalignment of retaining plate relative to an axis defined by the seal element.

[0012] In a further embodiment of the foregoing face seal, the radial length of the seal overlap is approximately equal to the maximum possible radial misalignment of the retaining plate relative to the axis defined by the seal element.

[0013] A gas turbine engine according to an exemplary embodiment of this disclosure, among other possible things includes a compressor section connected to a first turbine spool, a combustor fluidly connected to the compressor section, a turbine section fluidly connected to the combustor and connected to a second turbine spool, an engine static structure connected to the first spool and the second spool via a plurality of bearing systems, at least one face seal assembly sealing at least one of the bearing systems, the at least one face seal assembly includes a seal carrier defining an axis and having a pilot flange disposed circumferentially about the axis, a seal element disposed at least partially in the seal carrier, a retaining plate connected to one axial end of the seal carrier, the retaining plate having an axial step disposed circumferentially about the retaining plate, and the axial step is interfaced with the pilot flange.

[0014] In a further embodiment of the foregoing gas turbine engine, the axial step includes a pilot surface facing radially inward and facing the pilot flange.

[0015] In a further embodiment of the foregoing gas turbine engine, the retaining plate includes a seal overlap, and the seal overlap radially covers the seal element on a full 360 degree arc.

[0016] In a further embodiment of the foregoing gas turbine engine, a radial length of the seal overlap is greater than a maximum possible radial misalignment of retaining plate relative to the axis defined by the seal element.

[0017] A retaining plate for a face seal according to an exemplary embodiment of this disclosure, among other possible things includes a main retaining plate body including a ring defining an axis, an axial step in the retaining plate body, a seal overlap extending radially inward from the axial step, and a plurality of retainer flanges extending radially outward from the retaining plate.

[0018] In a further embodiment of the foregoing retaining plate, the axial step is an axial shift in the main retaining plate body.

[0019] In a further embodiment of the foregoing retaining plate, the axial step comprises a radially inward facing pilot surface.

[0020] In a further embodiment of the foregoing retaining plate, a radial length of the seal overlap is defined by a tolerance of the axial step.

[0021] In a further embodiment of the foregoing retaining plate, the plurality of flanges is disposed circumferentially evenly about the retaining plate.

[0022] In a further embodiment of the foregoing retaining plate, the plurality of flanges is disposed circumferentially unevenly, and circumferentially balanced about the retaining plate.

[0023] In a further embodiment of the foregoing retaining plate, each flange in the plurality of flanges includes a through hole operable to receive a coil spring guide.

[0024] The foregoing features and elements may be combined in any combination without exclusivity, unless expressly indicated otherwise.

[0025] These and other features of the present invention can be best understood from the following specification and drawings, the following of which is a brief description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026]

Figure 1 schematically illustrates an example gas turbine engine.

Figure 2 schematically illustrates a partial isometric view of a face seal for use in the gas turbine engine of Figure 1.

Figure 3A schematically illustrates a partial cross sectional view of a face seal in an installed position.

Figure 3B Schematically illustrates a full cross sectional view of the face seal of Figure 3A.

Figure 4 schematically illustrates a fore view of a retaining plate.

Figure 5 schematically illustrates a cross sectional view of the retaining plate of Figure 4.

DETAILED DESCRIPTION OF AN EMBODIMENT

[0027] Figure 1 schematically illustrates a gas turbine engine 20. The gas turbine engine 20 is disclosed herein as a two-spool turbofan that generally incorporates a fan section 22, a compressor section 24, a combustor section 26 and a turbine section 28. Alternative engines might include an augmentor section (not shown) among other systems or features. The fan section 22 drives air along a bypass flow path B in a bypass duct defined within a nacelle 15, while the compressor section 24 drives air along a core flow path C for compression and communication into the combustor section 26 then expansion through the turbine section 28. Although depicted as a two-spool turbofan gas turbine engine in the disclosed non-limiting embodiment, it should be understood that the concepts described herein are not limited to use with two-spool turbofans as the teachings may be applied to other types of turbine engines including three-spool architectures.

[0028] The exemplary engine 20 generally includes a low speed spool 30 and a high speed spool 32 mounted

for rotation about an engine central longitudinal axis A relative to an engine static structure 36 via several bearing systems 38. A face seal 39 is positioned adjacent to one or more of the bearing systems 38 and seals the bearing systems 38. Although only illustrated in a single position, it is understood that face seals 39 can be utilized throughout the gas turbine engine 20 in alternate positions. It should be understood that various bearing systems 38 at various locations may alternatively or additionally be provided, and the location of bearing systems 38 may be varied as appropriate to the application.

[0029] The low speed spool 30 generally includes an inner shaft 40 that interconnects a fan 42, a low pressure compressor 44 and a low pressure turbine 46. The inner shaft 40 is connected to the fan 42 through a speed change mechanism, which in exemplary gas turbine engine 20 is illustrated as a geared architecture 48 to drive the fan 42 at a lower speed than the low speed spool 30. The high speed spool 32 includes an outer shaft 50 that interconnects a high pressure compressor 52 and high pressure turbine 54. A combustor 56 is arranged in exemplary gas turbine 20 between the high pressure compressor 52 and the high pressure turbine 54. A mid-turbine frame 57 of the engine static structure 36 is arranged generally between the high pressure turbine 54 and the low pressure turbine 46. The mid-turbine frame 57 further supports bearing systems 38 in the turbine section 28. The inner shaft 40 and the outer shaft 50 are concentric and rotate via bearing systems 38 about the engine central longitudinal axis A which is collinear with their longitudinal axes.

[0030] The core airflow is compressed by the low pressure compressor 44 then the high pressure compressor 52, mixed and burned with fuel in the combustor 56, then expanded over the high pressure turbine 54 and low pressure turbine 46. The mid-turbine frame 57 includes airfoils 59 which are in the core airflow path C. The turbines 46, 54 rotationally drive the respective low speed spool 30 and high speed spool 32 in response to the expansion. It will be appreciated that each of the positions of the fan section 22, compressor section 24, combustor section 26, turbine section 28, and fan drive gear system 48 may be varied. For example, gear system 48 may be located aft of combustor section 26 or even aft of turbine section 28, and fan section 22 may be positioned forward or aft of the location of gear system 48.

[0031] The engine 20 in one example is a high-bypass geared aircraft engine. In a further example, the engine 20 bypass ratio is greater than about six, with an example embodiment being greater than about ten, the geared architecture 48 is an epicyclic gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3 and the low pressure turbine 46 has a pressure ratio that is greater than about five. In one disclosed embodiment, the engine 20 bypass ratio is greater than about ten, the fan diameter is significantly larger than that of the low pressure compressor 44, and the low pressure turbine 46 has a pres-

sure ratio that is greater than about five. Low pressure turbine 46 pressure ratio is pressure measured prior to inlet of low pressure turbine 46 as related to the pressure at the outlet of the low pressure turbine 46 prior to an exhaust nozzle. The geared architecture 48 may be an epicycle gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3:1. It should be understood, however, that the above parameters are only exemplary of one embodiment of a geared architecture engine and that the present invention is applicable to other gas turbine engines including direct drive turbofans.

[0032] A significant amount of thrust is provided by the bypass flow B due to the high bypass ratio. The fan section 22 of the engine 20 is designed for a particular flight condition -- typically cruise at about 0.8 Mach and about 35,000 feet (10,668 m). The flight condition of 0.8 Mach and 35,000 ft (10,668 m), with the engine at its best fuel consumption - also known as "bucket cruise Thrust Specific Fuel Consumption ("TSFC")" - is the industry standard parameter of lbf of fuel being burned divided by lbf of thrust the engine produces at that minimum point. "Low fan pressure ratio" is the pressure ratio across the fan blade alone, without a Fan Exit Guide Vane ("FEGV") system. The low fan pressure ratio as disclosed herein according to one non-limiting embodiment is less than about 1.45. "Low corrected fan tip speed" is the actual fan tip speed in ft/sec divided by an industry standard temperature correction of $[(T_{\text{Tram}} \text{ } ^\circ\text{R}) / (518.7 \text{ } ^\circ\text{R})]^{0.5}$ (where $^\circ\text{R} = \text{K} \times 9/5$). The "Low corrected fan tip speed" as disclosed herein according to one non-limiting embodiment is less than about 1150 ft / second (350.5 m/s).

[0033] Figure 2 schematically illustrates an isometric view of an assembled face seal 100 for use in a gas turbine engine such as the gas turbine engine 20 of Figure 1. The face seal 100 includes a seal carrier 110, alternately referred to as a "carrier" or "housing". Disposed partially within the seal carrier 110 is a sealing element 130. In one example, the sealing element 130 is a graphitic carbon face seal. The sealing element 130 is retained in position axially by a retaining plate 120 and radially by an interference fit between an outer diameter of the sealing element 130 and the seal carrier 110. The face seal 100 is axially aligned with an engine shaft, that protrudes through a central opening 150 defined by the face seal 100. The sealing element 130 interfaces with an axially adjacent seal seat 250 (illustrated in Figure 3B) to seal a bearing compartment of the gas turbine engine 20. In alternate examples, the face seal 100 can be utilized to seal any similar configuration and is not limited to a bearing compartment.

[0034] Each of the seal carrier 110 and the retaining plate 120 includes multiple radially outward flanges 112, 122. When the face seal 100 is assembled, each of the seal carrier flanges 112 corresponds directly to one of the retaining plate flanges 122. The flanges 112, 122 are maintained in position relative to each other via a coil spring guide 140 that protrudes through an opening 124

in the retaining plate flange 122 and a hidden opening in the seal carrier flange 112.

[0035] In prior retaining plate designs, the retaining plate is approximately straight along a radial line drawn from an axis defined by the central opening, and includes a substantial seal overlap that overlaps the sealing element. The seal overlap maintains the sealing element in position axially by ensuring that a full 360 degree arc of the sealing element is overlapped by the retaining plate. The flanges and coil spring guides approximately radially center the retaining plate relative to the sealing element. The amount of seal overlap required in any given face seal is determined by the tolerances of the centering mechanisms. Because the previous designs use the flanges and the coil spring guides as the centering mechanism for the retaining plate, there are multiple tolerances (at each of the flanges and the coil spring guide holes) that compound to require a substantial seal overlap.

[0036] The retaining plate 120 of the instant disclosure includes a radially shortened seal overlap 126 relative to prior retaining plates. The seal overlap 126 extends radially inward from an axial step region 128 and a pilot portion hidden. The pilot portion is a radially inward surface of the axial step 128 and operates in conjunction with a pilot flange 218 (illustrated in Figures 3A and 3B) of the seal carrier 110 to radially center the retaining plate 120 and provide a full circumferential radial constraint on the sealing element 130 via a single centering feature.

[0037] Figure 3A provides a cross sectional view of a face seal arrangement with a face seal 200, such as the face seal 100 illustrated in Figure 2, positioned in a gas turbine engine 20 (illustrated in Figure 1). Figure 3B illustrates a full cross sectional view of the face seal arrangement of Figure 3A. As with the face seal 100 of Figure 2, the face seal 200 includes a seal carrier 210 with multiple circumferentially positioned carrier flanges 214 extending radially outwards from the seal carrier 210. A sealing element 230, such as a graphitic carbon ring, is retained in the seal carrier 210 via a retaining plate 220. The retaining plate 220 has multiple circumferentially positioned retaining flanges 222 extending radially outward, with each retaining flange 222 corresponding to a carrier flange 214. Each pair of corresponding flanges 214, 222 includes a coil spring guide 240 (hidden in Figure 3B) passing through both flanges 214, 222 and maintaining a connection of the flanges 214, 222. The sealing element 230 interfaces with a seal seat 250 (removed from Figure 3A for illustrative purposes) to seal a bearing compartment 280.

[0038] In contrast to prior face seals, the seal carrier 210 and the retaining plate 220 each include an axial step region 260. The axial step regions 260 interact with each other, thereby centering the retaining plate 220 relative to the sealing element 230. The axial step regions 260 include two tolerances (a pilot surface 262 of the retaining plate 220 and a pilot flange 218 of the seal carrier 210). As such, a seal overlap 270 need only account for the variation of the two tolerances. Furthermore, there

is no interference between the retaining plate 220 and the pilot flange 218 as a result of a gap between the pilot surface 262 and the pilot flange 218. The lack of interference between the pilot portion 262 and the pilot flange 218 is alternately referred to as a loose fit. The tighter radial alignment in turn reduces the radial length of the seal overlap 270 that is required to be present between the retaining plate 220 and the seal element 230.

[0039] Figure 4 schematically illustrates a fore view of a simplified retaining plate 300 for use in a seal, such as the face seals 100, 200 illustrated in Figure 2 and 3. The retaining plate 300 includes a main retaining plate body 310, from which radially protruding flanges 320 protrude outward. Each of the retaining flanges 320 includes an opening 322 for receiving a coil spring guide. Figure 4 illustrates four flanges 320 disposed circumferentially evenly about the retaining plate 300. In alternate examples different numbers of flanges 320 are utilized. In yet further alternate examples, the flanges 320 are disposed circumferentially unevenly about the retaining plate 300 in a circumferentially balanced manner. In a practical embodiment, the number and position of the flanges 320 correspond to flanges of the seal carrier 210 (illustrated in Figure 3).

[0040] Radially inward of the flanges 320, on the main retaining plate body 310 is an axial step 330. As described above, at the axial step 330 the retaining plate body 310 shifts axially via an axial aligned portion 334 (illustrated in Figure 5). In the illustrated example, the axial step 330 is a full ring of the retaining plate main body 310. A seal overlap portion 340 extends radially inward from the axial step 330.


[0041] With continued reference to Figure 4, and with like numerals indicating like elements, Figure 5 schematically illustrates a cross section of the retaining plate 300 along view line x. The axial step 330 includes a radially inward pilot surface 332. As described above with regard to Figure 3, the pilot surface 332 is disposed about a pilot flange 218 of a seal carrier (such as seal carrier 110 illustrated in Figure 2) in a loose fit arrangement. The pilot surface 332 and the pilot flange 218 of the seal carrier form the axial step region described above. The interfacing between the pilot flange 218 and the pilot surface 332 in the axial step region radially centers the retaining plate 300 relative to the sealing element 230, such that the retaining plate 300 to sealing element 230 relative radial position is primarily controlled by the differences in tolerances between the pilot flange 218 of the seal carrier and the pilot surface 332. The tolerances define a gap between the pilot flange 218 of the seal carrier and the pilot surface 332. In an ideal face seal assembly, this difference is designed to have a minimal length, thereby minimizing the potential radial misalignment that the retaining plate 300 can have. As described above, the minimized potential radial misalignment corresponds directly to a minimized seal overlap 340 required to ensure that the retaining plate 300 provides a full 360 degree arc of radial coverage of the seal element.

[0042] It is further understood that any of the above described concepts can be used alone or in combination with any or all of the other above described concepts. Although an embodiment of this invention has been disclosed, a worker of ordinary skill in this art would recognize that certain modifications would come within the scope of this invention. For that reason, the following claims should be studied to determine the true scope and content of this invention.

Claims

1. A retaining plate (120, 220, 300) for a face seal (100, 200) comprising:
 - a main retaining plate body (310) comprising a ring defining an axis;
 - an axial step (128, 260, 330) in said retaining plate body (310);
 - a seal overlap (126, 270, 340) extending radially inward from said axial step (128, 260, 330); and
 - a plurality of retainer flanges (122, 222, 320) extending radially outward from said retaining plate body (310).
2. The retaining plate (120, 220, 300) of claim 1, wherein said axial step (128, 260, 330) is an axial shift in said main retaining plate body (310).
3. The retaining plate (120, 220, 300) of claim 1 or 2, wherein said axial step (128, 260, 330) comprises a radially inward facing pilot surface (262, 332).
4. The retaining plate (120, 220, 300) of claim 1, 2 or 3, wherein a radial length of said seal overlap (126, 270, 340) is defined by a tolerance of said axial step (128, 260, 330).
5. The retaining plate (120, 220, 300) of any preceding claim, wherein said plurality of flanges (122, 222, 320) are disposed circumferentially evenly about said retaining plate body (310).
6. The retaining plate (120, 220, 300) of any of claims 1 to 4, wherein said plurality of flanges (122, 222, 320) are disposed circumferentially unevenly, and circumferentially balanced about said retaining plate body (310).
7. The retaining plate (120, 220, 300) of any preceding claim, wherein each flange in said plurality of flanges (122, 222, 320) includes a through hole (124, 332) operable to receive a coil spring guide (140, 240).
8. A face seal assembly (100, 200) comprising:
 - a seal carrier (110, 210) defining an axis and

- having a pilot flange (218) disposed circumferentially about said axis;
 a seal element (130, 230) disposed at least partially in said seal carrier (110, 210); and
 a retaining plate (120, 220, 300) connected to one axial end of said seal carrier (110, 210), said retaining plate (120, 220, 300) having an axial step (128, 260, 330) disposed circumferentially about said retaining plate (120, 220, 300), wherein said axial step (128, 260, 330) is interfaced with said pilot flange (218).
9. The face seal assembly (100, 200) of claim 8, wherein said seal element (130; 230) is a graphitic carbon face seal.
10. The face seal assembly (100, 200) of claim 8 or 9, further comprising a gap between said axial step (128, 260, 330) and said pilot flange (218), such that said retaining plate (120, 220, 300) is loose fit to said pilot flange (218).
11. The face seal assembly (100, 200) of claim 8, 9 or 10, wherein said retaining plate (120, 220, 300) further comprises a plurality of radially outward retainer flanges (122, 222, 320) and said seal carrier (110, 210) comprises a plurality of radially outward carrier flanges (112, 214), and wherein each of said retainer flanges (122, 222, 320) corresponds to one of said carrier flanges (112, 214), optionally wherein the face seal assembly (100, 200) further comprises a coil spring guide (140, 240) connecting each carrier flange (112, 214) to said corresponding retainer flange (122, 222, 320).
12. The face seal assembly (100, 200) of any of claims 8 to 11, wherein said axial step (128, 260, 330) includes a pilot surface (262, 332) facing radially inward and facing said pilot flange (218).
13. The face seal assembly (100, 200) of any of claims 8 to 12, wherein said retaining plate (120, 220, 300) further comprises a seal overlap (126, 270, 340), and said seal overlap (126, 270, 340) radially covers said seal element (130, 230) on a full 360 degree arc.
14. The face seal assembly (100, 200) of claim 6, wherein a radial length of said seal overlap (126, 270, 340) is:
- greater than a maximum possible radial misalignment of retaining plate (120, 220, 300) relative to said axis defined by said seal carrier (110, 210); or
 approximately equal to said maximum possible radial misalignment of said retaining plate (120, 220, 300) relative to said axis defined by said seal carrier (110, 210).
15. A gas turbine engine (20) comprising:
- a compressor section (24) connected to a first turbine spool (30);
 a combustor (56) fluidly connected to the compressor section (24);
 a turbine section (28) fluidly connected to the combustor (56) and connected to a second turbine spool (32);
 an engine static structure (36) connected to said first spool (30) and said second spool (32) via a plurality of bearing systems (38); and
 at least one face seal assembly (100, 200) of any of claims 8 to 14, sealing at least one of said bearing systems (38).

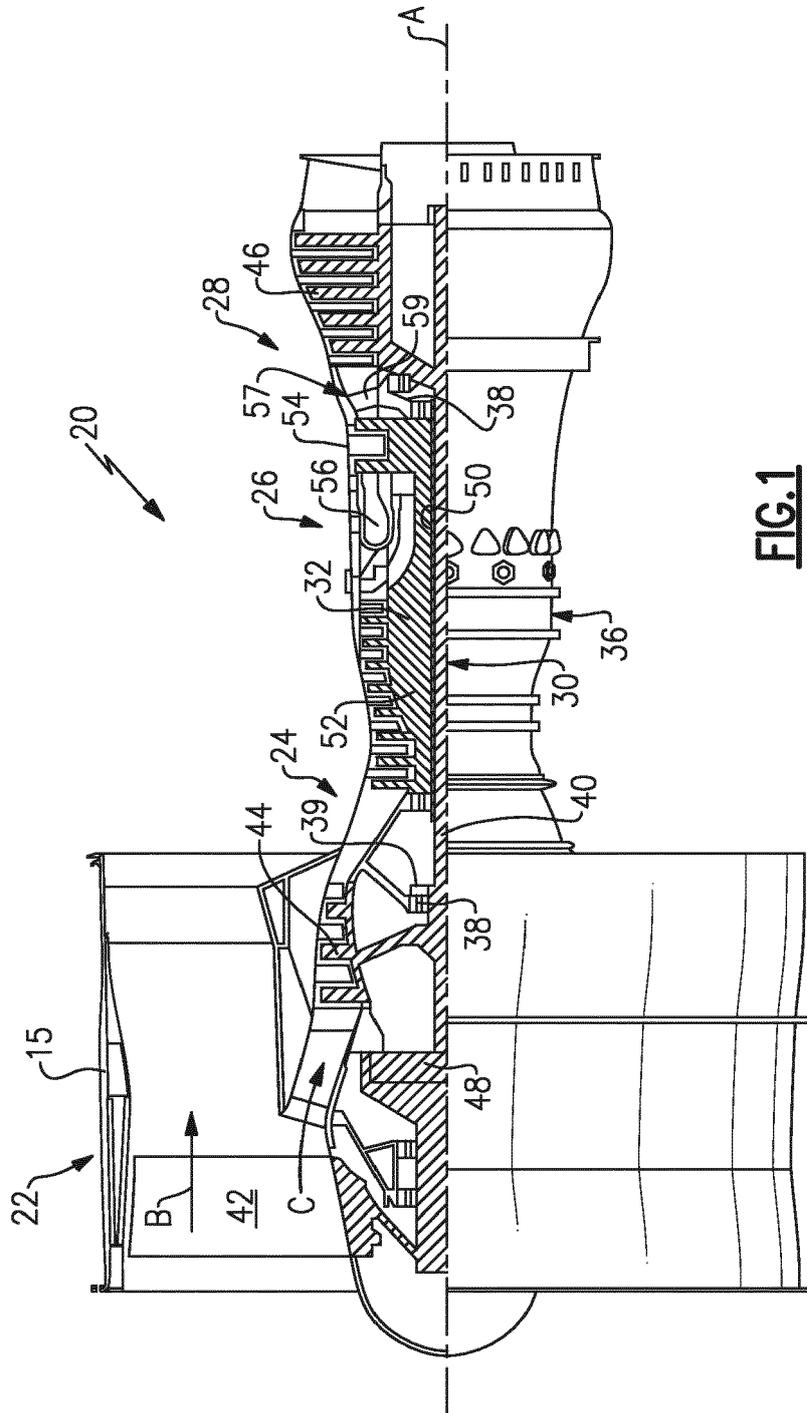

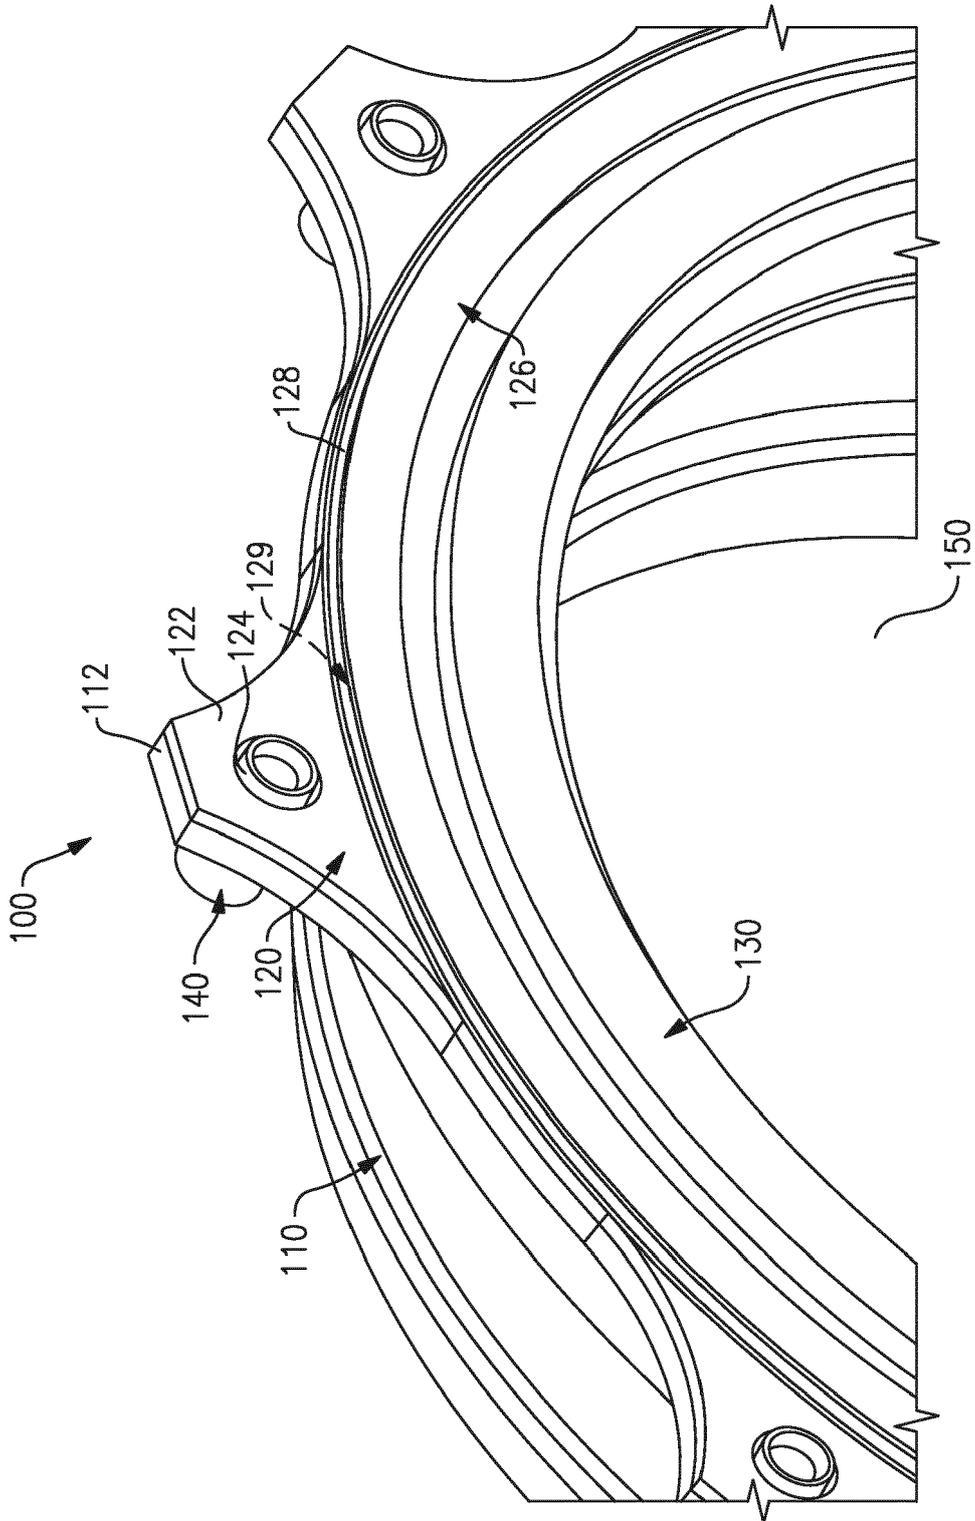
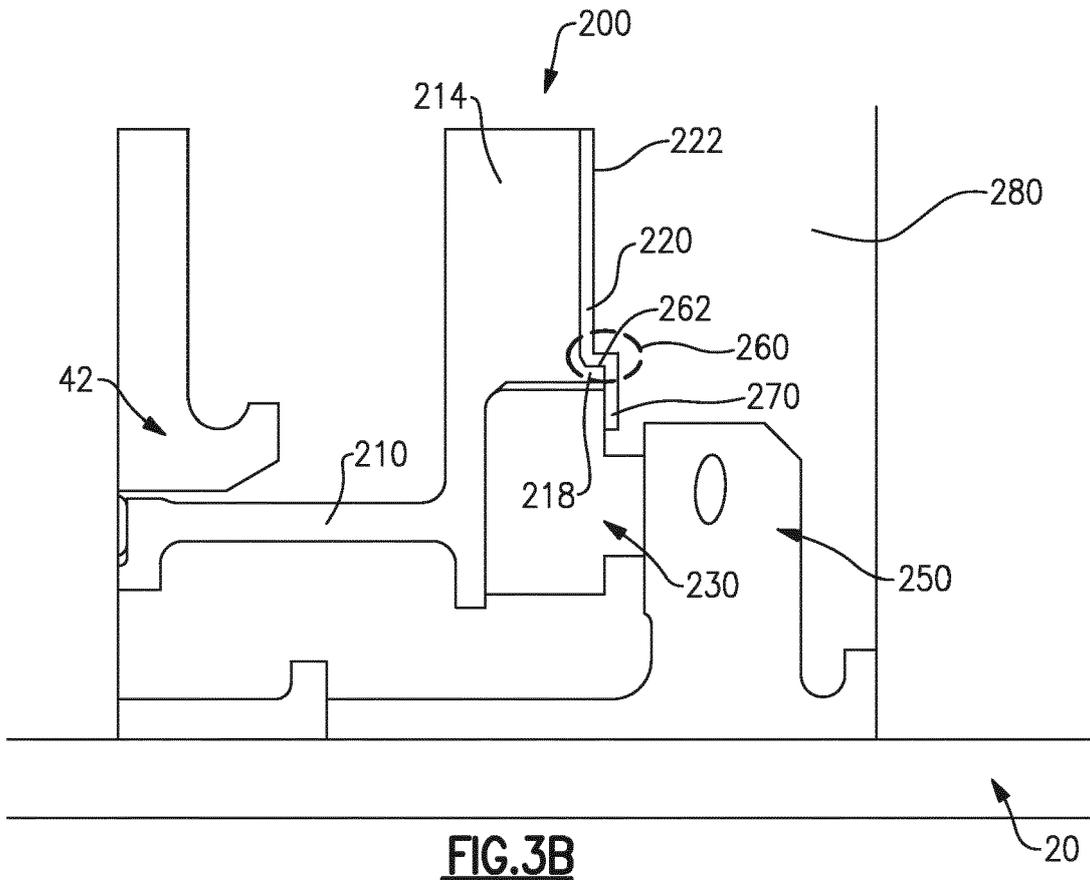
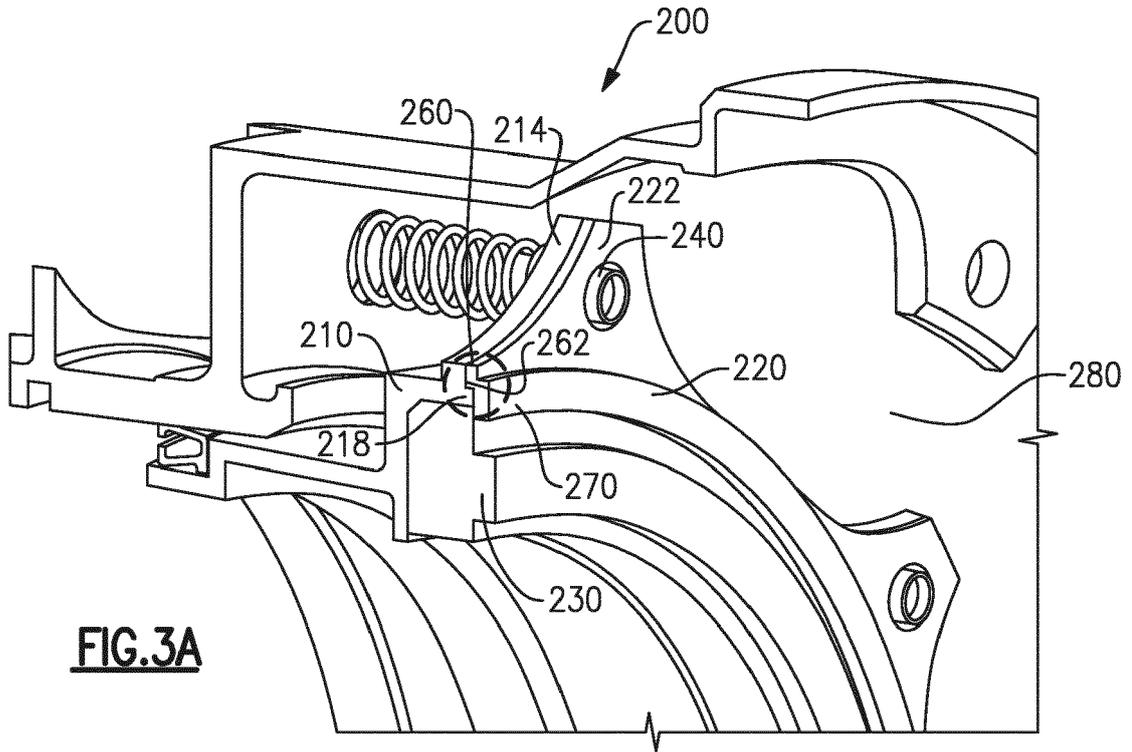


FIG. 2



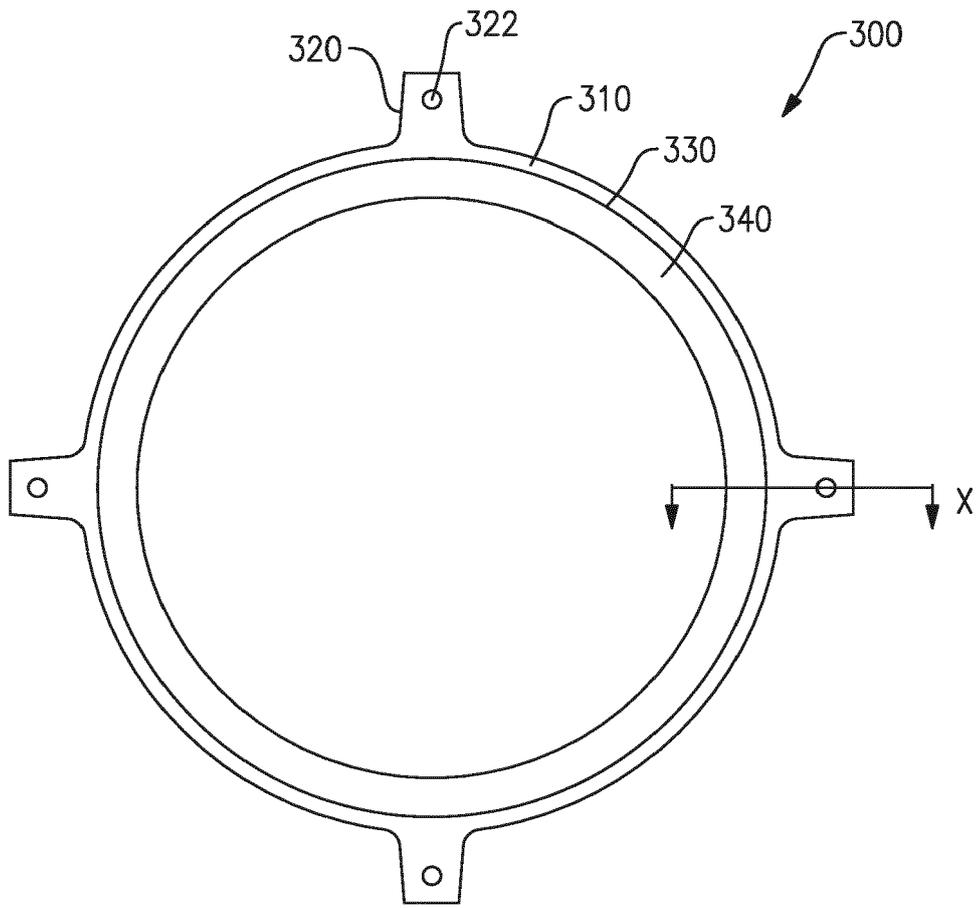


FIG. 4




FIG. 5