



Europäisches Patentamt

(19)

European Patent Office

Office européen des brevets

(11) Publication number:

0 124 190

B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **27.04.88**

(51) Int. Cl.⁴: **B 41 J 3/04, G 01 D 15/18,**
H 04 N 1/032

(21) Application number: **84300464.9**

(22) Date of filing: **26.01.84**

(54) Method of generating an N-tone gray scale with a thermal ink jet printer, and apparatus therefor.

(30) Priority: **29.04.83 US 490003**

(73) Proprietor: **Hewlett-Packard Company**
Mail Stop 20 B-O 3000 Hanover Street
Palo Alto California 94304 (US)

(43) Date of publication of application:
07.11.84 Bulletin 84/45

(71) Inventor: **Tacklind, Christopher A.**
250 Cowper Street
Palo Alto California 94301 (US)

(45) Publication of the grant of the patent:
27.04.88 Bulletin 88/17

(74) Representative: **Liesegang, Roland, Dr.-Ing.**
FORRESTER & BOEHMERT Widenmayerstrasse
4 Postfach 22 01 37
D-8000 München 22 (DE)

(84) Designated Contracting States:
DE FR GB

(50) References cited:
GB-A-1 592 834
US-A-4 339 762
US-A-4 353 079

EP 0 124 190 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Description

This invention is concerned with a method of generating an N-tone printed gray scale with a thermal ink jet printer, and apparatus therefor.

5 Thermal ink jet printers are operative for emitting ink droplets as described in UK Patent Application No. 8217720. Such thermal ink jet printers emit single ink droplets onto a page to form printed characters. The utility of prior art thermal ink jet printers has been inhibited because of the difficulty involved in creating a printed gray scale.

10 One prior art gray scale approach has been to aim multiple ink jets at one page location to allow variations in the darkness of a printed dot. This prior art approach requires a complex electromechanical system to coordinate the multiple jets. Another prior art approach, described in U.S. Patent No. 4,353,079, is to have a single ink jet emit a series of discrete droplets to form a single dot on the page. This prior art approach has the inherent problem that the speed at which dots may be printed on the page is seriously limited.

15 The present invention provides apparatus for applying a train of current pulse packets to a thermal ink jet printer, comprising a controller for issuing a control signal, and characterized by first generation means, coupled to the controller, for generating control pulses at a predetermined rate, for receiving the control signal, and for generating control pulses having widths determined from the control signal, and second generation means, coupled to the first generation means at an input and to the thermal ink jet printer at an 20 output, for receiving the control pulses and for presenting packets of current pulses at the output, said packets of current pulses having a preselected pulse repetition rate greater than the reciprocal of a droplet break-off interval of the thermal ink jet printer, having a pulse packet rate determined from the control pulse rate, and having a number of pulses per packet determined from the width of the control pulse.

25 In apparatus as set forth in the last preceding paragraph, it is preferred that the second generation means can produce the packets of current pulses at a rate which is less than or equal to a maximum single droplet emission rate of the thermal ink jet printer.

In apparatus as set forth in either one of the last two immediately preceding paragraphs, it is preferred that the second generation means can produce the pulses at a preselected current pulse repetition rate which is greater than the reciprocal of the droplet break-off interval of the thermal ink jet printer.

30 In apparatus as set forth in any one of the last three immediately preceding paragraphs, it is preferred that the second generation means is arranged to produce the current pulses so that they are located contiguously within the current pulse packet.

In apparatus as set forth in any one of the last four immediately preceding paragraphs, it is preferred that the second generation means produces a pulseless blanking interval between current pulse packets 35 which is greater than the droplet break-off interval.

In apparatus as set forth in any one of the last five immediately preceding paragraphs, it is preferred that the number of current pulses per packet multiplied by the current pulse packet rate is less than or equal to the reciprocal of a bubble collapse time of the thermal ink jet printer.

40 In apparatus as set forth in any one of the last six immediately preceding paragraphs, it is preferred that the controller comprises a microprocessor.

In apparatus as set forth in any one of the last seven immediately preceding paragraphs, it is preferred that the number of current pulses per packet is less than or equal to 16.

45 In apparatus as set forth in any one of the last eight immediately preceding paragraphs, it is preferred that the second generation means produces a current pulse rate which is less than the reciprocal of a bubble collapse time of the thermal ink jet printer and greater than a droplet recede time of the thermal ink jet printer.

The present invention also provides a method of generating an N-time printed gray scale with a thermal ink jet printer, characterized by the steps of determining a desired number of pulses to provide a 50 packet of pulses required to create a dot having a desired darkness tone, delaying for a blanking interval after application of a previous packet to the thermal ink jet printer, generating a packet containing the desired number of pulses and having a pulse repetition rate greater than the reciprocal of a droplet break-off interval for the thermal ink jet printer, and applying the packet to the thermal ink jet printer.

In carrying out a method as set forth in the last preceding paragraph, it is preferred that the blanking interval is greater than a droplet break-off interval of the thermal ink jet printer.

55 In carrying out a method as set forth in the last preceding paragraph, it is preferred that the steps are repeated at a pulse packet rate, and the pulse packet rate multiplied by an integer N is less than or equal to the reciprocal of a bubble collapse time of the thermal ink jet printer.

In carrying out a method as set forth in the last preceding paragraph, it is preferred that the pulse packet rate is less than or equal to a maximum single droplet emission rate of the thermal ink jet printer.

60 In carrying out a method as set forth in the last preceding paragraph, it is preferred that the pulses are located contiguously within the packet.

65 The present invention also provides a method of generating an ink drop with a thermal ink jet printer, characterized by the steps of determining a required number of pulses necessary to cause emission of the drop, generating a pulse packet containing the required number of pulses at a pulse repetition rate which is less than the reciprocal of a bubble collapse time of the thermal ink jet printer and greater than the

0 124 190

reciprocal of an ink recede time of the thermal ink jet printer, and applying the pulse packet to ink-drop producing means of the thermal ink jet printer.

The steps may be repeated a plurality of times to cause emission of a plurality of drops and to provide a blanking interval greater than or equal to a droplet break-off interval of the thermal ink jet printer.

- 5 In accordance with the illustrated preferred embodiment of the present invention, a thermal ink jet printer is capable of providing a printed gray scale at a high printing speed. A packet of current pulses is applied to the resistor of a single ink jet to cause emission of a packet of droplets. The interval between individual pulses is long enough that bubble collapse may occur after application of each pulse, yet short enough that the droplets do not individually break off from the ink jet orifice. Thus, the individual droplets
10 within the packet remain connected and merge in flight to form a single drop. The drop breaks off from the orifice only after emission of the last droplet in the packet. Since the probability of ink jet malfunction is related to the rate at which break-offs occur, by having only a single break-off for each packet, i.e., drop, the drop emission rate can approach the single droplet emission rate without an increase in the probability of malfunction. In the illustrated preferred embodiment of the present invention, a multi-tone gray scale is
15 possible at drop emission rates which approach the maximum single droplet emission rate of the thermal ink jet printer.

- In the situation where a thermal ink jet printer is operated with a resistor which is undersized for a given ink, it is often the case that a single current pulse is insufficient to cause emission of an ink droplet. The illustrated preferred embodiment of the present invention is useful, in this situation, for providing a
20 pulse packet in which the impulses generated by the individual pulses are combined to cause emission of a single ink drop.

- There now follows a detailed description, which is to be read with reference to the accompanying drawings, of apparatus according to the invention and a method according to the invention; it is to be clearly understood that both apparatus and method have been selected for description to illustrate the
25 invention by way of example and not by way of limitation.

In the accompanying drawings:—

Figure 1 shows a thermal ink jet print head which is constructed in accordance with the preferred embodiment of the present invention;

- Figure 2 shows a thermal ink jet printer which is constructed in accordance with the preferred
30 embodiment of the present invention and which uses the print head shown in Figure 1;

Figure 3 shows a pulse train of three pulse packets which is generated by the pulser shown in Figure 2;

Figures 4A to 4F show various stages of initial droplet growth when a single current pulse is used in the thermal ink jet printer shown in Figure 2; and

- Figures 5A to 5L show droplet growth stages subsequent to those shown in Figures 4A to 4F when a
35 pulse packet containing two current pulses is used in the thermal ink jet printer shown in Figure 2.

- Figure 1 shows a thermal ink jet print head 1 which is constructed in accordance with the preferred embodiment of the present invention and which is described in the aforementioned UK Patent Application No. 8217720. When a current pulse is applied through a resistor 5 via a conductor 11 and a ground line 15, the resistor 5 is resistively heated and a vapor bubble is created overlaying the resistor 5 in the ink within a
40 channel 25. An impulse generated by the growth of the bubble causes the ink within an orifice 33 to move outwards and, consequently, a droplet of ink may be emitted from the orifice 33.

- Figure 2 shows a thermal ink jet printer which is constructed in accordance with the preferred embodiment of the present invention utilizing the print head shown in Figure 1. Ink from a reservoir 43 fills the channel 25 by capillary action to overlay the resistor 5. A controller 47, which may comprise a
45 microprocessor, instructs a pulser 45 to apply a current pulse to the resistor 5 in order to cause an ink droplet to be emitted from the orifice 33 onto a page 41. In typical prior art printers the maximum single droplet emission rate (the maximum rate at which single droplets are successfully emitted by single pulses) is roughly 10 kHz and bubble collapse occurs at a time less than 20 microseconds after application of a pulse. As the single droplet emission rate exceeds 10 kHz the probability of malfunction, which is typically caused by orifice wetting, increases dramatically.

- The pulse repetition rate of the pulser 45 must allow sufficient time between pulses for the individual bubbles created by resistor 5 to collapse. For the print head 1 the bubble collapse time is less than 20 microseconds and, therefore, the maximum pulse repetition rate is approximately 50 kHz. Further, in order to allow the individual droplets within a packet to merge into a single drop, the spacing between the pulses
55 within a packet must be less than the droplet break-off interval so that the individual droplets do not break off from the orifice 33. This limit varies with the physical parameters of the print head and with the characteristics of the ink being used and will typically be less than the reciprocal of the maximum single droplet emission rate for a given set of conditions. A pulseless blanking interval between pulse packets must be greater than the droplet break-off interval to allow the drop created by a pulse packet to break off
60 from the orifice 33.


- The pulser 45 may comprise first and second pulse generators 51 and 53 as shown in Figure 2. The controller 47 sets the gate width of the pulse generator 51, such as a Hewlett-Packard Co. model 8013B, and the number of pulses in a particular packet to be applied to the print head 1 is thereby specified. The repetition rate of the pulse generator 51 is set manually or by the controller 47 to specify the packet rate of
65 the pulses applied to the print head 1. The output of the pulse generator 51 is connected to a gate input of

0 124 190

the pulse generator 53 which may comprise, for example, a Hewlett-Packard Co. model 214B. The repetition rate of the pulse generator is set manually or by the controller 47 to specify the pulse repetition rate. The output of the pulse generator 53 is connected to the resistor 5 of the print head 1.

The printer shown in Figure 2 utilizes a .076 mm diameter nickel orifice 33, a .051 mm thick channel 25, and a .076 mm square 5 ohm unpassivated metallic glass resistor 5. An ink having a carrier comprising equal parts of water and diethylene glycol was used. Under these conditions, the print head 1 has a maximum single droplet emission rate of roughly 10 kHz and individual droplet break-off occurs 45 microseconds after application of a pulse. The maximum single droplet emission rate, and hence the maximum pulse repetition rate, was found to be 50 kHz. Pulse packets selectively containing from zero to N pulses were used to cause emission of drops containing from zero to N droplets. Therefore, the maximum pulse packet rate, and the maximum drop printing rate, was

1



If under these conditions $N=16$, the maximum drop printing rate would be 2.74 kHz.

20 The printer shown in Figure 2 was also operated with a slower pulse train, a three packet portion of
which is shown in Figure 3, to generate a 16-tone gray scale. The pulse train comprised a series of pulse
packets containing from zero to sixteen 1 ampere by 1 microsecond current pulses at a pulse repetition rate
of 25 kHz. The individual pulses within each packet were located contiguously and the number of individual
pulses contained in each packet was varied from zero to sixteen as commanded by the controller 47 to
25 create a desired darkness tone of each particular printed dot. Thus, the maximum packet width was 640
microseconds. The pulse packet rate was 400 Hz with the result that the drop printing rate (the rate at which
drops are emitted towards the page 41 to print dots) was also 400 Hz. A pulseless blanking interval ranging
from 1.22—1.86 milliseconds existed between pulse packets. Figure 3 shows a series of three pulse packets
containing 6, 4, and 2 pulses, respectively. The result of application of these pulse packets to the print head
30 1 was to cause emission of three separate drops from the orifice 33 with the three drops having a nominal
volume ratio of 6:4:2.

Figures 4A to 4F show various stages of droplet formation at the orifice 33 within the first 40 microseconds after application of a single current pulse to the resistor 5. Figures 4A to 4D show that the bubble generated by the resistor 5 causes the ink meniscus within the orifice 33 to expand outwards. In Figures 4E and 4F, bubble collapse has occurred, an individual droplet has started to form, and a thin tail of ink remains attached to the ink meniscus. If no additional impulses were applied to the ink meniscus the individual droplet shown in Figure 4F would continue to move away from the orifice 33 and the tail would break with the result that the droplet would break off and move towards the page 41 as a discrete drop.

Figures 5A to 5L show various stages of droplet formation when a second pulse is applied to resistor 5 at a time 40 microseconds after application of the initial pulse which created the droplet shown in Figures 4A to 4F. It should be understood that Figures 4A to 4F and Figures 5A to 5L depict one continuous formation process caused by the application of a packet of pulses and that this process may be extended with the use of a packet containing a larger number of pulses. Figures 5A to 5F show the effects of the application of a second pulse to the resistor 5 before the break-off of the droplet shown in Figure 4F. A second droplet is formed which merges with the first droplet to form a drop having approximately twice the volume of each of the two individual droplets. Figures 5G to 5L show the effects of break-off of the resultant drop from the orifice 33.

As the number of pulses is increased, the number of individual droplets increases and the resultant drop may become elongated because the final droplets are unable to fully merge with the first droplets. If the scan speed of the print head 1 relative to page 41 is increased, the elongated drops can be made to print elongated dots on the page 41.

The printer shown in Figure 2 is also useful for causing successful droplet emission when a physically undersized resistor 5 for a particular ink is used. Droplet emission occurs when a bubble generated by the resistor 5 imparts enough of an impulse to the ink that a droplet moves out of the orifice 33 with a velocity sufficient to overcome the surface tension of the ink and to cause the droplet to break off from the meniscus. If an insufficient impulse is imparted by the bubble the droplet will progress through the stages shown in Figures 4A—D and will then recede back into the orifice 33. An insufficient impulse can be caused by the use of too small a resistor 5 for a particular ink since the size of the bubble is directly related to the physical size of the resistor 5.

60 The printer shown in Figure 2 was used with a .102 mm square metallic glass resistor 5 and a .046 mm
by .046 mm silicon orifice 33. An ink carrier comprising formamide (supplied by, e.g., the Aldrich Chemical
Co.) was used and it was found that a 3 microsecond by 1.2 ampere pulse generated an optimal bubble but
emission of a droplet did not occur and the ink which was protruded began to recede into the orifice 33 at a
recede time which occurred 60 microseconds after application of the pulse. It was found that a 6
65 microsecond by 1.2 ampere pulse was also unable to cause ejection of an ink droplet. In contrast, when a

0 124 190

first 3 microsecond by 1.2 ampere pulse, which was applied at time t=0, was followed by a second 3 microsecond by 1.2 ampere pulse at time t=27 microseconds (before the first ink droplet began to recede back into the orifice 33) a drop having a diameter of .061 mm was successfully emitted towards the page 41.

5 Claims

1. Apparatus for applying a train of current pulse packets to a thermal ink jet printer (1), comprising:
 - a controller (47) for issuing a control signal; and characterized by
 - first generation means (51), coupled to the controller, for generating control pulses at a predetermined rate, for receiving the control signal, and for generating control pulses having widths determined from the control signal; and,
 - second generation means (53), coupled to the first generation means at an input and to the thermal ink jet printer at an output, for receiving the control pulses and for presenting packets of current pulses at the output, said packets of current pulses having a preselected pulse repetition rate greater than the reciprocal of a droplet break-off interval of the thermal ink jet printer, having a pulse packet rate determined from the control pulse rate, and having a number of pulses per packet determined from the width of the control pulse.
2. Apparatus according to claim 1, characterized in that the second generation means can produce the packets of current pulses at a rate which is less than or equal to a maximum single droplet emission rate of the thermal ink jet printer.
3. Apparatus according to either one of claims 1 and 2, characterized in that the second generation means can produce the pulses at a preselected current pulse repetition rate which is greater than the reciprocal of the droplet break-off interval of the thermal ink jet printer.
4. Apparatus according to any one of the preceding claims, characterized in that the second generation means is arranged to produce the current pulses so that they are located contiguously within the current pulse packet.
5. Apparatus according to any one of the preceding claims characterized in that the second generation means produces a pulseless blanking interval between current pulse packets which is greater than the droplet break-off interval.
6. Apparatus according to any one of the preceding claims characterized in that the number of current pulses per packet multiplied by the current pulse packet rate is less than or equal to the reciprocal of a bubble collapse time of the thermal ink jet printer.
7. Apparatus according to any one of the preceding claims characterized in that the controller comprises a microprocessor.
8. Apparatus according to any one of the preceding claims characterized in that the number of current pulses per packet is less than or equal to 16.
9. Apparatus according to any one of the preceding claims, characterized in that the second generation means produces a current pulse rate which is less than the reciprocal of a bubble collapse time of the thermal ink jet printer and greater than a droplet recede time of the thermal ink jet printer.
10. A method of generating an N-tone printed gray scale with a thermal ink jet printer, characterized by the steps of:
 - determining a desired number of pulses to provide a packet of pulses required to create a dot having a desired darkness tone;
 - delaying for a blanking interval after application of a previous packet to the thermal ink jet printer;
 - generating a packet containing the desired number of pulses and having a pulse repetition rate greater than the reciprocal of a droplet break-off interval for the thermal ink jet printer; and,
 - applying the packet to the thermal ink jet printer.
11. A method according to claim 10, characterized in that the blanking interval is greater than a droplet break-off interval of the thermal ink jet printer.
12. A method according to claim 11, characterized in that the steps are repeated a plurality of times to generate a plurality of packets and a plurality of drops;
 - the packets are repeated at a pulse packet rate; and,
 - the pulse packet rate multiplied by an integer N is less than or equal to the reciprocal of a bubble collapse time of the thermal ink jet printer.
13. A method according to claim 12, characterized in that the pulse packet rate is less than or equal to a maximum single droplet emission rate of the thermal ink jet printer.
14. A method according to claim 13, characterized in that the pulses are located contiguously within the packet.
15. A method of generating an ink drop with a thermal ink jet printer, characterized by the steps of:
 - determining a required number of pulses necessary to cause emission of the drop;
 - generating a pulse packet containing the required number of pulses at a pulse repetition rate which is less than the reciprocal of a bubble collapse time of the thermal ink jet printer and greater than the reciprocal of an ink recede time of the thermal ink jet printer; and,
 - applying the pulse packet to ink-drop producing means of the thermal ink jet printer.
16. A method according to claim 15, characterized in that the steps are repeated a plurality of times to

0 124 190

cause emission of a plurality of drops and to provide a blanking interval greater than or equal to a droplet break-off interval of the thermal ink jet printer.

Patentansprüche

- 5 1. Vorrichtung zum Abgeben eines Zuges von Strompulspaketen an einen thermischen Tintenstrahldrucker (1), mit einer Steuerung (47), die ein Steuersignal abgibt, gekennzeichnet durch
erste an die Steuerung angeschlossene Erzeugungsmittel (51) zum Erzeugen von Steuerpulsen mit
einer vorbestimmten Pulsrate, zum Empfangen des Steuersignals und zum Erzeugen von Steuerpulsen mit
10 einer von dem Steuersignal abhängenden Pulsbreite; und
zweite Erzeugungsmittel (53), deren Eingang an die ersten Erzeugungsmittel und deren Ausgang an
den thermischen Tintenstrahldrucker angeschlossen ist, zum Erzeugen der Steuerpulse und zum Abgeben
von Strompulspaketen an ihrem Ausgang, wobei die Strompulspakete eine vorbestimmte
Pulswiederholungsrate haben, die größer als der Reziprokwert der Zeitspanne bis zum Abreißen eines
15 Tröpfchens an dem thermischen Tintenstrahldrucker ist, und die Rate der Pulspakete von der
Steuerpulsrate und die Anzahl der Pulse pro Paket von der Breite der Steuerpulse abhängt.
20 2. Vorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die zweiten Erzeugungsmittel Pakete
von Strompulsen mit einer Rate erzeugen können, die kleiner oder gleich der maximalen Abgaberate von
Einzeltröpfchen des thermischen Tintenstrahldruckers ist.
25 3. Vorrichtung nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die zweiten Erzeugungsmittel die
Pulse mit einer vorbestimmten Strompulswiederholungsrate erzeugen können, die größer als der
Reziprokwert der Zeitspanne bis zum Abreißen der Tröpfchen an dem thermischen Tintenstrahldrucker ist.
4. Vorrichtung nach einem der vorgehenden Ansprüche, dadurch gekennzeichnet, daß die zweiten
Erzeugungsmittel die Strompulse so erzeugen, daß sie in dem Strompulspaket nahe beieinander liegen.
30 5. Vorrichtung nach einem der vorgehenden Ansprüche, dadurch gekennzeichnet, daß die zweiten
Erzeugungsmittel puifreie Austastintervalle zwischen den Strompulspaketen erzeugen, die länger als die
Zeitspanne bis zum Abreißen der Tröpfchen sind.
6. Vorrichtung nach einem der vorgehenden Ansprüche, dadurch gekennzeichnet, daß die Anzahl
von Strompulsen pro Paket multipliziert mit der Strompulspaketrage kleiner oder gleich dem Reziprokwert
35 der Kollabierzeit von Blasen des thermischen Tintenstrahldruckers ist.
7. Vorrichtung nach einem der vorgehenden Ansprüche, dadurch gekennzeichnet, daß die
Steuerung einen Mikroprozessor umfaßt.
8. Vorrichtung nach einem der vorgehenden Ansprüche, dadurch gekennzeichnet, daß die Anzahl
von Strompulsen pro Paket kleiner oder gleich 16 ist.
35 9. Vorrichtung nach einem der vorgehenden Ansprüche, dadurch gekennzeichnet, daß die zweiten
Erzeugungsmittel eine Strompulsrage erzeugen, die kleiner als der Reziprokwert der Kollabierzeit von
Blasen und größer als die Ablösezeit der Tröpfchen des thermischen Tintenstrahldruckers ist.
10. Verfahren zum Erzeugen einer N-Ton Grauskala mittels eines thermischen Tintenstrahldruckers,
gekennzeichnet durch folgende Schritte:
40 Festlegen der gewünschten Anzahl von Pulsen in einem Pulspaket, die nötig ist, um einen Punkt einer
bestimmten Schattierung zu erzeugen;
Abwarten für die Länge eines Austastintervalls nach Aussendung des vorigen Pakets an den
thermischen Tintenstrahldrucker;
Erzeugen eines Pakets mit der gewünschten Anzahl von Pulsen und einer Pulswiederholungsrate, die
45 größer als der Reziprokwert der Zeitspanne bis zum Abreißen des Tröpfchens an dem thermischen
Tintenstrahldrucker ist; und
Abgeben des Pakets an den thermischen Tintenstrahldrucker.
11. Verfahren nach Anspruch 10, dadurch gekennzeichnet, daß das Austastintervall größer als die
Zeitspanne bis zum Abreißen des Tröpfchens an dem thermischen Tintenstrahldrucker ist.
50 12. Verfahren nach Anspruch 11, dadurch gekennzeichnet, daß
die Schritte mehrfach wiederholt werden, um eine Mehrzahl von Paketen und Tropfen zu erzeugen;
die Pakete mit einer Pulspaketrage wiederholt werden; und
die Pulspaketrage multipliziert mit einer ganzen Zahl N kleiner oder gleich dem Reziprokwert der
Kollabierzeit von Blasen an dem thermischen Tintenstrahldrucker ist.
13. Verfahren nach Anspruch 12, dadurch gekennzeichnet, daß die Pulspaketrage kleiner oder gleich
55 der maximalen Abgaberate einzelner Tröpfchen des thermischen Tintenstrahldruckers ist.
14. Verfahren nach Anspruch 13, dadurch gekennzeichnet, daß die Pulse in dem Paket nahe
beieinander liegen.
15. Verfahren zum Erzeugen eines Tintentropfens mit einem thermischen Tintenstrahldrucker,
60 gekennzeichnet durch folgende Schritte:
Bestimmen der für die Abgabe des Tropfens erforderlichen Anzahl von Pulsen;
Erzeugen eines Pulspaketes der erforderlichen Pulszahl mit einer Pulswiederholungsrate, die kleiner
als der Reziprokwert der Kollabierzeit von Blasen und größer als der Reziprokwert der Tintenabgabearbeit des
thermischen Tintenstrahldruckers ist; und
65 Abgeben des Pulspakets an Tintentropfen erzeugende Mittel des thermischen Tintenstrahldruckers.

0 124 190

16. Verfahren nach Anspruch 15, dadurch gekennzeichnet, daß die Schritte mehrfach wiederholt werden, um die Abgabe mehrerer Tropfen zu bewirken, wobei Austastintervalle erzeugt werden, die größer oder gleich der Zeitspanne bis zum Abreißen der Tröpfchen an dem thermischen Tintenstrahldrucker sind.

5

Revendications

1. Un appareil pour appliquer un train de paquets d'impulsions de courant à une imprimante thermique à jet d'encre (1), comprenant:

- 10 une unité de commande (47) pour délivrer un signal de commande; et caractérisée par:
des premiers moyens générateurs (51) reliés à l'unité de commande, produisant des impulsions de commande à une fréquence prédéterminée, recevant le signal de commande et produisant des impulsions de commande ayant des largeurs déterminées en fonction du signal de commande, et
des seconds moyens générateurs (53) reliés en entrée aux premiers moyens générateurs et en sortie à
15 l'imprimante thermique à jet d'encre, recevant les impulsions de commande et présentant des paquets d'impulsions de courant en sortie, ces paquets d'impulsions de courant ayant une fréquence de récurrence des impulsions prédéterminée supérieure à l'inverse de l'intervalle de temps de détachement d'une gouttelette de l'imprimante thermique à jet d'encre, avec une fréquence des paquets d'impulsions déterminée en fonction de la fréquence des impulsions de commande, et avec un nombre d'impulsions par paquet déterminé en fonction de la largeur de l'impulsion de commande.

20 2. L'appareil de la revendication 1, caractérisé en ce que les seconds moyens générateurs peuvent produire les paquets d'impulsions de courant à une fréquence inférieure ou égale à la fréquence maximale d'émission d'une gouttelette isolée de l'imprimante thermique à jet d'encre.

25 3. L'appareil de l'une des revendications 1 et 2, caractérisé en ce que les seconds moyens générateurs peuvent produire les impulsions à une fréquence de récurrence des impulsions de courant prédéterminée qui est supérieure à l'inverse de l'intervalle de temps de détachement d'une gouttelette de l'imprimante thermique à jet d'encre.

30 4. L'appareil de l'une des revendications précédentes, caractérisé en ce que les seconds moyens générateurs sont configurés de manière à produire les impulsions de courant de façon qu'elles se situent de façon contiguë à l'intérieur du paquet d'impulsions de courant.

35 5. L'appareil de l'une des revendications précédentes, caractérisé en ce que les seconds moyens générateurs produisent un intervalle de repos, sans impulsion, entre les paquets d'impulsions de courant, intervalle qui est supérieur à l'intervalle de temps de détachement d'une gouttelette.

40 6. L'appareil de l'une des revendications précédentes, caractérisé en ce que le nombre d'impulsions de courant par paquet multiplié par la fréquence des paquets d'impulsions de courant est inférieur ou égal à l'inverse du temps d'effondrement d'une bulle de l'imprimante thermique à jet d'encre.

45 7. L'appareil de l'une des revendications précédentes, caractérisé en ce que l'unité de commande comprend un microprocesseur.

40 8. L'appareil de l'une des revendications précédentes, caractérisé en ce que le nombre d'impulsions de courant par paquet est inférieur ou égal à seize.

45 9. L'appareil de l'une des revendications précédentes, caractérisé en ce que les seconds moyens générateurs produisent une fréquence d'impulsion de courant qui est inférieure à l'inverse du temps d'effondrement d'une bulle de l'imprimante thermique à jet d'encre et supérieure au temps de retrait d'une gouttelette de l'imprimante thermique à jet d'encre.

50 10. Un procédé pour produire une échelle de gris imprimée à N tons avec une imprimante thermique à jet d'encre caractérisé par les étapes de:

55 détermination d'un nombre souhaité d'impulsions pour former un paquet d'impulsions nécessaire à la création d'un point avec un ton ayant un degré de noir souhaité,
application d'un retard pendant un intervalle de repos suivant l'application d'un précédent paquet à l'imprimante thermique à jet d'encre,

60 production d'un paquet comprenant le nombre souhaité d'impulsions et ayant une fréquence de récurrence des impulsions supérieure à l'inverse de l'intervalle de temps de détachement d'une gouttelette de l'imprimante thermique à jet d'encre, et
application du paquet à l'imprimante thermique à jet d'encre.

55 11. Le procédé de la revendication 10, caractérisé en ce que l'intervalle de repos est supérieur à l'intervalle de temps de détachement d'une gouttelette de l'imprimante thermique à jet d'encre.

60 12. Le procédé de la revendication 11, caractérisé en ce que:
les étapes sont répétées plusieurs fois de manière à produire une pluralité de paquets et une pluralité de gouttes,

65 les paquets sont répétés à une fréquence de paquets d'impulsions, et
la fréquence de paquets d'impulsions multipliée par un entier N est inférieure ou égale à l'inverse du temps d'effondrement d'une bulle de l'imprimante thermique à jet d'encre.

65 13. Le procédé de la revendication 12, caractérisé en ce que la fréquence de paquets d'impulsions est inférieure ou égale à la fréquence maximale d'émission de gouttelettes isolées de l'imprimante thermique à jet d'encre.

0 124 190

14. Le procédé de la revendication 13, caractérisé en ce que les impulsions sont situées de façon contiguë à l'intérieur du paquet.

15. Un procédé pour produire une goutte d'encre avec une imprimante thermique à jet d'encre, caractérisé par les étapes de:

5 détermination d'un nombre d'impulsions nécessaire pour produire l'émission de la goutte,
production d'un paquet d'impulsions contenant le nombre nécessaire d'impulsions avec une
fréquence de récurrence des impulsions inférieure à l'inverse du temps d'effondrement d'une bulle de
l'imprimante thermique à jet d'encre et supérieure à l'inverse du temps de retrait de l'encre de l'imprimante
thermique à jet d'encre, et

10 application du paquet d'impulsions aux moyens de production de la goutte d'encre de l'imprimante
thermique à jet d'encre.

16. Le procédé de la revendication 15, caractérisé en ce que les étapes sont répétées plusieurs fois pour
provoquer l'émission d'une pluralité de gouttes et pour former un intervalle de repos supérieur ou égal à
l'intervalle de temps de détachement d'une gouttelette de l'imprimante thermique à jet d'encre.

15

20

25

30

35

40

45

50

55

60

65

0 124 190

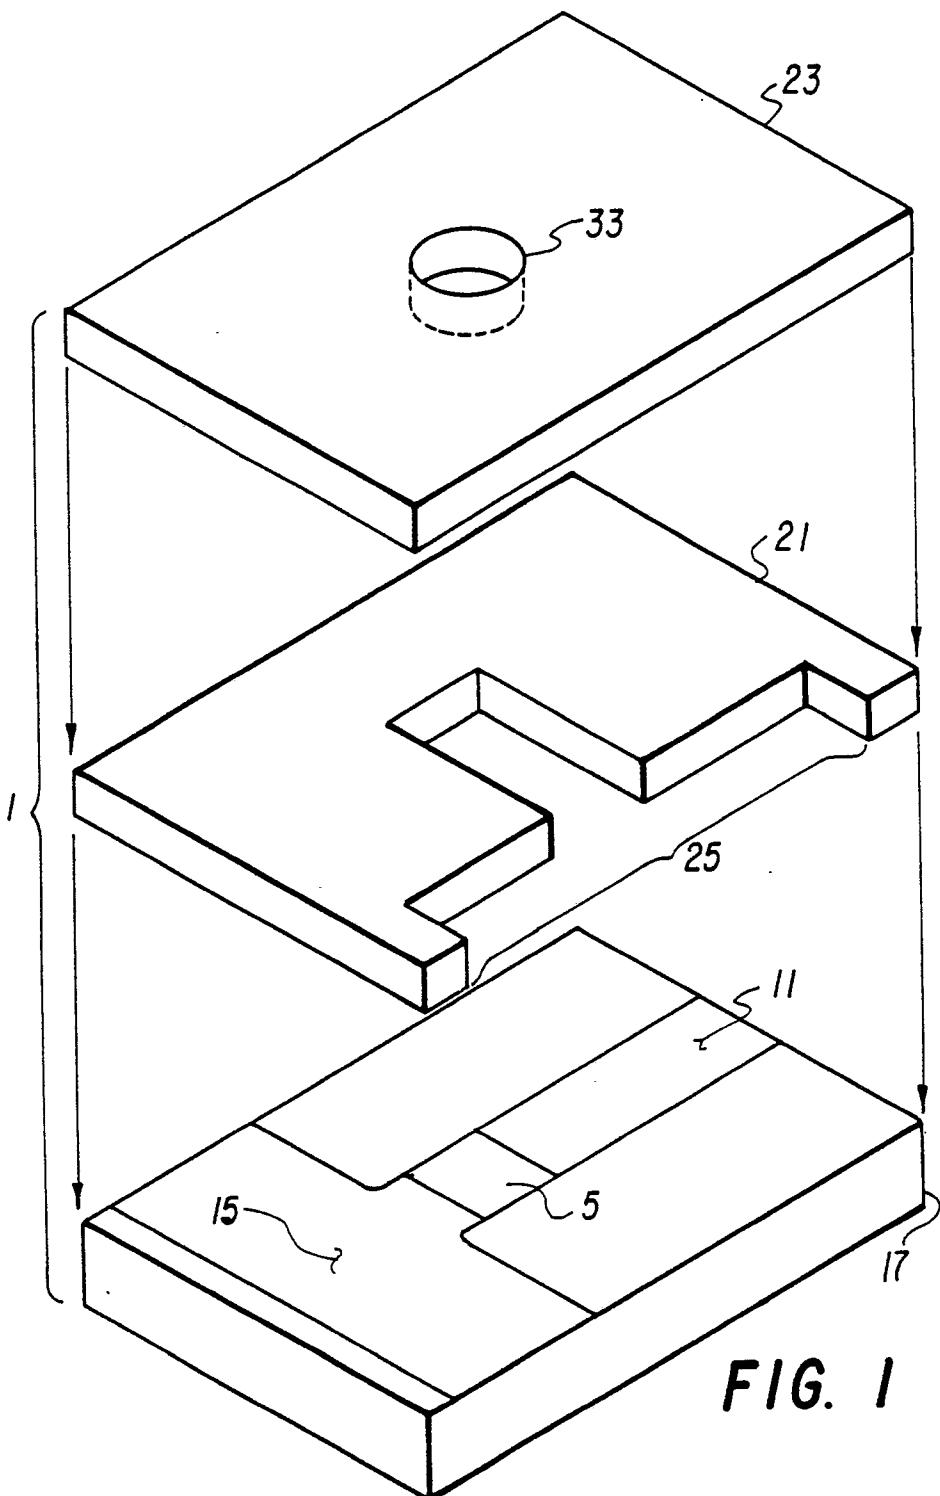


FIG. 1

0 124 190

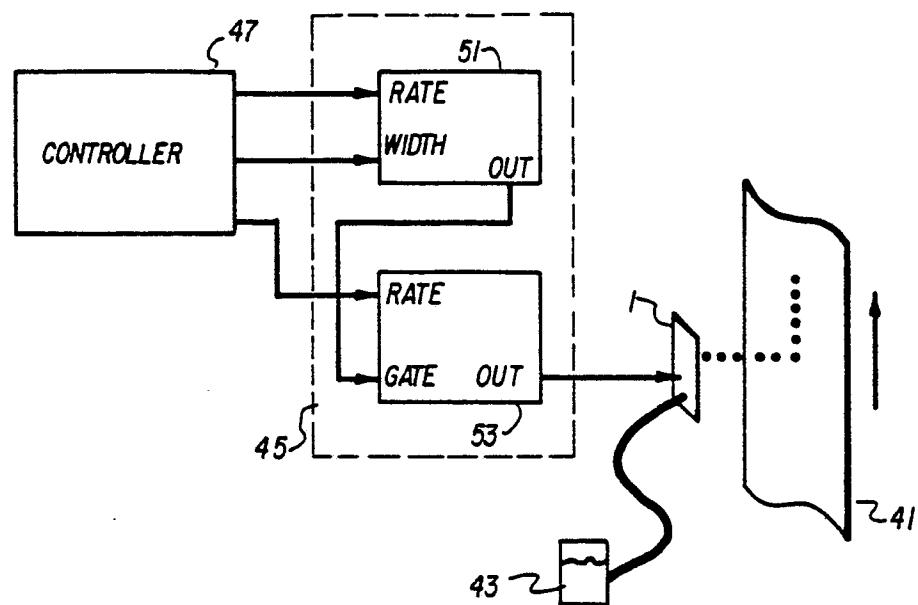


FIG. 2

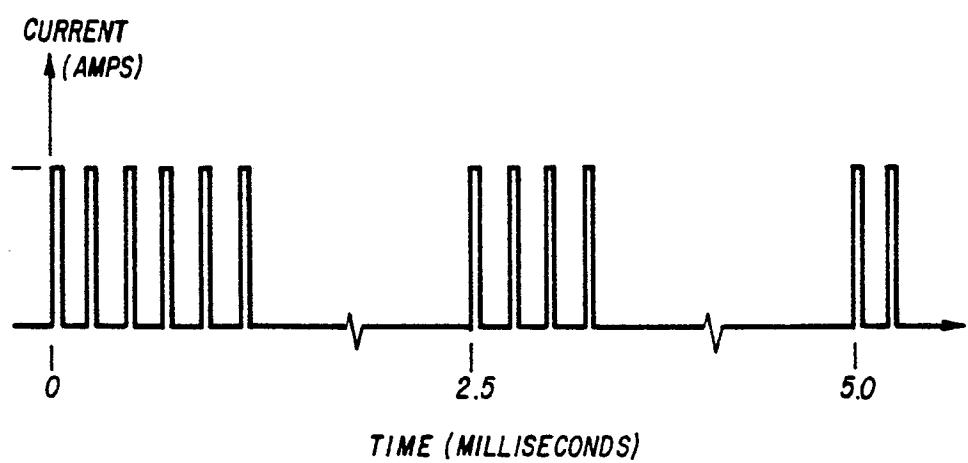


FIG. 3

0 124 190

