



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 394 411 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
26.10.2005 Bulletin 2005/43

(51) Int Cl.7: **F04B 27/10, F04B 27/18**

(21) Application number: **03019524.2**

(22) Date of filing: **29.08.2003**

(54) **Swash plate type variable displacement compressor**

Taumelscheibenkompressor mit variabler Verdrängung

Compresseur à déplacement variable du type à disque oblique

(84) Designated Contracting States:
DE FR IT SE

(30) Priority: **30.08.2002 JP 2002255225**
11.06.2003 JP 2003167059

(43) Date of publication of application:
03.03.2004 Bulletin 2004/10

(73) Proprietor: **KABUSHIKI KAISHA TOYOTA**
JIDOSHOKKI
Kariya-shi, Aichi-ken (JP)

(72) Inventors:
• **Hibino, Sokichi**
Kariya-shi Aichi-ken (JP)
• **Fukanuma, Tetsuhiko**
Kariya-shi Aichi-ken (JP)
• **Kayukawa, Hiroaki**
Kariya-shi Aichi-ken (JP)

- **Tokunaga, Eiji**
Kariya-shi Aichi-ken (JP)
- **Morishita, Atsuyuki**
Kariya-shi Aichi-ken (JP)
- **Murakami, Tomohiro**
Kariya-shi Aichi-ken (JP)
- **Kimoto, Yoshio**
Kariya-shi Aichi-ken (JP)
- **Kondo, Yoshitami**
Kariya-shi Aichi-ken (JP)

(74) Representative: **HOFFMANN EITLE**
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(56) References cited:
EP-A- 0 789 145 **EP-A- 0 794 331**
EP-A- 0 943 802 **EP-A- 1 092 873**
US-A- 4 005 948

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 394 411 B1

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a swash plate type variable displacement compressor.

[0002] A conventional swash plate type variable displacement compressor includes a cylinder block and a housing. The cylinder block defines a cylinder bore therein. The housing is fixed to the cylinder block and defines a crank chamber, a suction chamber and a discharge chamber. The suction chamber and the discharge chamber are connected to a refrigerating circuit that includes a condenser, an expansion valve and an evaporator. A piston is accommodated in the cylinder bore so as to be able to reciprocate therein. The piston defines a compression chamber in the cylinder bore. A drive shaft is rotatably supported by the cylinder block and the housing. The drive shaft is driven by an external drive source such as an engine of a vehicle. A swash plate is supported by the drive shaft in the crank chamber so as to rotate integrally with the drive shaft and so as to be inclinable with respect to the axis of the drive shaft. The swash plate allows the piston to reciprocate through a pair of shoes and a piston rod. The pressure in the crank chamber is controlled by a control mechanism.

[0003] There are three types of the control mechanisms. One of the control mechanisms, which is a supply control mechanism, includes a bleed passage that has a constant inner diameter and continuously interconnects the crank chamber with the suction chamber regardless an inclination angle of the swash plate, and adjusts an opening degree of a supply passage which interconnects the discharge chamber with the crank chamber by a control valve. Another control mechanism, which is a bleed control mechanism, adjusts an opening degree of the bleed passage by a control valve. The other control mechanism, which is a three-way valve control mechanism, adjusts both opening degrees of the bleed passage and the supply passage by a control valve.

[0004] In the compressor, when the drive shaft is driven by the external drive source, the swash plate rotates integrally with the drive shaft. The piston reciprocates in the cylinder bore in accordance with the inclination angle of the swash plate. Refrigerant gas is introduced from the suction chamber into the compression chamber. The refrigerant gas is discharged to the discharge chamber after compressed. Therefore, refrigeration capacity in the refrigerating circuit is performed in accordance with an amount of the refrigerant gas discharged to the discharge chamber. Since the pressure in the crank chamber is controlled by the control mechanism, the inclination angle of the swash plate is adjusted. As a result, the stroke of the piston is varied, and the amount of the refrigerant gas discharged from the compression chamber to the discharge chamber by the re-

ciprocation of the piston is varied.

[0005] In the control mechanism, blow-by gas, which is the refrigerant gas leaked from the compression chamber through a clearance between the cylinder bore and the piston, is supplied to the crank chamber. In the control mechanism including the supply passage, high-pressure refrigerant gas is supplied from the discharge chamber to the crank chamber. On the other hand, in the control mechanism including the bleed passage, the refrigerant gas in the crank chamber is discharged to the suction chamber. The refrigerant gas includes lubricating oil. Therefore, the lubricating oil is stored in the crank chamber, and sliding parts such as the swash plate and the shoes are lubricated by the lubricating oil.

[0006] However, in the above-mentioned swash plate type variable displacement compressor, the lubricating oil is excessively stored in the crank chamber in the maximum displacement operation of the compressor, depending on a kind of the control mechanisms. In this case, it is hard to cope with the compression efficiency and the durability of the compressor.

[0007] Namely, in the compressor including the supply control mechanism as the control mechanism, the inner diameter of the bleed passage is small so as to be able to increase the pressure in the crank chamber in a displacement-decreasing operation of the compressor, in which the supply passage is opened by the control valve for decreasing the displacement of the compressor. Furthermore, in the maximum displacement operation of the compressor, in which the pressure in the crank chamber is relatively low, the supply passage is closed by the control valve. So the high-pressure refrigerant gas in the discharge chamber is not supplied to the crank chamber. Therefore, in the maximum displacement operation of the compressor, the lubricating oil stored in the crank chamber is not pushed out to the bleed passage by the refrigerant gas. As a result, the lubricating oil is excessively stored in the crank chamber.

[0008] Also, in the compressor including the three-way valve control mechanism as the control mechanism, when the displacement of the compressor is decreased by increasing the pressure in the crank chamber, the supply passage is opened by the control valve and the bleed passage is closed by the control valve. On the other hand, when the displacement of the compressor is increased by decreasing the pressure in the crank chamber, the supply passage is closed by the control valve and the bleed passage is opened by the control valve. Therefore, the opening degree of the bleed passage, which becomes the maximum by the control valve in the maximum displacement operation of the compressor, is not relatively large. Furthermore, in the maximum displacement operation of the compressor, the supply passage is closed, and the high-pressure refrigerant gas in the discharge chamber is not supplied to the crank chamber. Therefore, in the maximum displacement operation of the compressor, the lubricating

oil stored in the crank chamber is hard to push out to the bleed passage by the refrigerant gas. The lubricating oil is easily excessively stored in the crank chamber. Although the three-way valve control mechanism includes the bleed passage, the lubricating oil is easily excessively stored in the crank chamber due to a small inner diameter of the bleed passage.

[0009] On the other hand, in the compressor including the bleed control mechanism as the control mechanism, the pressure in the crank chamber is increased by the blow-by gas that is continuously supplied to the crank chamber and by the high-pressure refrigerant gas that is continuously supplied to the crank chamber through the supply passage. Therefore, in the maximum displacement operation of the compressor, the opening degree of the bleed passage is large. As a result, the lubricating oil is hard to store in the crank chamber excessively.

[0010] When the control mechanism is the supply control mechanism or the three-way valve control mechanism, in the maximum displacement operation of the compressor, the lubricating oil is excessively stored in the crank chamber. Therefore, the ratio of the lubricating oil in the refrigerant gas is decreased in the refrigerating circuit, and the refrigerant gas that does not contain much lubricating oil is introduced from the suction chamber into the compression chamber. As a result, sliding performance of the piston in the cylinder bore may deteriorate, and it is worried that the durability of the piston deteriorates.

[0011] In order to solve the above problem, it is considered to increase the ratio of the lubricating oil in the refrigerant gas. However, in the compressor, in the displacement-decreasing operation of the compressor, in which the pressure in the crank chamber is relatively high, the supply passage is opened by the control valve. The high-pressure refrigerant gas is supplied to the crank chamber, and the lubricating oil stored in the crank chamber is easily pushed out to the bleed passage by the high-pressure refrigerant gas. Therefore, if the ratio of the lubricating oil in the refrigerant gas is increased, a large amount of the lubricating oil, which is pushed out in the displacement-decreasing operation of the compressor, is mixed in the refrigerant gas in the refrigerating circuit. The ratio of the lubricating oil in the refrigerant gas in the refrigerating circuit becomes excessively high. As a result, the compression efficiency of the compressor becomes low.

[0012] A communication path that interconnects the crank chamber with the compression chamber is disclosed in Japanese Unexamined Patent Publication No. 56-162281, No. 7-35037, No. 2001-107847 and No. 2001-20863, and International Publication No. WO96/39581.

[0013] In the compressor disclosed in Japanese Unexamined Patent Publication No. 56-162281, a swash plate is fixed to a drive shaft and is not inclinable with respect to the axis of the drive shaft. The compressor

does not include a control mechanism that controls the pressure in the crank chamber for changing the displacement of the compressor. In the compressor, which is a fixed displacement type, only volumetric efficiency is improved by interconnecting the crank chamber or a swash plate chamber with the compression chamber by the communication path.

[0014] In the compressor disclosed in Japanese Unexamined Patent Publication No. 7-35037, refrigerant gas in the crank chamber is introduced into the compression chamber through the communication path that interconnects the crank chamber with the compression chamber. Lubricating oil in the crank chamber is not discharged into the compression chamber in the maximum displacement operation of the compressor. The communication path only allows the refrigerant gas to move from a suction chamber to the crank chamber, and the pressure in the crank chamber is not decreased through the communication path.

[0015] In the compressor disclosed in Japanese Unexamined Patent Publication No. 2001-107847, the communication path that interconnects the crank chamber with the compression chamber functions as a passage for blow-by gas. Lubricating oil in the crank chamber is not discharged into the compression chamber in the maximum displacement operation of the compressor.

[0016] A compressor in which a groove is formed on the outer circumferential surface of the piston is disclosed in Japanese Unexamined Patent Publication No. 2001-20863 and international Publication No. WO96/39581. However, in the compressor disclosed in Japanese Unexamined Patent Publication No. 2001-20863, the groove does not interconnect the crank chamber with the compression chamber and only functions as a fluid bearing. Also, In the compressor disclosed in International Publication No. WO96/39581, the groove does not interconnect the crank chamber with the compression chamber and is only for storing the lubricating oil in a cylinder bore therein.

[0017] EP 0789145 A1 discloses a swash plate type variable compressor having similar features to the pre-characterizing portion of Claim 1.

[0018] EP 1092873 A discloses a compressor having the same structural features as the pre-characterizing portion of Claim 1.

SUMMARY OF THE INVENTION

[0019] The present invention is directed to a swash plate type variable displacement compressor including a control mechanism that decreases pressure in a crank chamber by a bleed passage interconnecting the crank chamber with a suction chamber, wherein the durability and compression efficiency of the swash plate type variable displacement compressor are compatible with each other without excessively storing lubricating oil in the crank chamber in the maximum displacement oper-

ation of the compressor.

[0020] In accordance with the present invention, there is provided a swash plate type variable displacement compressor for connection to an external drive source for compressing refrigerant gas that contains lubricating oil, having a cylinder block defining a cylinder bore, a housing, a drive shaft, a swash plate, a piston and a control mechanism for controlling pressure in a crank chamber, the crank chamber, a suction pressure region and a discharge chamber being defined in the compressor, the housing being fixed to the cylinder block, the drive shaft being supported by the housing and the cylinder block for rotation, the drive shaft being arranged to be driven by the external drive source, the drive shaft having an axis, the swash plate being supported by the drive shaft in the crank chamber so as to rotate integrally with the drive shaft, the swash plate being inclinable with respect to the axis of the drive shaft for varying an inclination angle of the swash plate in accordance with the pressure in the crank chamber, the piston being accommodated in the cylinder bore so as to define a compression chamber in the cylinder bore, the piston being coupled to the swash plate for converting the rotation of the swash plate into the reciprocating movement of the piston, displacement of the compressor being varied by the reciprocation of the piston in accordance with the inclination angle of the swash plate, the control mechanism includes a bleed passage that interconnects the crank chamber with the suction pressure region for decreasing the pressure in the crank chamber, characterized in that:

a communication path interconnects the crank chamber with the compression chamber only while the inclination angle of the swash plate is substantially a maximum inclination angle and the piston is located substantially at its bottom dead center.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] For a better understanding of the present invention, and to show how the same may be carried into effect, reference will now be made, by way of example only, to the following drawings, in which:-

FIG. 1 is a longitudinal cross-sectional view of a compressor according to a first preferred embodiment;

FIG. 2A is a view illustrating a supply control mechanism according to the first preferred embodiment;

FIG. 2B is a view illustrating a three-way valve control mechanism according to a first alternative preferred embodiment;

FIG. 3 is a partially enlarged longitudinal cross-sectional view of the compressor according to the first preferred embodiment;

FIG. 4 is a view taken by the line I - I in FIG. 1 of the first preferred embodiment;

FIG. 5 is a partially enlarged view of FIG. 4;

FIG. 6 is a partially enlarged longitudinal cross-sectional view of a compressor according to a second preferred embodiment;

FIG. 7 is a partially enlarged longitudinal cross-sectional view of a compressor according to a third preferred embodiment;

FIG. 8 is a partially enlarged longitudinal cross-sectional view of a compressor according to a fourth preferred embodiment;

FIG. 9 is a cross-sectional view of a compressor according to a fifth preferred embodiment;

FIG. 10 is a partially enlarged longitudinal cross-sectional view of a compressor according to a sixth preferred embodiment;

FIG. 11 is a cross-sectional view of the compressor according to the sixth preferred embodiment;

FIG. 12 is a cross-sectional view of a compressor according to a seventh preferred embodiment;

FIG. 13 is a partially enlarged longitudinal cross-sectional view of a compressor according to an eighth preferred embodiment;

FIG. 14A is a cross-sectional view of the compressor according to the eighth preferred embodiment;

FIG. 14B is a partially enlarged view of FIG. 14A;

FIG. 14C is a perspective view of the head of a piston according to the eighth preferred embodiment;

FIG. 15 is a partially enlarged longitudinal cross-sectional view of a compressor according to a ninth preferred embodiment;

FIG. 16 is a partially enlarged longitudinal cross-sectional view of a compressor according to a tenth preferred embodiment;

FIG. 17 is a partially enlarged plan view of the compressor when viewed from the inside of a cylinder bore according to the tenth preferred embodiment;

FIG. 18 is a partially enlarged plan view of a compressor when viewed from the inside of a cylinder bore according to a eleventh preferred embodiment;

FIG. 19 is an explanatory view of FIG. 18;

FIG. 20 is a graph showing a relationship between the width of a straight flute portion and the central angle of an introduction portion according to the eleventh preferred embodiment; and

FIG. 21 is a longitudinal cross-sectional view of a compressor according to a twelfth preferred embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0022] Preferred embodiments 1 through 12 according to the present invention will be described by referring to FIGs. 1 through 21 hereafter.

[0023] Now, the first preferred embodiment will be described. As shown in FIG. 1, a compressor of the first preferred embodiment has a cylinder block 1 and a housing that includes a cup-shaped front housing 2 and a rear housing 7. In FIG. 1, the left side and the right side of the drawing respectively correspond to the front side and the rear side of the compressor. The cylinder block 1 has seven bore surfaces that define seven cylinder bores 1a, a shaft hole 1b, a muffler chamber 1c and an inlet 1d. The front housing 2 is fixed to the front end of the cylinder block 1. The rear housing 7 is fixed to the rear end of the cylinder block 1. A suction valve plate 3, a valve plate 4, a discharge valve plate 5 and a retainer plate 6 are placed between the rear housing 7 and the cylinder block 1.

[0024] A shaft hole 2a is formed in the front housing 2. A crank chamber 8 is defined by the front end of the cylinder block 1 and the front housing 2. A shaft seal 9 and a radial bearing 10 are arranged in the shaft hole 2a. A radial bearing 11 is arranged in the shaft hole 1b. A drive shaft 12 is rotatably supported by the front housing 2 through the shaft seal 9 and the radial bearing 10, and by the cylinder block 1 through the radial bearing 11 in the crank chamber 8.

[0025] A lug plate 14 is secured to the drive shaft 12 in the crank chamber 8. A thrust bearing 13 is interposed between the front housing 2 and the lug plate 14. A pair of support arms 15 is mounted on the lug plate 14 so as to protrude rearward. A guide hole 15a is formed in each support arm 15 and has a cylindrical inner surface. The drive shaft 12 is interposed through a through hole 16a of a swash plate 16. A spring 17 for decreasing inclination angle is arranged between the swash plate 16 and the lug plate 14. A circlip 25 is fitted around the drive shaft 12 near the shaft hole 1b of the cylinder block 1. A restoring spring 26 is arranged between the circlip 25 and the swash plate 16. A thrust bearing 27 is arranged at the rear end of the drive shaft 12 in the shaft hole 1b of the cylinder block 1. A spring 29 is arranged between the thrust bearing 27 and the suction valve plate 3.

[0026] A pair of guide pins 16b is mounted on the front

side of the swash plate 16 so as to protrude toward each support arm 15. A guide ball 16c having a spherical surface is formed on a top of each of the guide pins 16b so as to slidably move in the guide hole 15a. Therefore, the swash plate 16 is supported by the drive shaft 12 so as to rotate integrally with the drive shaft 12 and so as to be inclinable with respect to the axis of the drive shaft 12. A hollow piston 19 is accommodated in each of the cylinder bores 1a. The piston 19 is coupled to the swash plate 16 through a pair of shoes 18. The outer circumferential surface of each of the pistons 19 is covered with a sliding film that solid lubricant such as PTFE (polytetrafluoroethylene) is dispersed in binder resin made of polyamide-imide. The compressor is designed such that the position of the top dead center of the piston 19 in the maximum displacement operation of the compressor is substantially identical to that in the minimum displacement operation of the compressor. A compression chamber 30 is defined by the cylinder bore 1a and the piston 19. An inclination angle of the swash plate 16 is an angle between the swash plate 16 and a hypothetical plane perpendicular to the axis of the drive shaft 12. A maximum inclination angle of the swash plate 16 is an angle between the swash plate 16 and the hypothetical plane perpendicular to the axis of the drive shaft 12 when the swash plate 16 contacts the lug plate 14.

[0027] The drive shaft 12 protrudes frontward from the front housing 2, and a pulley 22 is fixed to the front end of the drive shaft 12 by a bolt 23. The pulley 22 is supported by the front housing 2 through a ball bearing 24. The pulley 22 is coupled to a belt, and the belt is connected to an engine EG as an external drive source.

[0028] A suction chamber 7a is defined in the rear housing 7 and is interconnected with the inlet 1d through a suction passage, which is not shown. A suction port 31 is formed in the retainer plate 6, the discharge valve plate 5 and the valve plate 4. A suction valve 3a is formed in the suction valve plate 3. The suction chamber 7a is interconnected with each of the cylinder bores 1a through the suction port 31 and the suction valve 3a. The inlet 1d is connected to an evaporator EV in a refrigerating circuit by a pipe. The evaporator EV is connected to a condenser CO by a pipe via an expansion valve V. A discharge chamber 7b is defined around the suction chamber 7a in the rear housing 7. A discharge passage 7d is formed in the rear housing 7 by extending through the retainer plate 6, the discharge valve plate 5, the valve plate 4 and the suction valve plate 3. The discharge passage 7d interconnects the discharge chamber 7b with the muffler chamber 1c. The muffler chamber 1c is connected to the condenser in the refrigerating circuit by a pipe. A discharge port 32 is formed in the valve plate 4 and the suction valve plate 3. A discharge valve 5a is formed in the discharge valve plate 5. The discharge chamber 7b is interconnected with each of the cylinder bores 1a through the discharge port 32 and the discharge valve 5a.

[0029] A control valve 34 is arranged in the rear hous-

ing 7. As shown in FIG. 2A, a supply passage 36 interconnects the discharge chamber 7b with the crank chamber 8, and the control valve 34 is arranged on the supply passage 36. The opening degree of the control valve 34 can be adjusted in accordance with a suction pressure P_s in the suction chamber 7a. A bleed passage 35 interconnects the crank chamber 8 with the suction chamber 7a for decreasing the pressure in the crank chamber 8. The bleed passage 35 has a throttle 35a with a constant inner diameter and continuously interconnects the crank chamber 8 with the suction chamber 7a regardless the inclination angle of the swash plate 16. A clearance is formed in the piston 19 shown in FIG. 1 between the piston 19 and the cylinder bore 1a. Blow-by gas, which is the refrigerant gas leaked from the compression chamber 30 to the crank chamber 8, is supplied to the crank chamber 8 through the clearance. In the compressor, a supply control mechanism which is a control mechanism for controlling the pressure in the crank chamber 8 is constituted of the supply passage 36, the control valve 34, the bleed passage 35, and the clearance between the piston 19 and the cylinder bore 1a.

[0030] As a characteristic structure of the compressor, as shown in FIGS. 3 and 4, a communication groove 50 as a communication path is formed in the surface of one of the cylinder bores 1a and interconnects the crank chamber 8 with the associated compression chamber 30. The communication groove 50 axially extends from a crank chamber side toward a suction valve plate side in the bore surface of the cylinder block 1. The communication groove 50 has a length so as to cross the rear end of the piston 19 while the inclination angle of the swash plate 16 is substantially the maximum inclination angle and the piston 19 is located substantially at its bottom dead center. Namely, the communication groove 50 interconnects the crank chamber 8 with the compression chamber 30 while the inclination angle of the swash plate 16 is substantially the maximum inclination angle and the piston 19 is located substantially at its bottom dead center. Therefore, when the piston 19 is in a compression process, the refrigerant gas in the compression chamber 30 does not leak to the crank chamber 8 through the communication groove 50. Furthermore, as shown in FIG. 4, the communication groove 50 is located in an inner circumferential area that is near the drive shaft 12, that is, inside a circle C that passes through the center axis of each of the cylinder bore 1a. As shown in FIG. 5, arcuate chamfers 50a and 50b are formed respectively at both side surfaces of the communication groove 50. As shown in FIGS. 1 and 3, an arcuate chamfer 50c is formed at the periphery of the communication groove 50 at a compression chamber side. The communication groove 50 is relatively easily formed only by working the cylinder block 1.

[0031] In the above-constructed compressor, as shown in FIG. 1, while the engine EG is running, the pulley 22 is rotated by the engine EG via the belt, and the drive shaft 12 is continuously driven. The swash

plate 16 oscillates as the swash plate 16 is rotated by the drive shaft 12, and the piston 19 reciprocates in the cylinder bore 1a. Namely, the rotation of the swash plate 16 is converted into the reciprocating movement of the piston 19. Therefore, the refrigerant gas in the evaporator in the refrigerating circuit is introduced into the suction chamber 7a through the Inlet 1d. After compressed in the compression chamber 30, the refrigerant gas is discharged into the discharge chamber 7b. The refrigerant gas in the discharge chamber 7b is discharged to the condenser CO through the muffler chamber 1c.

[0032] During the above period, the blow-by gas is supplied from the compression chamber 30 to the crank chamber 8 through the clearance between the cylinder bore 1a and the piston 19. As shown in FIG. 2A, the control valve 34 adjusts the opening degree of the supply passage 36 in accordance with the suction pressure P_s in the suction chamber 7a. Therefore, when the supply passage 36 is opened by the control valve 34, the refrigerant gas having the discharge pressure P_d in the discharge chamber 7b is supplied to the crank chamber 8 through the supply passage 36. On the other hand, the refrigerant gas in the crank chamber 8 is discharged to the suction chamber 7a through the bleed passage 35. Therefore, the pressure P_c in the crank chamber 8 is varied, and the back pressure that is applied to the piston 19 shown in FIG. 1 is varied. Then, the inclination angle of the swash plate 16 is varied, and the stroke of the piston 19 is varied. As a result, the displacement of the compressor can be practically changed from 0% to 100%. Namely, the displacement of the compressor is varied by the reciprocation of the piston 19 in accordance with the inclination angle of the swash plate 16. The refrigerant gas contains lubricating oil. Therefore, the lubricating oil is stored in the crank chamber 8, and sliding parts such as the swash plate 16 and the shoes 18 are lubricated by the lubricating oil.

[0033] In the compressor, the inner diameter of the throttle 35a of the bleed passage 35 is small such that the pressure P_c in the crank chamber 8 is capable of being increased in a displacement-decreasing operation of the compressor in which the supply passage 36 is opened by the control valve 34 for decreasing the displacement of the compressor. In the maximum displacement operation of the compressor, in which the pressure P_c in the crank chamber 8 is relatively low, the supply passage 36 is closed by the control valve 34. So the refrigerant gas having the discharge pressure P_d in the discharge chamber 7b is not supplied to the crank chamber 8. Therefore, in the maximum displacement operation of the compressor, the lubricating oil is not pushed out into the bleed passage 35 by the high-pressure refrigerant gas supplied from the discharge chamber 7b. As a result, the lubricating oil tends to be excessively stored in the crank chamber 8.

[0034] In the maximum displacement operation of the compressor, which is a state that the inclination angle of the swash plate 16 is substantially the maximum in-

clination angle, only while the piston 19 is located substantially at its bottom dead center, the crank chamber 8 is interconnected with the compression chamber 30 through the communication groove 50 as shown in FIG. 3. Therefore, the lubricating oil stored in the crank chamber 8 is discharged into the compression chamber 30 in the maximum displacement operation of the compressor. The compressor is designed such that the position of the top dead center of the piston 19 in the maximum displacement operation of the compressor is substantially identical to that in the minimum displacement operation of the compressor. Therefore, the lubricating oil in the crank chamber 8 can be discharged into the compression chamber 30 only in the maximum displacement operation of the compressor. Also, an appropriate amount of the lubricating oil can be stored in the crank chamber 8 when the compressor is not in the maximum displacement operation. In this way, the lubricating oil in the crank chamber 8 is easily discharged into the compression chamber 30 through the communication groove 50 in the maximum displacement operation of the compressor.

[0035] According to the first preferred embodiment, following advantageous effects are obtained.

[0036] The crank chamber 8 is interconnected with the compression chamber 30 through the communication groove 50 only while the inclination angle of the swash plate 16 is substantially the maximum inclination angle and the piston 19 is located substantially at its bottom dead center. Therefore, in the compressor, the lubricating oil in the crank chamber 8 can be discharged into the compression chamber 30 only in the maximum displacement operation of the compressor. The lubricating oil discharged to the compression chamber 30 enhances sliding performance between the cylinder bore 1a and the piston 19. If the lubricating oil stored in the crank chamber 8 is discharged to the compression chamber 30 even while the inclination angle of the swash plate 16 is not substantially the maximum inclination angle, the appropriate amount of the lubricating oil is hard to store in the crank chamber 8. In this case, the lubricity of the sliding parts of the swash plate 16 and the shoes 18 easily deteriorates. However, in this embodiment, the appropriate amount of the lubricating oil can be stored in the crank chamber 8 even though the compressor is not in the maximum displacement operation. Therefore, the lubricity of the sliding parts of the swash plate 16 and the shoes 18 can be ensured.

[0037] Also, since the arcuate chamfers 50a through 50c are respectively formed at both side surfaces of the communication groove 50 and at the periphery of the communication groove 50 at the compression chamber side in the compressor, abrasion of the piston 19 is avoided even when the piston 19 that reciprocates in the cylinder bore 1a slightly rolls in a circumferential direction of the cylinder bore 1a. Durability of the piston 19 is maintained, and the sliding performance of the piston 19 is excellent. Furthermore, the lubricant oil in the

communication groove 50 is easily discharged into the compression chamber 30 due to the chamfers 50a through 50c.

[0038] The lubricating oil in the crank chamber 8 tends to exist in the lower side in the crank chamber 8 due to its own weight. The lubricating oil in the crank chamber 8 also tends to exist in an outer circumferential area that is far from the drive shaft 12 due to centrifugal force generated by the rotation of the swash plate 16. The outer circumferential area is outside the circle C that passes through the center axis of each of the cylinder bores 1a. Therefore, since the communication groove 50 is located near the drive shaft 12 in the inner circumferential area as shown in FIG. 4, the lubricating oil in the crank chamber 8 can be gradually reduced. Also, side force is applied to the piston 19 in the compressor due to compression and suction reactive force such that the piston 19 is inclined with respect to the axis of the drive shaft 12 to have more distance from the rear side to the front side, while the compressor is driven. Therefore, the front side end of the piston 19 at a swash plate side is easy to press against the cylinder bore 1a at the outer side of the bore surface of the cylinder block 1. However, since the communication groove 50 is formed at the inner side of the bore surface of the cylinder block 1. Therefore, the abrasion of the piston 19, especially abrasion of the sliding film can be more certainly avoided.

[0039] Thus, in the compressor, the ratio of the lubricating oil in the refrigerant gas in the refrigerating circuit is hard to excessively decrease, and the refrigerant gas appropriately containing the lubricating oil is introduced from the suction chamber 7a to the compression chamber 30 through the inlet 1d. Therefore, the sliding performance between the piston 19 and the cylinder bore 1a does not deteriorate, and the durability of the piston 19 is excellent. Furthermore, since it is unnecessary to excessively increase the ratio of the lubricating oil in the refrigerant gas, compression efficiency of the compressor can be maintained.

[0040] Consequently, the lubricating oil is not excessively stored in the crank chamber 8, and the excellent durability of the compressor can be compatible with maintaining the compression efficiency of the compressor.

[0041] The compressor is a clutchless compressor whose drive shaft 12 is continuously driven while the engine EG is running. In a conventional clutchless compressor, the lubricating oil is excessively stored in the crank chamber in the maximum displacement operation of the compressor. If the relatively large amount of the lubricating oil is still stored in the crank chamber in the minimum displacement operation of the compressor, the swash plate stirs the lubricating oil in the crank chamber, and the lubricating oil becomes hot by shearing. In this case, the temperature of the compressor becomes extremely high. As a result, seal members deteriorate, and the durability of the compressor deteriorates. On the other hand, the lubricating oil is not exces-

sively stored in the crank chamber 8 in the compressor of the first preferred embodiment. Therefore, seal members such as the shaft seal 9 and an O-ring, which is not shown, are hard to deteriorate, and the durability of the seal members is excellent.

[0042] A second, third, fourth, fifth, sixth, seventh, eighth, ninth, tenth, eleventh and twelfth preferred embodiments will be described by referring to FIGs. 6 through 21. The same reference numerals denote the substantially identical elements as those in the first preferred embodiment.

[0043] In a compressor of the second preferred embodiment, as shown in FIG. 6, the communication groove 50 of the first preferred embodiment is changed to a communication groove 51 as a communication path. The communication groove 51 formed in the bore surface of the cylinder block 1 is deeper at the crank chamber side than at the compression chamber side so as to have a trapezoidal longitudinal section. Therefore, the cross-sectional area of the communication groove 51 at the crank chamber side is larger than that at the compression chamber side. Namely, the cross-sectional area of the end of the communication groove 51 at the crank chamber side is larger than any other cross-sectional area of the communication groove 51. The other structure of the compressor is the same as the compressor in the first preferred embodiment.

[0044] In the compressor, the lubricating oil in the crank chamber 8 is easily introduced into the communication groove 51 in the maximum displacement operation of the compressor. Therefore, the advantageous effects of the present invention can be enhanced.

[0045] In a compressor of the third preferred embodiment, as shown in FIG. 7, the communication groove 50 of the first preferred embodiment is changed to a communication groove 52 as the communication path. The communication groove 52 at the crank chamber side extends toward the drive shaft 12. Therefore, the cross-sectional area of the communication groove 52 at the crank chamber side is larger than that at the compression chamber side. The other structure of the compressor is the same as the compressor in the first preferred embodiment. In the compressor, the same advantageous effects are obtained as mentioned in the second preferred embodiment.

[0046] In a compressor of the fourth preferred embodiment, as shown in FIG. 8, the communication groove 50 of the first preferred embodiment is changed to a communication passage 53 as the communication path. The communication passage 53 is formed in the cylinder block 1 so as to extend through the cylinder block 1. The other structure of the compressor is the same as the compressor in the first preferred embodiment. In the compressor, the same advantageous effects are obtained as mentioned in the first preferred embodiment.

[0047] In a compressor of the fifth preferred embodiment, the same communication grooves 50 as in the first preferred embodiment are formed in the three cylinder

bores 1a that are located in an upper side of the compressor that is above a horizontal line L in a state when the compressor is installed in a vehicle. The other structure of the compressor is the same as the compressor in the first preferred embodiment.

[0048] In the compressor, the lubricating oil is easily supplied to the three cylinder bores 1a in which the lubricating oil tends to be lacking due to its own weight. The sliding performance in the corresponding compression chambers 30 is ensured by the lubricating oil supplied through the communication grooves 50. The other advantageous effects are the same as mentioned in the first preferred embodiment. The amount of the lubricating oil in the crank chamber 8 can be adjusted by changing the location and the number of the communication groove 50. Furthermore, in this embodiment, the communication groove 50 of the first preferred embodiment can be changed to the communication groove 51, the communication groove 52, or the communication passage 53.

[0049] In a compressor of the sixth preferred embodiment, as shown in FIG. 10, the communication groove 50 of the first preferred embodiment is changed to a communication groove 54 as the communication path. The communication groove 54 is formed in the front housing 2 and the cylinder block 1. As shown in FIG. 11, the communication groove 54 is located in the outer circumferential area that is far from the drive shaft 12 and that is outside the circle C which passes through the center axis of each of the cylinder bores 1a. The other structure of the compressor is the same as the compressor in the first preferred embodiment.

[0050] In the compressor, a large amount of the lubricating oil in the crank chamber 8 can be reduced by the centrifugal force generated by the rotation of the swash plate 16. The other advantageous effects are the same effects as mentioned in the first preferred embodiment.

[0051] In a compressor of the seventh preferred embodiment, as shown in FIG. 12, communication grooves 54 are formed in all of the bores surfaces of the cylinder block 1. The other structure of the compressor is the same as the compressor in the first preferred embodiment. In the compressor, the lubricating oil can be supplied to all cylinder bores 1a through the communication grooves 54.

[0052] In a compressor of the eighth preferred embodiment, as shown in FIGs. 13 through 14C, the communication groove 50 of the first preferred embodiment is changed to a communication groove 55 as the communication path. The communication groove 55 is formed in the outer circumferential surface and the end surface of the piston 19 at the head side of the piston 19. The communication groove 55 axially extends to the compression chamber 30. As shown in FIGs. 14B and 14C, Chamfers 55a and 55b are formed respectively at both side surfaces of the communication groove 55. As shown in FIG. 14C, chamfers 55c are formed at the periphery of the communication groove 55 at the compres-

sion chamber side. The other structure of the compressor is the same as the compressor in the first preferred embodiment. In the compressor, the same advantageous effects are obtained as mentioned in the first preferred embodiment.

[0053] In a compressor of the ninth preferred embodiment, as shown in FIG. 15, the communication groove 50 of the first preferred embodiment is changed to a communication groove 56 as the communication path. The communication groove 56 formed in the outer circumferential surface of the piston 19 is deeper at the crank chamber side than at the compression chamber side so as to have a trapezoidal longitudinal section. Therefore, the cross-sectional area of the communication groove 56 at the crank chamber side is larger than that at the compression chamber side. Namely, the cross-sectional area of the end of the communication groove 56 at the crank chamber side is larger than any other cross-sectional area of the communication groove 56. The other structure of the compressor is the same as the compressor in the first preferred embodiment.

[0054] In the compressor, the lubricating oil in the crank chamber 8 is easily introduced into the communication groove 56 in the maximum displacement operation of the compressor. Therefore, the advantageous effects of the present invention can be enhanced.

[0055] In a compressor of the tenth preferred embodiment, as shown in FIG. 16, the communication groove 50 of the first preferred embodiment is changed to a communication groove 57 as the communication path. The communication groove 57 is formed in the bore surface of the cylinder block 1 at the near side of the axis of the drive shaft. The communication groove 57 is constituted of an introduction portion 57a for introducing the lubricating oil to the compression chamber 30. The introduction portion 57a is broader at the crank chamber side than at the compression chamber side and that forms substantially a sector in shape when viewed from the inside of the cylinder bore 1a as shown in FIG. 17. A periphery E of the piston 19 at the swash plate side is positioned at the introduction portion 57a when the piston 19 is located substantially at its top dead center.

[0056] In the compressor, the same advantageous effects are obtained as mentioned in the first preferred embodiment. If the communication groove 57, which is formed in the bore surface of the cylinder block 1, extends axially so as to have sides parallel to each other and does not form a sector in shape when viewed from the inside of the cylinder bore 1a, the periphery E of the piston 19 slides over the communication groove 57 at its one position in a circumferential direction of the piston 19. In this case, the sliding film may abrade. However, the introduction portion 57a is broader at the crank chamber side than at the compression chamber side and forms substantially a sector in shape when viewed from the inside of the cylinder bore 1a. Therefore, the periphery E of the piston 19 at the swash plate side slides over the introduction portion 57a of the commu-

nication groove 57 at its different position in the circumferential direction of the piston 19. As a result, the abrasion of the piston 19, especially the abrasion of the sliding film can be avoided.

[0057] In a compressor of the eleventh preferred embodiment, as shown in FIG. 18, the communication groove 57 is changed to a communication groove 58 as the communication path. The communication groove 58 includes an introduction portion 58a that is the same as the introduction portion 57a of the tenth preferred embodiment and a straight flute portion 58b. In addition, the straight flute portion 58b is formed at the compression chamber side of the introduction portion 58a and extends in the axial direction of the drive shaft 12. As shown in FIG. 19, it is assumed that B denotes the diameter of the cylinder bore 1a and L denotes the distance between a hypothetical peak P of the introduction portion 58a and a rear end surface H of the piston 19 in a state that the inclination angle of the swash plate 16 is substantially the maximum inclination angle and that the piston 19 is located at its bottom dead center. Particularly, in this case, a width X of the straight flute portion 58b and a central angle θ of the introduction portion 58a ranges in an area α as shown in FIG. 20. Namely, the width X ranges from 0 to $0.47B$, and the central angle θ ranges from 2 to $2 \tan^{-1} \{0.63B/2/(12+L)\}$. The other structure of the compressor is the same as the compressor in the tenth preferred embodiment.

[0058] In the compressor, the same advantageous effects are obtained as mentioned in the first preferred embodiment. Especially, in the compressor, the amount of the lubricant oil that is discharged from the crank chamber 8 to the compression chamber 30 through introduction portion 58a can be controlled by adjusting the largeness of the straight flute portion 58b.

[0059] In a compressor of the twelfth preferred embodiment, as shown in FIG. 21, a suction chamber 7a is formed in an inner area in the rear housing 7 near the middle of the rear housing 7. A discharge chamber 7b is formed in an outer area in the rear housing 7 near the outer circumferential surface of the rear housing 7 separately from the suction chamber 7a. A rotary valve 60 is located in the shaft hole 1b of the cylinder block 1 and is fixed to the rear end of the drive shaft 12. An introduction hole 1e is radially formed from the shaft hole 1b to each of the compression chambers 30. An introduction chamber 60a is formed in the rotary valve 60 and communicates with the suction chamber 7a. A suction passage 60b is radially formed in the rotary valve 60 and interconnects the introduction chamber 60a with the introduction hole 1e that communicates with the compression chamber 30 in the suction process.

[0060] Also, a first communication groove 59a is formed in the outer circumferential surface of the piston 19 so as to extend axially. The first communication groove 59a at the crank chamber side is open to the crank chamber 8 only while the inclination angle of the swash plate 16 is substantially the maximum inclination

angle and the piston 19 is located substantially at its bottom dead center. A communication passage 59b is formed in the cylinder block 1 so as to extend through the cylinder block 1. The communication passage 59b interconnects the first communication groove 59a at the compression chamber side with the shaft hole 1b only while the inclination angle of the swash plate 16 is substantially the maximum inclination angle and the piston 19 is located substantially at its bottom dead center. A second communication groove 59c is formed on an outer circumferential surface of the rotary valve 60. The second communication groove 59c axially extends and communicates with the suction passage 60b. The second communication groove 59c communicates with the communication passage 59b only while the inclination angle of the swash plate 16 is substantially the maximum inclination angle and the piston 19 is located substantially at its bottom dead center. The first communication groove 59a, the communication passage 59b, the second communication groove 59c, the suction passage 60b and the introduction hole 1e are included in a communication path 59 that interconnects the crank chamber 8 with the compression chamber 30. The other structure is the same as the first preferred embodiment.

[0061] In the compressor, the rotary valve 60 is rotated integrally with the drive shaft 12 and interconnects the suction chamber 7a with the compression chamber 30 in the suction process sequentially, through the introduction chamber 60a, the suction passage 60b and the introduction hole 1e. Therefore, the suction valve plate 3 as shown in FIG. 1 is can be removed from the compressor, and the decrease in compression efficiency which is caused by resistance to suction at the suction valve 3a can be avoided.

[0062] Also, the second communication groove 59c, which is formed on the outer circumferential surface of the rotary valve 60, interconnects the communication passage 59b and the first communication groove 59a with the suction passage 60b only while the inclination angle of the swash plate 16 is substantially the maximum inclination angle and the piston 19 is located substantially at its bottom dead center. Therefore, the crank chamber 8 is interconnected with the compression chamber 30 through the first communication groove 59a, the communication passage 59b, the second communication groove 59c, the suction passage 60b and the introduction hole 1e as the communication path 59. Accordingly, in the compressor, the same advantageous effects are obtained as mentioned in the first preferred embodiment. Furthermore, in the twelfth preferred embodiment, in which the rotary valve 60 is utilized, the timing when the refrigerant is drawn into the cylinder bore 1a can be changed by adjusting the largeness and the location of the suction passage 60b of the rotary valve 60. Therefore, the amount of the lubricant oil that discharged from the crank chamber 8 into the cylinder bore 1a can be easily adjusted.

[0063] According to the present invention, the follow-

ing alternative preferred embodiments may be practiced.

[0064] The supply control mechanism is utilized as the control mechanism as shown in FIG. 2A in the above-mentioned first preferred embodiment. However, in a first alternative preferred embodiment, a three-way valve control mechanism may be utilized as the control mechanism as shown in FIG. 2B. In the three-way valve control mechanism, a control valve 37 is arranged on the supply passage 36 that interconnects the discharge chamber 7b to the crank chamber 8, and on the bleed passage 35 that interconnects the crank chamber 8 to the suction chamber 7a. The control valve 37 adjusts both opening degrees of the supply passage 36 and the bleed passage 35 in accordance with the suction pressure P_s in the suction chamber 7a. The three-way valve control mechanism is constituted of the supply passage 36, the control valve 37, the bleed passage 35 and the clearance between the piston 19 and the cylinder bore 1a. In the compressor, although a control mechanism is the three-way valve control mechanism, the same advantageous effects are obtained by the communication groove 50 as mentioned in the above-mentioned first preferred embodiment.

[0065] The pulley 22 is provided directly to the drive shaft 12 of the compressor in the above-mentioned first preferred embodiment. In a second alternative preferred embodiment, the pulley 22 is not provided directly to the drive shaft 12 of the compressor, and an electromagnetic clutch may be provided to the drive shaft 12.

[0066] The communication groove 57 or 58 is formed in one of the cylinder bores 1a in the above-mentioned tenth or eleventh preferred embodiment. In a third alternative preferred embodiment, the communication grooves 57 or 58 may be formed in all cylinder bores 1a. The communication grooves 57 or 58 may be formed in any position of the cylinder bores 1a in a circumferential direction of the cylinder bores 1a. Since the side force is applied to the piston 19, it is preferable that the communication grooves 57 are formed in the bore surface of the cylinder block 1 at the near side of the axis of the drive shaft 12.

[0067] The second communication groove 59c that is a part of the communication path is formed on the outer circumferential surface of the rotary valve 60 in the above-mentioned twelfth preferred embodiment. However, in a fourth alternative preferred embodiment, the communication path may not be formed in the rotary valve 60 and may be formed in one of the cylinder bore 1a, the piston 19, the cylinder block 1 and the front housing 2, or in a combination selected from the cylinder bore 1a, the piston 19, the cylinder block 1 and the front housing 2, similarly to the above-mentioned preferred embodiments except for the above-mentioned twelfth preferred embodiment. In the above structure, the same advantageous effects are obtained as mentioned in the above-mentioned first preferred embodiment.

[0068] In the above-mentioned preferred embodi-

ments, the lubricating oil stored in the crank chamber 8 is discharged into the compression chamber 30 while the inclination angle of the swash plate 16 is substantially the maximum inclination angle. However, in a fifth alternative preferred embodiment, the lubricating oil 5 stored in the crank chamber 8 may be discharged into the suction chamber 7a or the discharge chamber 7b while the inclination angle of the swash plate 16 is substantially the maximum inclination angle in the above-mentioned preferred embodiments. Or, the lubricating oil 10 stored in the crank chamber 8 may be discharged into any combination selected from the suction chamber 7a, the discharge chamber 7b and the compression chamber 30 while the inclination angle of the swash plate 16 is substantially the maximum inclination angle 15 in the above-mentioned preferred embodiments.

[0069] The present examples and embodiments are to be considered as illustrative and not restrictive, and the invention is not to be limited to the details given herein but may be modified within the scope of the appended 20 claims.

Claims

1. A swash plate type variable displacement compressor for connection to an external drive source for compressing refrigerant gas that contains lubricating oil, having a cylinder block (1) defining a cylinder bore (1a), a housing (2, 7), a drive shaft (12), a swash plate (16), a piston (19) and a control mechanism for controlling pressure in a crank chamber (8), the crank chamber, a suction pressure region (7a, 60a) and a discharge chamber (7b) being defined in the compressor, the housing being fixed to the cylinder block, the drive shaft being supported by the housing and the cylinder block for rotation, the drive shaft being arranged to be driven by the external drive source, the drive shaft having an axis, the swash plate being supported by the drive shaft 30 in the crank chamber so as to rotate integrally with the drive shaft, the swash plate being inclinable with respect to the axis of the drive shaft for varying an inclination angle of the swash plate in accordance with the pressure in the crank chamber, the piston 35 being accommodated in the cylinder bore so as to define a compression chamber (30) in the cylinder bore, the piston being coupled to the swash plate for converting the rotation of the swash plate into the reciprocating movement of the piston, displacement of the compressor being varied by the reciprocation of the piston in accordance with the inclination angle of the swash plate, the control mechanism includes a bleed passage (35) that interconnects the crank chamber (8) with the suction pressure region (7a, 60a) for decreasing the pressure in the crank chamber, **characterized in that:**

a communication path (50-59) interconnects the crank chamber (8) with the compression chamber (30) only while the inclination angle of the swash plate (16) is substantially a maximum inclination angle and the piston (19) is located substantially at its bottom dead center.

2. The compressor according to claim 1, wherein the control mechanism includes:

a supply passage (36) interconnecting the discharge chamber (7b) with the crank chamber (8); and

a control valve (34) arranged on the supply passage (36) for adjusting an opening degree of the supply passage, wherein the bleed passage (35) has a constant inner diameter for continuously interconnecting the crank chamber with the suction pressure region regardless the inclination angle of the swash plate, the suction pressure region being a suction chamber (7a) formed in the housing (7).

3. The compressor according to claim 1 or 2, wherein the compressor is continuously driven while the external drive source is running.

4. The compressor according to any one of claims 1 through 3, **characterized in that** the communication path (50-54, 57) is formed in the cylinder block (1) so as to cross the rear end of the piston (19) in the cylinder bore (1a) only while the inclination angle of the swash plate (16) is substantially the maximum inclination angle and the piston is located substantially at its bottom dead center.

5. The compressor according to claim 1, wherein the cylinder block (1) has a bore surface that defines the cylinder bore (1a), the communication path being a communication groove (50-54, 57) that is formed in the bore surface.

6. The compressor according to claim 5, wherein the communication groove (51, 52, 57) includes an introduction portion for introducing the lubricating oil to the compression chamber, the introduction portion being broader at a crank chamber side than at a compression chamber side and forming substantially a sector in shape when viewed from the inside of the cylinder bore, a periphery of the piston at a swash plate side being positioned at the introduction portion when the piston is located substantially at its top dead center.

7. The compressor according to claim 6, wherein the communication groove (50, 54, 57) includes a straight flute portion that is formed at the compression chamber side of the introduction portion and

that extends in an axial direction of the drive shaft.

8. The compressor according to claim 7, wherein a width of the straight flute portion ranges from 0 to 0.47B, a central angle of the introduction portion ranging from 2 to $2 \tan^{-1} \{0.63B/2/(12+L)\}$, B denoting the diameter of the cylinder bore, L denoting the distance between a hypothetical peak of the introduction portion and a rear end surface of the piston in a state that the inclination angle of the swash plate is the maximum inclination angle and that the piston is located at its bottom dead center. 5
9. The compressor according to any one of claims 5 through 8, wherein the communication groove (50-53, 57) is formed at the inner side of the bore surface of the cylinder block. 10
10. The compressor according to claim 5, wherein chamfers (50a, 50b, 50c) are formed respectively at both side surfaces of the communication groove. 15
11. The compressor according to claim 5 or 10, wherein a chamfer (50c) is formed at a periphery of the communication groove at a compression chamber side. 20
12. The compressor according to claim 1, wherein the communication path is a communication groove (55, 56) that is formed in an outer circumferential surface of the piston. 25
13. The compressor according to claim 12, wherein chamfers (55a, 55b, 55c) are formed respectively at both side surfaces of the communication groove. 30
14. The compressor according to claim 12 or 13, wherein a chamfer (55c) is formed at a periphery of the communication groove at a compression chamber side. 35
15. The compressor according to claim 1, wherein the communication path is a communication passage (53) that extends through the cylinder block (1). 40
16. The compressor according to claim 15, wherein a chamfer (50c) is formed at an opening of the communication passage at a compression chamber side. 45
17. The compressor according to claim 1, wherein the communication path is in communication with the compression chamber that is located in an upper side of the compressor in a state when the compressor is installed in a vehicle. 50
18. The compressor according to claim 1, wherein an end of the communication path (50, 51, 52, 53, 55, 56, 57, 59) at a crank chamber side is located in an

inner circumferential area near the drive shaft.

19. The compressor according to claim 1, wherein an end of the communication path (54) at a crank chamber side is located in an outer circumferential area far from the drive shaft.
20. The compressor according to claim 19, wherein the communication path is a communication groove that is formed in the housing (2) and the cylinder block (1).
21. The compressor according to claim 20, wherein the cylinder block has a plurality of bore surfaces that define the cylinder bores (1a), the communication groove being formed in each of the bore surface.
22. The compressor according to claim 1, wherein a cross-sectional area of an end of the communication path at a crank chamber side is larger than any other cross-sectional area of the communication path.
23. The compressor according to claim 1, wherein the cylinder block (1) has a shaft hole, the housing including a rear housing (7) that is located at a rear end side of the drive shaft (12), the rear housing forming a suction chamber (7a) in an inner area in the rear housing and the discharge chamber (7b) in an outer area in the rear housing separately from the suction chamber, the compressor including a rotary valve (60) that is placed at a rear end of the drive shaft and that has an introduction chamber (60a) communicating with the suction chamber, the suction pressure region including the suction chamber (7a) and the introduction chamber (60a), the rotary valve being located in the shaft hole of the cylinder block and interconnecting the suction chamber (7a) with the compression chamber (30) when the compression chamber is in a suction process, the communication path including a communication groove (59) that is formed on an outer circumferential surface of the rotary valve.
24. The compressor according to any one of claims 1 and 3 through 22, wherein the control mechanism includes:
a supply passage (36) interconnecting the discharge chamber (7b) with the crank chamber (8), and
a control valve (34) arranged on the supply passage (36) and the bleed passage (35), the control valve being arranged for adjusting both opening degrees of the supply passage and the bleed passage.
25. Air conditioning system for a motor vehicle, com-

prising a compressor according to any one of claims 1 to 24.

Patentansprüche

1. Kompressor des Taumelscheibentyps mit variablem Hubraum zur Verbindung mit einer externen Antriebsquelle zur Komprimierung eines Kühlgases, das ein Schmieröl enthält, aufweisend einen Zylinderblock (1), der eine Zylinderbohrung (1a) definiert, ein Gehäuse (2, 7), eine Antriebswelle (12), eine Taumelscheibe (16), einen Kolben (19) und einen Steuermechanismus zum Steuern des Druckes in einer Kurbelkammer (8), wobei die Kurbelkammer, ein Saugdruckbereich (7a, 60a) und eine Ausstoßkammer (7b) in dem Kompressor definiert sind, wobei das Gehäuse an dem Zylinderblock befestigt ist, die Antriebswelle durch das Gehäuse und den Zylinderblock drehbar gehalten ist, wobei die Antriebswelle dazu ausgebildet ist, durch die externe Antriebsquelle angetrieben zu werden, wobei die Antriebswelle eine Achse aufweist, wobei die Taumelscheibe durch die Antriebswelle in der Kurbelkammer gehalten wird, um sich fest verbunden mit der Antriebswelle zu drehen, wobei die Taumelscheibe bezüglich der Achse der Antriebswelle neigbar ist, um einen Neigungswinkel der Taumelscheibe in Übereinstimmung mit dem Druck in der Kurbelkammer zu variieren, wobei der Kolben in der Zylinderbohrung so aufgenommen ist, dass er in der Zylinderbohrung eine Kompressionskammer (30) definiert, wobei der Kolben mit der Taumelscheibe verbunden ist, um die Drehung der Taumelscheibe in die Kolbenbewegung des Kolbens umzuwandeln, wobei der Hubraum des Kompressors durch das Hin- und Hergehen des Kolbens in Übereinstimmung mit dem Neigungswinkel der Taumelscheibe variiert wird, wobei der Steuermechanismus eine Entlüftungspassage (35) umfasst, die die Kurbelkammer (8) mit dem Saugdruckbereich (7a, 60a) verbindet, um den Druck in der Kurbelkammer zu reduzieren, **dadurch gekennzeichnet, dass:**

ein Kommunikationsweg (50 - 59) die Kurbelkammer (8) mit der Kompressionskammer (30) nur dann verbindet, wenn der Neigungswinkel der Taumelscheibe (16) im Wesentlichen ein maximaler Neigungswinkel ist und der Kolben (19) im Wesentlichen an seinem unteren Totpunkt angeordnet ist.

2. Kompressor gemäß Anspruch 1, wobei der Steuermechanismus umfasst:

eine Versorgungspassage (36), die die Ausstoßkammer (7b) mit der Kurbelkammer (8) verbindet; und

ein Steuerventil (34), das an der Versorgungspassage (36) zum Einstellen eines Öffnungsgrades der Versorgungspassage vorgesehen ist, wobei die Entlüftungspassage (35) einen konstanten inneren Durchmesser zur kontinuierlichen Verbindung der Kurbelkammer mit dem Saugdruckbereich aufweist, unabhängig von dem Neigungswinkel der Taumelscheibe, wobei der Saugdruckbereich eine Saugkammer (7a) ist, die in dem Gehäuse (7) eingeformt ist.

3. Kompressor gemäß Anspruch 1 oder 2, wobei der Kompressor kontinuierlich angetrieben wird, während die externe Antriebsquelle betrieben wird.
4. Kompressor gemäß einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** der Kommunikationsweg (50 - 54, 57) in dem Zylinderblock (1) so geformt ist, dass er das hintere Ende des Kolbens (19) in der Zylinderbohrung (1a) nur dann kreuzt, wenn der Neigungswinkel der Taumelscheibe (16) im Wesentlichen der maximale Neigungswinkel ist und der Kolben im Wesentlichen an seinem unteren Totpunkt vorgesehen ist.
5. Kompressor gemäß Anspruch 1, wobei der Zylinderblock (1) eine Bohrungsoberfläche aufweist, die die Zylinderbohrung (1a) definiert, wobei der Kommunikationsweg eine Kommunikationsrille (50 - 54, 57) ist, die in der Bohrungsoberfläche eingeformt ist.
6. Kompressor gemäß Anspruch 5, wobei die Kommunikationsrille (51, 52, 57) einen Einfließbereich zum Einfließen lassen des Schmieröls in die Kompressionskammer umfasst, wobei der Einfließbereich an einer Kurbelkammerseite weiter ist, als an einer Kompressionskammerseite und im Wesentlichen die Form eines Sektors aufweist, wenn er von der Innenseite der Zylinderbohrung aus betrachtet wird, wobei ein Umfang des Kolbens an der Taumelscheibenseite an dem Einfließbereich positioniert ist, wenn der Kolben im Wesentlichen an seinem oberen Totpunkt ist.
7. Kompressor gemäß Anspruch 6, wobei die Kommunikationsrille (50, 54, 57) einen geraden Ausheblungsbereich umfasst, der an der Kompressionskammerseite des Einfließbereichs eingeformt ist und der sich in einer axialen Richtung der Antriebsquelle erstreckt.
8. Kompressor gemäß Anspruch 7, wobei sich eine Breite des geraden Ausheblungsbereichs von 0 bis $0,47B$ erstreckt, ein zentraler Winkel des Einfließbereichs sich von 2 bis $2 \tan^{-1} \{0,63B/2/(12+L)\}$ erstreckt, wobei B den Durchmesser der Zylinder-

bohrung bezeichnet, L den Abstand zwischen einer hypothetischen Spitze des Einfließbereichs und einer hinteren Endoberfläche des Kolbens in einem Zustand, in dem der Neigungswinkel der Taumelscheibe der maximale Neigungswinkel ist und dass der Kolben an seinem unteren Totpunkt vorgesehen ist.

9. Kompressor gemäß einem der Ansprüche 5 bis 8, wobei die Kommunikationsrille (50 - 53, 57) an der inneren Seite der Bohrungsoberfläche des Zylinderblocks eingeformt ist. 5
10. Kompressor gemäß Anspruch 5, wobei Anfasungen (50a, 50b, 50c) jeweils an beiden Seitenoberflächen der Kommunikationsrille eingeformt sind. 10
11. Kompressor gemäß Anspruch 5 oder 10, wobei eine Anfasung (50c) an einem Umfang der Kommunikationsrille an einer Kompressionskammerseite eingeformt ist. 15
12. Kompressor gemäß Anspruch 1, wobei der Kommunikationsweg eine Kommunikationsrille (55, 56) ist, die in einer äußeren Umfangsoberfläche des Kolbens eingeformt ist. 20
13. Kompressor gemäß Anspruch 12, wobei Anfasungen (55a, 55b, 55c) jeweils an beiden Seitenoberflächen der Kommunikationsrille eingeformt sind. 25
14. Kompressor gemäß Anspruch 12 oder 13, wobei eine Anfasung (55c) an einem Umfang der Kommunikationsrille auf einer Kompressionskammerseite eingeformt ist. 30
15. Kompressor gemäß Anspruch 1, wobei der Kommunikationsweg eine Kommunikationspassage (53) ist, die sich durch den Zylinderblock (1) erstreckt. 35
16. Kompressor gemäß Anspruch 15, wobei eine Anfasung (50c) an einer Öffnung der Kommunikationspassage auf einer Kompressionskammerseite eingeformt ist. 40
17. Kompressor gemäß Anspruch 1, wobei der Kommunikationsweg in Kommunikation mit der Kompressionskammer ist, die in einer oberen Seite des Kompressors angeordnet ist in einem Zustand, in dem der Kompressor in einem Fahrzeug installiert ist. 45
18. Kompressor gemäß Anspruch 1, wobei ein Ende des Kommunikationsweges (50, 51, 52, 53, 55, 56, 57, 59) an einer Kurbelkammerseite in einem inneren Umfangsbereich neben der Pleuellwelle angeordnet ist. 50

19. Kompressor gemäß Anspruch 1, wobei ein Ende des Kommunikationsweges (54) an einer Kurbelkammerseite in einem äußeren Umfangsbereich weit weg von der Pleuellwelle angeordnet ist.

20. Kompressor gemäß Anspruch 19, wobei der Kommunikationsweg eine Kommunikationsrille ist, die in dem Gehäuse (2) und dem Zylinderblock (1) eingeformt ist.

21. Kompressor gemäß Anspruch 20, wobei der Zylinderblock eine Mehrzahl von Bohrungsoberflächen aufweist, die die Zylinderbohrung (1a) definieren, wobei die Kommunikationsrille in jeder der Bohrungsoberflächen eingeformt ist.

22. Kompressor gemäß Anspruch 1, wobei eine Durchschnittsfläche eines Endes des Kommunikationsweges an einer Kurbelkammerseite größer ist, als jede andere Durchschnittsfläche des Kommunikationsweges.

23. Kompressor gemäß Anspruch 1, wobei der Zylinderblock (1) ein Wellenloch aufweist, wobei das Gehäuse ein hinteres Gehäuse (7) umfasst, das an einer Rückendseite der Pleuellwelle (12) angeordnet ist, wobei das hintere Gehäuse eine Saugkammer (7a) in einem inneren Bereich in dem hinteren Gehäuse und die Ausstoßkammer (7b) in einem äußeren Bereich in dem hinteren Gehäuse separat von der Saugkammer ausformt, wobei der Kompressor ein Drehventil (60) umfasst, das an dem hinteren Ende der Pleuellwelle angeordnet ist und das eine Einfließkammer (60a) aufweist, die mit der Saugkammer kommuniziert, wobei der Saugdruckbereich die Saugkammer (7a) und die Einfließkammer (60a) umfasst, wobei das Drehventil in dem Wellenloch des Zylinderblocks angeordnet ist und die Saugkammer (7a) mit der Kompressionskammer (30) verbindet, wenn sich die Kompressionskammer in einem Saugvorgang befindet, wobei der Kommunikationsweg eine Kommunikationsrille (59) umfasst, die an einer äußeren Umfangsoberfläche des Drehventils ausgeformt ist.

24. Kompressor gemäß einem der Ansprüche 1 und 3 bis 22, wobei der Steuermechanismus umfasst:

eine Zuführpassage (36), die die Ausstoßkammer (7b) mit der Kurbelkammer (8) verbindet und
ein Steuerventil (34), das an der Versorgungspassage (36) und der Entlüftungspassage (35) vorgesehen ist, wobei das Steuerventil zum Einstellen des Öffnungsgrades sowohl der Zuführpassage als auch der Entlüftungspassage vorgesehen ist.

25. Aircondition System für ein Motorfahrzeug umfassend einen Kompressor gemäß einem der Ansprüche 1 bis 24.

Revendications

1. Compresseur à déplacement variable de type à plateau oscillant destiné à être relié à une source d'entraînement externe pour compresser un gaz réfrigérant qui contient de l'huile lubrifiante, ayant un bloc-cylindres (1) définissant un alésage de cylindre (1a), un boîtier (2,7), un arbre d'entraînement (12), un plateau oscillant (16), un piston (19) et un mécanisme de commande pour commander la pression dans un carter (8), le carter, une région de pression d'aspiration (7a, 60a) et une chambre de refoulement (7b) étant définis dans le compresseur, le boîtier étant fixé au bloc-cylindres, l'arbre d'entraînement étant supporté par le boîtier et le bloc-cylindres pour pivoter, l'arbre d'entraînement étant agencé pour être entraîné par la source d'entraînement externe, l'arbre d'entraînement ayant un axe, le plateau oscillant étant supporté par l'arbre d'entraînement dans le carter de manière à pivoter en une seule pièce avec l'arbre d'entraînement, le plateau oscillant pouvant s'incliner par rapport à l'axe de l'arbre d'entraînement pour faire varier un angle d'inclinaison du plateau oscillant conformément à la pression dans le carter, le piston étant logé dans l'alésage du cylindre de manière à définir une chambre de compression (30) dans l'alésage du cylindre, le piston étant couplé au plateau oscillant pour convertir la rotation du plateau oscillant en mouvement de va-et-vient du piston, le déplacement du compresseur étant modifié par le mouvement de va-et-vient du piston conformément à l'angle d'inclinaison du plateau oscillant, le mécanisme de commande incluant un passage de purge (35) qui relie entre eux le carter (8) et la région de pression d'aspiration (7a, 60a) pour faire diminuer la pression dans le carter, **caractérisé en ce que** :

un chemin de communication (50-59) relie entre eux le carter (8) et la chambre de compression (30), uniquement lorsque l'angle d'inclinaison du plateau oscillant (16) est sensiblement un angle d'inclinaison maximum et que le piston (19) est situé sensiblement au niveau de son point mort bas.

2. Compresseur selon la revendication 1, dans lequel le mécanisme de commande inclut :

un passage d'alimentation (36) reliant entre eux la chambre de refoulement (7b) et le carter (8) ; et

une soupape de commande (34) agencée sur le passage d'alimentation (36) pour ajuster à un degré d'ouverture du passage d'alimentation, dans lequel le passage de purge (35) a un diamètre interne constant pour relier entre eux, en continu, le carter et la région de pression d'aspiration, quel que soit l'angle d'inclinaison du plateau oscillant, la région de pression d'aspiration étant une chambre d'aspiration (7a) formée dans le boîtier (7).

3. Compresseur selon la revendication 1 ou 2, dans lequel le compresseur est entraîné en continu lorsque la source d'entraînement externe est en marche.
4. Compresseur selon l'une quelconque des revendications 1 à 3, **caractérisé en ce que** le chemin de communication (50-54, 57) est formé dans le bloc-cylindres (1) de manière à croiser l'extrémité arrière du piston (19) dans l'alésage du cylindre (1a), uniquement lorsque l'angle d'inclinaison du plateau oscillant (16) est sensiblement l'angle d'inclinaison maximum et que le piston est situé sensiblement au niveau de son point mort bas.
5. Compresseur selon la revendication 1, dans lequel le bloc-cylindres (1) a une surface d'alésage qui définit l'alésage de cylindre (1a), le chemin de communication étant une rainure de communication (50-54, 57) formée dans la surface d'alésage.
6. Compresseur selon la revendication 5, dans lequel la rainure de communication (51, 52, 57) inclut une partie d'introduction destinée à l'introduction de l'huile lubrifiante dans la chambre de compression, la partie d'introduction étant plus large au niveau d'un côté carter qu'au niveau d'un côté chambre de compression et formant sensiblement un secteur profilé lorsqu'on le regarde depuis l'intérieur de l'alésage du cylindre, une périphérie du piston au niveau d'un côté plateau oscillant étant positionnée au niveau de la partie d'introduction lorsque le piston est situé sensiblement au niveau de son point mort haut.
7. Compresseur selon la revendication 6, dans lequel la rainure de communication (50, 54, 57) inclut une partie de cannelure droite formée au niveau du côté chambre de compression de la partie d'introduction et s'étendant dans une direction axiale de l'arbre d'entraînement.
8. Compresseur selon la revendication 7, dans lequel une largeur de la partie de cannelure droite est comprise entre 0 et 0,47B, un angle central de la partie d'introduction étant compris entre 2 et $2 \tan^{-1} \{0,63B/2/(12+L)\}$, B désignant le diamètre de l'alésage.

sage du cylindre, L désignant la distance entre un sommet hypothétique de la partie d'introduction et une surface de l'extrémité arrière du piston dans un état permettant à l'angle d'inclinaison du plateau oscillant d'être l'angle d'inclinaison maximum et au piston d'être situé au niveau de son point mort bas.

9. Compresseur selon l'une quelconque des revendications 5 à 8, dans lequel la rainure de communication (50-53, 57) est formée au niveau du côté interne de l'alésage du cylindre du bloc-cylindres. 5
10. Compresseur selon la revendication 5, dans lequel des chanfreins (50a, 50b, 50c) sont respectivement formés au niveau des deux surfaces latérales de la rainure de communication. 10
11. Compresseur selon la revendication 5 ou 10, dans lequel un chanfrein (50c) est formé au niveau d'une périphérie de la rainure de communication au niveau d'un côté chambre de compression. 15
12. Compresseur selon la revendication 1, dans lequel le chemin de communication est une rainure de communication (55, 56) formée dans une surface de circonférence externe du piston. 20
13. Compresseur selon la revendication 12, dans lequel des chanfreins (55a, 55b, 55c) sont respectivement formés au niveau des deux surfaces latérales de la rainure de communication. 25
14. Compresseur selon la revendication 12 ou 13, dans lequel un chanfrein (55c) est formé au niveau d'une périphérie de la rainure de communication au niveau d'un côté de la chambre de compression. 30
15. Compresseur selon la revendication 1, dans lequel le chemin de communication est un passage de communication (53) s'étendant à travers le bloc-cylindres (1). 35
16. Compresseur selon la revendication 15, dans lequel un chanfrein (50c) est formé au niveau d'une ouverture du passage de communication au niveau d'un côté chambre de compression. 40
17. Compresseur selon la revendication 1, dans lequel le chemin de communication est en communication avec la chambre de compression située dans un côté supérieur du compresseur dans un état qui correspond à l'état dans lequel le compresseur est installé dans un véhicule. 45
18. Compresseur selon la revendication 1, dans lequel une extrémité du chemin de communication (50, 51, 52, 53, 55, 56, 57, 59) au niveau d'un côté carter est située dans une zone de circonférence interne 55

près de l'arbre d'entraînement.

19. Compresseur selon la revendication 1, dans lequel une extrémité du chemin de communication (54) au niveau d'un côté carter est située dans une zone de circonférence externe éloignée de l'arbre d'entraînement. 5
20. Compresseur selon la revendication 19, dans lequel le chemin de communication est une rainure de communication formée dans le boîtier (2) et le bloc-cylindres (1). 10
21. Compresseur selon la revendication 20, dans lequel le bloc-cylindres a une pluralité de surfaces d'alésage définissant les alésages de cylindre (1a), la rainure de communication étant formée dans chacune des surfaces d'alésage. 15
22. Compresseur selon la revendication 1, dans lequel une zone en coupe d'une extrémité du chemin de communication au niveau d'un côté carter est plus grand que toute autre zone en coupe du chemin de communication. 20
23. Compresseur selon la revendication 1, dans lequel le bloc-cylindres (1) a un trou d'arbre, le boîtier incluant un boîtier arrière (7) situé au niveau d'un côté de l'extrémité arrière de l'arbre d'entraînement (12), le boîtier arrière formant une chambre d'aspiration (7a) dans une zone interne dans le boîtier arrière et la chambre de refoulement (7b) dans une zone externe dans le boîtier arrière séparée de la chambre d'aspiration, le compresseur incluant une valve rotative (60) placée au niveau d'une extrémité arrière de l'arbre d'entraînement et ayant une chambre d'introduction (60a) communiquant avec la chambre d'aspiration, la région de pression d'aspiration incluant la chambre d'aspiration (7a) et la chambre d'introduction (60a), la valve rotative étant située dans le trou d'arbre du bloc-cylindres et reliant entre elles la chambre d'aspiration (7a) et la chambre de compression (30) lorsque la chambre de compression est dans un processus d'aspiration, le chemin de communication incluant une rainure de communication (59) formée sur une surface de circonférence externe de la valve rotative. 25
24. Compresseur selon l'une quelconque des revendications 1 et 3 à 22, dans lequel le mécanisme de commande inclut : 30
 - un passage d'alimentation (36) reliant entre eux la chambre de refoulement (7b) et le carter (8), et
 - une soupape de commande (34) agencée sur le passage d'alimentation (36) et le passage de

purge (35), la soupape de commande étant agencée pour ajuster à la fois les degrés d'ouverture du passage d'alimentation et du passage de purge.

5

- 25.** Système de conditionnement d'air d'un véhicule à moteur, comprenant un compresseur selon l'une quelconque des revendications 1 à 24.

10

15

20

25

30

35

40

45

50

55

FIG. 1

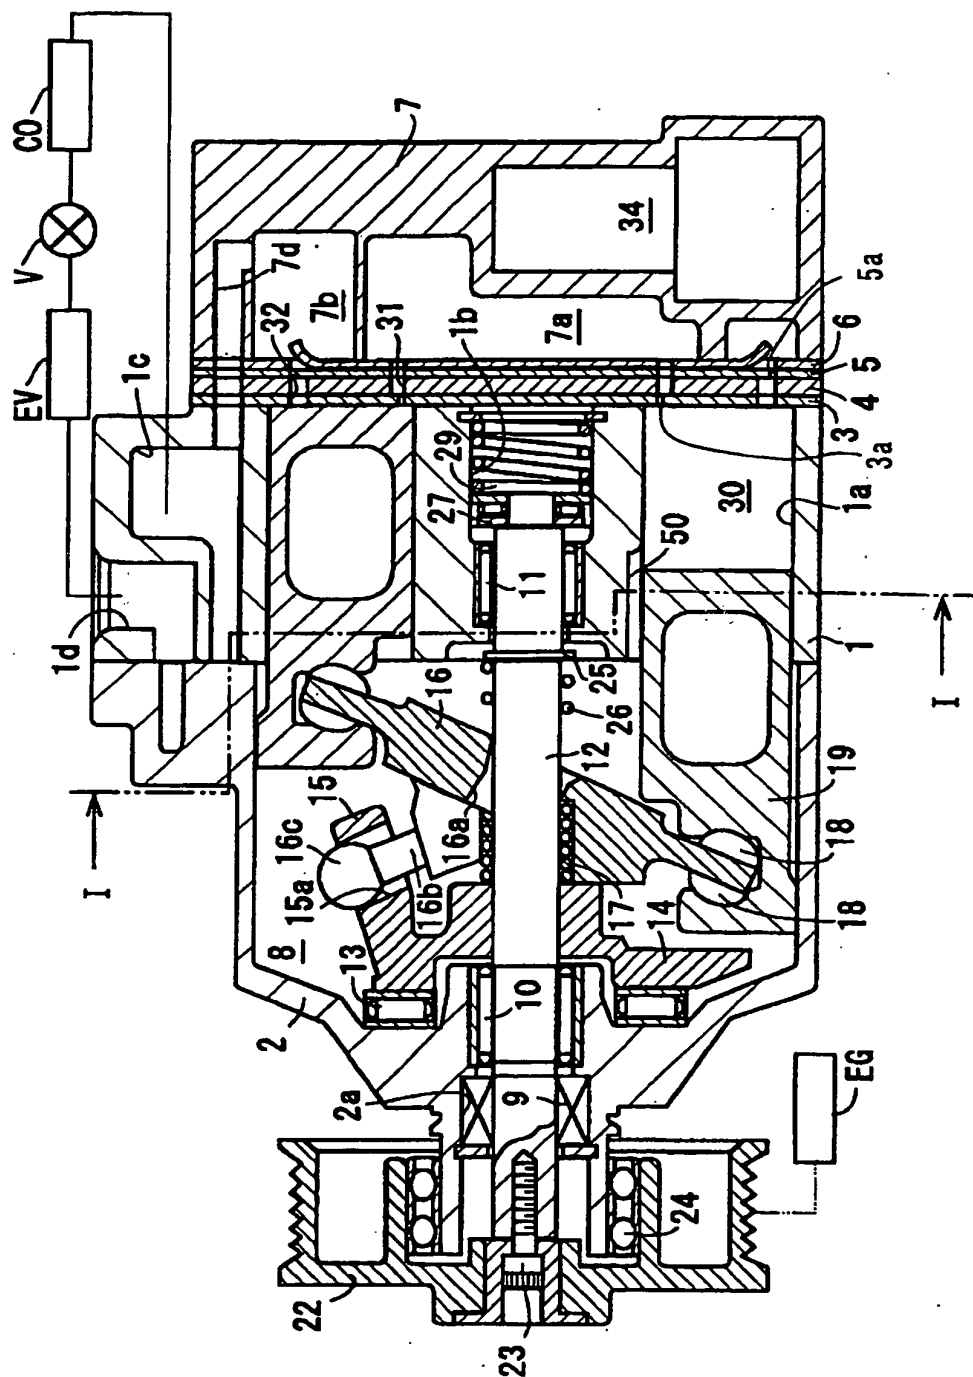


FIG. 2A

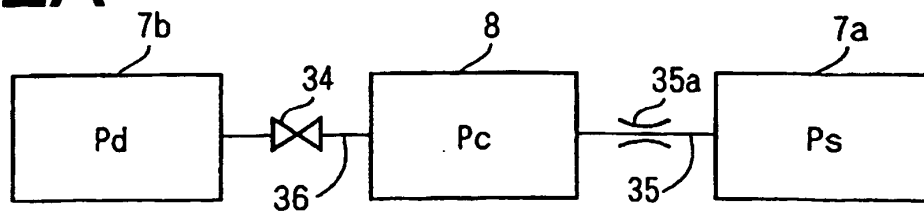


FIG. 2B

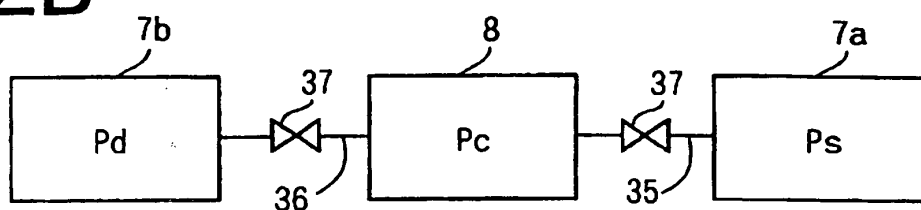


FIG. 3

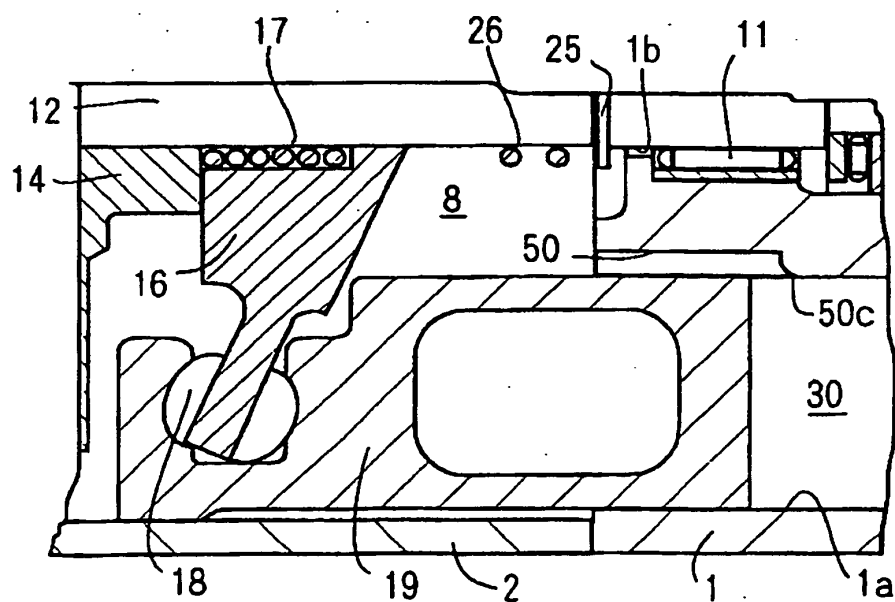


FIG. 4

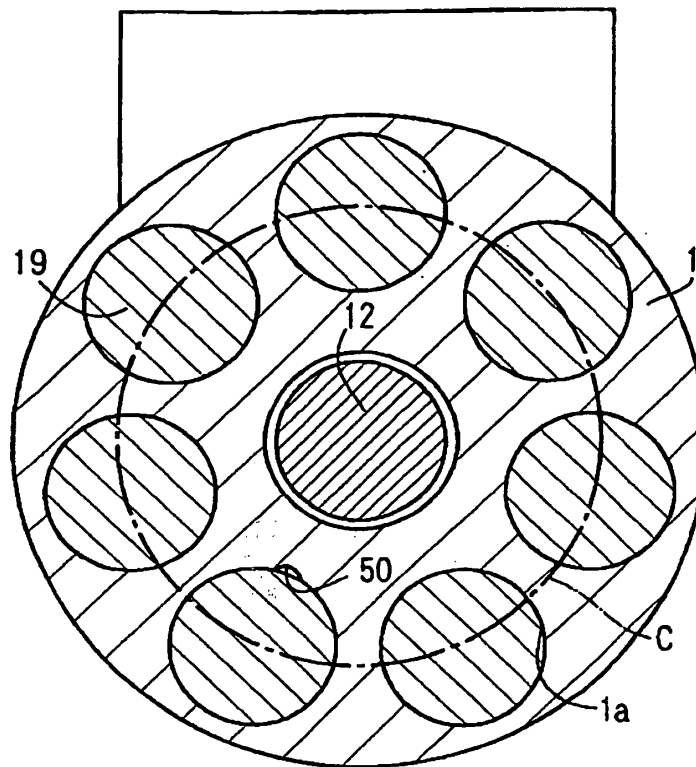


FIG. 5

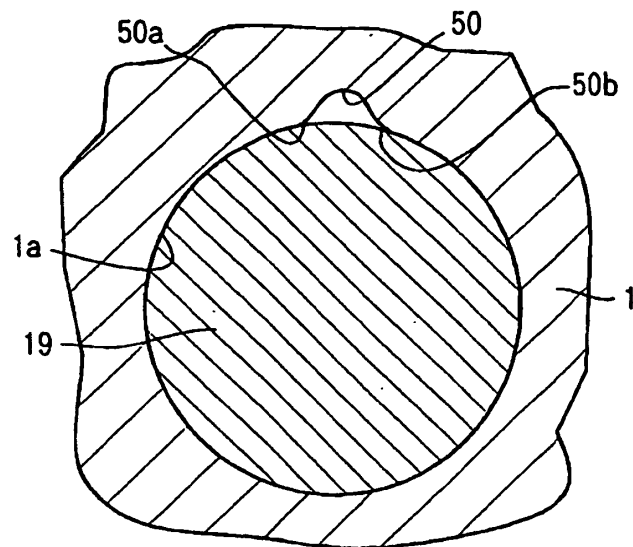


FIG. 6

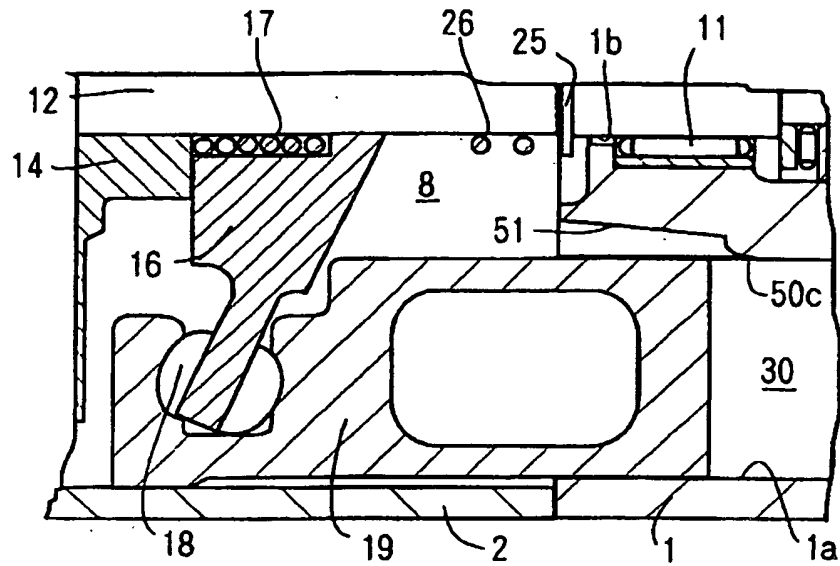


FIG. 7

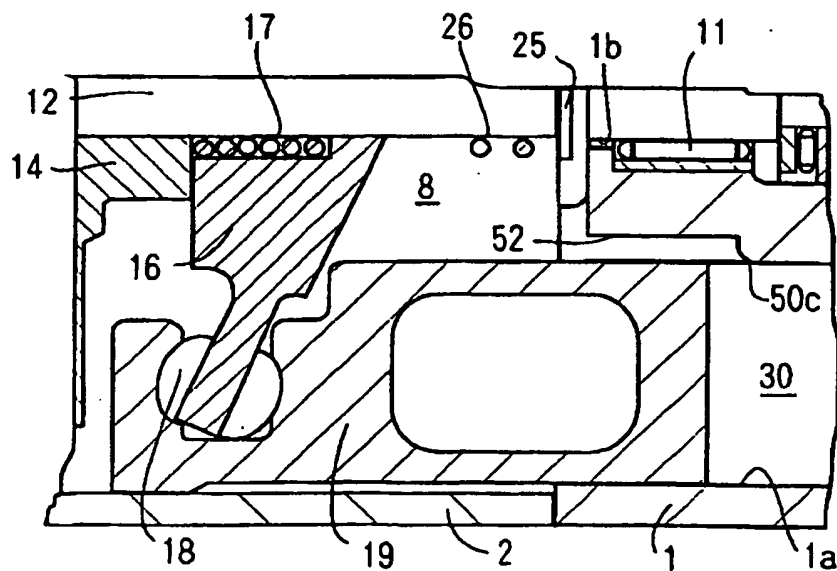


FIG. 8

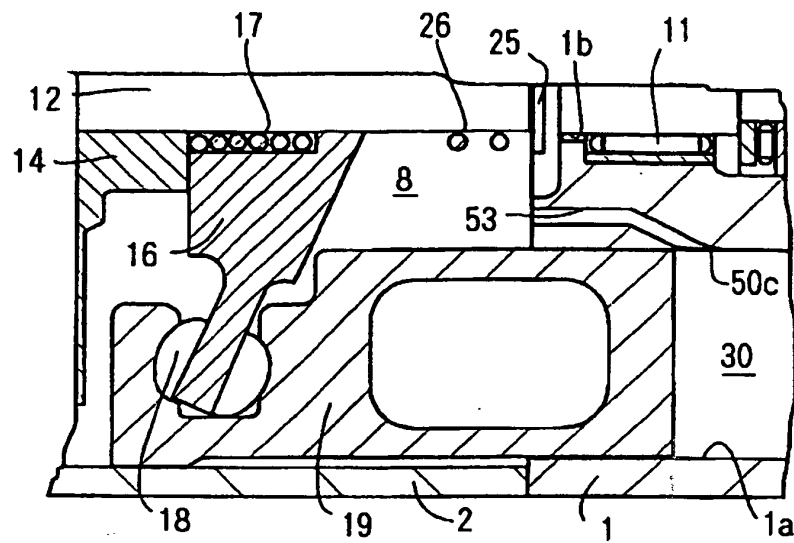


FIG. 9

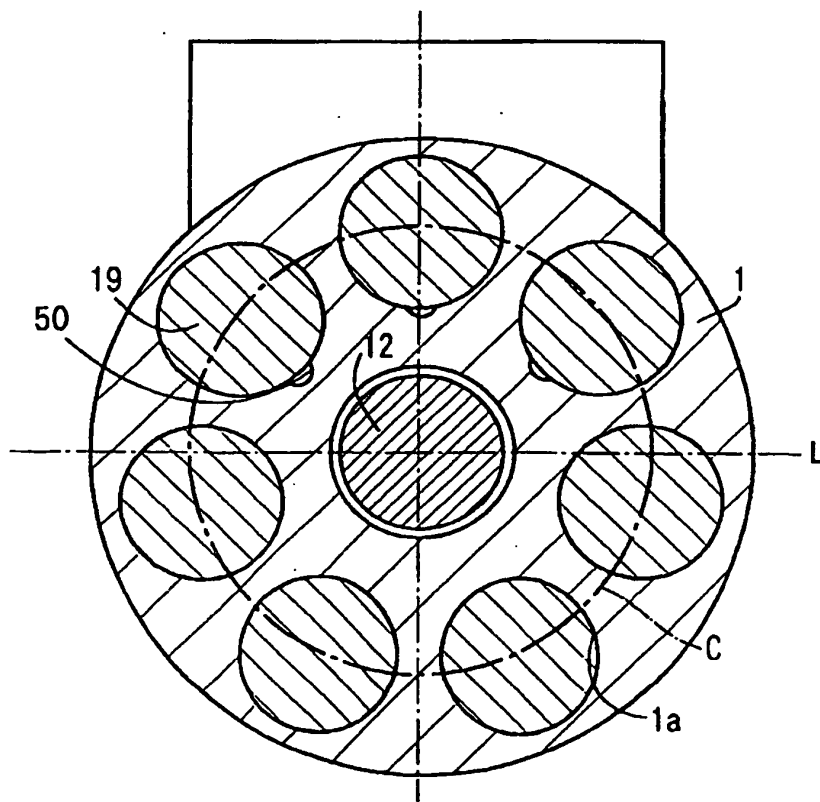


FIG. 10

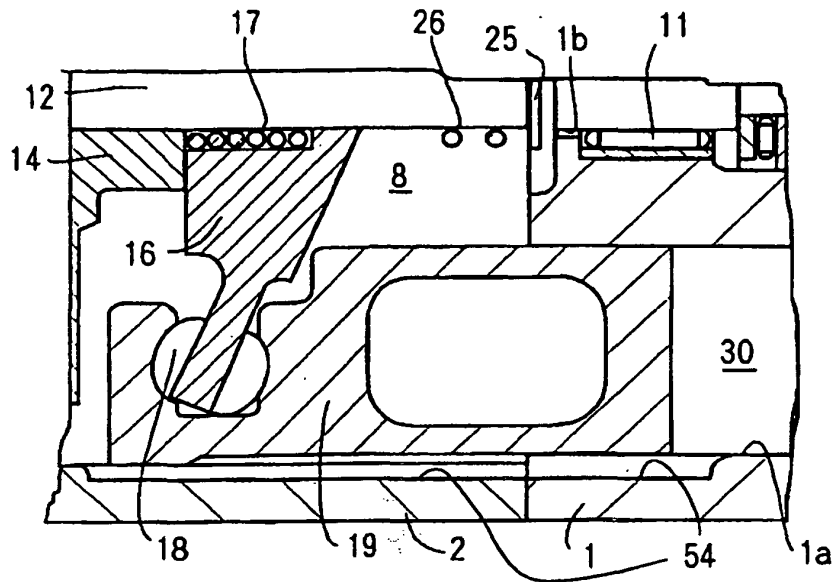


FIG. 11

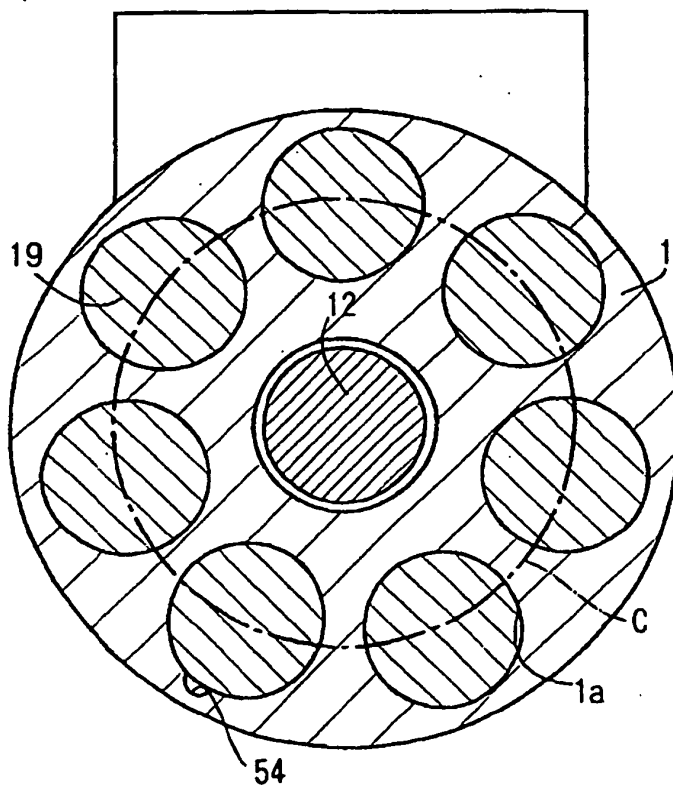


FIG. 12

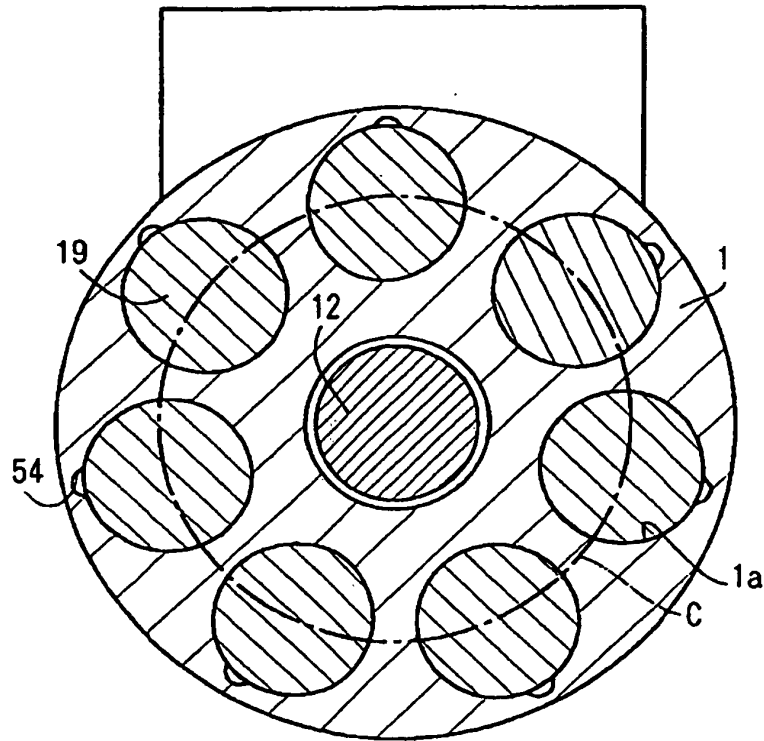


FIG. 13

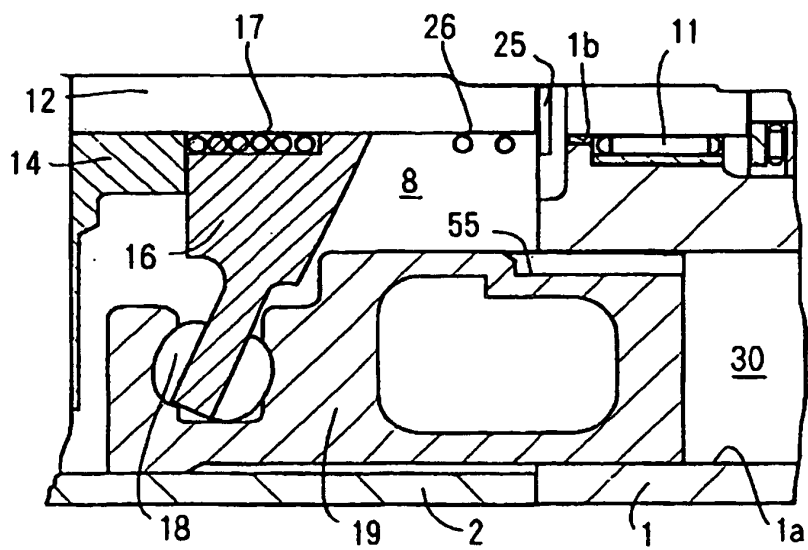


FIG. 14A

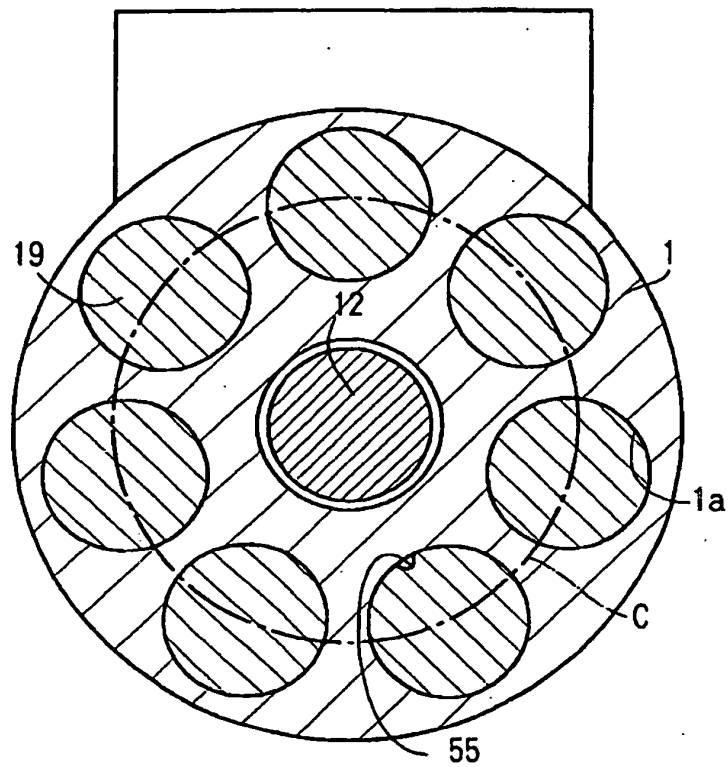


FIG. 14B

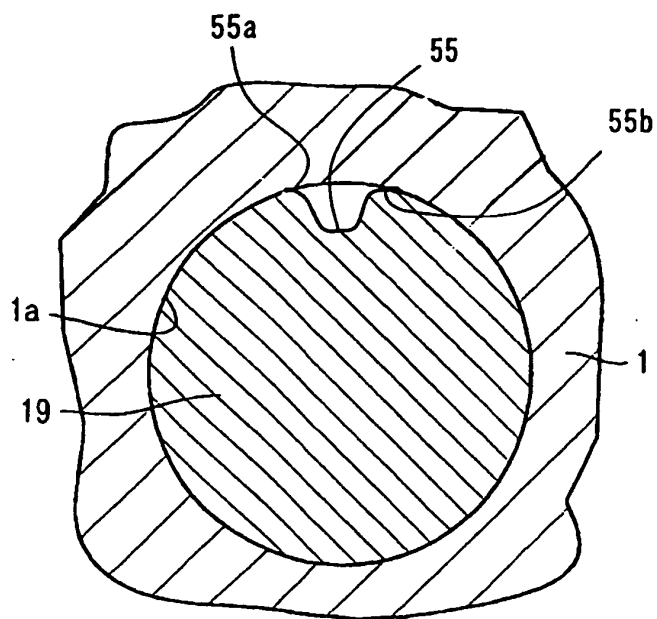


FIG. 14C

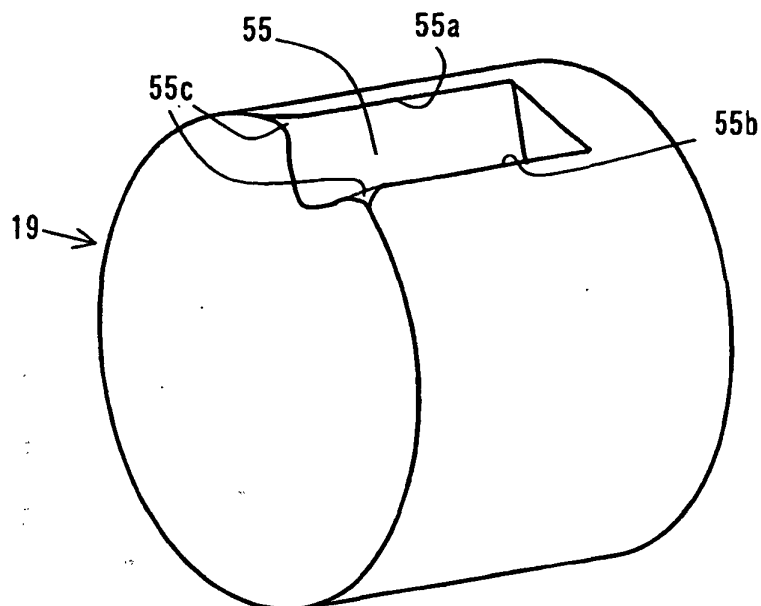


FIG. 15

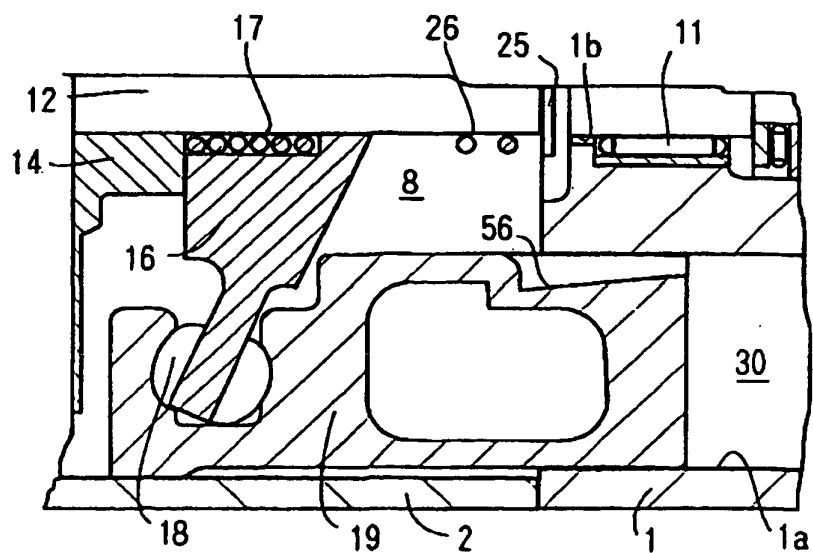


FIG. 16

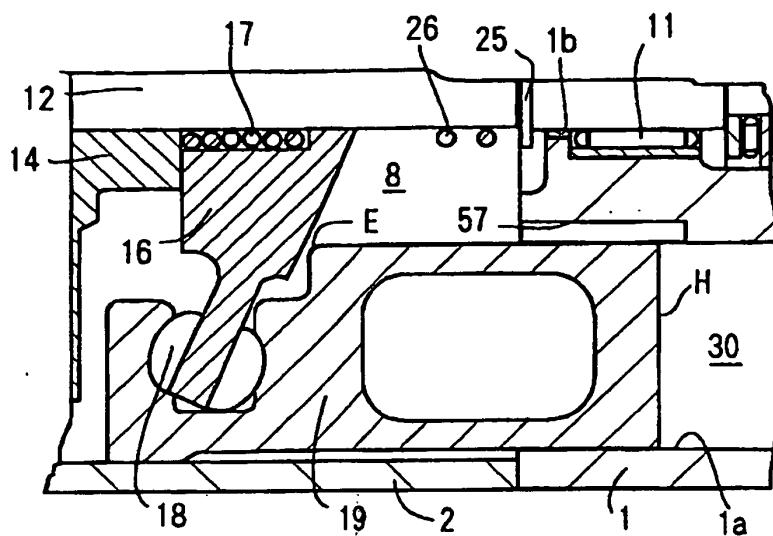


FIG. 17

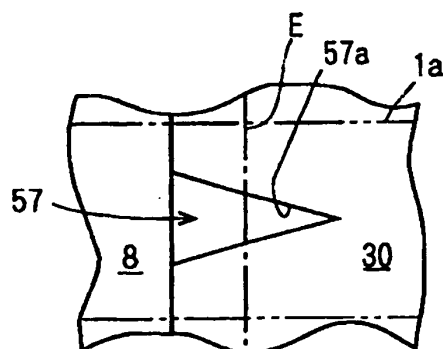


FIG. 18

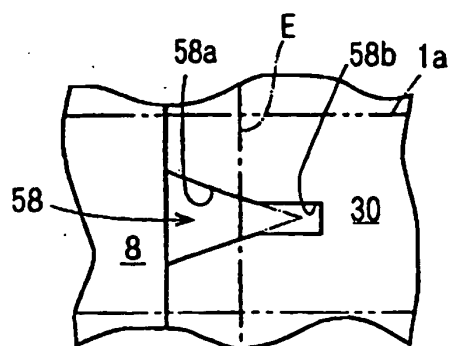


FIG. 19

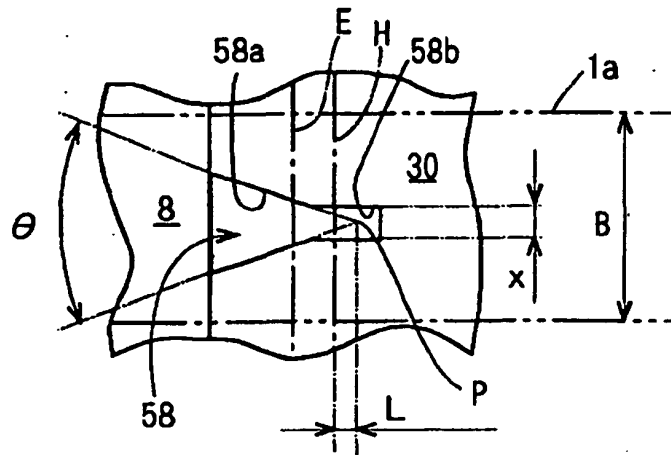


FIG. 20

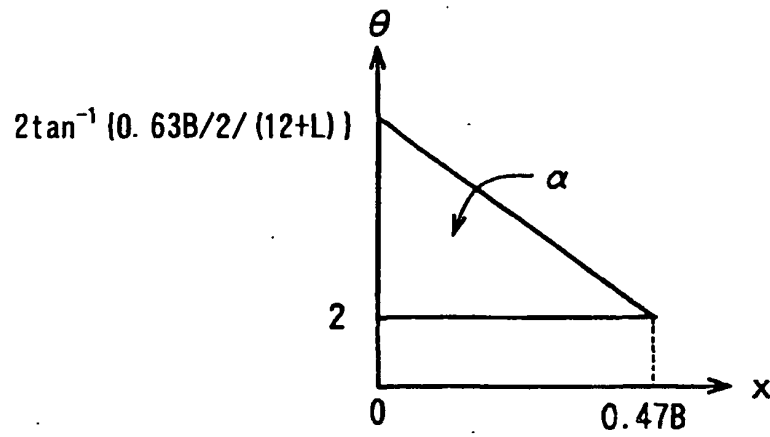


FIG. 21

