



(11) **EP 1 462 618 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**11.07.2007 Bulletin 2007/28**

(51) Int Cl.:  
**F01L 1/053** <sup>(2006.01)</sup> **F02F 1/38** <sup>(2006.01)</sup>

(21) Application number: **04006853.8**

(22) Date of filing: **22.03.2004**

(54) **Bearing structure for camshaft**

Lagerstruktur einer Nockenwelle

Structure du palier pour un arbre aux cames

(84) Designated Contracting States:  
**DE FR GB IT**

(30) Priority: **25.03.2003 JP 2003082021**

(43) Date of publication of application:  
**29.09.2004 Bulletin 2004/40**

(73) Proprietor: **Isuzu Motors Limited**  
**Shinagawa-ku,**  
**Tokyo (JP)**

(72) Inventor: **Iijima, Akira**  
**c/o Isuzu Motors Limited**  
**Fujisawa-shi**  
**Kanagawa (JP)**

(74) Representative: **Schaumburg, Thoenes, Thurn,**  
**Landskron**  
**Patentanwälte**  
**Postfach 86 07 48**  
**81634 München (DE)**

(56) References cited:  
**EP-A- 1 239 136** **US-A- 4 823 747**  
**US-A- 5 458 099** **US-A- 6 035 817**

- **PATENT ABSTRACTS OF JAPAN** vol. 1996, no.  
12, 26 December 1996 (1996-12-26) & JP 08 218836  
A (TOYOTA MOTOR CORP), 27 August 1996  
(1996-08-27)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 462 618 B1**

## Description

**[0001]** The present invention relates to a bearing structure, in particular, a bearing structure for a camshaft in which a counterbore or a spot facing is formed to a part of a bearing surface of a lower journal.

**[0002]** As shown in Figs. 4 and 5, with regard to a camshaft 2 supported on a cylinder head 1 of the OHC engine, the camshaft 2 is clamped between a lower journal 3 provided in the cylinder head 1 and an upper journal (not shown) fixed thereon, and is rotatably supported by them. A plurality of lower journals 3 are aligned in an axis direction of the camshaft at certain intervals.

**[0003]** Each lower journals are supplied with oil from cylinder head side to lubricate the interface between the lower journals and the camshaft. Such type is also known that only one lower journal 3 is provided with oil and the oil is in turn provided to other lower journals via the camshaft 2. The cylinder head 1 is secured onto the cylinder body by head bolts (not shown) penetrating the cylinder head 1.

**[0004]** In recent years, it is required that an engine is smaller and lighter but more powerful. Therefore, bore pitch between cylinders becomes narrower, and the number of head bolts and valves becomes more. For this reason head bolts are close to the lower journals 3, and thus counterbores for head bolts interfere with bearing surfaces of the lower journals 3 in the cylinder head 1. This type of the cylinder head is known as described in paragraph 0006 and 0007, and Fig.21 of Japanese Patent Application published by No. 8-218836, for example.

**[0005]** In this type, as shown in Fig.6, while a counterbore face 4 for the head bolt is formed in the cylinder head 1, a cutting tool is moved down from above the cylinder head 1 to the level of the counterbore face 4 for the head bolt. In this process a part of the bearing surface 5 is cut off at where the route of the cutting tool overlaps with the bearing surface 5, thereby the counterbore 6 with a sharp edge is formed in the lower journal 3.

**[0006]** In Fig.6, an upper end surface of the cylinder head is depicted by hatching. Numeral 4 shows the counterbore face for the head bolts which is at lower than the bearing surface 5. Numeral 7 shows a hole into which the head bolt is inserted. Numeral 8 shows a hole into which an injector is attached. Numeral 9 shows a female screw into which a bolt to secure the upper journal is engaged. X shows a hole for an inlet or exhaust valve stem.

**[0007]** Meanwhile, a connection part between the counterbore 6 and the bearing surface 5 is formed with a sharp, arc-of-circle like knife edge 10 as shown in Figs. 7 to 9, because the cutting tool cut off a part of the bearing surface 5 when the counterbore face 4 is machined by the cutting tool in the cylinder head 1.

**[0008]** This knife edge 10 contacts with the surface of the camshaft 2 at an angle, then wipes off the oil from the surface of the camshaft 2 (knife edge function), because its relative contact point to the surface of the cam-

shaft moves in turn in the width direction of the bearing surface 5 as the camshaft 2 rotates. This may cause lubrication failure on the camshaft 2.

**[0009]** It is an object of the present invention to provide a bearing structure for a camshaft which can prevent obliquely wiping off the oil from the surface of the camshaft caused by a knife edge.

**[0010]** It is another object of the present invention to provide a bearing structure for a camshaft which can prevent wiping off the oil from the surface of the camshaft in the axis direction of the camshaft.

**[0011]** It is further object of the present invention to provide a bearing structure for a camshaft which can collect the oil to be wiped off from the surface of the camshaft.

**[0012]** According to a first aspect of the present invention there is provided a bearing structure for a camshaft comprising a lower journal for supporting the camshaft thereon, the lower journal being formed with a hole cutting off a part of a bearing surface of the lower journal, wherein a connecting part between the bearing surface and the hole is formed with a recess hollowed from the bearing surface so that a bottom surface of the recess is apart from the bearing surface, and a part of an edge connecting the recess and the bearing surface to each other is elongated in a direction perpendicular to the axis of the bearing surface.

**[0013]** Preferably, a remaining part of the edge is elongated along a direction parallel to the axis of the bearing surface.

**[0014]** Preferably, the recess has a side surface connecting to the bearing surface.

**[0015]** Preferably, the side surface comprises a first side surface and a second side surface, the first side surface involves the part of the edge and is elongated in a direction perpendicular to the axis of the bearing surface, and the second side surface involves the remaining part of the edge and is elongated in a direction parallel to the axis of the bearing surface.

**[0016]** Optionally, the side surface has a ramp crossing to the bearing surface at an angle of less than 90°.

**[0017]** Optionally, the side surface has a curved surface tangentially crossing to the bearing surface.

**[0018]** Preferably, the recess has a bottom surface connecting to the side surface.

**[0019]** Preferably, the bottom surface is parallel to the bearing surface.

**[0020]** Preferably, the hole is formed in a region where the surface of the camshaft moves downwardly.

**[0021]** Optionally, the hole is a counterbore.

**[0022]** Optionally, the hole is offset in the axis direction of the bearing surface relative to a center of width of the bearing surface.

**[0023]** Preferably, a width of the bearing surface (L1) is wider than a standard width (L2) such that the area of the bearing surface to be lost by providing the recess is compensated.

**[0024]** According to a second aspect of the present

invention there is provided a bearing structure for a camshaft comprising a lower journal for supporting the camshaft thereon, the lower journal being formed with a counterbore cutting off a corner part of a bearing surface of the lower journal in an arc-of-circle like manner, wherein a connecting part between the bearing surface and the counterbore is formed with an approximately triangular recess hollowed from the bearing surface to apart from the bearing surface, and an edge connecting the recess and the bearing surface to each other comprises a first edge being elongated in a direction perpendicular to the axis of the bearing surface, and a second edge being elongated in a direction parallel to the axis of the bearing surface.

**[0025]** Preferably, the recess has a side surface connecting to the bearing surface, and the side surface comprises a first side surface involving the first edge and a second side surface involving the second edge.

**[0026]** Optionally, at least one of the first side surface and the second side surface has a ramp crossing the bearing surface at an angle of less than 90°.

**[0027]** Optionally, at least one of the first side surface and the second side surface has a curved surface tangentially crossing the bearing surface

**[0028]** Preferably, the recess has a bottom surface connecting to the side surface.

**[0029]** Preferably, the bottom surface is parallel to the bearing surface.

**[0030]** Preferably, the counterbore is formed in a region where the surface of the camshaft moves downwardly.

**[0031]** Optionally, the counterbore is offset in the axis direction of the bearing surface relative to a center of width of the bearing surface.

**[0032]** These and other object of the present invention, and their preferred embodiments, shall become clear by consideration of the specification, claims and drawings taken as a whole.

**[0033]** Fig.1A is a plan view of the bearing structure for the camshaft according to the present invention.

**[0034]** Fig. 1B is a sectional view taken along line 1B-1B of Fig. 1A.

**[0035]** Fig. 2 is a perspective view of the bearing structure.

**[0036]** Figs. 3A-3D is sectional views taken along line 3-3 of Fig.1A.

**[0037]** Fig.4 is a perspective view of the cylinder head.

**[0038]** Fig.5 is a perspective view of the cylinder head and the camshaft.

**[0039]** Fig. 6 is a plan view of the cylinder head.

**[0040]** Fig.7 is a sectional view taken along line 7-7 of Fig.6.

**[0041]** Fig.8A is a plan view of a conventional type of a bearing structure for a camshaft.

**[0042]** Fig. 8B is a sectional view taken along line 8B-8B of Fig. 8A.

**[0043]** Fig. 9 is a perspective view of the conventional type of the bearing structure.

**[0044]** The preferred embodiment of the present invention will be described hereinbelow based on the appended drawings.

**[0045]** A bearing structure for a camshaft relating to the preferred embodiment is applied to the cylinder head 1 of the OHC engine as described above with reference to Figs.4-7, therefore, same parts as described above are not detailed, but are provided with the same numerals in the drawings. As described above, a plurality of lower journals 3 is formed in the cylinder head 1, and the lower journals are aligned in the axis direction of the inlet and exhaust camshafts at certain intervals. Counterbores 6 are respectively formed in each of the lower journals 3, which cut off a part of the bearing surface of the lower journal 3.

**[0046]** In detail, basic configuration of the bearing surface 5 of the lower journal is approximately rectangular in plan view as shown in Fig.1A, and is semicircular in side view as shown in Fig.1B. As shown in Fig.1A, the counterbore 6 is formed at a corner part in plan view of the bearing surface 5. The counterbore 6 is formed at a region B where the surface of the camshaft moves downwardly, and is positioned at an end of the bearing surface 5 in its width (L1) direction. The counterbore 6 is offset relative to a center C5 of the width L1 of the bearing surface 5 in the axis direction of the bearing surface 5 at length S.

**[0047]** As also shown in Fig.2, a recess 11 is formed in the connecting part between the counterbore 6 and the bearing surface 5. The recess 11 is hollowed from the bearing surface 5 so that a bottom surface 16 of the recess 11 is apart from the bearing surface 5 or the surface of the camshaft 2. The recess 11 is stepped down in parallel from the bearing surface 5 (i.e., from the surface of the camshaft 2) at a length of several mm (about 1 mm for example). A part of an edge connecting the recess 6 and the bearing surface 5 to each other comprises a first edge 11a elongated in a direction perpendicular to the axis of the bearing surface 05 (or elongated in a rotational direction A of the camshaft 2). A remaining part of the edge comprises a second edge 11b elongated in a direction parallel of the axis of the bearing surface 05 (or elongated in the direction perpendicular to the rotational direction A of the camshaft 2).

**[0048]** As shown in Fig 1A, the recess 11 is configured to be an approximately right-angled triangle. As shown in Figs.2 and 3A-3D in detail, the recess 11 has a side surface 15 connecting to the bearing surface 5 and having a vertical length, and the bottom surface 16 connecting to the side surface 15 and being parallel to the bearing surface 5. The side surface 15 comprises a first side surface 15a involving the first edge 11a, a second side surface 15b involving the second edge 11b, and a curved side surface 19 connecting the first side surface 15a and the second side surface 15b to each other.

**[0049]** While Figs.3A-3D representatively show sectional views around the second side surface 15b, the same structures are applicable to around the first side

surface 15a. As shown in Fig.3A, the first side surface 15a and/or the second side surface 15b may be simply a flat plane perpendicular to the bearing surface 5. Optionally, as shown in Figs.3B and 3C, the first side surface 15a and/or the second side surface 15b may have a ramp 17 crossing to the bearing surface 5 at an angle  $\theta$  of less than  $90^\circ$  to the bearing surface 5. As shown in Fig.3B, the ramp 17 may be provided in the whole of the first side surface 15a and/or the second side surface 15b. Or, as shown in Fig.3C, the ramp 17 may be provided at only the top part of the first side surface 15a and/or the second side surface 15b. In this case the ramp 17 is made by chamfering. As shown in Fig.3D, the first side surface 15a and/or the second side surface 15b may have a curved surface 18 crossing tangentially to the bearing surface 5. The curved surface 18 may be provided in either the whole or only the top part of the first side surface 15a and/or the second side surface 15b.

**[0050]** A function of the preferred embodiment is described hereinafter.

**[0051]** As is understood from Figs. 1A, 1B and 2, the camshaft 2 is clamped to be supported by the lower journal 3 and the upper journal (not shown) fixed thereon. In operation the camshaft 2 rotates in a direction shown by arrow A.

**[0052]** As the camshaft 2 rotates, the oil adhered onto the surface of the camshaft 2 firstly approaches the first edge 11a of the recess 11. Here, the first edge 11a does not wipe off the oil from the surface of the camshaft 2 in the width direction of the bearing surface 5 (or the axis direction of the camshaft 2), because the first edge 11a extends in a direction perpendicular to the axis of the bearing surface 05 (or extends along the rotational direction of the camshaft A).

**[0053]** Subsequently, the oil adhered onto the surface of the camshaft 2 approaches the second edge 11b of the recess 11 as the camshaft 2 rotates. Here, the second edge 11b wipes off the oil from the surface of the camshaft 2, because the second edge 11b extends in a direction parallel to the axis of the bearing surface 05. However, the second edge 11b does not wipe off the oil obliquely towards the width direction of the bearing surface 5 as performed by the conventional type of the structure shown in Figs.8A, 8B and 9, but wipes off the oil downwardly. Accordingly, the oil wiped off is, in cooperation with an effect of gravity, received in the recess 11 for the moment. Thus, lubrication performance is secured.

**[0054]** That is, in the preferred embodiment, there is no knife edge which is sharp and arch shaped as in the conventional type shown in Figs. 8A, 8B and 9, therefore it is not caused that the oil is wiped off from the surface of the camshaft by knife edge effect. The term "knife edge effect" is used to refer to an operation that the oil adhered to the surface of the shaft is obliquely wiped off while a relative contact point to the surface of the shaft 2 successively moves in the width direction of the bearing surface 5 as the shaft 2 rotates.

**[0055]** And then, the oil wiped off downwardly by the

second edge 11b is, because this is not applied with thrust force in the width direction, received in the recess 11 for the moment in cooperation with an effect of gravity. The oil received is successively adhered to the surface of the camshaft 2, and is trailed out of the recess 11 by the camshaft 2 which intends to rotate upwardly. Thus, lubrication for interface between the camshaft 2 and the bearing surface 5 improves.

**[0056]** Further, in the preferred embodiment, the second edge 11b wiping off the oil is formed along a direction parallel to the axis of the bearing surface 05. Therefore, a length functioning as a wiping member of the second edge 11b is shorter than that of the knife edge 10 of the conventional type shown in Figs.8A, 8B and 9 which is oblique relative to the axis 05 and arched. Accordingly, an amount of oil to be wiped in the preferred embodiment is less than that in the conventional type.

**[0057]** In the meantime, with regard to the bearing structure of the preferred embodiment, as the recess 11 is depressed in the lower journal 3, bearing area contacting to the surface of the camshaft 2 becomes smaller at the area of the recess 11, compared to the bearing area of the conventional type not having the recess 11. This causes increase of bearing pressure. Therefore, in the preferred embodiment, the width of the bearing surface L1 is wider than that of the conventional type such that the lost area by providing recess 11 is compensated, in order to secure a same amount of bearing pressure. That is, a width L1 of a rib 12 (Fig. 1A) formed with the bearing surface 5 in the preferred embodiment is wider than the standard width L2 of the rib 12 (Fig.8A) in the conventional type.

**[0058]** As described above, according to the bearing structure of the present invention, it is possible to prevent wiping off the oil caused by the knife edge.

**[0059]** In light of the significance of the present invention, one which cuts off the bearing surface may be any holes. Besides the counterbore 6 shown in the preferred embodiment, either a simple bolt hole or a sunk hole is applicable for example.

**[0060]** While the invention had been described with reference to the preferred embodiments, it will be understood by those skilled in the art that various obvious changes may be made, and equivalents may be substituted for elements thereof, without departing from the essential scope of the present invention. Therefore, it is intended that the invention not be limited to the particular embodiments disclosed, but that the invention includes all embodiments falling within the scope of the appended claims.

## Claims

1. A bearing structure for a camshaft (2) comprising a lower journal (3) for supporting the camshaft (2) thereon, the lower journal (3) being formed with a hole (6) cutting off a part of a bearing surface (5) of the

lower journal (3), **characterized in that**

a connecting part between the bearing surface (5) and the hole (6) is formed with a recess (11) hollowed from the bearing surface (5) so that a bottom surface (16) of the recess (11) is separate from the bearing surface (5), and a part (11a) of an edge connecting the recess (11) and the bearing surface (5) to each other is elongated in a direction perpendicular to the axis of curvature (05) of the bearing surface (5).

2. The bearing structure as defined by Claim 1, **characterized in that** a remaining part (11b) of the edge is elongated along a direction parallel to the axis of curvature (05) of the bearing surface (5).
3. The bearing structure as defined by Claim 1 or 2, **characterized in that** the recess (11) has a side surface (15) connecting to the bearing surface (5).
4. The bearing structure as defined by Claim 3, **characterized in that** the side surface (15) comprises a first side surface (15a) and a second side surface (15b), the first side surface (15a) involves the part (11a) of the edge and is elongated in the direction perpendicular to the axis of curvature (05) of the bearing surface (5), and the second side surface (15b) involves the remaining part (11b) of the edge and is elongated in the direction parallel to the axis of curvature (05) of the bearing surface (5).
5. The bearing structure as defined by Claims 3 or 4, **characterized in that** the side surface (15) has a ramp (17) crossing the bearing surface (5) at an angle of less than 90°.
6. The bearing structure as defined by Claims 3 or 4, **characterized in that** the side surface (15) has a curved surface (18) tangentially crossing the bearing surface (5).
7. The bearing structure as defined by any one of Claims 1 to 6, **characterized in that** the bottom surface (16) is parallel to the bearing surface (5).
8. The bearing structure as defined by any one of Claims 1 to 7, **characterized in that** the hole (6) is formed in a region where the surface of the camshaft (2) moves downwardly.
9. The bearing structure as defined by any one of Claims 1 to 8, **characterized in that** the hole is a counterbore (6).

#### Patentansprüche

1. Lagerstruktur für eine Nockenwelle (2), enthaltend ein unteres Wellenlager (3) zum Stützen der Nok-

kenwelle (2) auf diesem Wellenlager, wobei das untere Wellenlager (3) mit einem Loch (6) versehen ist, das einen Teil einer Lageroberfläche (5) des unteren Wellenlagers (3) abschneidet, **dadurch gekennzeichnet,**

**dass** ein Verbindungsteil zwischen der Lageroberfläche (5) und dem Loch (6) mit einer Vertiefung (11) ausgestattet ist, die in der Lageroberfläche (5) so ausgehöhlt ist, dass eine Bodenfläche (16) der Vertiefung (11) von der Lageroberfläche (5) getrennt ist, und **dadurch,** dass ein Teil (11a) einer die Vertiefung (11) und die Lageroberfläche (5) miteinander verbindenden Kante sich in einer Richtung senkrecht zur Krümmungsachse (05) der Lageroberfläche (5) erstreckt.

2. Lagerstruktur nach Anspruch 1, **dadurch gekennzeichnet,** dass ein verbleibender Teil (11b) der Kante sich entlang einer parallel zur Krümmungsachse (05) der Lageroberfläche (5) verlaufenden Richtung erstreckt.
3. Lagerstruktur nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** die Vertiefung (11) eine Seitenoberfläche (15) aufweist, welche mit der Lageroberfläche (5) verbunden ist.
4. Lagerstruktur nach Anspruch 3, **dadurch gekennzeichnet, dass** die Seitenfläche (15) eine erste Seitenfläche (15a) und eine zweite Seitenfläche (15b) umfasst, die erste Seitenfläche (15a) den Teil (11a) der Kante umfasst und sich in die Richtung senkrecht zur Krümmungsachse (05) der Lageroberfläche (5) erstreckt und die zweite Seitenfläche (15b) den verbleibenden Teil (11b) der Kante umfasst und sich in die Richtung parallel zur Krümmungsachse (05) der Lageroberfläche (5) erstreckt.
5. Lagerstruktur nach Anspruch 3 oder 4, **dadurch gekennzeichnet, dass** die Seitenfläche (15) eine Aufwulffläche (17) aufweist, welche die Lageroberfläche (5) in einem Winkel von weniger als 90° kreuzt.
6. Lagerstruktur nach Anspruch 3 oder 4, **dadurch gekennzeichnet, dass** die Seitenfläche (15) eine gekrümmte Oberfläche (18) aufweist, die die Lageroberfläche (5) tangential kreuzt.
7. Lagerstruktur nach einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** die Bodenfläche (16) parallel zur Lageroberfläche (5) ist.
8. Lagerstruktur nach einem der Ansprüche 1 bis 7, **dadurch gekennzeichnet, dass** das Loch (6) in einem Bereich ausgeformt ist, in dem die Oberfläche der Nockenwelle (2) sich nach unten bewegt.
9. Lagerstruktur nach einem der Ansprüche 1 bis 8,

**dadurch gekennzeichnet, dass** das Loch eine Senkbohrung (6) ist.

#### Revendications

1. Structure de palier pour un arbre à cames (2), comprenant un tourillon inférieur (3) destiné à supporter l'arbre à cames (2) sur celui-ci, ledit tourillon inférieur (3) étant doté d'un trou (6) découpant une partie d'une surface de palier (5) du tourillon inférieur (3), **caractérisée en ce que** une partie de raccordement entre la surface de palier (5) et le trou (6) est dotée d'un évidement (11) creusé depuis la surface de palier (5) de sorte qu'une surface de fond (16) de l'évidement (11) est séparée de la surface de palier (5), et une partie (11a) d'un bord reliant l'un à l'autre l'évidement (11) et la surface de palier (5) s'allonge dans une direction perpendiculaire à l'axe de courbure (05) de la surface de palier (5). 5 10 15 20
2. Structure de palier selon la revendication 1, **caractérisée en ce qu'**une partie restante (11b) du bord s'allonge le long d'une direction parallèle à l'axe de courbure (05) de la surface de palier (5). 25
3. Structure de palier selon la revendication 1 ou 2, **caractérisée en ce que** l'évidement (11) présente une surface latérale (15) reliée à la surface de palier (5). 30
4. Structure de palier selon la revendication 3, **caractérisée en ce que** la surface latérale (15) comprend une première surface latérale (15a) et une seconde surface latérale (15b), où la première surface latérale (15a) implique la partie (11a) du bord et s'allonge dans la direction perpendiculaire à l'axe de courbure (05) de la surface de palier (5), et la seconde surface latérale (15b) implique la partie restante (11b) du bord et s'allonge dans la direction parallèle à l'axe de courbure (05) de la surface de palier (5). 35 40
5. Structure de palier selon la revendication 3 ou 4, **caractérisée en ce que** la surface latérale (15) présente une pente (17) croisant la surface de palier (5) selon un angle inférieur à 90°. 45
6. Structure de palier selon la revendication 3 ou 4, **caractérisée en ce que** la surface latérale (15) présente une surface incurvée (18) croisant de façon tangentielle la surface de palier (5). 50
7. Structure de palier selon l'une quelconque des revendications 1 à 6, **caractérisée en ce que** la surface de fond (16) est parallèle à la surface de palier (5). 55

8. Structure de palier selon l'une quelconque des revendications 1 à 7, **caractérisée en ce que** le trou (6) est formé dans une région où la surface de l'arbre à cames (2) se déplace vers le bas.

9. Structure de palier selon l'une quelconque des revendications 1 à 8, **caractérisée en ce que** le trou est un contre-alésage (6).

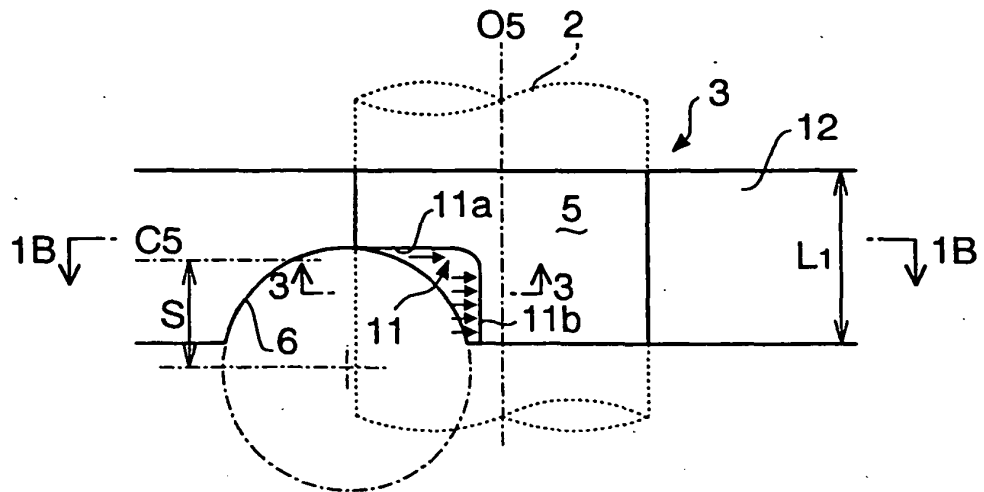


FIG. 1A

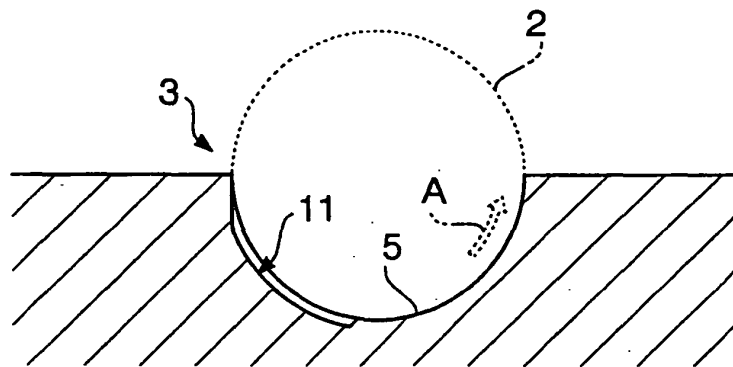


FIG. 1B

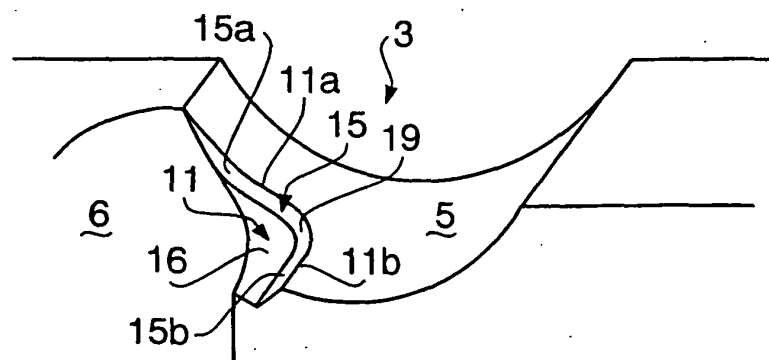


FIG. 2

FIG.3A

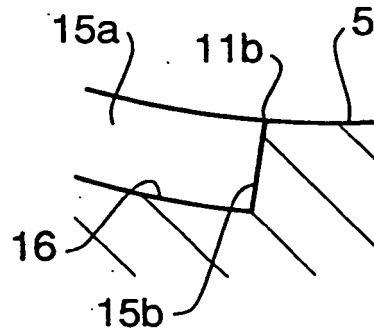


FIG.3B

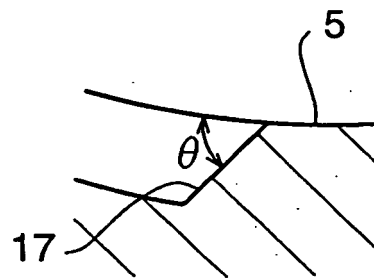


FIG.3C





FIG.3D





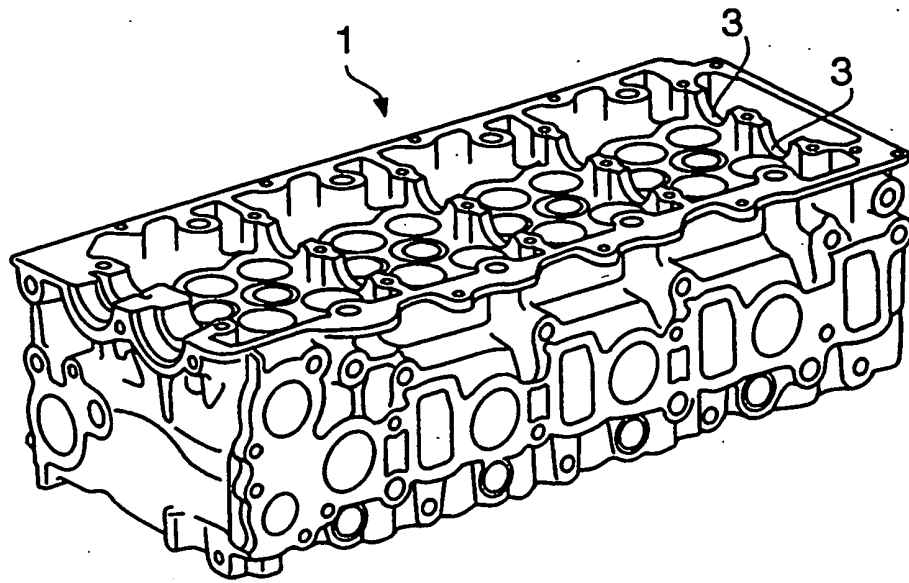


FIG. 4

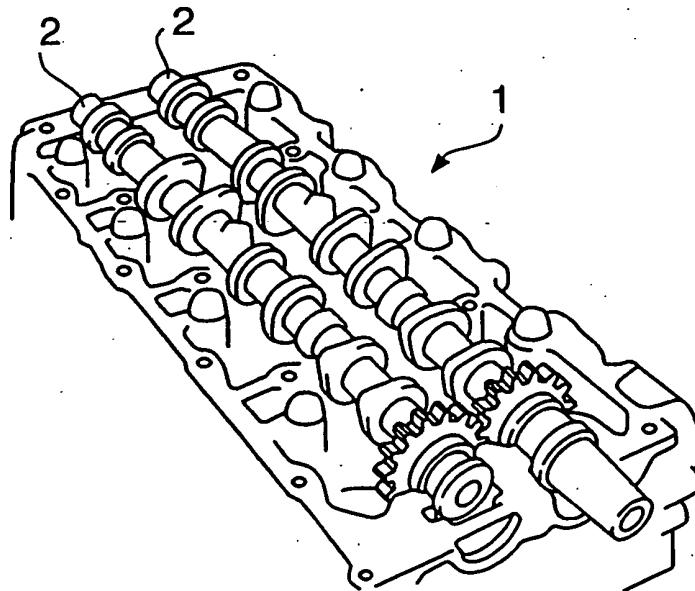


FIG. 5

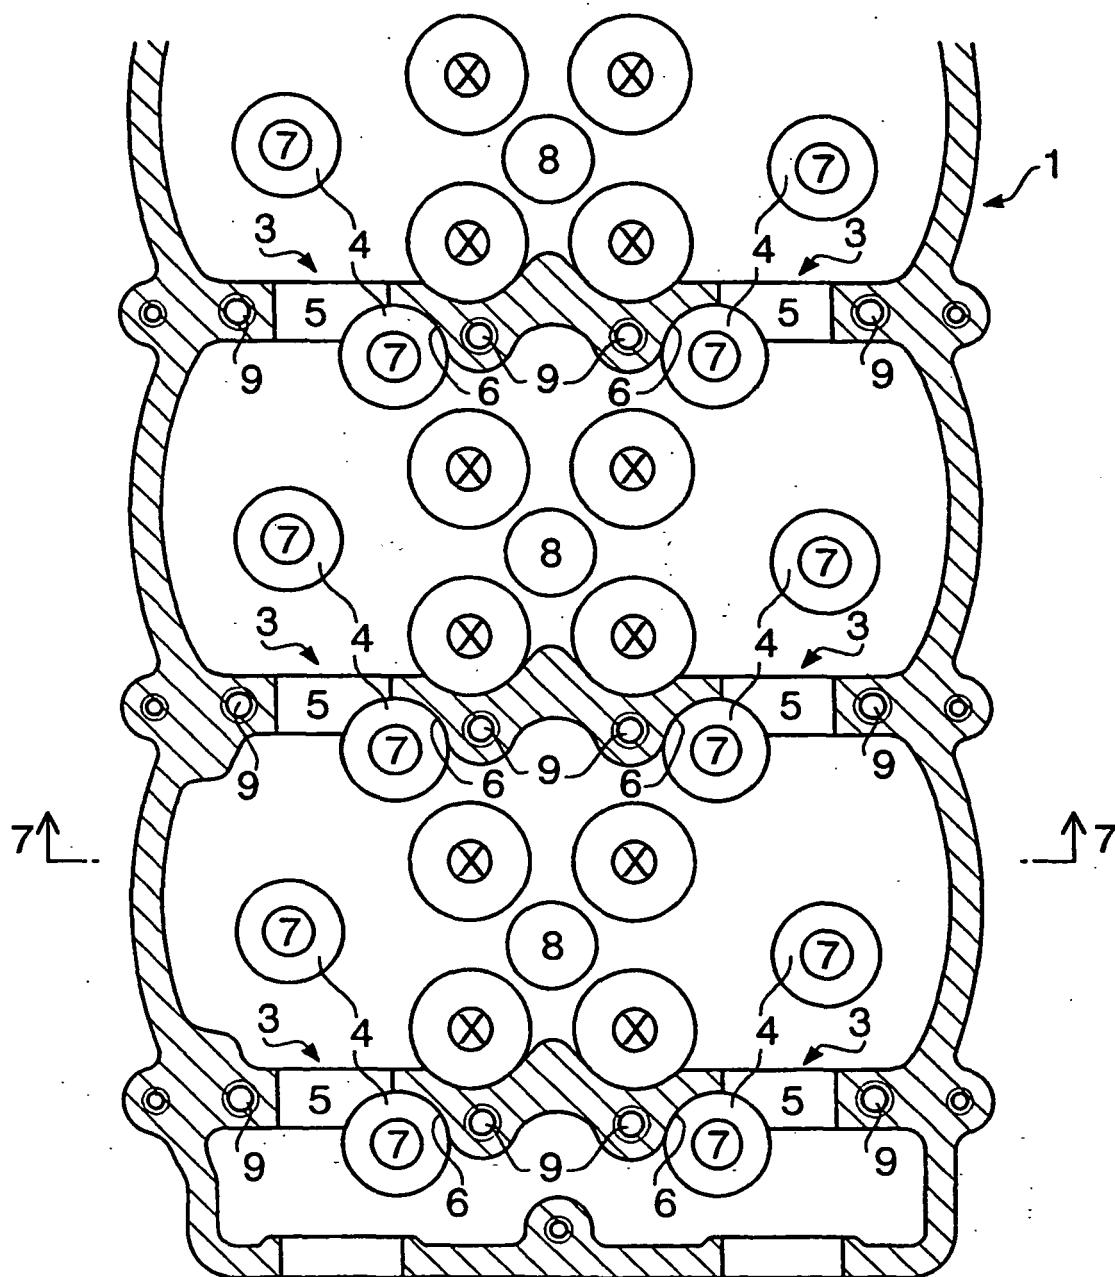


FIG. 6

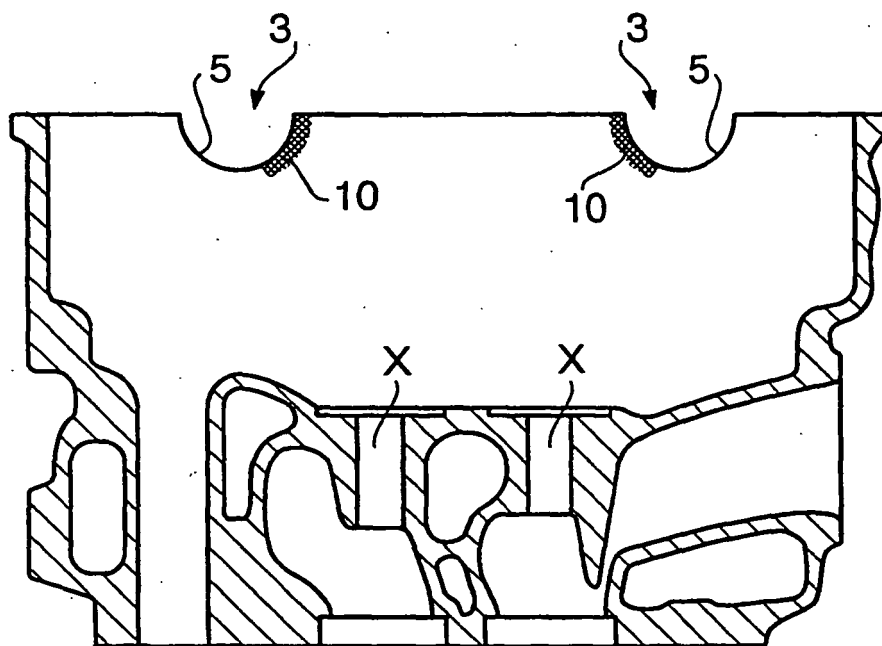


FIG. 7

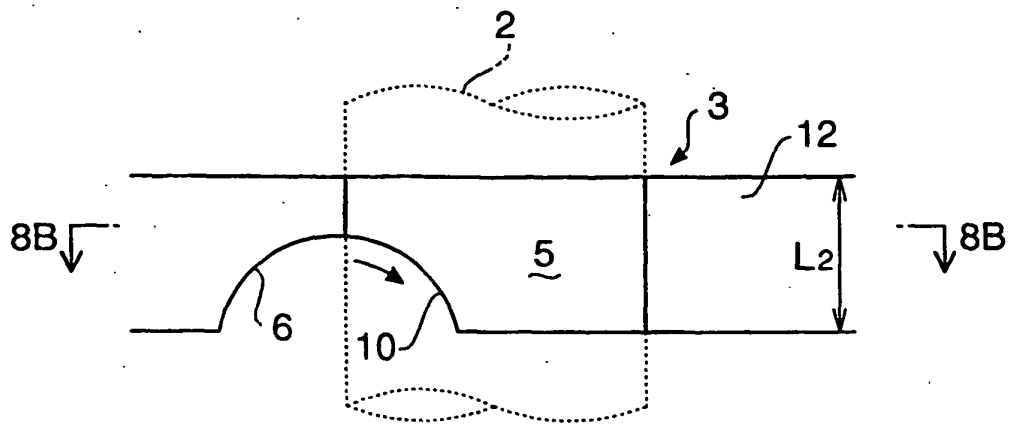


FIG. 8A

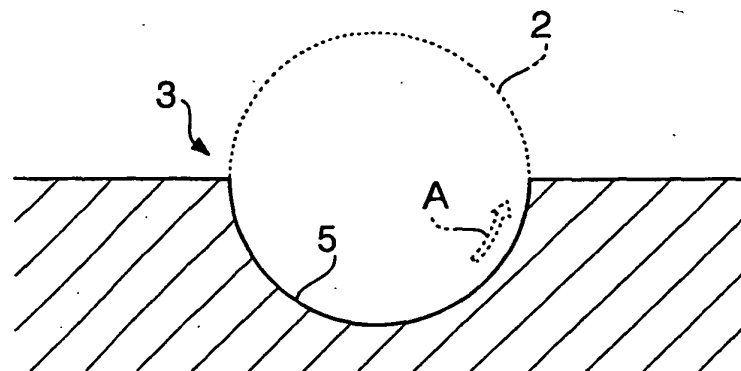


FIG. 8B

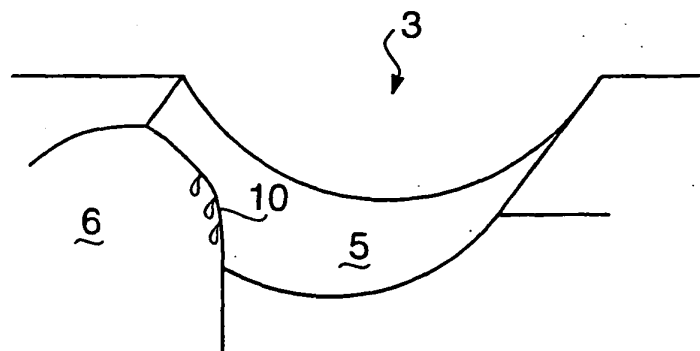


FIG. 9

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 8218836 A [0004]