

(19)



(11)

EP 1 669 303 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
02.09.2009 Bulletin 2009/36

(51) Int Cl.:
B65D 33/38 (2006.01)

(21) Application number: **04788360.8**

(86) International application number:
PCT/JP2004/014332

(22) Date of filing: **30.09.2004**

(87) International publication number:
WO 2005/030601 (07.04.2005 Gazette 2005/14)

(54) **POUCH FOR RETORT FOOD**

BEUTEL FÜR ERHITZBARE NAHRUNGSMITTEL

SACHET POUR ALIMENTS STERILISABLES

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR
 Designated Extension States:
AL HR LT LV MK

- **MATSUMOTO, Shinichi,**
c/o AJINOMOTO CO., INC.
Kawasaki-shi, Kanagawa 2108681 (JP)
- **OMORI, Mayumi,**
c/o AJINOMOTO CO., INC.
Kawasaki-shi, Kanagawa 2108681 (JP)

(30) Priority: **30.09.2003 JP 2003339847**

(74) Representative: **Nicholls, Kathryn Margaret et al**
Mewburn Ellis LLP
33 Gutter Lane
London
EC2V 8AS (GB)

(43) Date of publication of application:
14.06.2006 Bulletin 2006/24

(73) Proprietor: **Ajinomoto Co., Inc.**
Tokyo 104-8315 (JP)

- (56) References cited:
- | | |
|---------------------------|---------------------------|
| EP-A- 1 203 655 | WO-A-95/30590 |
| JP-A- 5 254 551 | JP-A- 7 300 146 |
| JP-A- 11 310 254 | JP-A- 11 321 885 |
| JP-A- 2000 318 091 | JP-A- 2001 058 655 |
| JP-A- 2002 019 795 | JP-A- 2002 046 754 |
| JP-A- 2003 104 400 | JP-U- 3 006 944 |
| US-A- 5 795 071 | |

- (72) Inventors:
- **HARANO, Shigenobu,**
c/o AJINOMOTO CO., INC.
Kawasaki-shi, Kanagawa 2108681 (JP)
 - **SAGAE, Miho,**
c/o AJINOMOTO CO., INC.
Kawasaki-shi, Kanagawa 2108681 (JP)

EP 1 669 303 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field of the Invention

[0001] The present invention relates to a retort food pouch, and more particularly to a retort food pouch capable of easily transferring fluid products such as liquids, powders, and grains, and especially retort foods including liquid foods and the like, into a cup.

Background of the Invention

[0002] Pouches made by methods such as sealing the edge portions of one or a plurality of films are widely used as packaging materials for various contents, particularly fluid contents. A means is sought whereby an opening portion (a pour spout) capable of reliably pouring out contents to a predetermined position without spillage can be formed on an upper corner portion of a pouch, without requiring the use of scissors.

[0003] As a solution to such problems, a refillable pouch is known (see, for example, JP H7-300146) in which a notch portion including a groove portion is formed in a seal portion in which a pour spout is formed, thus enabling the pouch pour spout to be affixed to the opening portion of another container to which contents are to be transferred.

[0004] Pouches with rectangular notch portions are disclosed in the document US-A-5,795,071.

[0005] Such pouches of the prior art hold liquids and powders such as liquid detergent and shampoos, and are constituted of relatively soft materials. In pouches constituted of relatively soft materials, notch portion having the shapes disclosed in the prior art enable easy and reliable formation of pour spouts, as well as reliable affixing of a pour spout onto the opening portion of another container to which shampoo or other contents is to be transferred.

[0006] It has become evident, however, that a similar effect cannot be obtained using retort food pouches made of materials having the characteristics sought in pouches for retort foods, such as strength, retort resistance, oxygen impermeability, and the ease of tearing required for easy opening.

Disclosure of the Invention

[0007] The present invention was undertaken to resolve such issues, and seeks to provide a retort food pouch which, when constituted of materials having the characteristics sought in pouches for retort foods, enables easy and reliable forming of an appropriate pour spout, and also enables the appropriate affixing of the formed pour spout to the opening portion of another container to which contents are to be transferred.

[0008] According to the present invention, a retort food pouch is closed by an upper heat seal portion, a lower heat seal portion, and a side heat seal portion, and in-

cludes a notch portion formed to open toward a side edge on a top portion of the side heat seal portion so as to form a content pour spout at a cutting section where a corner portion between said notch portion and the upper heat seal portion is cut; said notch portion comprises an approximately rectangular main body, opening toward the side edge, and an extended portion having a rectangular shape, with a semicircular shape at the tip continuously extending from a lower side section of said main body portion in the pouch breadth direction; whereby said extended portion is constituted to receive an upper edge portion of a wall forming the mouth of another container into which the retort food is to be transferred, extending along its axial line in a direction approximately perpendicular to the side edge; and a precut is formed to extend from the main body portion toward the upper edge at an angle of 20-80 degrees with respect to the side edge, with said cutting performed along said precut.

[0009] In another preferred embodiment of the present invention, the main body portion upper edge comprises a horizontal portion extending at a right angle to the side edge and a vertical portion extending approximately perpendicularly downward from the end of the horizontal portion; the precut extends from the connecting portion between the horizontal portion and the vertical portion.

[0010] In another preferred embodiment of the present invention, the side edge-side portions at the upper and lower edge of the main body portion are respectively inclined upward and downward.

[0011] In another preferred embodiment of the present invention, the notch portion and the precut are established such that the length of the pour spout formed by the cutting is 15-60 mm.

[0012] In another preferred embodiment of the present invention, the lateral heat seal portion on which the notch portion is formed is a widened portion of wider width than the heat seal portion on the side on which the notch portion is not formed.

[0013] In another preferred embodiment of the present invention, the widened portion is formed 10-25 mm away from the upper edge heat seal portion.

[0014] In another preferred embodiment of the present invention, the pouch is constituted by a metal laminate film with a multi-layer structure comprising a crystalline polypropylene resin film/adhesive resin layer including modified polypropylene/metal foil/adhesive layer/oriented nylon film/adhesive layer/polyester film.

[0015] According to the present invention of the above-described constitution, a retort food pouch is provided which, when constituted of materials having characteristics required for retort food pouches, permits easy and reliable formation of an appropriate pour spout and, further, permits appropriate affixing of the formed pour spout to the opening portion of another container into which contents are to be transferred.

Brief Description of the Drawings

[0016]

Fig. 1 is a side elevation depicting a retort food pouch in a preferred embodiment of the present invention. Fig. 2 is an expanded diagram of the portion of Fig. 1 in which a notch in the pouch is formed.

Best Mode for Carrying out the Invention

[0017] A retort food pouch according to a preferred embodiment of the present invention is described in detail below using figures. Fig. 1 is a side view depicting a retort food pouch according to a preferred embodiment of the present invention; Fig. 2 is an expanded view depicting the portion of pouch 1 in which a notch is formed.

[0018] A retort food pouch according to the present preferred embodiment is manufactured by heat seal bonding the perimeter portions of two laminate films (only one is here depicted) having a height of approximately 185 mm and a width of approximately 130 mm. When the bag is fabricated, only a top edge 4 is open; the two side edges and the bottom edge are respectively closed by side heat seal portions 6 and 8 and a lower heat seal portion 10. In the retort food pouch 1 of the present invention, contents such as food or the like are filled into the open upper end, whereupon the open upper end is closed by the upper heat seal portion 12 and the contents are sealed.

[0019] The retort food pouch 1 takes the form of a "standing pouch," in which a third laminate film (not depicted) is disposed between the bottom edge portions of two metal laminate films 2 (only one is here depicted), and the two laminate films 2 and the third laminate film are bonded so as to form an approximately circular gusset.

[0020] The retort food pouch 1 of the present embodiment is constituted so as to be easily opened by cutting off an upper corner portion thereof, such that an opening is formed in the cut portion which serves as a pour spout for contents. In the retort food pouch 1 of the present invention, as depicted in Fig. 1, a notch portion 14 forming a start-of-cut portion is formed in the upper portion of one of the side heat seal portions 6. The notch portion 14 is formed by notching so as to open the side heat seal portion 6 at an upper position separated by a predetermined distance from the top end 4 of the retort food pouch 1 in the direction of the side edge 16 (the outward direction).

[0021] The notch portion 14 comprises an approximately rectangular main body portion 18 opening toward the side edge 16 and an extended portion 20 which extends inward as a continuation of the lower portion of the main body portion 18. The extended portion 20 is dimensioned and shaped so that when transferring a retort food as pouch contents to another container, the extended portion 20 can engage the upper edge portion of a wall which constitutes the opening portion of the other con-

tainer. In the present embodiment, the extended portion 20 has a rectangular shape with a semicircular shape at the tip, extending horizontally (in the pouch breadth direction). Also, the extended portion 20 is disposed such that the axial line x in the lateral direction (depth direction) thereof extends in a direction approximately perpendicular to the side edge 16.

[0022] As depicted in Fig. 2, portions of the top side edge (top edge) 18a and bottom side edge (bottom edge) 18b of the main body portion 18 are designed on the side edge 16 side, as top side inclined portion 18c and bottom side inclined portion 18d, and respectively slope upward and downward. Moreover, the top edge 18a is furnished with a horizontal portion 18e extending from the inside edge of the top side inclined portion 18c in a direction approximately perpendicular to the side edge 6.

[0023] The main body portion 18 is provided with a vertical portion 18f extending approximately perpendicularly downward from the inside edge of the horizontal portion 18e. Therefore the main body portion 18 is provided with an approximately right angle corner portion 18g, constituted by the mutually perpendicularly extending horizontal portion 18e and vertical portion 18f.

[0024] In the retort food pouch 1 of the present embodiment, a precut (I-shaped notch) 22 is formed, extending from the main body portion 18 corner portion 18g of the notch portion 14 toward the top edge 6. This precut 22 is the portion at which cutting starts when opening the retort food pouch 1; the precut 22 extension line L becomes the cutting line, which is to say the pour spout, when opening the retort food pouch 1. The precut 22 is disposed so that its angle with respect to the side edge 6 is 20-80 degrees, and preferably 40-60 degrees.

[0025] As depicted in Fig. 1, the portion of the side heat seal portion 6 in which the notch portion 14 is formed is a widened portion 6a, in order that space to form the notch portion 14 can be secured, and that a heat seal portion can be secured with sufficient strength that the bag will not break even when subjected to shock such as dropping or the like on the inner side of the notch portion 14. In the present embodiment, the width w1 of the side heat seal portion 6 in portions other than the widened portion 6a is approximately 6 mm, but the width w2 of the widened portion 6a is set at approximately 10 mm, thus securing a width of approximately 3 mm on the inner side of the notch portion 14 for the heat seal portion. A width range for w 1 of 4-12 mm is preferable, as this range prevents bag breakage and assures an appropriate pouch fill quantity. It is preferable that the width of the notch portion 14 inner side heat seal portion be 2 mm or greater, as bag breakage is unlikely to occur when that width is wider than 2 mm. The value for w2-w1 can be 4-12 mm, and is preferably 4-8 mm.

[0026] As described above, a widened portion 6a is formed in the upper portion of the side heat seal portion 6; therefore a region 24 extending outward, in which contents are movable, is formed between the widened portion 6a and the upper heat seal portion 12. When a shock

is imparted to the pouch 1 through dropping or the like, pouch contents suddenly flow into the region 24 and stress is concentrated at the edge of region 24, resulting in potential bag breakage in this portion. It is therefore preferable to adopt a large height (length in the vertical direction) for the region 24 and to use a long perimeter for the region 24 to prevent bag breakage caused by stress concentration. In the present invention, this height h is 16 mm. The height h should preferably be in a range of 10-25 mm. In that range, bags will be unlikely to break, the notch position is not too far below the upper edge of the pouch, and dimensions are appropriate.

[0027] In the retort food pouch 1 of the present embodiment, the laminate film 2 is broken along a line extending from the precut 22, using the precut 22 as a start-of-cut portion, thus forming an opening in the upper portion of the pouch. To move fluid contents quickly and without spillage to another container however, it is desirable for the opening length 1, which is to say the length of the portion positioned between the side heat seal portion 6 and the upper heat seal portion 12 of the precut 22 extended line L, to be approximately 15-60 mm. Therefore in the retort food pouch 1 of the present embodiment, the notch portion 14 position, the precut 22 position, and the angle, etc. are set so that the opening length 1 is approximately 15-60 mm. A range of 2-10 mm is preferable for the distance between the precut 22 and the seal edge portion (the starting point for the opening length). Using this range, the bag will not break starting from the precut portion during distribution, and users will be able to easily open the bag.

[0028] Adoption of the above structure not only enables prevention of bag breakage and improved opening characteristics, but also results in improved pouring characteristics, whereby the unique seal shape of the present embodiment prevents disturbance of content flow and liquid spillage when transferring contents to a cup or the like.

[0029] A material having the characteristics required for a retort food pouch, such as strength, retort resistance, oxygen impermeability, and the ease of tearing which forms the basis for ease of opening, for example a metal laminate film with a multi-layer structure comprising crystalline polypropylene resin film/adhesive resin layer including denatured polypropylene/metal foil/adhesive layer/oriented nylon film/adhesive layer/polyester film, is used as a metal laminate film for the pouch of the present embodiment.

[0030] Examples of the crystalline polypropylene resin films used in the present invention includes a homopolymer type wherein the films are obtained by polymerizing polypropylenes only, a copolymer type wherein they are obtained by copolymerizing ethylenes and the like with propylenes, and a terpolymer type wherein they are obtained by copolymerizing three kinds of propylenes, ethylenes, and butylenes. For example, they include copolymers which can be produced in accordance with the production methods described in Japanese Patent Pub-

lication (JP Kokoku) Nos. Sho 44-16668 or Sho 55-8011, such as ethylene propylene block copolymers of which ethylene concentration is 3 to 40 weight% and preferably 5 to 30 weight%, melt flow index (MFI) is 0.1 to 40g/10mm (ASTM-D-1238) and preferably 20g/10mm or less, and absorbance ratio between 720cm⁻¹ and 731cm⁻¹ is 0.5 or larger; and blended compounds with other polyolefin resins containing 50 weight% or more of the above copolymers. The thickness of the crystalline polypropylene resin films can be optional, and it is preferably 30 to 80μm.

[0031] Metal foils used in the present invention are whatever can be easily torn by hands, including forms of metal sheets and metal films. As for metals, aluminum is preferable, that is, an aluminum foil is more preferable. The thickness of the metal foils can be optional as far as they can be easily torn by hands, and it is preferably about 3 to 10μm.

[0032] As for modified polypropylenes in the adhesive resin layer including a modified polypropylene used in the present invention, a carboxylic acid modified polypropylene is preferable and a maleic anhydride modified polypropylene is particularly preferable. In this connection, the adhesive resin layer including a modified polypropylene is preferably in the form of a single layer of a modified polypropylene resin or in the form of a double layer having a modified polypropylene resin layer and an unmodified polypropylene resin layer. Such adhesive resin layer is used so that the modified polypropylene resin layer adheres to the metal foil. The unmodified polypropylene resin includes ordinary polypropylene resins.

[0033] In the present invention, it is particularly preferable to use the adhesive resin layer in the form of the double layer having the modified polypropylene resin and the unmodified polypropylene resin layer because it is easy to manufacture and excellent in adhesion to both of a crystalline polypropylene film and a metal foil, and a metal laminated film is obtained having the thickness enough to maintain the strength.

[0034] The thickness of the adhesive resin layer can be optional as far as it can tightly bond a crystalline polypropylene resin film to a metal foil, and it is preferably about 3 to 30μm. When using the layer in the form of the double layer having the modified polypropylene resin and the unmodified polypropylene resin layer, it is preferable that the modified polypropylene resin is about 1 to 10μm and the unmodified polypropylene resin layer is about 9 to 20μm. Further, corresponding to the production methods, the adhesive resin layer can be added as a film and then welded.

[0035] As for polyester films, polyethylene terephthalate and polybutylene terephthalate are preferable. Polyethylene terephthalate is more preferable among them, and it is preferable to use a film thereof having the thickness of about 9 to 20μm. As for oriented nylon films, it is preferable to stretch 6 nylon or 66 nylon films and to use those having the thickness of about 10 to 30μm. Thus, when setting a oriented nylon film layer between a polyester film and a metal foil, the strength in forming

a standing pouch and its independence are improved. Especially, it is preferable in terms of the easiness in transferring contents into other containers because the opening of a pouch does not easily lose its shape. Further, benefits are obtained such as that holes are not easily made on the side of a container because a standing pouch is not easily torn or damaged on the parts other than a cutout (e.g. notch) for opening the pouch. Such material makes pouch resistant to a loss of shape of the opening.

[0036] As for adhesives used for bonding a metal foil and a oriented nylon film, and a polyester film and a oriented nylon film, it is preferable to use UV cure adhesives such as acrylic adhesives and methacrylic adhesives; and heat-hardening (cure) adhesives such as urethane adhesives (isocyanate adhesives) and epoxy adhesives. Among them, heat-hardening adhesives are more preferable as adhesives forming an adhesive layer which exists on at least one side (preferably both sides) of the oriented nylon film. In addition, an ink layer may be set on the adhesive coating surface of a polyester film in order to indicate the ingredients or the trade name.

[0037] As for adhesives used for bonding a nylon film to a metal foil or a metal film, those described as the adhesives used for bonding a polyester film and a oriented nylon film can be used.

[0038] The methods for producing a metal laminated film used for a retort pouch of the present invention are not particularly limited, and such film can be produced by ordinary laminating methods used for producing a retort pouch, such as dry-laminating, by laminating constituent films in any order. The following production method is particularly preferable.

[0039] As the first multilayer film, three film layers are produced in accordance with the method described in Japanese Patent Publication (JP Kokoku) No. Hei 1-54191, consisting of a crystalline polypropylene resin film, an adhesive resin layer including a modified polypropylene, and a metal foil.

[0040] As the second multilayer film, the film is produced by dry-laminating, consisting the step of bonding the polyester film to a oriented nylon film through an adhesive layer. Then, the nylon film of the second multilayer film are bonded to the metal foil of the first multilayer film by using an adhesive(s) in accordance with dry-laminating.

[0041] In the present embodiment retort food pouch 1 having the configuration described above, the corner portion of the pouch 1 can be easily parted to form an opening by cutting the two metal laminate films 2 along the notch portion 14 precut 22 and the extension line L thereof. Moreover, by engaging the extended portion 20 of the notch portion 14 to another container to which the contents of pouch 1 are to be transferred, the pouch 1 can be reliably affixed with respect to the other container while pouring out its contents, thereby enabling the contents to be transferred quickly and reliably to the other container without spillage.

[0042] Moreover, the laminate film which forms the pouch 1 in the present embodiment is comparatively hard, making it resistant to a loss of shape of the opening formed by cutting when pouring out the contents, and thus enabling rapid pouring out.

Claims

- 10 **1.** A retort food pouch closed by an upper heat seal portion (12), a lower heat seal portion (10), and a side heat seal portion (6, 8), and including a notch portion (14) formed to open toward a side edge on a top portion of the side heat seal portion so as to form a content pour spout at a cutting section where a corner portion between said notch portion and the upper heat seal portion is cut, wherein
 15 said notch portion comprises an approximately rectangular main body (18), opening toward the side edge, and an extended portion (20) having a rectangular shape, with a semicircular shape at the tip continuously extending from a lower side section of said main body portion in the pouch breadth direction; whereby
 20 said extended portion is constituted to receive an upper edge portion of a wall forming the mouth of another container into which the retort food is to be transferred, and extending along its axial line in a direction approximately perpendicular to the side edge;
 25 and a precut (22) is formed to extend from the main body portion toward the upper edge at an angle of 20-80 degrees with respect to the side edge, with said cutting performed along said precut.
- 30 **2.** The retort food pouch according to Claim 1, wherein the notch comprises a horizontal section in which the upper edge (18a) of the main body portion extends at a right angle with respect to the side edge, and a vertical section (18f) extending approximately perpendicularly downward from the tip of the horizontal section, and the precut (22) extends from a connecting portion which connects the horizontal section and the vertical section.
- 35 **3.** The retort food pouch according to Claims 1 or 2, wherein the upper edge and the lower edge side edge sections of the main body portion are respectively inclined upward and downward.
- 40 **4.** The retort food pouch according to any one of Claims 1 through 3, wherein the notch portion and the precut portion are formed in such a way that the length of the pour spout formed by cutting is 15-60 mm.
- 45 **5.** The retort food pouch according to any one of Claims 1 through 4, wherein the side heat seal portion in which the notch portion is formed is a widened por-
- 50
- 55

tion having a width which is wider than the side heat seal portion where no notch portion is formed.

6. The retort food pouch according to Claim 5, wherein the widened portion is formed 10-25 mm apart from the upper heat seal portion.
7. The retort food pouch set forth in any one of Claims 1 through 6, comprising a metal laminate film having a multilayer structure of crystalline polypropylene resin film/adhesive resin layer including modified polypropylene/metal foil/adhesive layer/oriented nylon film/adhesive layer/polyester film.

Patentansprüche

1. Beutel für aufheizbare Nahrungsmittel, der durch einen oberen Heißversiegelungsteil (12), einen unteren Heißversiegelungsteil (10) und einen seitlichen Heißversiegelungsteil (6, 8) verschlossen ist und einen Einkerbungsteil (14) aufweist, der so geformt ist, dass er in Richtung eines seitlichen Randes auf einem oberen Teil des seitlichen Hitzeversiegelungsteils öffnet, so dass an einem Schnittbereich, wo ein Eckteil zwischen dem Einkerbungsteil und dem oberen Hitzeversiegelungsteil ausgeschnitten ist, ein Ausguss gebildet wird, wobei der Einkerbungsteil einen nahezu rechtwinkligen Hauptkörper (18), der zum seitlichen Rand hin öffnet, und einen Erstreckungsteil (20) mit einer rechtwinkligen Form und einer Halbkreisform an der Spitze umfasst, der sich von einem unteren Seitenabschnitt des Hauptkörperteils in Richtung der Breite des Beutels erstreckt, wobei der Erstreckungsteil so ausgestaltet ist, dass er einen oberen Randteil einer Wand, die die Mündung eines weiteren Behälters bildet, in den das aufheizbare Nahrungsmittel überführt werden soll, aufnimmt und sich entlang der axialen Linie in einer nahezu senkrechten Richtung zu dem Seitenrand erstreckt; und ein Zuschnitt (22) gebildet ist, der sich von dem Hauptkörperteil zu dem oberen Rand mit einem Winkel von 20-80°, bezogen auf den Seitenrand, erstreckt, wobei der Schnitt entlang diesem Zuschnitt durchgeführt wird.
2. Beutel für aufheizbare Nahrungsmittel nach Anspruch 1, wobei die Einkerbung einen horizontalen Abschnitt, wobei der obere Rand (18a) des Hauptkörperteils sich in bezug auf den Seitenrand im rechten Winkel erstreckt, und einen vertikalen Abschnitt (18f) umfasst, der sich etwa senkrecht von der Spitze des horizontalen Abschnitts nach unten erstreckt, und wobei der Zuschnitt (22) sich von einem Verbindungsteil aus erstreckt, der den horizontalen Abschnitt und den vertikalen Abschnitt verbindet.

3. Beutel für aufheizbare Nahrungsmittel nach Anspruch 1 oder 2, wobei die Abschnitte des oberen Randes und des unteren seitlichen Randes des Hauptkörperteils nach oben bzw. nach unten geneigt sind.
4. Beutel für aufheizbare Nahrungsmittel nach einem der Ansprüche 1 bis 3, wobei der Einkerbungsteil und der Zuschnittteil auf eine solche Weise gebildet worden sind, dass die Länge des durch Schneiden gebildeten Ausgusses 15-60 mm ist.
5. Beutel für aufheizbare Nahrungsmittel nach einem der Ansprüche 1 bis 4, wobei der seitliche Hitzeversiegelungsteil, worin der Einkerbungsteil gebildet wird, ein verbreiteter Teil mit einer Breite ist, die größer ist als der seitliche Hitzeversiegelungsteil, wo kein Einkerbungsteil gebildet worden ist.
6. Beutel für aufheizbare Nahrungsmittel nach Anspruch 5, wobei der verbreiterte Teil 10-25 mm von dem oberen Hitzeversiegelungsteil entfernt gebildet ist.
7. Beutel für aufheizbare Nahrungsmittel nach einem der Ansprüche 1 bis 6, welcher eine Metalllaminafolie mit einer Mehrschichtstruktur aus kristalliner Polypropylenharzfolie/Klebeharzschicht, einschließlich modifiziertem Polypropylen/Metallfolie/Klebeschicht/Folie aus orientiertem Nylon/- Klebeschicht/Polyesterfolie umfasst.

Revendications

1. Sachet pour aliments stérilisés fermé grâce à une partie de joint thermique supérieure (12), une partie de joint thermique inférieure (10) et une partie de joint thermique latérale (6, 8) et comprenant une partie d'encoche (14) réalisée pour s'ouvrir vers un bord latéral sur une partie supérieure de la partie de joint thermique latérale afin de former un bec verseur de contenu au niveau d'une section de découpe où une partie de coin entre ladite partie d'encoche et la partie de joint thermique supérieure est découpée, dans lequel ladite partie d'encoche comprend un corps principal approximativement rectangulaire (18), s'ouvrant vers le bord latéral, et une partie étendue (20) ayant une forme rectangulaire, avec une forme semi-circulaire à la pointe, s'étendant en continu d'une section latérale inférieure de ladite partie de corps principal dans le sens de la largeur du sachet ; moyennant quoi ladite partie étendue est constituée de manière à recevoir une partie de bord supérieur d'une paroi formant le goulot d'un autre récipient dans lequel l'aliment stérilisé doit être transféré, et s'étendant le

long de la ligne axiale dans une direction approximativement perpendiculaire au bord latéral; et une pré-découpe (22) est formée de manière à s'étendre depuis la partie de corps principal vers le bord supérieur à un angle de 20 à 80 degrés par rapport au bord latéral, ladite découpe étant réalisée le long de ladite pré-découpe.

2. Sachet pour aliments stérilisés selon la revendication 1, dans lequel l'encoche comprend une section horizontale dans laquelle le bord supérieur (18a) de la partie de corps principal s'étend en formant un angle droit par rapport au bord latéral et une section verticale (18f) s'étendant à peu près perpendiculairement vers le bas depuis la pointe de la section horizontale, et la pré-découpe (22) s'étend depuis une partie de liaison qui relie la section horizontale et la section verticale.
3. Sachet pour aliments stérilisés selon la revendication 1 ou 2, dans lequel les sections de bord supérieur, de bord inférieur et de bord latéral de la partie de corps principal sont respectivement inclinées vers le haut et vers le bas.
4. Sachet pour aliments stérilisés selon l'une quelconque des revendications 1 à 3, dans lequel la partie d'encoche et la partie prédécoupée sont formées de telle manière que la longueur du bec verseur formé par la découpe soit de 15 à 60 mm.
5. Sachet pour aliments stérilisés selon l'une quelconque des revendications 1 à 4, dans lequel la partie de joint thermique latérale dans laquelle est formée la partie d'encoche est une partie élargie ayant une largeur qui est plus large que la partie de joint thermique latérale où aucune partie d'encoche n'est formée.
6. Sachet pour aliments stérilisés selon la revendication 5, dans lequel la partie élargie est formée à une distance de 10 à 25 mm de la partie de joint thermique supérieure.
7. Sachet pour aliments stérilisés selon l'une quelconque des revendications 1 à 6, comprenant un film de stratifié métallique ayant une structure multicouche de film en résine de polypropylène cristallin/couche de résine adhésive comprenant du polypropylène modifié/feuille métallique/couche adhésive/film de nylon orienté/couche adhésive/film de polyester.

55

FIG.1


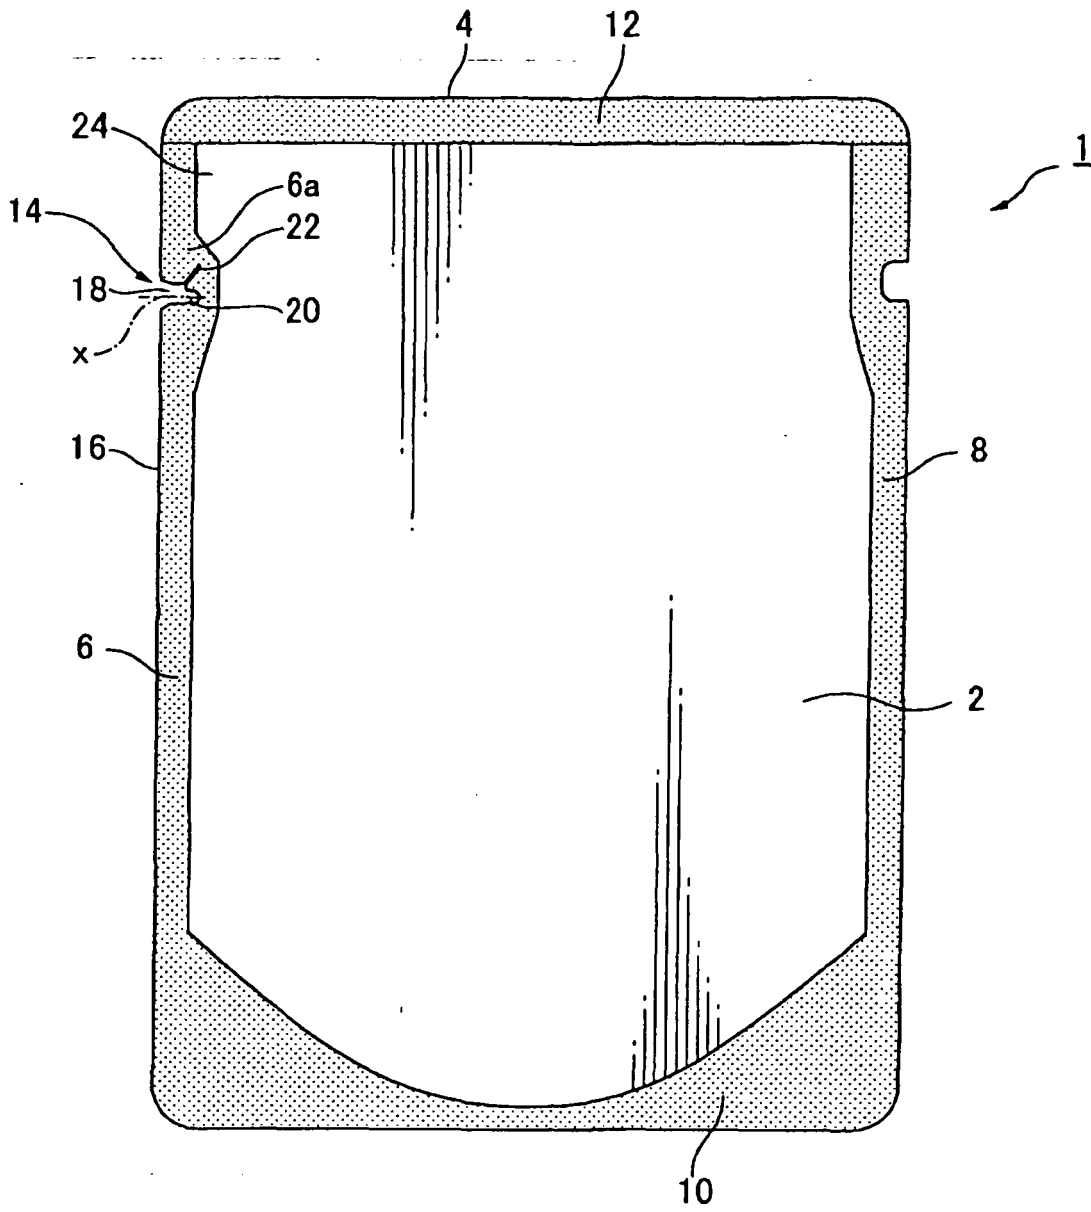


FIG.2

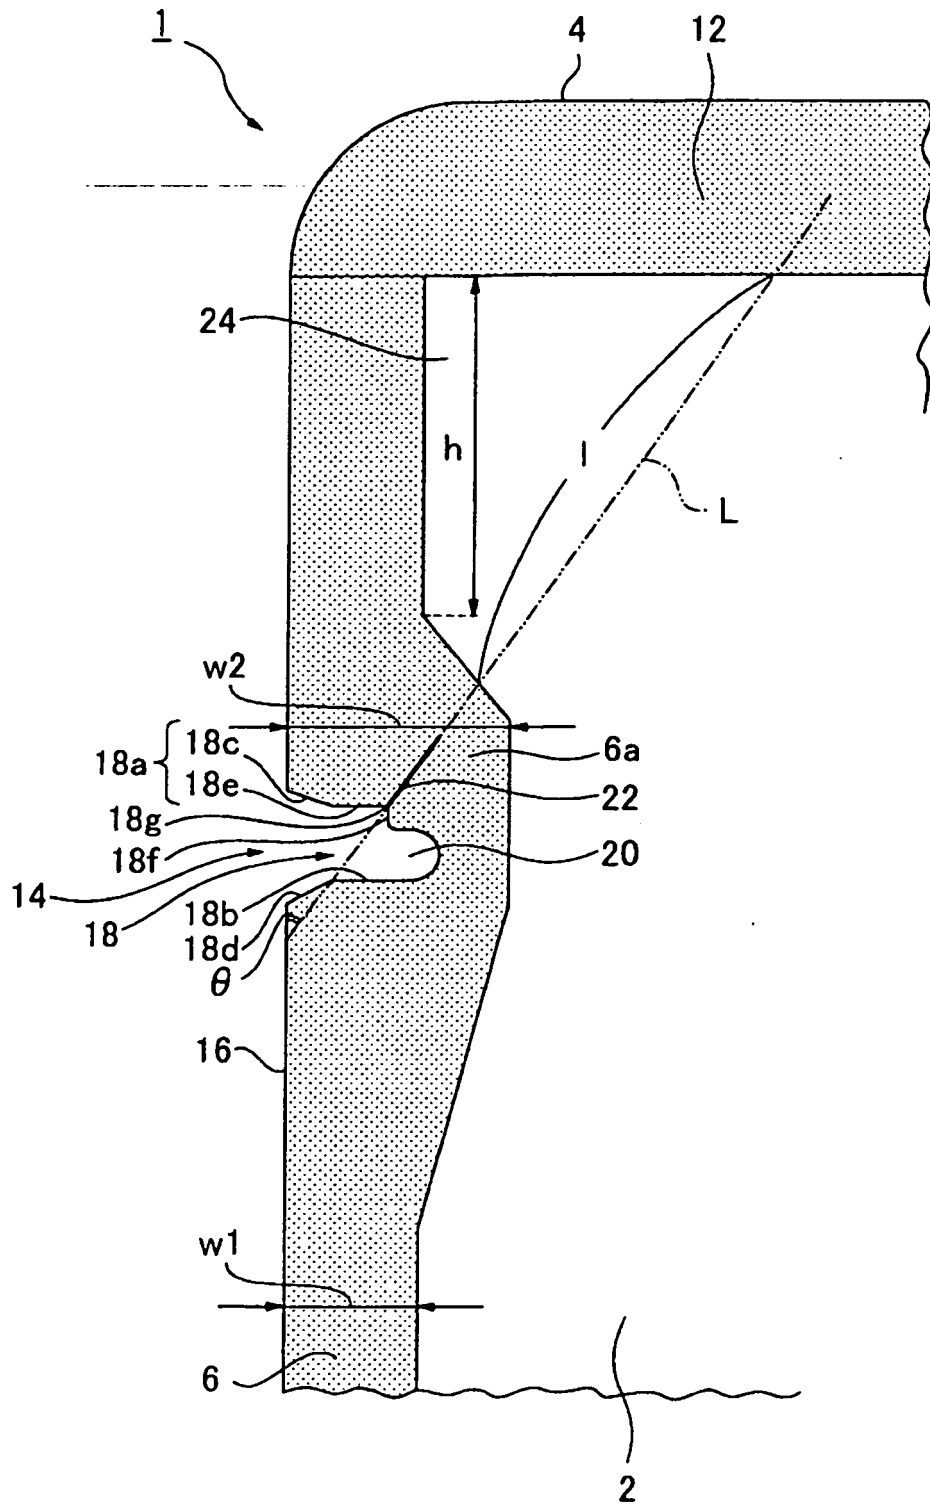

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP H7300146 B [0003]
- US 5795071 A [0004]
- JP SHO4416668 B [0030]
- JP SHO558011 B [0030]
- JP HEI154191 B [0039]