

⑫

EUROPEAN PATENT APPLICATION

⑰ Application number: **79300184.3**

⑸ Int. Cl.²: **H 01 B 13/22**

⑱ Date of filing: **06.02.79**

⑳ Priority: **08.02.78 CA 296625**

⑦ Applicant: **NORTHERN TELECOM LIMITED, 1600
Dorchester Boulevard, West, Montreal Quebec
H3H 1R1 (CA)**

④ Date of publication of application: **22.08.79**
Bulletin 79/17


⑦ Inventor: **Walling, Jorg-Hein, 431 Church, Beaconsfield
Quebec H3R 3W9 (CA)**
Inventor: **Bouffard, Jean, 147e-17 Ave. Apt. 203,
Lachine Quebec (CA)**

⑧ Designated Contracting States: **DE FR GB IT NL**

⑦ Representative: **Wright, Peter David John et al, R.G.C.
Jenkins & Co. 53-64 Chancery Lane, London
WC2A 1QU (GB)**

⑤ **Powder distributor for filling a cable.**

⑦ A device for filling the interstices of multistranded cable with powder, comprising an outer cylindrical housing (14) and a concentric inner tube (16) with an annular chamber (18) between them. The tube at one end carries a coaxial impeller (32) located at the outlet end portion (26) of the housing. Powder is fed into the chamber and a helical screw (20) pushes the powder onto the impeller which is rotated to distribute the powder onto conductors (40) passing from a strander around the device and into a closing die (12).

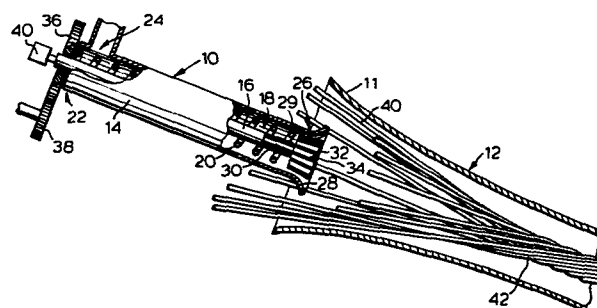

EP 0 003 672 A1

POWDER DISTRIBUTOR FOR FILLING A CABLE

This invention relates to the production of multi-stranded electrical cables and more particularly to filling the interstices in such cables with powder.

5 Multi-stranded electrical cables are filled with powder for water blockage. A powder filling for this purpose is described in United States Patent No. 4,002,819 issued 11th January 1977 to Northern Telecom Limited assignee of Leo. V. Woytiuk. One
10 method of filling the interstices of the cable is by passing the cable core through an electrostatic powder chamber as described in United States Patent No. 4,100,002 issued 11th July 1978 in the name of Leo V. Woytiuk assignor to Northern Telecom Limited.
15 Such a method is relatively difficult to operate to obtain fine adjustments in

the amount of powder filling placed within the interstices of the cable, i.e. the percentage of voids filled by the powder.

It is an object of the present invention to
5 provide an improved method and apparatus for powder filling a multi-stranded cable.

Essentially the invention consists of a device for filling the interstices of multi-stranded cable with powder, comprising: a cylindrical housing; a
10 tube concentric with the housing and spaced inwardly therefrom to form an annular chamber having an inlet end and an outlet end, and an aperture opening into the chamber for feeding powder thereto; means to move powder along the chamber from the aperture to
15 the outlet end thereof; and an impeller coaxially mounted at the end of the tube and located at the outlet end of the chamber, the impeller being axially rotatable whereby powder moved along the chamber is dispersed laterally from the open end thereof.

20 Example embodiments of the invention are shown in the accompanying drawings in which:

Figure 1 is a side view in cross-section of a device for powder filling a cable;

Figure 2 is a cross-sectional side view of an
25 alternate embodiment of the device of Figure 1;

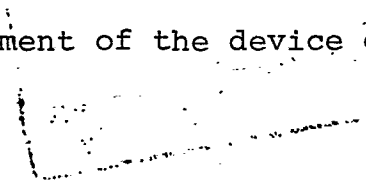


Figure 3 is a cross-section side view of another alternate embodiment of the device of Figure 1; and

Figure 4 is a cross-sectional side view of yet another alternate embodiment of the device of

5 Figure 1.

The example embodiment shown in Figure 1 of the drawings consists of a cable filling device in the form of a powder distributor 10 located at the inlet end 11 of a closing die 12. Distributor 10
10 comprises an outer housing 14 and an inner tube 16 fixed to the outer housing, the tube and housing forming between them an annular chamber 18. A rotatable helical screw member 20 concentric with tube 16 is located in chamber 18. That end of
15 chamber 18 and housing 14 remote from closing die 12, designated the inlet end 22, has a powder feed aperture 24 opening laterally into the chamber. Outlet end 26 of housing 14, which in the operation of the device is located within inlet end 11 of closing
20 die 12, flares outwardly to form a bell mouth 28. A drive shaft 30 extends coaxially through tube 16 which terminates short of outlet end 26 of outer tube 14 and defines an outlet 29 of chamber 18. Drive shaft 30 projects from tube 16 and carries an
25 impeller 32 located in bell mouth 28 of housing 14.

Impeller 32 is frustroconical with spaced ribs or blades 34 on its outer surface. Helical screw 20 terminates an outlet 29 of chamber 18 short of impeller 32. Adjacent inlet end 22 of distributor 10 lies a gear 36 coaxial with housing 14 and meshing with a drive gear 38. Helical screw 20 is fixed at one end to gear 36. In this embodiment gear 36 serves to close inlet end 22 of housing 14 and chamber 18. Fixed tube 16 and drive shaft 30 extend through gear 26, drive shaft 30 being driven by suitable drive means 40.

In the operation of the device of Figure 1 conductors 40 are fed from a strander (not shown) into closing die 12 through its inlet 11 to form a stranded cable 42. Distributor 10 is located within the circle of conductors as they enter the closing die and is coaxially aligned with the closing die. As conductors 40 are fed into closing die 12, powder is fed continuously through conduit 24 into chamber 18 and gear 36 is rotated by drive gear 38 which rotates helical screw 20. Screw 20 carries the powder forward in chamber 18 to impeller 32. Impeller 32, rotated by drive shaft 30, throws the powder out laterally into closing die 12 around conductors 40 and as the conductors close to form cable 42 the powder is

carried by the conductors to fill the interstices in the cable. Preferably conductors 40 are coated with oil to which the powder adheres.

The device shown in Figure 2 is an alternate embodiment of the device of Figure 1 and it is employed in the same manner to powder fill a stranded cable. In this alternate embodiment tube 16 terminates in an electric motor 50 which drives an impeller 52 located coaxially in bell mouth 28 of housing 14 and having spaced blades 54. Gear 36 is driven as before but tube 16 carries electrical leads 56 for motor 50. The operation of this alternate embodiment is the same device of Figure 1.

In Figure 3 distributor 10 is modified to provide another form of impeller driven by shaft 30 as seen in Figure 1. In this embodiment outlet end 26 of housing 14 is not flared and drive shaft 30 terminates in an impeller 62 which extends outwardly and laterally beyond the outlet end of the outer tube, the turbine being annularly dished with a deflector plate 64 normal to the axis of the drive shaft end with spaced blades 66.

In the operation of the embodiment of Figure 3 powder is moved by helical screw 20 along chamber 18 and delivered to impeller 62 which throws it laterally

outwardly against conductors 40 within closing die 12.

The example embodiment of Figure 4 shows an
impeller 70 enclosed by housing 14. Impeller 70 is
cylindrical and mounted on the end of drive shaft 30
5 as before, with spaced blades 72. Housing 14 has
a closed outlet end 74 with a ring of spaced slots
76 opening laterally from the housing in the region
of blades 72 of impeller 70. Slots 76 are curved
in the direction of rotation of impeller 70 for
10 increased flow of powder.

In the operation of the device of Figure 4 helical
screw 20 feeds powder to impeller 72 which throws
the powder laterally through slots 76 and against
conductors 40 in closing die 40.

15 It will be appreciated that the shape and
orientation of the blades on the impeller of the
device are alterable to achieve the purpose of the
distributor.

The centrifugal force applied to the powder by
20 the impeller distributes the powder effectively to
the conductors and this is especially important where
the conductors are oil-coated or the powder particles
are to adhere to the conductors electrostatically.
Also the force imparted to the powder particles
25 inhibits them from agglomerating. The powder is

distributed symmetrically to the conductors and excess powder may be collected at the outlet of the closing die for recycling.

It will also be appreciated that types of
5 mechanism may be employed for driving impeller 42
other than meshing gears 26 and 28; for example a
worm and screw, a belt and pulley, or a chain and
sprocket.

CLAIMS:

1. A device for filling the interstices of multi-stranded cable with powder, characterised by:

a cylindrical housing (14);

5 a tube (16) concentric with the housing and spaced inwardly therefrom to form with the housing an annular chamber (18) having an outlet end (26), and an aperture (24) opening into the chamber for feeding powder thereto;

10 means (20) to move powder along the chamber from the aperture to the outlet end thereof; and an impeller (32) coaxially mounted adjacent the end of the tube and located at the outlet end of the chamber, the impeller being rotatable whereby
15 powder moved along the chamber is dispersed laterally from the outlet end thereof.

2. A device as claimed in claim 1 characterised in that the impeller is mounted on the end of a drive shaft (30) which passes axially through the tube
20 (16), and means (40) is provided to rotate the drive shaft axially.

3. A device as claimed in claim 1 characterised
in that the means to move the powder comprises a
helical screw (20) concentrically mounted within
the chamber, and means (36) to rotate the screw
5 member.

4. A device as claimed in claim 1 characterised
in that the impeller includes an electrical motor
(50) mounted on the end of the tube, the electrical
leads (56) for the motor passing through the tube.

10 5. A device as claimed in claim 1 characterised
in that the impeller comprises a frustro-conical
member (52) having a plurality of spaced blades (54)
extending laterally therefrom.

6. A device as claimed in claim 1 characterised
15 in that the impeller (62) comprises a frustro-conical
member having a plurality of spaced blades (66)
extending laterally therefrom and a deflector plate
(64) normal to the axis thereof.

7. A device as claimed in claim 1 characterised
20 in that the housing is closed about the impeller
and has a ring of spaced slots (76) opening therethrough
adjacent the impeller.

8. A device as claimed in claim 1 characterised in that the means to rotate the screw comprises a gear (36) fixed coaxially to the screw and closing that end of the chamber remote from the outlet end.

9. A device as claimed in claim 8 characterised in that the impeller is mounted on the end of a drive shaft (30) which passes axially through the tube and the gear (36), and drive means (40) is fixed to that end of the drive shaft remote from the impeller.

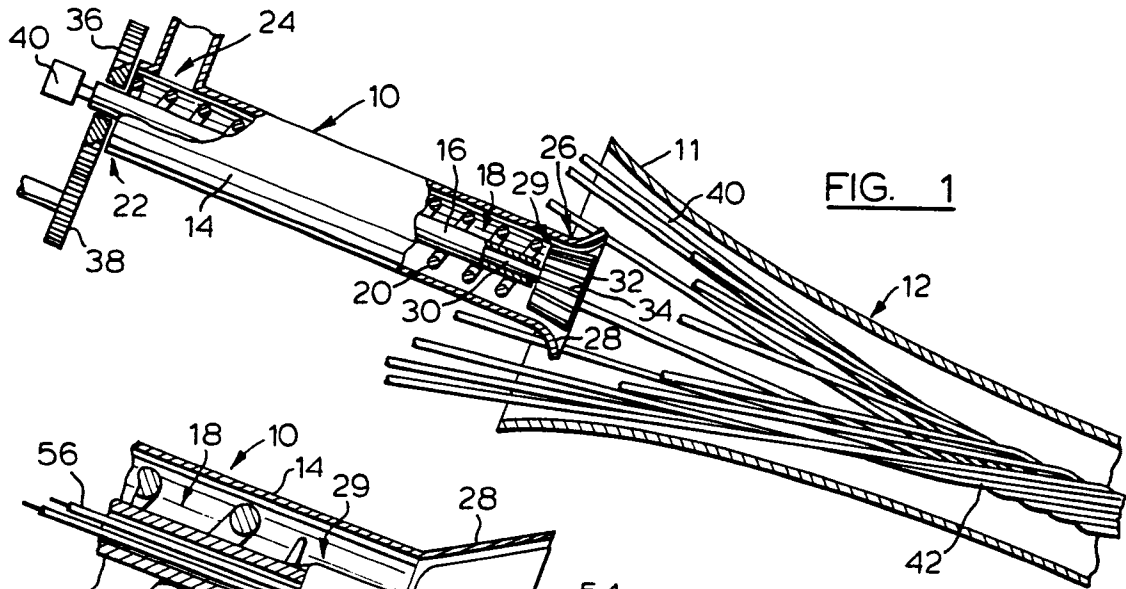


FIG. 1

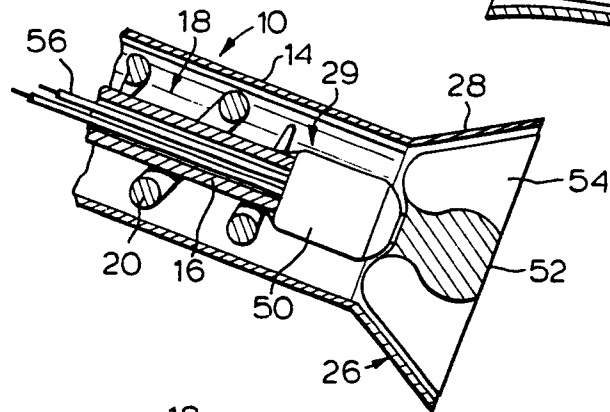


FIG. 2

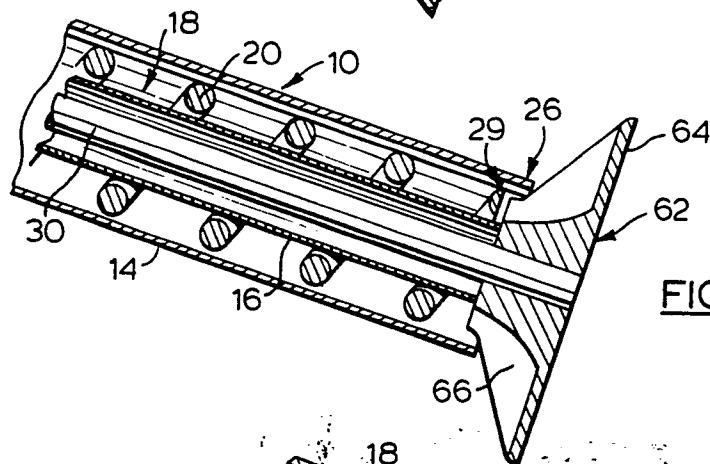


FIG. 3

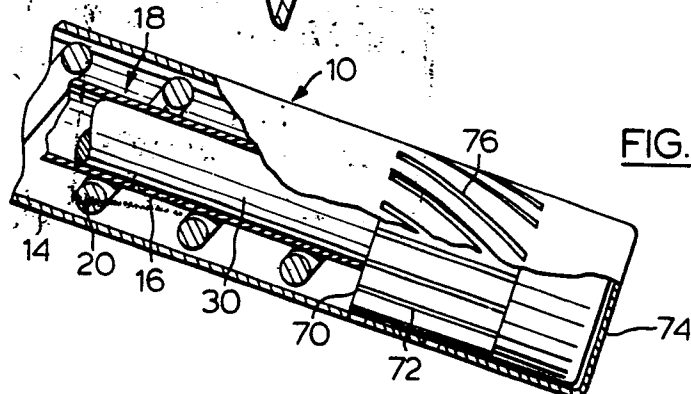


FIG. 4



European Patent
Office

EUROPEAN SEARCH REPORT

0003672

Application number

EP 79 30 0184

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. ²)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
	<u>DE - B - 1 016 008</u> (FELTEN & GUILLEAUME) * Column 3, lines 5-52; figure 1 * -- <u>DE - A - 2 712 820</u> (NORTHERN TELECOM) * Page 8, last paragraph - page 10, first paragraph; figures 1,2 * ----	1,3,8 1-3	H 01 B 13/22
			TECHNICAL FIELDS SEARCHED (Int. Cl. ²)
			H 01 B 13/22 7/28 13/24 13/14 13/00
			CATEGORY OF CITED DOCUMENTS
			X: particularly relevant A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: conflicting application D: document cited in the application L: citation for other reasons
			&: member of the same patent family, corresponding document
 The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
The Hague	19-04-1979	DEMOLDER	