

⑫

**EUROPEAN PATENT APPLICATION**

⑰ Application number: 79300326.0

⑤① Int. Cl.<sup>2</sup>: **H 01 H 19/63**

⑳ Date of filing: 06.03.79

③① Priority: 17.03.78 GB 1058178

⑦① Applicant: **AMP INCORPORATED**, Eisenhower Boulevard, Harrisburg, Pennsylvania (US)

④③ Date of publication of application: 03.10.79  
Bulletin 79/20


⑦② Inventor: **Janssen, Johannes Theodorus Maria**, Karperlaan 4, Hedel (NL)  
 Inventor: **Gilissen, Hermanus Petrus Johannes**, 7A Haarenseweg, Esch (NL)  
 Inventor: **Soes, Lucas**, Lijsterbeslaan 36, Rosmalen (NL)  
 Inventor: **Van der Sanden, Ludovicus Cornelis**, De Baken 4, 's-Hertogenbosch (NL)  
 Inventor: **Van Dijk, Petrus Richardus Martinus**, De Baken 8, 's-Hertogenbosch (NL)

⑧④ Designated Contracting States: **BE CH DE FR GB IT NL SE**

⑦④ Representative: **Stuart-Prince, Richard Geoffrey et al**, 20 Queensmere, Slough, Berkshire SL1 1YZ (GB)

⑤④ Coded electric switch.

⑤⑦ An electrical switch comprises a base (1) of electrically insulating material carrying an input contact (3) and a plurality of output contacts (3); a bridging contact (5) fixedly mounted on the base (1) in permanent connection with the input contact (2), and having a plurality of resilient contact arms (6) respectively associated with the output contacts (3), and an operating member mounted on the base and formed with a plurality of cam projections (11) adapted and arranged to engage the contact arms (6) of the bridging contact (5) as the operating member (8) is moved relative to the base (1), thereby to urge the contact arms (6) into contact with the associated output contacts (3).

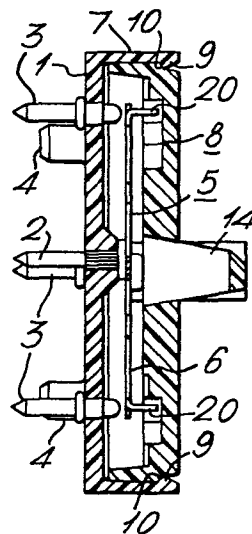

**TITLE MODIFIED**  
see front page

Electrical switch.

This invention relates to an electrical switch, and particularly to an electrical switch capable of selectively providing a connection between an input  
5 contact and any one or more of a plurality of output contacts.

Such switches can be arranged to give a binary or other coded output, and find use, for example, as programming devices in electronic equipment.

10 Known such switches comprise a base of electrically insulating material carrying an input contact and a plurality of output contacts; a bridging contact capable of providing connections between the input contact and any one or more of  
15 the output contacts; and an operating member mounted on the base and movable relative thereto between a plurality of relative positions in each of which the bridging contact is caused to provide a connection between the input contact and a respective one  
20 or combination of the output contacts.

Such known switches are generally of complicated structure and are thus expensive and difficult to assemble.

According to this invention such a switch is  
25 characterised in that the bridging contact is fixedly mounted on the base in permanent connection with the input contact and has a plurality of resilient contact arms respectively associated with the output contacts, the operating member being formed with  
30 a plurality of cam projections adapted and arranged

to engage the contact arms of the bridging contact as the operating member is moved relative to the base, thereby to urge the contact arms into contact with the associated output contacts.

5           This invention will now be described by way of example with reference to the drawings, in which:-

          Figure 1 is a top plan view with part broken away of a first electrical switch according to this invention;

10           Figure 2 is a vertical sectional view of the switch of Figure 1;

          Figure 3 is an underneath plan view of the operating member of the switch of Figures 1 and 2;

          Figure 4 is a top plan view with part broken away of a second electrical switch according to  
15           this invention; and

          Figure 5 is a vertical sectional view of the switch of Figure 4.

          The switch shown in Figures 1 to 3 comprises  
20           a circular base 1 moulded from electrically insulating plastics material, and carrying an input contact 2 and four output contacts 3. The contacts 2 and 3 are in-moulded in the base 1, and each has an outwardly projecting pin portion for receipt in a  
25           hole in a substrate (not shown) thereby to connect the contact 2 or 3 to a conductor on the substrate which may be a printed circuit board. The outer face of the base 1 from which the pin portions of the contacts 2 and 3 project is formed with two  
30           diametrically opposed circular bosses 4 which in use of the switch are received in holes in the substrate to locate the switch on the substrate. The inner ends of the output contacts 3 project above the adjacent surface of the base 1 to constitute contact  
35           points while the inner end of the input contact 2

has a flat head on which is welded a substantially planar bridging contact 5 having four contact arms 6 associated with the four output contacts 3 respectively.

5           As clearly shown in Figure 1, the output contacts 3 are located at positions spaced at about 90° around the centre of the base 1 and at mutually different distances, that is radii, from the centre of the base 1, and the input contact 2 is offset  
10           from the centre of the base 1 such that it is substantially equi-spaced from each of the output contacts 3. Thus, the effective lengths of the four contact arms 6 of the bridging contact 5 are also equal.

15           The base 1 is formed with an upstanding peripheral flange 7 within which is received a circular operating member 8 which completes the switch. The flange 7 has an inwardly directed lip 9 which engages over an annular shoulder 10  
20           on the operating member 8 to mount the operating member 8 on the base 1.

            The inner surface of the operating member 8 is formed with a plurality of arcuate cam projections 11 having mutually different radii measured from  
25           the centre of the operating member 8, that is from the axis of rotation thereof, which axis passes through the centre of the base 1.

            There is at least one cam projection 11 having a radius of curvature equal to the distance  
30           of each of the output contacts 3 from the centre of the base 1. Each cam projection has end surfaces 12 which slope from the surface of the operating member 8 up to a level middle surface 13 which is parallel to the surface of the operating member 8.

35           The operating member 8 is formed with an

outwardly directed bar 14 which can be gripped by  
a user's fingers to rotate the operating member  
8 relative to the base 1. The flange 7 on the base  
1 is divided into a plurality of circumferentially  
5 spaced segments 15 by ten slots 16, and the operating  
member is formed with a projection 17 on its peripheral  
edge, which projection 17 is engageable in the slots 16  
to provide an indexing action on rotation of the  
operating member relative to the base 1, the slots  
10 16 and projection 17 thus together defining ten  
rotary positions of the operating member 8 relative  
to the base 1.

As clearly shown in Figure 1, each contact  
arm 6 of the bridging contact 5 comprises a single  
15 limb 18 extending from the input contact 2 and  
carrying at its outer end a three-legged arrangement  
comprising three outwardly extending substantially  
equal length legs 19 lying in a common plane. The  
free end of the centre leg 19 constitutes a contact  
20 portion for engagement with the associated output  
contact 3 positioned beneath the centre leg 19, and  
the two outer legs 19 are joined by an arcuate  
linking member 20 which extends towards the operating  
member 8 for engagement by the cam projection or  
25 projections 11 associated therewith.

The arrangement is such that when the linking  
member 20 of a contact arm 6 is not engaged with an  
associated cam projection 11 on the operating member  
8, the centre leg 19 of that contact arm 6 is out  
30 of engagement with the associated output contact 3,  
as shown in Figure 2, but when the operating member  
8 is rotated relative to the base 1 to a position in  
which the linking member 20 is engaged by an  
associated projection 11, then the centre leg 19 is  
35 held in engagement with the associated output contact

3 whereby the bridging contact 5 provides a connection between the input contact 2 and that output contact 3.

As can be ascertained from Figure 3, the cam projections 11 are arranged such that for each of the ten rotational positions of the operating member 8 relative to the base 1 a unique combination of connections between the input contact 2 and the output contacts 3 is established by the bridging contact 5, these connections enabling a binary coded decimal output to be obtained from the output contacts 3 from a voltage applied to the input contact 2.

The three-legged form of each of the contact arms 6 of the bridging contact 5 is advantageous in that it gives a two stage closing of the centre leg 19 onto the associated output contact 3, this ensuring ease of operation of the switch with a final high contact force between the centre leg 19 and the output contact 3. When the sloping surface 12 of a cam projection 11 first engages the linking member 20 of a contact arm 6, the whole contact arm 6 including the limb 18 is deflected about the connection of the contact arm 6 to the input contact 2 until the centre leg 19 of the contact arm 6 engages the associated output contact 3. Thereafter only the two outer legs 19 are deflected relative to the centre leg 19 thereby increasing the contact force between the centre leg 19 and the output contact 3 until the linking member 20 is engaged with the planar surface 13 of the cam projection 11. Further, since all three legs 19 are of substantially equal length whereby the linking member 20 engages the cam projection 11 over the associated output contact 3 a maximum contact force is obtained for a minimum applied force, and thus the switch is easy to

operate.

Referring now to Figures 4 and 5, the switch here shown is somewhat similar to that shown in Figures 1 to 3, and corresponding parts have the same reference numerals. The essential difference is in the form of the bridging contact 5.

In this switch the input contact 2 is constituted by an arm of the bridging contact 5, which is bent to extend through the base 1. Each contact arm 6 of the bridging contact 5 is a single limb the free end 21 of which is bent to extend away from the base 1 to be received in a respective annular groove 22 in the operating member 8. The cam projections 11 engaged by the free ends 21 of the contact arms 6 are formed by changes in the depths of the grooves 22, such that as the operating member 8 is rotated relative to the base 1 the contact arms 6 are deflected towards the base 1 such that a point on the contact arm 6 intermediate the ends thereof is urged into contact with the associated output contact 3. Each contact arm 6 is received between a respective pair of bosses 23 upstanding from the base 1 adjacent the free end of the contact arm 6, which bosses 23 serve to restrain the contact arm 6 from rotary movement with the operating member 8 relative to the base 1. As shown in Figure 4, the flange 7 of the base 1 is provided with six slots 16 defining rotational positions of the operating member 8 relative to the base 1, the cam projections 11 being such that for each of these positions a particular combination of connections between the input contact 2 and the output contacts 3 is established by the bridging contact 5. Further, the base 1 is formed with five locating bosses 4 on its outer surface.

A particular advantage of the switches described above are that simply by changing the operating member to one with a different arrangement of cam projections, the coding of the switch can be changed. Further, since there is substantially no sliding contact between the output contacts and the contact arms of the bridging contact, it is possible to have high contact forces with only little wear of the contact surfaces. The only slight sliding contact which takes place is however sufficient to provide cleaning of the contact surfaces. It is thus possible to use tin-plated members for the contacts rather than the often used more expensive gold-plated contacts.

15

20

25

30

35



Claims:

1. An electrical switch comprising a base of electrically insulating material carrying an input contact and a plurality of output contacts; a  
5 bridging contact capable of providing connections between the input contact and any one or more of the output contacts; and an operating member mounted on the base and movable relative thereto between a plurality of relative positions in each of which  
10 the bridging contact is caused to provide a connection between the input contact and a respective one or combination of the output contacts, characterised in that the bridging contact (5) is fixedly mounted on the base (1) in permanent connection with the input  
15 contact (2), and has a plurality of resilient contact arms (6) respectively associated with the output contacts (3), the operating member (8) being formed with a plurality of cam projections (11) adapted and arranged to engage the contact arms (6) of the bridging  
20 contact (5) as the operating member (8) is moved relative to the base (1), thereby to urge the contact arms (6) into contact with the associated output contacts (3).

2. A switch as claimed in Claim 1, characterised in that the base (1) is circular, the output contacts (3) being located at positions spaced around the centre of the base (1) and at mutually different distances from the centre of the base (1), the operating member (8) also being circular and being  
30 mounted on the base (1) for rotary movement relative thereto about an axis passing through the centres of the base (1) and the operating member (8), the cam projections (11) on the operating member (8) being in the form of arcuate projections having  
35 mutually different radii measured from the axis of

rotation of the operating member (8), there being at least one arcuate projection (11) associated with each output contact (3).

3. A switch as claimed in Claim 2, characterised  
5 in that the input contact (2) is offset from the axis of rotation of the operating member (8).

4. A switch as claimed in Claim 2 or Claim 3, characterised in that the base (1) is formed with an upstanding peripheral flange (7) within which the  
10 operating member (8) is received, the flange (7) having an inwardly directed lip (9) which engages over an annular shoulder (10) on the operating member (8) to mount the operating member (8) on the base (1).

5. A switch as claimed in Claim 4, characterised  
15 in that the flange (7) on the base is divided into a plurality of circumferentially spaced segments (15) separated by slots (16), the operating member (8) being formed with a projection (17) on its peripheral edge, which projection (17) is engageable in the slots  
20 (16) between adjacent segments (15) of the flange (7) on the base (1) to provide an indexing action on rotation of the operating member (8) relative to the base (1).

6. A switch as claimed in any one of Claims  
25 2 to 5, characterised in that the free end (21) of each contact arm (6) of the bridging contact (5) is bent to extend away from the base (1) and is received in a respective annular groove (22) in the operating member (8), the cam projections (11)  
30 being formed as changes in the depth of the grooves (22) in the operating member (8), the point of contact between each contact arm (6) and the associated output contact (3) being intermediate the ends of the contact arm (6).

35 7. A switch as claimed in Claim 6, characterised

in that each contact arm (6) of the bridging contact (5) is received between a respective pair of bosses (23) upstanding from the base (1) adjacent the free end (21) of the contact arm (6).

5           8. A switch as claimed in any one of Claims 2 to 5, characterised in that each contact arm (6) of the bridging contact (5) comprises a single limb (18) extending from the input contact (2) and carrying at its outer end a three-legged arrangement  
10 comprising three outwardly extending substantially equal length legs (19) lying in a common plane, the free end of the centre leg constituting a contact portion for engagement with the associated output contact (3), and the two outer legs (19) being joined  
15 by a linking member (20) which extends towards the operating member (8) for engagement by the cam projection (11) or projections (11) associated therewith.

20

25

30

35

1/2

FIG.1.



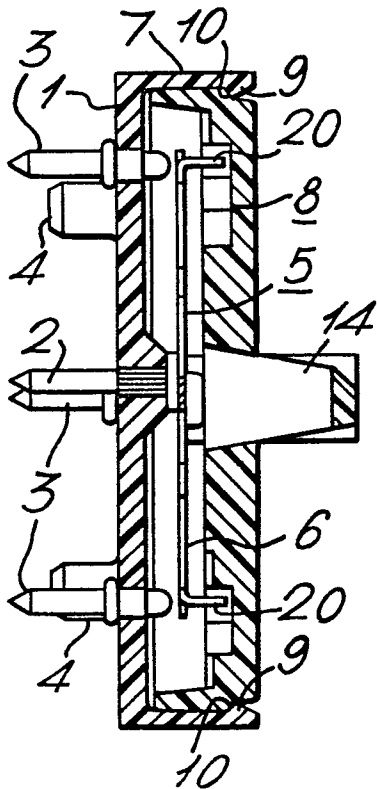


FIG.2.

FIG.3.

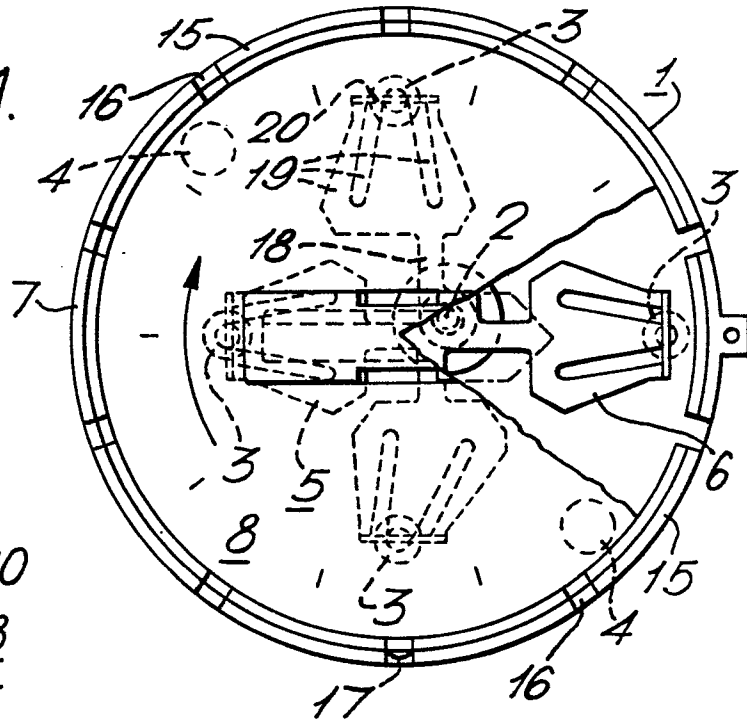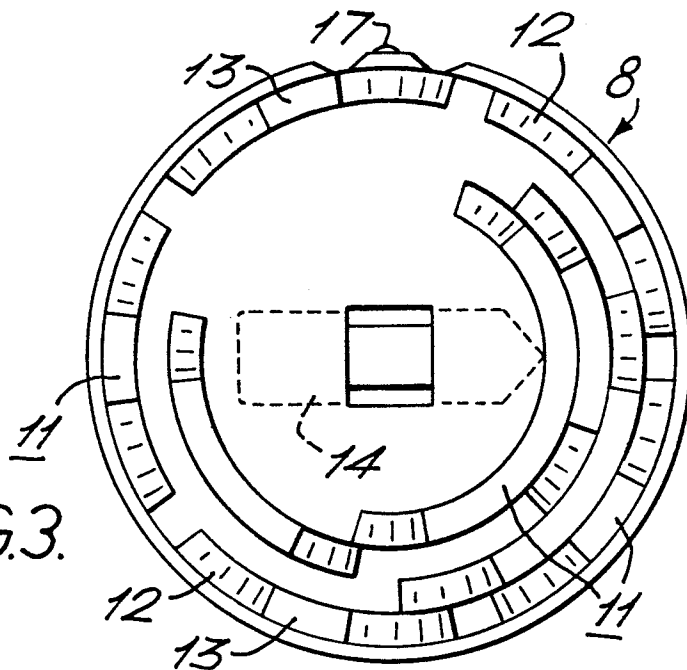

2/2

FIG. 4.

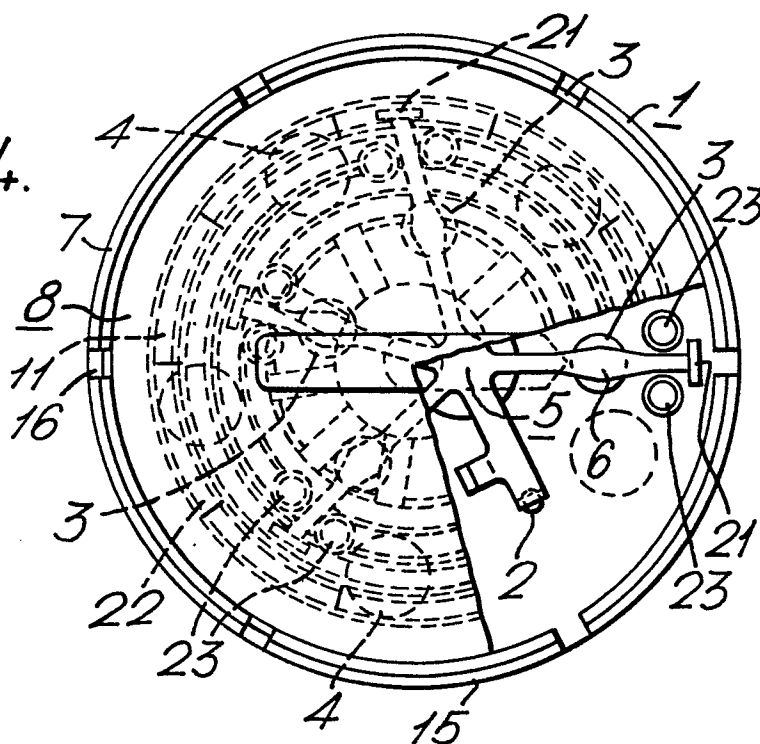


FIG. 5.

