

⑫

EUROPEAN PATENT APPLICATION

⑰ Application number: **78300053.2**

⑤① Int. Cl.³: **H 01 R 23/00, H 01 R 13/648**

⑱ Date of filing: **19.06.78**

④③ Date of publication of application: **09.01.80**
Bulletin 80/1

⑦① Applicant: **Hatch, David, A., 20, Pleasant Street,
Sherborn, Massachusetts 01770 (US)**


④④ Designated Contracting States: **CH DE FR GB NL**

⑦② Inventor: **Hatch, David, A., 20, Pleasant Street,
Sherborn, Massachusetts 01770 (US)**

⑦④ Representative: **Kerr, Simonne June et al, Potts, Kerr &
Co. 15, Hamilton Square, Birkenhead Merseyside
L41 6BR (GB)**

⑤④ **Ribbon cable connector.**

⑤⑦ An electrical connector composed of a dielectric housing (16) that defines an internal cavity, cable openings for receiving the ends of a pair of flat ribbon cables (71) with alternating ground and signal wires (72, 73), and conductor openings for receiving conductor elements (74) to be connected to the conductive wires (72, 73) in the flat cables. Located in the cavity is a first grounding bus for electrically connecting together the alternate ground wires in one of the cables and a second grounding bus for electrically connecting together the alternate ground wires in the other cable. Also retained within the cavity are a plurality of electrically isolated coupling elements each operative to electrically connect one of the conductor elements (74) with a different one of the alternate signal wires in the two cables. Finally a ground output means connects the first and second grounding busses to at least one conductor element so as to connect all of the ground wires to a circuit common outside the connector.

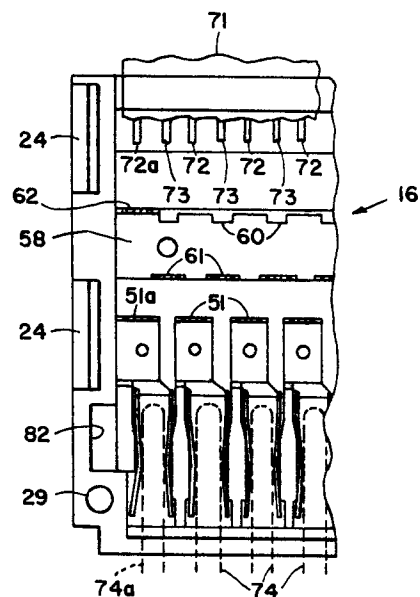

EP 0 006 100 A1

TITLE MODIFIED

-1-

see front pageMethod and apparatus for connecting flat cable

This invention relates to connectors for use with flat ribbon cables which include a large number of spaced apart, parallel conductive wires retained within a flexible insulative sheath.

5

Flat ribbon cables are used extensively in the wiring of printed and other intricate electrical and electronic circuits. Such cables greatly simplify the interconnection of circuits in electrical processes employing a multitude of independent signal lines. In addition, by grounding alternate wires in each cable, electrical interference or cross talk between adjacent signal lines can be greatly diminished. Although they offer many advantages, the procedures normally required to complete circuits with flat ribbon cable are tedious and time consuming. Accordingly, there is a great need for connectors that can simplify these procedures.

The object of this invention, therefore, is to provide an electrical connector that will both improve and simplify the use of flat ribbon cable.

The invention is an electrical connector composed of a dielectric housing that defines an internal cavity, cable openings for receiving the ends of a pair of flat ribbon cables with alternate ground and signal wires, and conductor openings for receiving conductor elements to be connected to the conductive wires in the flat cables.

Located in the cavity is a first grounding bus for

electrically connecting together the alternate ground wires in one of the cables and a second grounding bus for electrically connecting together the alternate ground wires in the other cable. Also retained within
5 the cavity are a plurality of electrically isolated coupling elements each operative to electrically connect one of the conductor elements with a different one of the alternate signal wires in the two cables. Finally a ground output means connects the first and second
10 grounding busses to at least one conductor element so as to connect all of the ground wires to a circuit common outside the connector. In a preferred embodiment the first and second busses are connected together within the cavity so as to permit commoning of both busses via a
15 single conductor element. By accomadating a pair of flat ribbon cables and internally connecting the alternate ground wires thereof, the present connector provides an output signal density approximately twice that exhibited by conventional flat cable connectors.

20

In a preferred embodiment of the invention, the dielectric housing comprises a pair of identical mating parts separated by a divider that divides the cavity into first and second cavity portions that each receive one of the
25 individual flat cables that enter one end of the housing in a longitudinally parallel relationship. The conductor elements enter conductor openings in the opposite end of the housing and connect with the coupling elements which are arranged in rows extending transversely to the cables.
30 The coupling elements in the first cavity portion are positioned to connect with the alternate signal wires in one of the cables and the coupling elements in the second cavity portion are positioned to connect with the alternate signal wires in the other cable. Similarly
35 arranged in each cavity portion is a row of ground contacts extending parallel to the row of coupling elements therein and longitudinally spaced therefrom.

The ground contacts in one of the cavity portions are connected to the first grounding bus and are disposed for connection to the alternate ground wires in one of the cables while the ground contacts in the other cavity
5 portion are connected to the second ground bus and disposed for connection to the alternate ground wires in the other cable. Preferably, both the coupling elements and the ground contacts include piercing portions that penetrate the insulative sheath on the cables so as to
10 make electrical contact with the conductive wires embedded therein.

One feature of the invention is the provision of a stress relief mechanism that will accommodate different gauged
15 flat ribbon cable. The stress relief mechanism comprises elongated rods located within the cavity adjacent the cable openings so as to forcibly engage the received cables along contact lines extending transversely to the retained conductor wires. By merely selecting a stress
20 relief rod of appropriate diameter, the same connector can be employed with any of a variety of different gauged flat ribbon cables. In addition, the rods enhance the structural integrity of the housing.

25 The invention further entails a method for making an electrical connector for use with flat ribbon cable. According to the method there is formed a dielectric housing with an internal cavity, a cable opening for accommodating an end of flat ribbon cable and conductor
30 openings for receiving a plurality of conductor elements. Also formed are a plurality of coupling elements each adapted to provide electrical connection between one of the conductive wires in the cable and one of the conductor elements. The coupling elements are mounted
35 within the cavity in electrically isolated positions located so as to electrically receive a different one of the conductive wires.

Next there is formed an electrically conductive bus for electrically connecting together a plurality of the conductive wires. The bus is mounted within the cavity in a position to electrically receive given wires in the cable not connected to the coupling elements..Finally formed is a ground output means for selectively providing electrical connection between the bus and any one of the coupling contacts. After selecting one of the conductor elements as a ground conductor, the ground output means is mounted within the cavity in a position to electrically connect the bus to that particular coupling contact that receives the selected conductor element. The method provides for interconnection of a plurality of ground lines within the connector and permits selection of any of a plurality of output conductors for use in connecting the ground wires to an external common.

In a preferred embodiment of the above method, the ground output means comprises a plurality of ground output contacts formed integrally with the bus and each located thereon so as to electrically connect the bus to a different one of the coupling contacts. Before mounting the bus in the cavity, only that ground output contact associated with the selected coupling contact is rendered operative for producing an electrical connection therebetween. In a preferred embodiment of this method all the nonselected ground output contacts are made inoperative by being removed from the bus prior to its mounting in the cavity.

30

The invention will now be described further, by way of example with reference to the accompanying drawings, in which:-

Fig.1 is an isometric view of one mating half of a connector housing according to the invention;

35

Fig.2 is a partial plan view of the housing half shown in Fig.1;

Fig.3 is a partial cross-sectional view taken along lines 3-3 of Fig.2;

5 Fig.4 is a cross-sectional view taken along lines 4-4 of Fig.2;

Fig.5 is a plan view of a coupling contact used in the housing shown in Figs 1 to 4;

10 Fig.6 is a side view of the coupling contact shown in Fig.5;

15 Fig.7 is a sectional view of the coupling contact shown in Fig.5 taken along lines 7-7;

Fig.8 is a partial plan view of a grounding bus used in the housing shown in Figs. 1 to 4;

20 Fig.9 is a partial side view of the grounding bus shown in Fig.8;

Fig.10 is an end view of the grounding bus shown in Figs. 8 and 9;

25 Fig.11 is a partial view of the housing shown in Figs. 1-4 after receiving a plurality of the contacts shown in Figs. 5-7 and the grounding bus illustrated in Figs. 8 to 10;

30 Fig.12 is a plan view of a divider element for use between a pair of the housings shown in Figs. 1 to 4;

Fig.13 is a cross-sectional view of a complete connector retaining a pair of flat ribbon cables;

35

Fig.14 is a plan view of a grounding element for inter-connecting the grounding busses in both halves of the connector;

Fig.15 is a side view of the element shown in Fig.14;
and

Fig.16 is an end view of the element shown in Figs.14
5 and 15.

Referring now to Fig.1 there is shown a body portion 16
that forms one half of a connector housing. The body 16
includes side walls 17 with upper surfaces 18, a bottom
10 wall 19 and an end wall 20 that define an open-sided
cavity 21. An opposite end wall 22 is recessed to form
an opening 23 for receiving an end of a flat ribbon cable.
As described below, the cavity 21 also accomodates contacts
that connect to the individual conductive wires in the
15 cable.

Extending out of one of the surfaces 18 are a pair of
projections 24 having re-entrant latch surfaces 25. A
pair of openings 26 are formed in the opposite side wall
20 17 and each includes a projecting catch 27. During
assembly of a complete connector the projections 24 of
one body portion 16 are forced into the openings 26 of
an identical body portion 16. As they enter the openings
26, the projections 24 are sprung outwardly by engagement
25 with the catches 27 and after passing therebeyond spring
back inwardly producing engagement between the latching
surfaces 25 and the undersurfaces 28 of the catches 27.
In this way a pair of identical body portions 16 are
latched together to form a composite connector housing.
30 Proper alignment between mating halves is enhanced by
engagement between a pin 29 on one body portion and an
accommodating cavity 30 on the other.

Referring now to Figs. 2 to 4 there is shown is greater
35 detail the body portion 16 illustrated in Fig.1. Formed
at one end of the body adjacent the cable opening 23

is an elongated groove 31 that snugly retains a rod 32 (Fig.13) made of a suitable rigid material such as steel. As described below, an upper surface 33 of the rod 32 forcibly engages so as to provide stress relief to a received flat cable upon assembly of a complete connector.

Formed in the end wall 20 are a plurality of conically shaped conductor openings 35 for accomodating entry into the cavity 21 of conductor pins in a compatible circuit board header (not shown). The inner and smaller ends of the conductor openings 35 communicate with contact chambers 36 formed in the cavity 21 by parallel, spaced apart isolating walls 37 extending out of the bottom wall 19. A plurality of auxiliary chambers 38 slightly offset from the chambers 36 are formed by spaced apart recesses in the bottom wall 19. Each adjacent pair of chambers 36 and 38 forms a composite chamber that receives a coupling contact as described more fully hereinafter. For securing these contacts a stud 41 extends out of the bottom wall 19 in each of the auxiliary chambers 38. A recess extending transversely to the isolating walls 37 forms another chamber 43 for receiving a grounding bus in a manner described below. Provided in the chamber 43 are a plurality of studs 44 for securing the grounding bus in place. As shown in Fig.4, the step 40 separates that portion of the housing 16 defining the chambers 36 and the remainder of the housing. For this reason one portion of the housing 16 has a narrow profile that is compatible with conventional connector headers while the remainder of the housing 16 has a wider profile that facilitates its use in a composite connector that accepts a pair of flat ribbon cables as described hereinafter.

Figs 5 to 7 illustrate a coupling element 46 used in the connector body 16 shown in Figs. 1 to 4. The coupling

element 46 comprises a rear portion 47 formed by spring contacts 48 adapted to receive a conductor pin and a forward portion 49 including an upright signal contact 51 having edges 52 adapted to pierce the insulative sheath of a cable and contact a conductive wire retained therein. Formed in a flat base 54 of the front portion 49 is a retainer hole 55 that receives the stud 41 shown in Figs. 2 and 4. The rear and front portions 48 and 49 of the coupling element are joined by a vertically oriented segment 53.

Figs. 8 to 10 are views illustrating a grounding bus 57 used in the connector body 16 shown in Figs. 1 to 4. The bus 57 comprises an elongated flat base 58 with a plurality of retaining holes 56 that receive the studs 44 shown in Figs. 2 and 4. Extending from one edge of the base 58 are a plurality of equally spaced apart ground contacts 59. Prior to insertion in the body 16, the contacts 59 are bent vertically to the base as shown by dotted lines in Fig. 10. Each of the ground contacts 59 has upper terminal portions 61 adapted to pierce the insulative sheath on flat ribbon cable and engage the conductive wires retained therein. A plurality of equally spaced apart ground output contacts 62 extend from the opposite edge of the base 58 in locations between each pair of the ground contacts 59. The ground output contacts 62 are also bent vertically and include upper terminal portions 63 adapted to pierce a flat cable.

Before the grounding bus 57 is mounted within the body 16, one of the ground output contacts 62 is selected to provide an external ground connection. All non-elected ground output contacts 62 are then rendered ineffective, preferably by being sheared from the base 58. To facilitate this operation the base 58 is provided with notches 60 between each pair of the ground output contacts 62.

Referring now to Fig. 11 there is partially depicted the connector body 16 after mounting of coupling elements 46 (Figs. 5 to 7) and the grounding bus 57 (Figs. 8 to 10) within the cavity 21. As shown, the rear portion 47 of each coupling element 46 is received in a chamber 36 while the front portion 49 thereof is received by an adjacent chamber 38. The difference in height between the chambers 36 and 38 is accommodated by the vertical segments 53 that join the front and rear portions of the elements 46. Securing the mounted elements 46 in position are the studs 41 which are received by the openings 55 in the bases 54 of all elements. The base 58 of the grounding bus 57 is mounted in the chamber 43 and is secured therein by the studs 44 that penetrate openings 56 in the base. As shown in Fig. 11 the ground contacts 59 on the grounding bus 57 and the signal contacts 51 on the coupling elements 46 are uniformly shifted with respect to each other along the length of the base 58 such that each ground contact 59 is directly between a spaced apart pair of adjacent signal contacts 51. Conversely, the preselected ground output contact 62 that was not removed from the grounding bus 57 is directly aligned with the first signal contact 51a in a direction transverse to the base 58 of the grounding bus 57. It will be noted that any of the removed ground contacts 62 would have been similarly aligned with a signal contact 51 had it not been removed from the bus 57.

As indicated by dotted lines in Fig. 11, a flat ribbon cable 71 is received by the cavity 21 in the body portion 16. The cable 71 is formed of a suitable electrical insulation material that encapsulates a plurality of longitudinally parallel conductive wires 72. The components within the body portion 16 are positioned such that one set of alternating wires 72 in the cable 71 aligns with the signal contacts 51 while the other alternate wires 73 align with the ground contacts 59. During assembly of a connector the cable 71 is forced against the contacts 51 and 59 causing the contact edges 52 and 61 to pierce the insulative sheath on the cable and electrically engage the conductive wires em-

bedded therein. Thus, each of the signal wires 72 will be electrically connected to a different one of the signal contacts 51 and each of the ground wires 73 will be connected to a different one of the ground contacts 59.

5 The end signal wire 72a, however, will make electrical contact with both the preselected ground output contact 62 and the signal contact 51a thereby connecting that contact to the base 58 of the grounding bus 57. Each of a plurality of conductor pins 74 on a mating header

10 (not shown) will be connected by one of the coupling elements 46 to a different one of the signal wires 72 which would be used to transmit signals. A conductor pin 74a, however, would connect an external common to all of the ground wires 73 via grounding bus 57, the grounding

15 contacts 59, the selected ground output contact 62, the end signal wire 72a and the first signal contact 51a.

Fig.12 is a plan view of a divider part 77 used with a pair of the body portions 16. The upper surface 78 of the

20 divider 77 defines three rows of recesses 79a, 79b and 79c. As described below, upon assembly of a complete connector unit each of the recesses is positioned to receive the insulation piercing portions 52, 61, 63 of one of the contacts 51, 59 or 62. The bottom surface of the divider

25 77 defines an identical set of recesses 79 as shown in Fig.12. Extending from opposite edges of the divider 77 are shoulders 81 that are received by accommodating recesses 82 (Fig.1) in the body portion 16.

30 Fig. 13 depicts a preferred form of complete connector 85 according to the invention. The complete connector 85 includes a body portion 16a shown in section and a mating body portion 16b shown in elevation. Each of the body portions 16a and 16b is identical to the body 16 shown in

35 Figs. 1 to 4 and engagement between the body portions is along their open sides which are thereby closed. The bodies 16a and 16b define a composite cavity that is

separated into a first cavity portion 21a within the body 16a and a second identical cavity portion within the body 16b by the divider part 77.

5 As shown, the divider recesses 79a are aligned with and receive the signal contacts 51, the recesses 79b are aligned with and receive the ground contacts 59 and one of the recesses 79c is aligned with and receives the selected ground output contact 62. As noted above, the
10 upper surface of the divider 77 is identical to the lower surface shown in Fig.13 and similarly receives contacts in the body 16b. Entering openings in the connector 85 formed between the recessed end walls of the parts 16a and 16b and the divider part 77 is a pair of flat cables
15 71a and 71b. The piercing portions 52, 61 and 63, respectively, of the signal contacts 51, the ground contacts 59 and the ground output contact 62 extend perpendicular to a planar region occupied by the cable 71a. Thus, the cable 71a is pierced by the piercing portions in response
20 to relative movement between the cable 71a and the body portion 16a in a direction transverse to that planar region. As schematically illustrated in Fig. 13, the end signal wire 72a contacts both the selected ground output contact 62 and the directly aligned first signal contact
25 51a while the partially cutaway ground conductive wire 73 is electrically connected to the ground contact 59. The remaining wires in the cable 71a are alternately connected to either ground contacts 59 or signal contacts 51 as described above. Strain relief for the cable 71a is
30 provided by its forcible engagement between a transverse rib 86 on the divider 77 and the upper surface 33 of the transverse rod 32. Appropriate stress relief for cables of different gauge can be selected by merely selecting a rod 32 of suitable diameter. It will be appreciated that
35 the cable 71b is identically stress relieved and electrically interconnected within the body portion 16b by contact piercing portions (not shown) that are disposed

vis-a-vis the piercing portions in the body portion 16a.

Figs. 14 to 16 are schematic views of a grounding element 91 for electrically connecting the grounding bus 57 in
5 the body portion 16a to the identical grounding bus (not shown) in the body portion 16b. The element 91 is a flat plate 92 formed with a suitable electrically conductive spring material. Slots 93 extend from opposite edges of and divide the plate 92 into a pair of bifurcated sections
10 94. The bifurcated sections are bent away from the plate 92 to form spring clips 95 having ends 96. Prior to assembly of a complete connector, the plate 92 of the element 91 is press fitted into notches 97 (Fig.2) framed in the side walls of the body portions 16. The arms 95
15 extend slightly into the cavities 21 and the ends 96 enter the chambers 43 (Fig.2). Upon assembly of a connector unit 85 as shown in Fig. 13, the oppositely projecting ends 96 of the element 91 electrically engage the grounding busses 57 retained within the chambers 43.
20 Because both busses are interconnected internally, a single coupling element 47 can be used to connect an external circuit common to all of the ground wires in both body halves 16a and 16b. Thus, all other outputs of the complete connector 85 can be used for signals
25 establishing a much higher signal output density than is available with conventional ribbon cable connectors.

Another feature of this invention is a method by which any of the coupling elements 46 can be employed as a
30 ground output terminal. As shown in Figs. 8 to 10, prior to assembly the grounding bus 57 is a flat conductive strip including an elongated base portion 58. A plurality of spaced apart ground contacts 59 extend from one edge of the base 58 while a plurality of spaced ground output
35 contacts 62 extend from the opposite edge thereof. Upon placement of the base 58 in the recess 43 in the body

16 as shown in Fig. 11, each of the ground output contacts 62 would be in alignment with one of the retained signal contacts 51. Before insertion of a bus 57, however, one determines which particular coupling element 46 will be
5 connected to an external circuit common. Next, the particular ground output contact that will be aligned with the signal contact 51 associated with the selected coupling element 46 is determined. All other output contacts 62 are then sheared from the base plate 58. For
10 example, in the connector illustrated in Fig. 11 only the end ground output contact 62 remains effective and all other ground output contacts have been sheared along lines joining the slots 60 in the base portion 58. Thus, the end coupling element 51a is connected to the bus 57 and
15 serves as a ground output terminal. It will be obvious that a grounding bus providing a ground output to any of the other coupling elements 47 could be similarly formed by appropriate choice of a ground output contact 62 aligned therewith and similar removal of all other ground
20 output contacts from the base plate 57.

0006100

Claims:

1. An electrical connector for flat ribbon cables comprising a plurality of transversely spaced elongate conductive wires within an insulative sheath, characterized in

a dielectric housing (16) defining an internal cavity (21), cable openings (23) for accommodating entry into the cavity of ends of a pair of parallel longitudinally aligned flat ribbon cables (71), and conductor openings (35) for accommodating entry into the cavity (21) of a plurality of conductor elements (74), the housing comprising a first housing part (16a) having an open side and defining a first cavity portion (21a) of the cavity (21) and a second housing part (16b) having an open side and defining a second cavity portion of the cavity (21), the first (16a) and second (16b) housing parts being engaged to close the open sides, a distinct divider part (77) positioned within the cavity (21) so as to electrically isolate the first cavity portion (21a) from the second cavity portion, a first grounding means retained within the first cavity (21a) portion and operative to electrically connect together a plurality of conductive wires (72) in one of the cables, a second grounding means retained within the second cavity portion and operative to electrically connect together a plurality of conductive wires (73) in the other cable, a first plurality of electrically isolated coupling elements (46) retained within the first cavity portion (21a) and each operative to electrically connect a different one of the conductive wires in the one cable to a respective different one of the conductor elements, and a second plurality of electrically isolated coupling elements retained within the second cavity portion and each operative to electrically connect a different one of the conductive wires in the other cable to a respective different one of the conductor elements.

2. An electrical connector as claimed in claim 1, in which the first grounding means is operative to electrically connect together alternate conductive wires in the one cable, and the second grounding means is operative to electrically connect together alternate conductive wires in the second cable.

3. An electrical connector as claimed in claim 2, in which the first plurality of coupling elements (46) connect to signal conductive wires in the one cable that alternates with the alternate conductive wires connected together

by the first grounding means, and the second plurality of coupling elements connect to signal conductive wires in the other cable that alternates with the alternate conductive wires connected together by the second grounding means.

4. An electrical connector as claimed in claim 3, in which ground output means connect the first grounding means to at least one of the conductor elements and the second grounding means to at least one of the conductor elements.

5. An electrical connector as claimed in claim 4, in which the ground output means comprises means for connecting the first and second grounding means to at least one of the signal conductive wires.

6. An electrical connector as claimed in claim 5, in which the cable openings (23) are defined by one end of the housing (16) and the conductor openings (35) are defined by an opposite end thereof.

7. An electrical connector as claimed in claim 5, in which the first plurality of coupling elements are arranged in a row extending transversely to the one cable and with each element aligned with one of the signal wires, the first grounding means comprises a first plurality of interconnected ground terminals arranged in a row extending transversely to the one cable and longitudinally spaced from the row of first elements, the ground terminals being aligned with the alternate conductive wires of the one cable, the second plurality of coupling elements are arranged in a row extending transversely to the other cable and with each element aligned with one of the signal wires, the second grounding means comprises a second plurality of interconnected ground terminals arranged in a row extending transversely to the one cable and longitudinally spaced from the row of second elements, the ground terminals being aligned with the alternate conductive wires of the other cable.

8. An electrical connector as claimed in claim 1, in which means are provided within the cavity for connecting the first grounding means to the second grounding means.

9. An electrical connector as claimed in claim 7, in which the first pluralities of coupling elements and ground terminals comprise first stationary piercing portions extending in one direction towards a planar region occupied by the one cable, the second pluralities of coupling elements and ground terminals comprise second stationary piercing portions disposed vis-a-vis the first piercing portions and extending towards the planar region in a direction opposite said one direction, and the first piercing portions are adapted to pierce the one cable and the second piercing portions are adapted to pierce the other cable in response to relative movement between the cables and the mating parts in a direction transverse to the planar region.

10. An electrical connector as claimed in claim 9, in which each of the coupling elements and ground terminals comprise bifurcated portions (94) that straddle the wires and the opposite sides of the divider part comprise a plurality of recesses that receive and retain so as to prevent separation of the bifurcated portions.

11. An electrical connector as claimed in claim 10, in which one end of the housing is substantially wider than the opposite end in a direction transverse to the rows of elements and terminals.

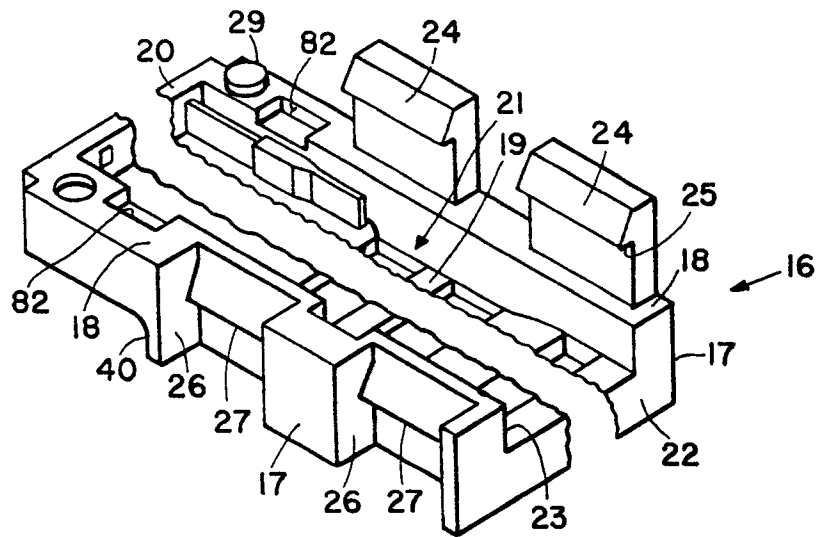


FIG. I

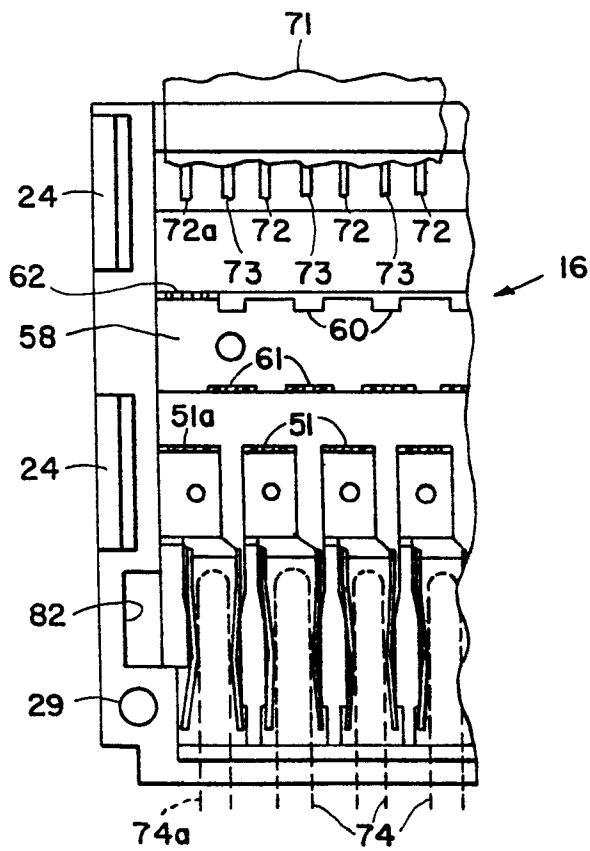


FIG. II

FIG. 16

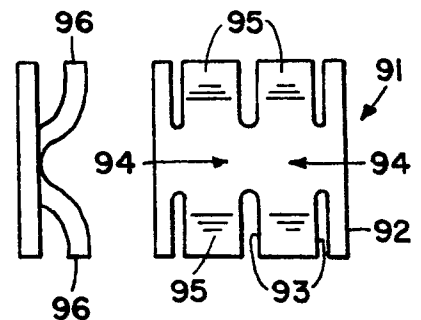



FIG. 15

FIG. 14

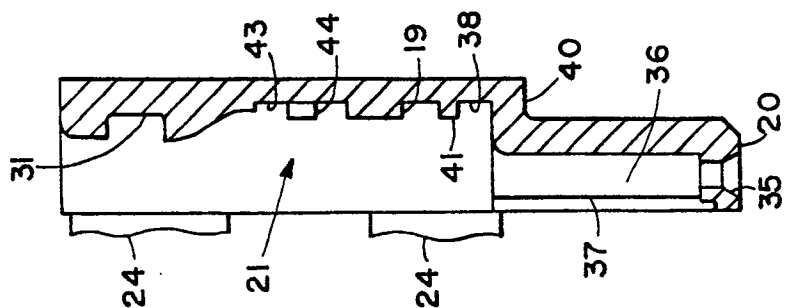


FIG. 4

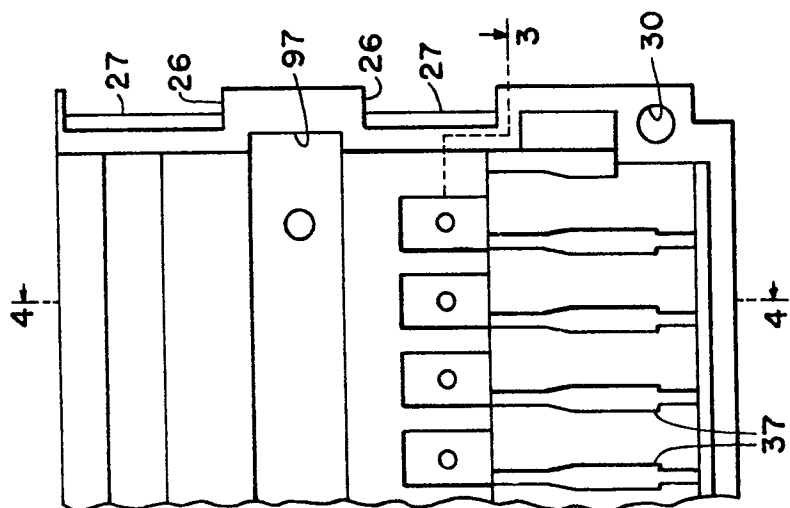


FIG. 2

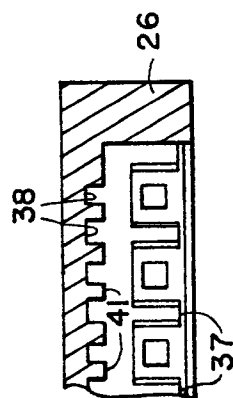
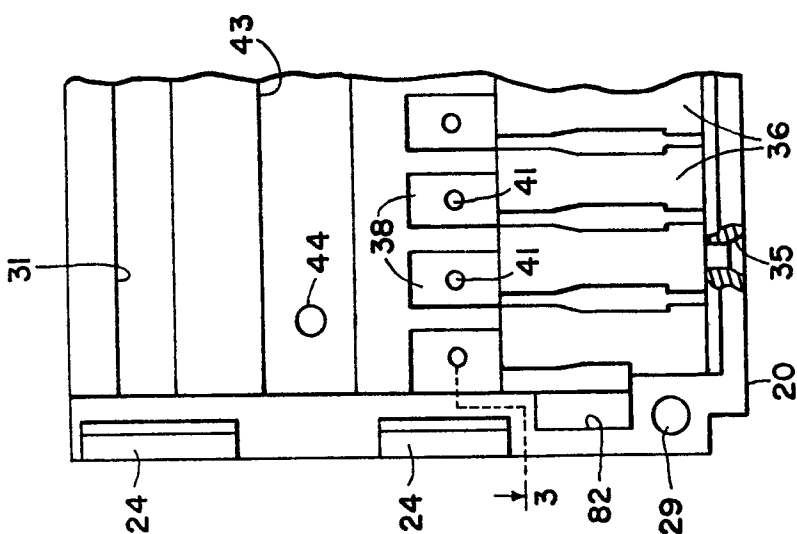
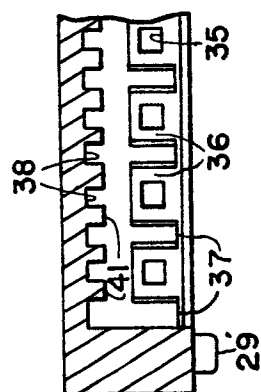
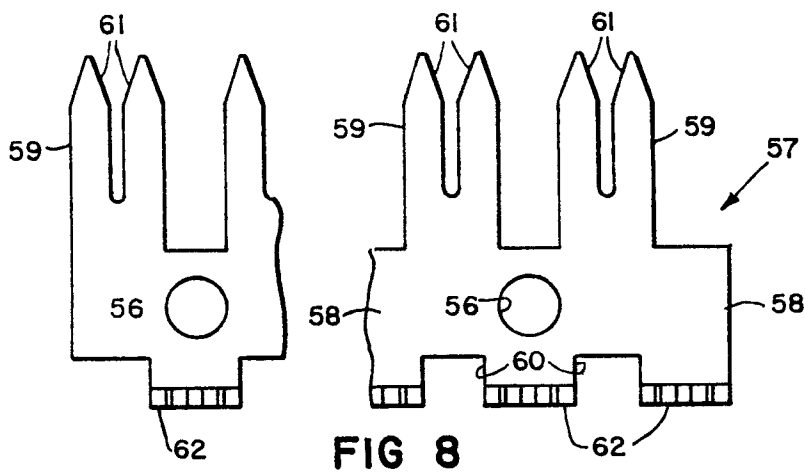
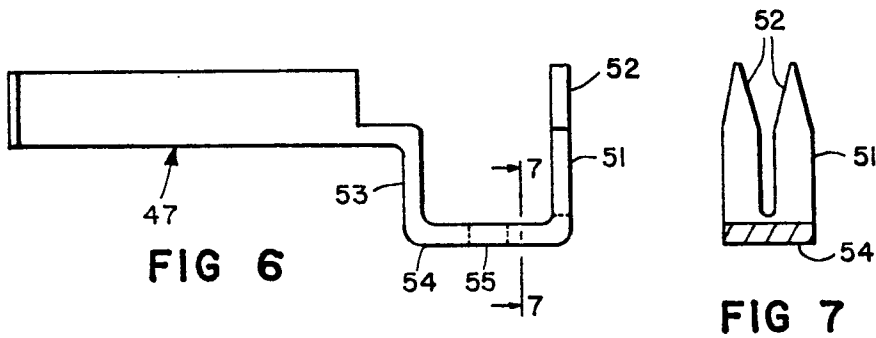
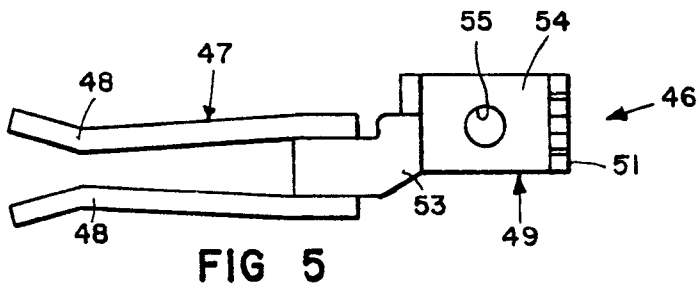


FIG. 3





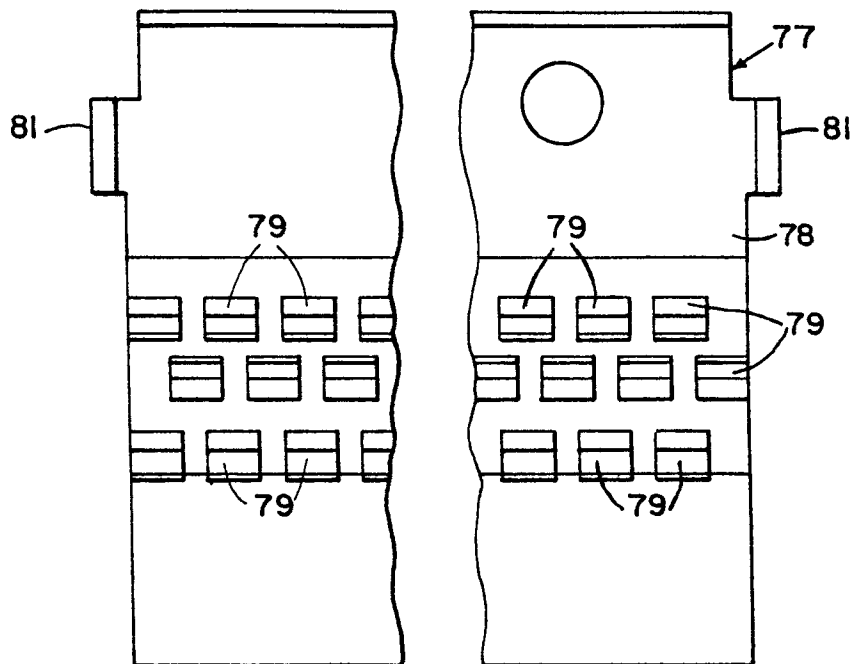


FIG. 12

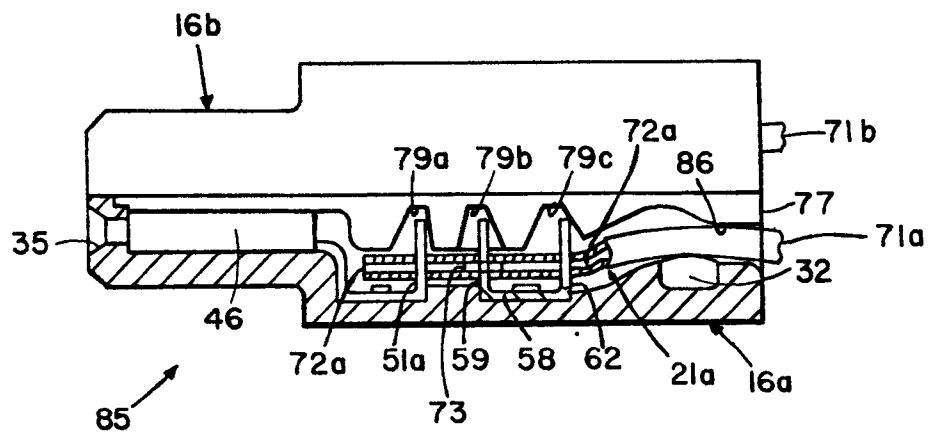


FIG. 13



European Patent
Office

EUROPEAN SEARCH REPORT

0006100

EP 78 30 0053

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl.3)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
	<u>US - A - 4 094 566</u> (AMP) * Columns 5-10 *	1-7,9	H 01 R 23/00 13/648

	<u>FR - A - 2 361 759</u> (AMP) * Pages 4-6 *	1-7,9 10	

	<u>US - A - 4 076 365</u> (AMP) * Column 5, lines 16-41 *	1,10	

A	<u>US - A - 4 027 941</u> (THOMAS & BETTS)	1,10	H 01 R 23/00 13/34 7/04 9/08
A	<u>US - A - 3 864 011</u> (AMP)	1,10	
A	<u>US - A - 3 768 067</u> (SODECO)	1	
A	<u>US - A - 3 731 251</u> (THOMAS & BETTS)	1	

			TECHNICAL FIELDS SEARCHED (Int.Cl.2)
			CATEGORY OF CITED DOCUMENTS
			X: particularly relevant A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: conflicting application D: document cited in the application L: citation for other reasons
			&: member of the same patent family, corresponding document
A The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 10-01-1979	Examiner MOBOUCK