

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: 79302676.6

(51) Int. Cl.<sup>3</sup>: **F 02 M 9/14**  
**F 02 D 35/00**

(22) Date of filing: 22.11.79

(30) Priority: 22.11.78 US 962883

(43) Date of publication of application:  
11.06.80 Bulletin 80/12

(84) Designated Contracting States:  
DE FR GB IT SE

(71) Applicant: **Abbey, Harold George**  
**11 Goldsmith Drive**  
**Holmdel, New Jersey 07733(US)**

(72) Inventor: **Abbey, Harold George**  
**11 Goldsmith Drive**  
**Holmdel, New Jersey 07733(US)**

(74) Representative: **Warden, John C. et al,**  
**R.G.C. JENKINS & CO. 53/64 Chancery Lane**  
**London WC2A 1QU(GB)**

(54) **Fuel-air ratio controlled carburetion system.**


(57) An automatic control system for supplying a fuel-air mixture to the inlet of the intake manifold of an internal combustion engine is adapted to regulate the ratio of air to fuel so that this ratio is optimised for prevailing conditions of engine speed and load. The system comprises a variable Venturi structure (13,16) whose input is coupled to a source of combination air and whose output is coupled to the inlet of the intake manifold, a servo motor (32) coupled to a mechanism for adjusting the area of the Venturi throat, a fuel supply metering valve (20) to control the feed of an auxiliary amount of fuel into the Venturi structure, a motor (22) coupled to the valve to adjust the auxiliary fuel feed and means for sensing the difference in air pressure between the input to the Venturi structure and its throat to generate a command signal. A controller (31) responds to the signal and compares the signal with a servo motor set point to produce an output for application to the servo motor (32) to adjust the throat area (14) to comply with the set point. Means are provided to sense the degree of vacuum in the intake manifold to control the auxiliary fuel-control motor (22) to adjust the auxiliary fuel feed, a transducer (25) is coupled to the auxiliary fuel-control motor (22) to produce an auxiliary signal proportional to the degree of vacuum and means are provided to apply the auxiliary signal to the controller (31) to modulate the command signal

and cause the rate of air flow through the Venturi structure to assume a value relative to the rate of fuel flow at which the resultant ratio is optimised with respect to the prevailing conditions of speed and load.

./...

**EP 0 011 994 A1**

Fig. 1.

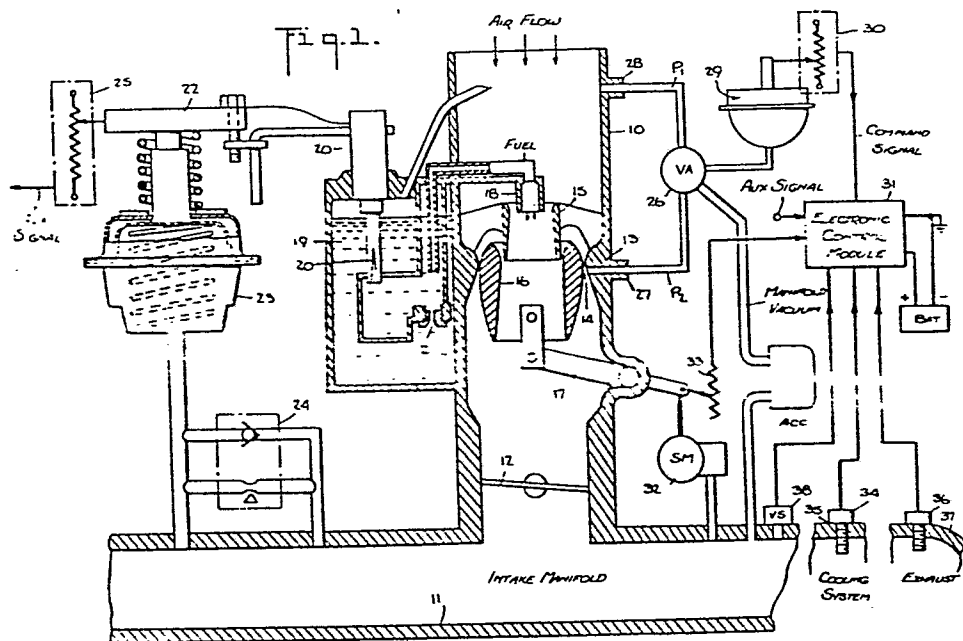

FUEL-AIR RATIO CONTROLLED CARBURETION SYSTEM

This invention relates generally to variable Venturi carburetion systems for supplying a fuel-air mixture to the internal combustion engine of an automotive vehicle, and more particularly to a system for automatically controlling the flow of fuel and air admitted into the Venturi to maintain a desired ratio thereto under varying conditions of load and speed.

The function of a carburetor is to produce the fuel-air mixture needed for the operation of an internal combustion engine. In the carburetor, the fuel is introduced in the form of tiny droplets in a stream of air, the droplets being vaporised as a result of heat absorption in a reduced pressure zone on the way to the combustion chamber whereby the mixture is rendered inflammable.

In a conventional carburetor, air flows into the carburetor through a Venturi tube which is generally circular in shape. The reduction in

pressure at the Venturi throat causes fuel to flow from a float chamber in which the fuel is stored through a fuel jet into the air stream, the fuel being atomised because of the difference between  
5 air and fuel velocities.

The behaviour of an internal combustion engine in terms of operating efficiency, fuel economy and emission of pollutants is directly effected by the fuel-air ratio of the combustible  
10 charge. Under ideal circumstances, the engine should at all times burn 14.5 parts of air to one part of fuel to satisfy the stoichiometric air-to-fuel ratio. But in actual operation, this ratio varies as a function of operating speed and  
15 is effected by changes in load and temperature.

To obtain maximum economy, the fuel-to-air ratio in the mixture should be maintained within close tolerances in all modes of operation, such as "idle" while standing still,  
20 "slow-speeds" up to about 20 miles an hour, "cruising speeds" and "high speeds". The conventional practice is to provide an accelerating pump system to furnish an extra charge of fuel for accelerations, a choke system  
25 to enrich the mixture for starting a cold engine and a throttle by-pass jet for idle and slow speed,

as well as a power jet or auxiliary barrels for high speed or high power operation, all in addition to the main jet.

5 Another reason why the maintenance of a steady fuel-to-air ratio is important is that the emission of pollutants is in large measure governed by this ratio. Thus, when the mixture is relatively low in air, carbon monoxide is produced, and when the ratio is excessively rich in fuel, unburned  
10 hydrocarbons are emitted in the exhaust.

A major problem encountered in carburetion is to secure the correct amount of suction around the main jet at slow engine speeds and yet allow enough air to enter at high engine speeds to maintain the  
15 desired ratio of air and fuel. Venturi size must, of necessity, represent a compromise for both high and low speed operation. Because the maximum power an engine can develop is limited by the amount of air it can breathe in, the Venturi size should  
20 offer minimum resistance to the larger volume of air flowing at high engine speed. On the other hand, a small Venturi is desirable at low engine speeds to afford sufficient air velocity for controllable fuel metering and good fuel atomisation.

25 The modern approach to this problem is

the use of two or more Venturis arranged in series  
and/or two or more barrels in parallel. The multiple  
Venturi design serves two purposes: First, the added  
Venturis build up air velocity in the smaller primary  
5 Venturi, thereby augmenting the force available at the  
main nozzle for drawing the atomising fuel. Secondly,  
air by-passing the primary Venturi forms an air  
cushion around the rich mixture discharged by the  
Venturi, tending to improve mixture distribution  
10 by preventing fuel from engaging the carburetor  
walls. Idle or very slow speed is invariably served  
by an auxiliary jet around the edge of the throttle  
plate.

However, the typical modern carburetor  
15 requires a series of additional jets and pumping  
systems that cut in and out as the carburetor  
velocity increases and decreases above and below  
average speed, and as the engine operation passes  
through successive operating modes of acceleration,  
20 cruising, high speed and deceleration. Idle or  
very slow speed operations both rely on an idle  
jet arrangement at the closed position of the  
butterfly throttle valve. The actions of these  
auxiliary devices give rise to large fluctuations  
25 in the air-fuel ratio and thereby adversely

affect fuel economy.

But fuel economy is not the only reason for maintaining a steady air-to-fuel ratio; for, as pointed out in Business Week (June 21, 1976), though  
5 a new catalytic converter is available which is adapted to limit the emission of hydrocarbons, carbon monoxide and nitrogen oxides, "A steady ratio (air-to-fuel) is crucial to the new converter because it must simultaneously harbor conflicting  
10 chemical reactions." As pointed out in this article, "in actual operation, the ratio fluctuates with acceleration and deceleration."

Although fuel-air mixtures may be introduced to the combustion chambers of an engine  
15 by means other than carburetors, as by fuel injection, supercharging and other expedients, none of these is comparable in effectiveness with the Venturi principle for effecient atomisation of volatile fuels.

20 Attempts have heretofore been made to provide variable-Venturi carburetors to tailor the air-fuel supply to changing engine conditions. Thus U.S. Patents 2,066,544; 3,659,572 and 3,778,041 show various embodiments of a variable-Venturi  
25 carburetor. But the arrangements disclosed in these patents are incapable of varying the effective

parameters of a Venturi tube so as to maintain the optimum shape and area ratios of the tube throughout the operating range and to properly locate the fuel nozzles or jets in a continuously changing  
5 Venturi throat.

The throat of a Venturi, as this term is used herein, refers to that cross-section of the air-flow passage in the Venturi that is either the smallest or through which the air flow velocity is greatest,  
10 or conversely in which the static pressure is lowest.

In my above-identified copending application SN 919,541, filed June 27, 1978, entitled "Variable Venturi Carburetion System" whose entire disclosure is incorporated herein by reference, there is  
15 disclosed a carburetion system for supplying a fuel-air mixture to an internal combustion engine in a manner maintaining a desired fuel-air ratio under varying conditions of engine demand.

The system disclosed in my copending  
20 application includes a variable-Venturi structure having a converging inlet supplying incoming air to a throat coupled to a diverging outlet leading into a throttle chamber, the effective area of the throat being adjustable by a control mechanism.  
25 A motor is operatively coupled to this control mechanism as well as to a fuel metering device feeding

fuel at an adjustable flow rate into the Venturi structure to be intermingled with the air passing through this structure.

5           The pressure differential between air pressure at the upstream Venturi input and at the throat thereof is sensed to produce a signal that depends on the effective area of the throat and is a function of the velocity of air passing through the Venturi. This signal is applied to a  
10   controller where it is compared to a set point to produce a control signal that is applied to the motor which acts not only to adjust the control mechanism for varying the effective area of the throat but also serves to adjust the fuel metering device to  
15   an extent maintaining a desired fuel-to-air ratio under varying conditions of engine demand.

          While the system disclosed in my copending application is responsive to certain operating conditions and represents an improvement over prior  
20   carburetion systems, it is incapable of taking into account all conditions of load and speed actually experienced with an engine, and it does not, therefore, always maintain a fuel-to-air ratio that is optimised for automotive operating conditions.

25           In view of the foregoing, the main object of this invention is to provide an automatically-controlled carburetion system which maintains that

ratio of air-to-fuel which represents the optimum ratio for the prevailing conditions of load and speed to effect a marked improvement in fuel economy and to substantially reduce the emission of noxious pollutants.

More particularly, it is an object of this invention to provide a system of the above type which includes a variable-Venturi structure to which air and fuel are supplied, the flow of air being controlled by a closed process control loop having a controller responsive to a command signal that is modulated as a function of load and speed conditions.

Also an object of the invention is to provide an automatic system which maintains an optimum ratio of fuel and air, which system operates efficiently and reliably and yet lends itself to low-cost mass-production.

Briefly stated, an automatic system in accordance with the invention includes a variable-Venturi carburetor for intermingling air and fuel and for feeding the air-fuel mixture in an appropriate ratio into the throttle inlet of the manifold. Air is fed into the input of the Venturi, the air passing through the throat thereof whose effective area is adjusted by a mechanism operated by a servo motor. Fuel is fed into the input of the Venturi

from a fuel reservoir through a main path having a fixed orifice and an auxiliary path formed by a metering valve operated by an auxiliary fuel-control motor. The differential air pressure developed between the inlet of the Venturi and the throat thereof is sensed to produce an air-velocity command signal which is applied to a controller adapted to compare this signal with the set point of the servo motor to produce an output for governing the servo motor to cause it to seek a null point, thereby defining a closed process control loop.

The intake manifold vacuum which varies in degree as a function of load and speed conditions is sensed to govern the auxiliary fuel-control motor accordingly and is, at the same time, converted into an auxiliary signal which is applied to the controller in the closed loop to modulate the command signal in a manner maintaining an optimum air-fuel ratio under the varying conditions of load and speed.

Thus the flow of air through the Venturi is controlled as a function of throat air velocity by a closed process control loop whose air velocity command signal is modulated by an auxiliary signal reflecting the degree of intake manifold vacuum developed under the prevailing conditions of speed and load. In this way, the flow of air and fuel in the carburetor are correlated to cope with transitions

through the modes of automatic operation smoothly and without hesitation within prescribed desirable ratios.

For a better understanding of the invention as well as other objects and further features thereof, reference is made to the following detailed description to be read in conjunction with the accompanying drawings, wherein:

Figure 1 schematically illustrates a first preferred embodiment of an automatically-controlled variable-Venturi carburetor system in accordance with the invention;

Figure 2 schematically illustrates a second preferred embodiment of the invention; and

Figure 3 is a block diagram of the electronic circuit of the control system shown in Figure 1.

While a system in accordance with the invention is operable with any of the variable-Venturi structures disclosed in my above-identified copending patent application, use is preferably made of a three-stage variable-Venturi structure of the type shown in Figure 1 having a tubular casing 10 into which an air stream at atmospheric pressure is introduced. The lower end of casing 10 is coupled to the intake manifold 11 of the internal combustion engine through a foot-operated throttle inlet 12.

Disposed in the mid-section of casing 10 is a stationary ring 13 having an internal Venturi configuration which defines a Venturi throat 14 that surrounds the outlet of a Venturi booster 15 also having an internal Venturi configuration mounted coaxially within the casing. The Venturi structure is completed by a cylindrical spool 16 having an external/internal Venturi configuration that is axially movable by means of a lever 17 pivoted on the casing 10. The lever acts to shift spool 16 upwardly toward the outlet of booster 15 to constrict throat 14 or to shift the spool downwardly to enlarge the effective area of the throat.

A fuel nozzle 18 which supplies fuel into the upper end of booster 15 is coupled to a fuel reservoir 19 by way of a main path which feeds a minimum amount of fuel through a fixed jet orifice 21 and by way of an auxiliary path including a metering valve 20 having a linear variable orifice which feeds a controllable amount of auxiliary fuel. Auxiliary fuel metering valve 20 is operated by the spring-biased air motor 22 of a vacuum sensor 23. This sensor is coupled through a damper valve 24 to the intake manifold 11. The position of vacuum sensor motor 22, which depends on the degree of vacuum, is converted into a corresponding auxiliary signal by a manifold vacuum transducer 25. In practice,

this transducer may simply be a potentiometer whose slider is operatively coupled to sensor motor 22.

5 A vacuum amplifier 26 is coupled to a sensing tap 27 communicating with throat 14 of the Venturi structure and a sensing tap 28 at the upstream end of the structure, the output of amplifier 28 being coupled to an air velocity sensor motor 29. The prevailing pressure differential  $P_1 - P_2$  developed between taps 27 and 28 is sensed and amplified to produce a  
10 strong linearly proportional vacuum signal from the intake manifold source assisted by a vacuum accumulator ACC. This air velocity signal operates sensor 29 coupled to a transducer 30 to produce an electrical command signal proportional to the velocity of air  
15 passing through the Venturi throat.

The command signal from transducer 30 is applied to an electronic controller 31 which compares this signal with the set point of servo motor 32 to produce an output for governing the operation of this  
20 motor. Servo motor 32 drives lever 17, thereby defining a closed process control loop in which one variable is the air velocity through the Venturi throat. The loop serves to adjust the Venturi throat area to thereby vary the air velocity so that it complies to the set  
25 point setting. Servo motor 32 operates a position feedback transducer 33 whose output is fed to the

controller to indicate the existing position of the motor. The air velocity command signal applied to controller 31 is modulated by the auxiliary signal yielded by the intake manifold vacuum transducer 25 so that the operation of the controller is responsive to another variable proportional to prevailing conditions of speed and load.

The air-velocity command signal from transducer 30 and the auxiliary signal from transducer 25 are further modified by control signals derived from an engine-temperature switch 34 in the engine cooling system 25 and an engine-exhaust emission transducer 36 placed in the engine exhaust pipe 37. A vacuum switch 38 is coupled to the manifold and is normally closed in the absence of a vacuum, the switch being coupled to controller 31.

The air velocity through throat 14 of the Venturi, as indicated by the value of differential pressure  $P_1 - P_2$  is converted by transducer 30 into a variable d-c command signal which is applied to controller 31 for comparison with the set point of servo motor 32. Controller 31 yields an output which governs the servo motor 32 which, in practice, may be a pneumatic or electric motor, causing motor 32 to adjust the position of the Venturi spool 16 and the resultant area of the throat to bring about a change in air velocity until

the servo motor attains its null position as determined by its set point. Thus the controller, the motor and the associated elements constitute the components of a closed air process control loop.

5                   In practice, the intake manifold vacuum varies from zero to twenty inches of mercury or more under the load and speed conditions encountered in normal engine operation. Thus accelerating or heavy loads with slow to moderate speeds results in a low to  
10                   increasing vacuum in a range extending from about 2 inches of mercury to a maximum of 10 to 15 inches. Cruising represents a condition of medium load at average speed or light load at high speed, this condition resulting in an intake manifold vacuum  
15                   of from 20 inches or more of mercury down to approximately 15 inches vacuum.

                  The load and demand imposed on the engine is reflected by the intake manifold pressure. In the present arrangement, the vacuum-responsive  
20                   motor 23 is designed for linear movement in a vacuum range of 0 to 20 inches mercury, this motor being directly connected to metering valve 20 in the auxiliary fuel path.

                  Thus a low vacuum in the intake manifold  
25                   causes motor 23 to open fuel metering valve 20, whereas a high vacuum brings about closure of this valve.

Concurrently with this action, motor 23 operates transducer 25 to produce an auxiliary signal that is applied to the controller of the closed process air loop to modulate the command signal reflecting air velocity as a function of the prevailing vacuum in the intake manifold.

The intake manifold vacuum sensor 23 therefore not only controls the flow of auxiliary fuel into the Venturi but through its associated transducer 25 which develops an auxiliary signal that depends on the prevailing vacuum in the intake manifold, it also acts to modulate the closed air loop to either increase or decrease air velocity. This in turn brings about, as a result of the changing throat pressure, an increase or decrease of fuel flow into the Venturi.

In this way, the fuel metering system is not only responsive to the engine's demand for more or less fuel, but it functions by way of its auxiliary signal applied to the closed process control air loop to so modify the ratio of air-to-fuel until the ratio is at the optimum value for the prevailing conditions of load and speed.

Damper valve 24 in the manifold vacuum line controlling the auxiliary fuel supply and the resultant auxiliary signal functions as a rate-of-change

modulator, so that the transitions from acceleration to deceleration in the various modes of operation are effectively bumpless and match the driving characteristics of the vehicle. In this way, the operation is free of hesitation and the car performance is smooth, economical and efficient in all modes of operation. In practice, damper 24 may be an adjustable flow check valve, an accumulator with by-pass orifices or other fluidic combinations.

The operations above-described are those encountered under normal conditions of start-up and engine temperature. To effect cold temperature enrichment, the engine temperature thermostatic switch 34 acts to cut in resistance in the controller circuit to provide a richer fuel-air ratio when the thermostatic switch senses a cold engine temperature and is opened thereby. Thereafter, when the engine warms up, this switch is closed to bypass the inserted resistance and thereby restore the leaner fuel-air ratio appropriate to operation at normal temperatures.

For emission control, exhaust-gas sensor 36, which may be of any known conductivity or excess oxygen type, after a normal engine temperature is achieved, acts to further limit the richness of the air-fuel ratio by raising the set point in the controller 31 to increase the ratio of air-to-fuel. It is well

known that the leaner the mixture, the lesser the amount of unburned hydrocarbons produced in the engine. This sensor can serve as a limiting fact that is operative after the engine is hot, so that one can control the minimum air-to-fuel ratio and thereby prevent over-enrichment in normal operation.

Vacuum switch 38 acts in a manner equivalent to a starting choke. When there is no vacuum, this indicates that the engine is not operating and the vacuum switch then acts to shift the variable-Venturi to its minimum position by causing servo motor 32, under the control of controller 31, to seek its minimum position. After the engine starts, the resultant vacuum in the intake manifold acts to open switch 38, thereby restoring the normal air flow signal, the Venturi system then being operated by all the other controls.

The first embodiment deals with an engine working with below-atmospheric induction, as in conventional carburetors or fuel injection systems. The control system in accordance with this embodiment adapts to these conventional engines by means of its below-atmospheric air intake and below-atmospheric fuel induction by a carburetion action from a float controlled fuel supply. In this first arrangement, the air flow sensor can be controlled only from the Venturi vacuum, considering the atmosphere as a basic

plenum. However, in the case of above-atmospheric arrangements, such as in the new supercharged engines, it is obvious that a pressurised fuel supply is required.

To this end, as shown in Figure 2, in  
5 conjunction with air booster or supercharger 43, we provide an air flow sensor 29, the upstream pressure tap 28 being placed in the pressurised air discharge into the Venturi structure. Thus the pressure drop from the above-atmospheric intake air pressure to the reduced  
10 Venturi throat pressure as sensed at tap 27 affords a direct measurement of air velocity.

Also in this embodiment, instead of a fuel nozzle as in Figure 1, a spray jet J disposed at the head of a centre pipe P coaxially disposed in casing  
15 10 is provided to eject the fuel at right angles to the direction of air flow at the throat of the primary Venturi booster 15. Coupled to fuel pipe P is a pressurised fuel supply constituted by a fuel tank 41 whose output is fed by a fuel pump 40 through  
20 a pressure-regulating valve 42 and a solenoid valve 39 to the fuel pipe.

Pressure regulating valve 42 acts to govern fuel pressure so that it is inversely proportional to the intake manifold vacuum. This is effected by  
25 operatively coupling the vacuum sensor motor 22 to valve 42, or by having the valve directly operated by the intake manifold vacuum. Fuel flow regulator valve 42 supplies fuel from a minimum to a maximum

pressure level.

Thus the fuel flow rate is again metered by the intake manifold vacuum, while the air velocity set point is also being modulated by transducer 25 whose auxiliary signal is applied to electronic control module 31 in the same manner as in the first embodiment.

Vacuum switch 28, which acts as a choke in the first embodiment, cuts off fuel flow in the second embodiment by closing solenoid valve 39 when the engine is stopped. Fuel flow for starting is controlled by the ignition switch "start" or "cranking" position until the vacuum switch takes over when the engine starts.

Thus the principles of control which regulate the fuel-to-air ratio under varying conditions of load and speed in the second embodiment are essentially the same as in the first embodiment, except for the means for metering fuel flow, the second embodiment operating with the same efficiency of air induction and fuel gasification.

Referring now to Figure 3, there is shown in block diagram form the electronic circuits included in controller 31 whose output is applied to servo motor 32 which drives the mechanism for adjusting the effective area of the Venturi throat to establish a desired air flow velocity.

Controller 31 is provided with a differential amplifier 45 to one input of which is

applied the air-velocity command signal derived from transducer 30. This transducer is operatively coupled to air-velocity sensor motor 29 responsive to the air-pressure differential  $P_1-P_2$  developed in the Venturi structure. Transducer 30 is provided with an air velocity set-point adjuster 46 capable of setting the set point for the command signal to the leanest air-to-fuel ratio.

Applied to the other input of differential amplifier 45 is the auxiliary fuel signal derived from transducer 25 which is operatively linked to the vacuum-sensing motor 23 coupled to the intake manifold which acts also to adjust the auxiliary fuel metering valve.

The auxiliary fuel signal from transducer 25 is modified by the engine-temperature switch 34 which opens when the temperature in the cooling system is cold and closes when it is hot, the open switch interposing a cold enrichment set point adjuster 47 in the auxiliary-fuel signal circuit which is shunted out by the closed temperature switch when hot.

The output of differential amplifier 45 is therefore constituted by the air-velocity command signal as modulated by the auxiliary fuel signal and further modified by the temperature-sensing and exhaust-sensing elements included in the system. This

output is applied to one input of a summing junction 48  
to whose other input is applied the servo-motor feedback  
voltage from transducer 33. The feedback voltage depends  
on the setting of the servo motor and hence on the  
5 position of the Venturi throat adjustment mechanism.  
Feedback adjuster 33A sets the sensitivity of response  
of servo motor 32.

The output of summing junction 48 is fed  
to a pair of differential amplifiers 49 and 50 forming  
10 a comparator with respect to a servo null bandwidth  
adjuster 51 which establishes the null set point of  
the servo motor. The output of the comparator goes  
to the drive amplifier 52 for the servo motor.

Thus the operation of the closed process  
15 control loop which includes servo motor 32 for varying  
the effective area of the throat in the Venturi  
structure is responsive to the air-velocity command  
signal as modulated by the auxiliary fuel signal  
reflecting the flow of auxiliary fuel into the  
20 Venturi as determined by the intake manifold  
vacuum, and as further modified to take into account  
the operating temperature of the engine and the degree  
of pollutants in the exhaust.

In this way, all of the interacting and  
25 interrelated factors that are involved in the behaviour  
of the engine serve to automatically regulate the  
ratio of air-to-fuel to attain the optimum ratio for

the prevailing conditions of speed and load.

The circuit shown in Figure 3 is designed for the first embodiment of the control system, but can readily be adapted to work with the second embodiment.

5           While there have been shown and described preferred embodiments of a fuel-air ratio controlled carburetion system in accordance with the invention, it will be appreciated that many changes and modifications may be made therein without, however,  
10   departing from the essential spirit thereof.

CLAIMS:

1.           An automatic control system for  
supplying a fuel-air mixture to the inlet of the  
intake manifold of the internal combustion engine  
of a vehicle for regulating the ratio of air to  
5       fuel so that this ratio is optimised for prevailing  
conditions of engine speed and load, said system  
comprising:

          A.   a variable Venturi structure whose  
input is coupled to a source of combustion air and  
10       whose output is coupled to the inlet of said intake  
manifold, said structure including a throat and a  
mechanism to adjust the effective area thereof;

          B.   a servo motor operatively coupled to  
said mechanism to adjust the area of said throat;

15       C.   fuel supply means including a metering  
valve which controls an auxiliary amount of the fuel  
to feed fuel into said Venturi structure to be  
intermixed with said air;

          D.   an auxiliary fuel-control motor  
20       operatively coupled to said valve to adjust the  
auxiliary fuel feed thereof;

          E.   means to sense the difference in  
air pressure existing between the input to the

Venturi structure and its throat to generate a command signal indicative thereof;

F. a controller responsive to said command signal to compare said signal with a servo motor set point to produce an output which is applied to the servo motor to adjust said throat area in a direction and to an extent causing the velocity of air through said Venturi structure to comply with said set point; said controller, said servo motor and said means to sense air pressure constituting a closed process control loop;

G. means to sense the degree of vacuum in said intake manifold to control said auxiliary fuel-control motor to adjust the auxiliary fuel feed accordingly, said degree of vacuum reflecting the prevailing conditions of speed and load;

H. a transducer coupled to said auxiliary fuel-control motor to produce an auxiliary signal proportional to the degree of vacuum; and

I. means to apply said auxiliary signal to said controller in said loop to modulate said command signal to cause the rate of air flow through said Venturi structure to assume a value relative to the rate of fuel flow at which the resultant ratio is optimised with respect to said prevailing conditions of speed and load.

2.           An automatic control system, as claimed in claim 1, wherein said engine includes an exhaust and further including means to sense the level of pollutants emitted through said exhaust to produce a signal which is applied to said controller to so modify the fuel-air ratio as to reduce said level.

3.           An automatic control system, as claimed in claim 1 or claim 2, wherein said engine includes a cooling system having a temperature sensor therein to produce a signal which is applied to said controller to so modify the fuel-air ratio as to enrich said fuel under cold temperature conditions.

4.           An automatic control system, as claimed in any of claims 1 to 3, further including a vacuum switch coupled to said manifold to produce a switching action in said controller in the absence of a vacuum to effect choking.

5.           A system as claimed in any of the preceding claims, wherein said means to sense differential pressure includes a tap at the upper end of the Venturi structure and tap at the throat thereof.

6. A system as claimed in any of the preceding claims, further including a foot-operated throttle in the inlet to the intake manifold.

5 7. A system as claimed in any of the preceding claims, further including a fixed orifice in said fuel supply means to assure a minimum main feed thereof.

8. A system as claimed in any of the preceding claims, further including a booster pump to supply pressurised air to said Venturi structure.

10 9. A system as claimed in claim 8, wherein said fuel metering valve is a pressure-regulating valve, and further including pump means to supply fuel from a reservoir through said valve.

15 10. A system as claimed in any of the preceding claims, further including means to regulate the rate of change of the auxiliary signal to provide a performance free of hesitation through the transitions encountered in varying modes of operation.

20 11. A system as claimed in any of the preceding claims, further including means to regulate the rate of change of the auxiliary fuel supply to provide smooth and economical performance through varying modes of

operation.

12. An automatic control system for supplying a fuel-air mixture to the inlet of the intake manifold of the internal combustion engine of a vehicle for regulating the ratio of air to fuel so that this ratio is optimised for prevailing conditions of engine speed and load, said system comprising:

A a variable Venturi structure whose input is coupled to a source of combustion air and whose output is coupled to the inlet of said intake manifold, said structure including a throat and a mechanism to adjust the effective area thereof;

B a signal-responsive closed process control loop including a servo motor coupled to said mechanism to adjust the effective area of said Venturi throat;

C means to sense the velocity of air passing through said Venturi structure to produce an air velocity command signal which is applied to the input of said loop to cause said servo motor to effect an adjustment in accordance therewith;

D means including a metering valve to feed fuel into said Venturi structure to be intermixed with said air therein;

E means to adjust said valve in accordance

with the degree of vacuum in said intake manifold; and

F means responsive to the valve adjustment to produce a signal that reflects said degree of vacuum and to modulate said command signal with said vacuum signal to provide the desired air-to-fuel ratio.

13. A system as claimed in claim 12, wherein said variable Venturi structure is constituted by a cylindrical casing provided with a stationary ring having an internal Venturi configuration that defines a throat that surrounds the outlet of a Venturi booster also having an internal Venturi configuration, and a cylindrical spool having an external/internal Venturi configuration that is axially shiftable with respect to the outlet of the booster to vary the constriction of the throat.

14. A system as claimed in claim 13, further including a lever pivoted on said casing and operatively coupled to said spool, said lever being swung by said servo motor to shift the spool position.

15. A system as claimed in claim 13 or claim 14, wherein said fuel is fed into the Venturi structure by a nozzle located at the inlet to said booster to feed fuel downwardly through said booster.

16. A system as claimed in any of claims 13 to 15, wherein said fuel is fed into said Venturi structure by a spray jet at the head of a fuel pipe coaxially centered within said casing and extending into  
5 said booster.

17. A system as claimed in claim 16, wherein said spray jet emits fuel at right angles to the direction of air flow through said booster.


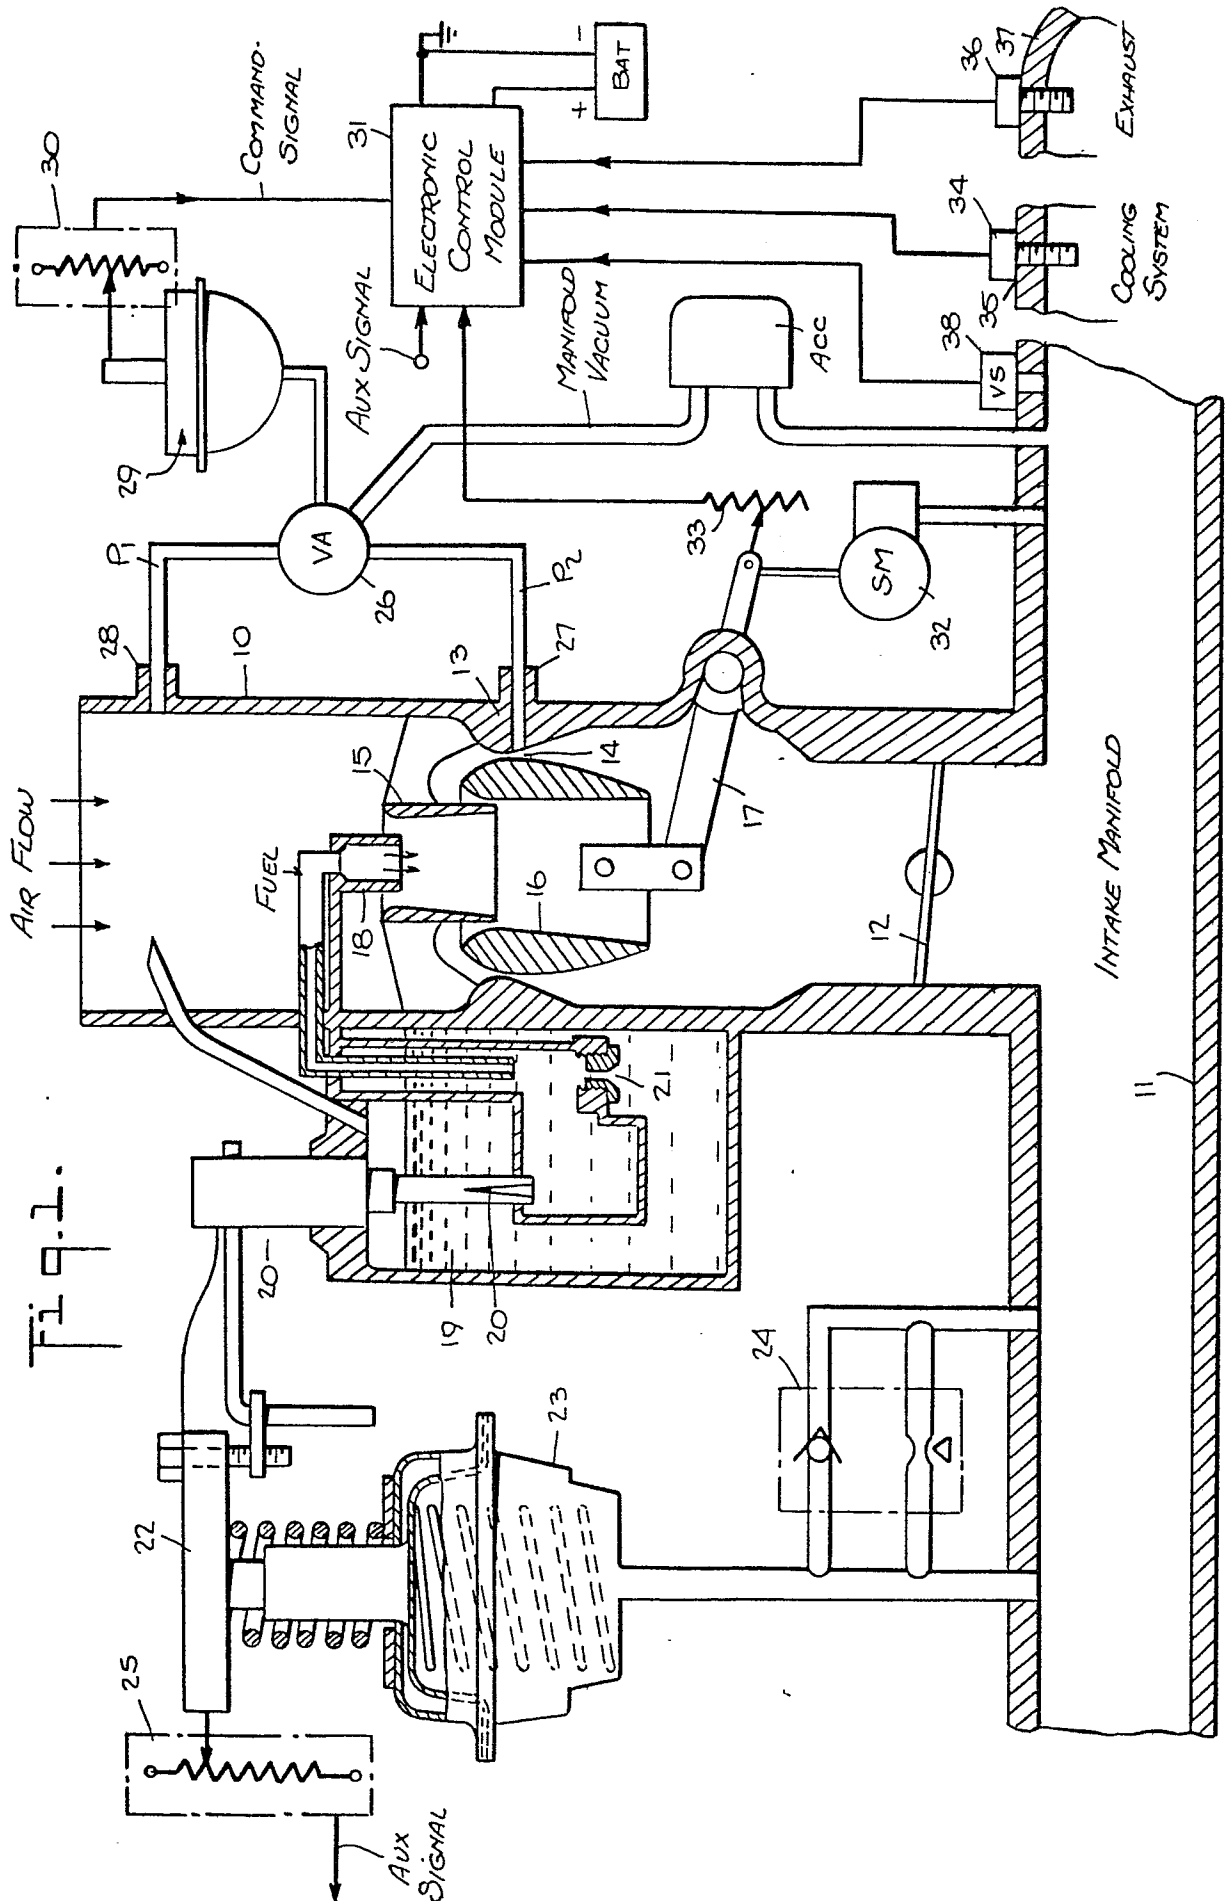


Fig. 1.





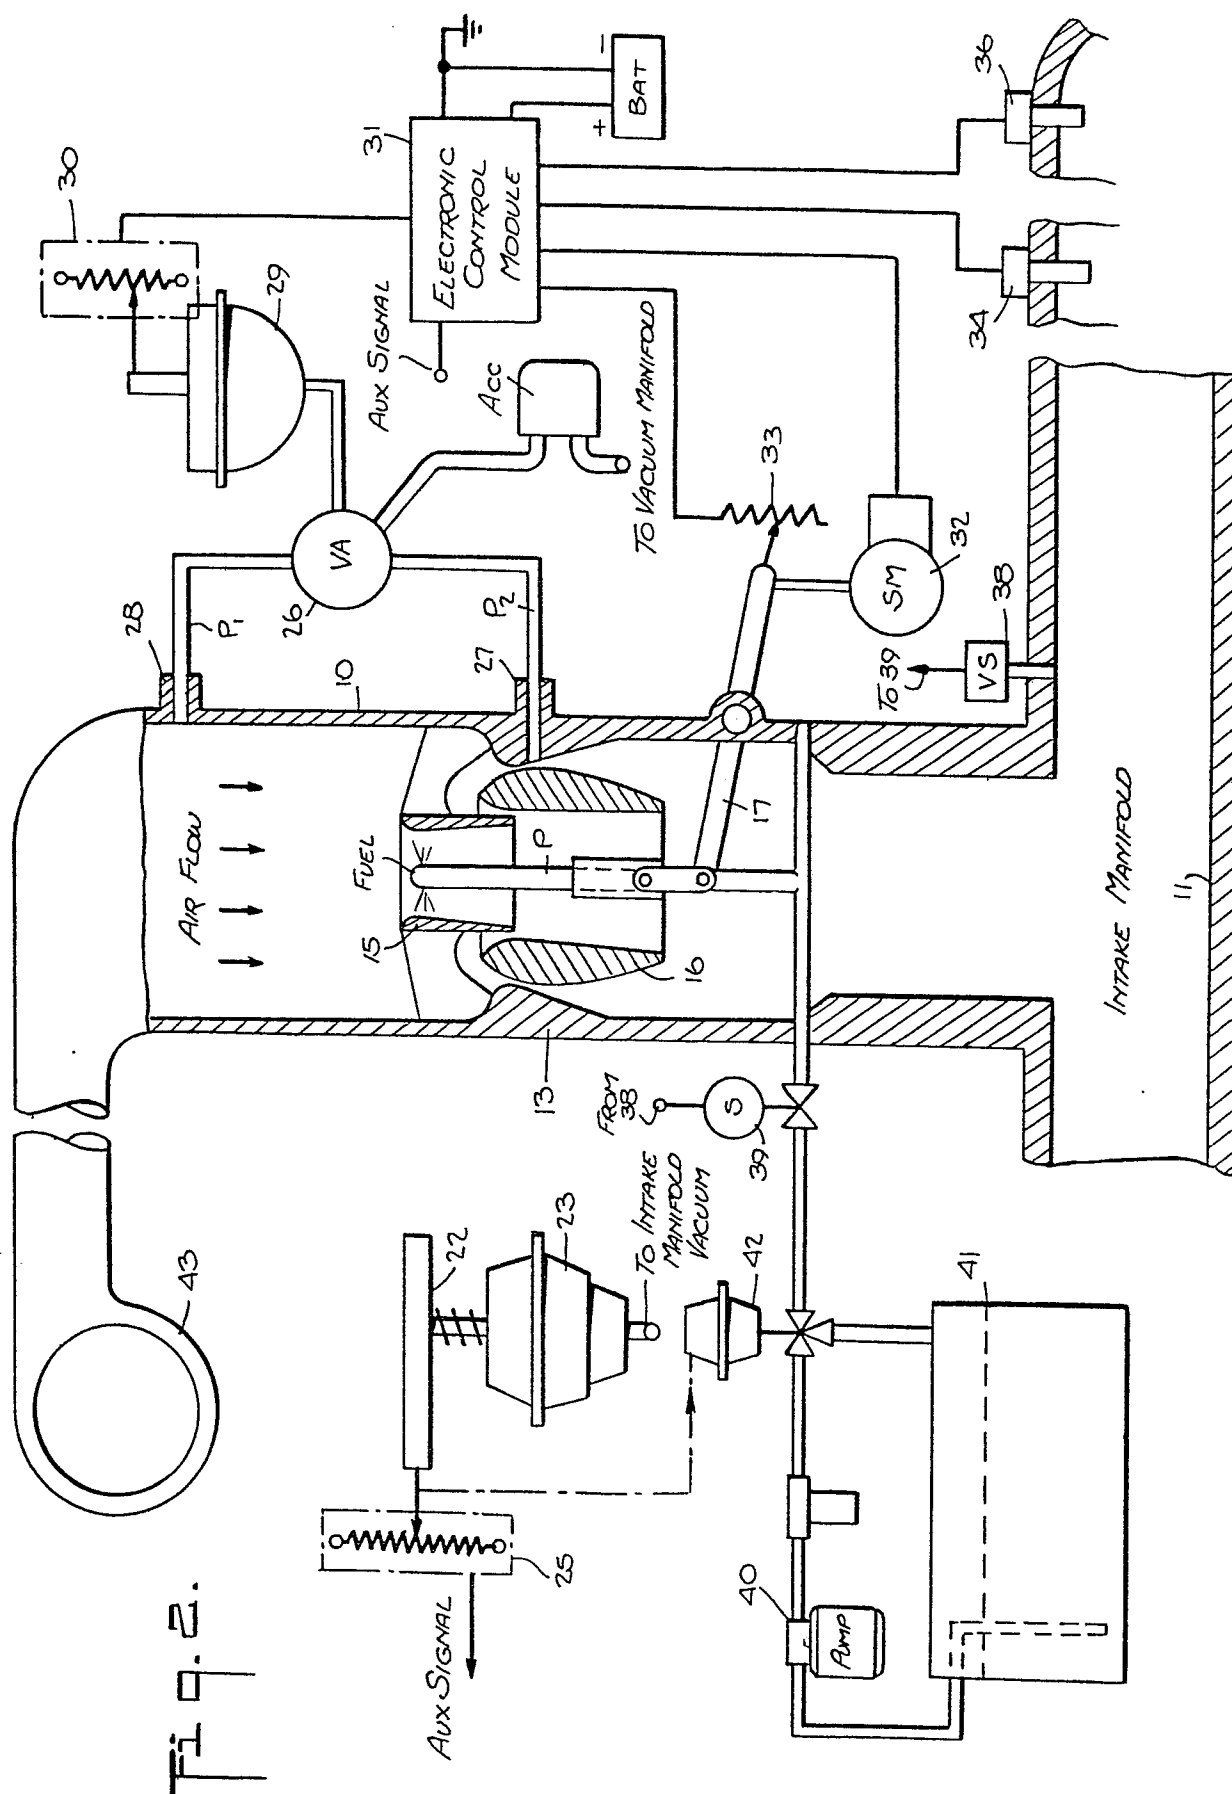

European Patent  
Office

# EUROPEAN SEARCH REPORT

0011994

Application number  
EP 84 30 2676

DOCUMENTS CONSIDERED TO BE RELEVANT		CLASSIFICATION OF THE APPLICATION (Int. Cl. 7)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim
	<p><u>DE - A - 2 357 465 (V.W.)</u></p> <p>* Page 1, 1st paragraph; page 3, 3rd paragraph; page 4, 1st and 2nd paragraph; page 6, last paragraph; page 7; page 8; page 9, 1st paragraph *</p> <p>--</p> <p><u>US - A - 4 036 186 (HATTORI)</u></p> <p>* Abstract; 1,29a,29b; column 3, lines 48-68; column 4, lines 1-31; 43-68; column 5, lines 1-12 *</p> <p>--</p> <p><u>GB - A - 1 238 033 (ZENITH)</u></p> <p>* Page 1, lines 9-36, 51-84; page 2, lines 1-8, 127-130; page 3, lines 1-16; figure 2 *</p> <p>--</p> <p><u>GB - A - 479 344 (SCOTT)</u></p> <p>* Page 3, lines 16-41, 68-73; 83-99; page 4, lines 74-105, 120-128; page 5, lines 22-27; 35-41, 68-74; figure *</p> <p>--</p> <p><u>FR - A - 2 078 528 (VESTA KAPL RINKER)</u></p> <p>* Page 3, lines 20-40; page 5, lines 6-14; page 12, lines 27-40; page 13, lines 1-11 *</p> <p>--</p> <p><u>FR - A - 676 737 (WEYMANN)</u></p> <p>* Page 1, lines 61-64; page 2, lines 1-70, 85-93, 103-104; ./. </p>	<p>1,5,6,12</p> <p>1,2,4,6,12</p> <p>1,5,6</p> <p>1,5,6,7</p> <p>1,6</p> <p>1,6,12</p>
		<p>F 02 M 9/14</p> <p>F 02 M 35/00</p>
		<p>TECHNICAL FIELDS SEARCHED (Int.Cl. 4)</p>
		<p>F 02 M</p> <p>F 02 I</p>
		<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant</p> <p>A: technological background</p> <p>O: non-written disclosure</p> <p>P: intermediate document</p> <p>T: theory or principle underlying the invention</p> <p>E: conflicting application</p> <p>D: document cited in the application</p> <p>L: citation for other reasons</p>
<p><input checked="" type="checkbox"/> The present search report has been drawn up for all claims</p>		<p>&amp;: member of the same patent family, corresponding document</p>
Place of search	Date of completion of the search	Examiner
The Hague	26-02-1980	JOF1S





0011994  
Application number

EF 17 30 - 5.0

EPO Form 1503.2 08.78



DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. <sup>3</sup> )
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
P	<u>GB - A - 2 004 591 (HITACHI)</u> * Page 1, lines 43-68, 112-115, 120-130; page 2, lines 1-14 *	1,2,5,6	
	--		
A	<u>FR - A - 2 315 008 (LAPRADE)</u> * Page 1, lines 14-29; page 3, lines 2-19; figure 1 *	1	TECHNICAL FIELDS SEARCHED (Int. Cl. <sup>3</sup> )
	----		