

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 80303805.8

(51) Int. Cl.³: **F 02 P 3/08**
F 02 P 3/00

(22) Date of filing: 27.10.80

(30) Priority: 07.11.79 GB 7938550

(43) Date of publication of application:
20.05.81 Bulletin 81/20

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

(71) Applicant: **ULTIMATE HOLDINGS S.A.**
Boite Postale 472 14, Rue des Bains
Luxembourg(LU)

(72) Inventor: **Wainwright, Basil Earle**
80 Greenaleigh Road Yardley Wood
Birmingham B14 4JE(GB)


(74) Representative: **Milhench, Howard Leslie et al,**
A. A. Thornton & Co. Northumberland House 303 High
Holborn
London, WC1V 7LE(GB)

(54) **Apparatus for producing spark ignition of an internal combustion engine.**

(57) Apparatus for producing spark ignition of an internal combustion engine in which sparks at the spark plugs are initiated by a high voltage pulse of typically 20KV and are sustained thereafter by a d.c. voltage of typically 3KV. In one embodiment the d.c. voltage is produced from a 12 volt supply by a d.c. to d.c. converter (7), the converter being adapted to produce a substantially constant voltage irrespective of the current drain produced by the spark, within given limits. The converter is also adapted to shut down its operation in the event of an output short circuit. The converter is disclosed connected to a lean burn PROCO engine with the result that only one spark plug per cylinder is required. In an alternative embodiment the d.c. sustaining voltage is derived directly from a conventional alternator driven by the engine.

EP 0 028 899 A1

FIG. 4.

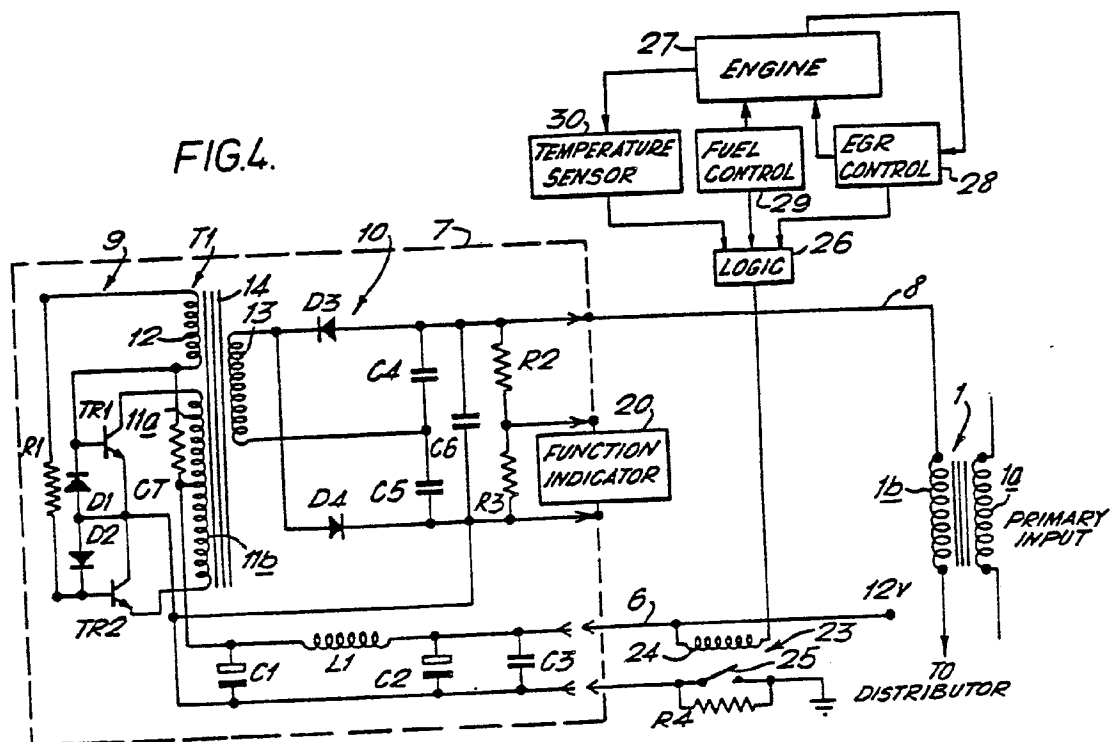

FIELD OF THE INVENTION

This invention concerns improvements in and relating to apparatus for producing spark ignition of an internal combustion engine, and is particularly but not exclusively
5 concerned with engines for automobiles.

BACKGROUND TO THE INVENTION

It is well known that the electrical sparks fed to the spark plugs of an internal combustion engine are usually produced by means of an ignition coil having its high
10 voltage secondary winding connected to the engine's spark plug through a distributor, the coil having its primary winding connected to a low voltage source, typically a 12 volt battery or an alternator system driven by the engine. An engine driven switching device, typically a
15 mechanical contact breaker produces interruptions in the current flowing the primary winding of the coil and consequently high voltage pulses are produced in the secondary winding, which are applied to the spark plugs.

Considerable research has been directed at improving
20 fuel economy and reducing pollutant emission of internal combustion engines. Efforts have been made to devise an engine which will run satisfactorily with a leaner fuel to air ratio fed to the cylinders of the engine. Such a leaner fuel to air ratio reduces fuel consumption but has
25 the disadvantage that the fuel/air mixture becomes more difficult to ignite with a conventional spark ignition system. Also, the increased ratio of air to fuel increases the likelihood of nitrogenous fuel constituents being converted by the combustion into oxides of nitrogen,
30 hereinafter referred to as NO_x. Such NO_x products are difficult to extract from the exhaust of the engine, as is necessary if the engine is to comply with pollutant emission regulations.

In order to reduce NO_x exhaust emission, recent
35 research has been directed to recirculating engine exhaust gases into the engine's cylinders so as to reduce the ratio of fuel to air in the mixture to be consumed in the engines, whilst maintaining a lean fuel content in the

mixture. Such exhaust gas recirculation, hereinafter referred to as EGR, reduces NO_x emission but cools the temperature of combustion and makes the combustible mixture in the engine's cylinders even more difficult to ignite.

5 Various proposals have been made to overcome the difficulties of igniting a lean fuel/air mixture. One solution involves the redesign of the engine such as to produce a so-called stratified charge in the cylinders. In a stratified charge engine, a fuel/air mixture has a
10 non uniform spatial fuel distribution within the cylinder such that a higher concentration of fuel occurs adjacent the spark plug than in the most part of the cylinder. When spark ignition occurs, combustion will occur more readily in the relatively high fuel concentration adjacent
15 the spark plug and the ensuing heat of combustion will cause the combustion to spread to the leaner mixture in the other parts of the cylinder. One example of a stratified charge engine is described in "A New Concept of Stratified Charge Combustion - The Ford Combustion Process (FCP)" SAE
20 Paper No. 680041 January 1968. This engine was developed into the PROCO engine described in "The Ford PROCO Engine Update" SAE Paper No. 780699 August 1978. It will be seen that in contrast to the FCP engine, the PROCO engine has an EGR system to reduce NO_x exhaust emissions. More-
25 over it is to be noted that in order to achieve satisfactory combustion, two spark plugs per cylinder are required with the EGR assisted PROCO engine, thus illustrating the further difficulties that occur in initiating ignition of a lean burn mixture when EGR is used. It will be
30 appreciated that when two spark plugs per cylinder are used, a complex distributor is required and the overall cost of the ignition system is increased substantially. Another problem resulting from the use of two spark plugs per cylinder is that the PROCO engine concept can only be used
35 for large engine capacities of typically 5 litres or more. For smaller engine capacities, there is not enough room in the cylinder head to receive the spark plugs and the

necessary valves and injectors used for this type of engine.

Another proposal for igniting a fuel/air mixture is shown in U.S. Patent No. 4,033,316 to Birchenough, that
5 discloses an arrangement in which a high voltage direct current source is connected in series with the secondary winding of an ignition coil, in such a manner as to maintain the spark initiated by the conventional operation of the coil. Thus, the spark ignition in the cylinder is
10 initiated by a typically 20KV pulse produced in a conventional manner by interrupting the current flow in the coil's primary winding, and the spark is thereafter maintained by a high voltage of typically 2 to 4 KV from the high voltage d.c. source that is connected in series with
15 the coil's secondary winding, in a manner broadly analogous to the way in which a welding arc is initiated by a high voltage pulse and is sustained by a lower voltage direct current. It is well known that once an arc has been struck it can be maintained by a voltage less than that
20 required to strike the arc.

Birchenough states that the voltage required to sustain the spark is generally constant, and that the voltage current characteristic of the direct current generator should be such as to deliver a constant current to the
25 spark.

The circuit shown in Figure 2 of the Birchenough U.S. Patent achieves this condition by arranging the d.c. generator to have an output voltage current characteristic defined by a curve for which a decreased output voltage
30 results in an increased current, the maximum current at low voltage being limited by the output impedance of the d.c. generator.

I have found that in practice, whilst the voltage required to sustain the arc does have a generally constant
35 mean value, it is subject to transistory fluctuations, these fluctuations occurring during combustion conditions of high EGR, high compression, high gas swirl rates within the

cylinder, and extremely lean burn fuel mixtures. During such a transitory fluctuations both a relatively high voltage and current may be required to sustain the spark. However, the d.c. generator of Birchenough delivers a
5 relatively low voltage at high current levels and accordingly will not sustain the spark during such transitory conditions unless the d.c. generator is made more powerful and accordingly inefficient for the most part of its operation.

10 Another problem occurs with the d.c. generator of Birchenough in the event that a short circuit occurs across the spark plug or across the output of the generator. Such a short circuit condition could occur when an engineer is checking operation of the ignition circuit. It is
15 common practice to touch the spark plug's lead against the engine to see if a spark jumps from the end of the lead. During such testing a short circuit is likely to occur across the output of the d.c. generator. Now, the d.c. generator of Birchenough comprises a free running
20 oscillator which drives a step up transformer, the output of which is applied to a diode and capacitor network which acts as a rectifier and voltage multiplier, to develop a high voltage d.c. output across an output capacitor. In the event of a short circuit across the output, the d.c.
25 generator operates to pump a high current into the short circuit. As a result the oscillator will overheat and is likely to fail. The circuit of Birchenough is accordingly dangerous to maintenance engineers. If an engineer accidentally touches the high voltage spark plug
30 lead, to produce a short circuit, the d.c. generator will pump a heavy current into the short, with consequential hazardous results for the engineer.

Another problem with the Birchenough circuit is that the operation of the high voltage d.c. source produces
35 substantial erosion rates of the spark plugs' electrodes and the electrodes of the distributor and its associated rotor arm. This problem is particularly serious if the

energy supplied by the d.c. generator is selected to be high enough to maintain the spark during combustion with high EGR rates and high combustion gas swirl for lean burn fuel mixtures.

- 5 A further problem with the Birchenough circuit is that the output capacitor of the d.c. generator will remain charged for a substantial time after the circuit has been switched off. Thus, if an engineer touches the output of the ignition circuit even after the circuit has
10 been switched off, he is liable to receive an electric shock.

OBJECTS AND SUMMARY OF THE INVENTION

It is an object of the invention to provide an improved ignition system for a lean burn engine.

- 15 It is another object of the invention to provide an ignition system that will provide satisfactory combustion of an internal combustion engine provided with an EGR system.

- It is a further object of the invention to provide an
20 ignition system in which the sparks produced by the spark plugs are initiated by the conventional operation of an ignition coil and are thereafter sustained by the use of a d.c. generator, the d.c. generator being so adapted as to sustain the sparks even during the aforesaid transitory
25 arc sustaining voltage and current fluctuations.

- It is yet another object of the invention to provide such a d.c. generator which does not pump heavy current into an output short circuit, and which is less likely to produce dangerous electrical shocks to maintenance
30 engineers.

A further object of the invention is to provide a stratified charge internal combustion engine having an EGR system, with an ignition system including only one spark plug per engine cylinder.

- 35 Yet another object of the invention is to provide a PROCO engine with an ignition system having only one spark plug per cylinder.

Yet a further object is to provide an ignition system which aids in permitting smaller size PROC0 engines to be constructed.

From one aspect the invention provides an apparatus
5 for producing spark ignition of an internal combustion engine in which sparks across the spark plugs are initiated by an electrical pulse and are thereafter sustained by the use of a d.c. generator which applies a sustaining voltage to the plugs, the generator being characterised in that
10 it is adapted to produce a substantially constant voltage over a predetermined range of current values supplied thereby to sustain the spark, and to cease operation capable of sustaining the spark in the event that the current supplied thereby to the spark plug exceeds a predetermined maximum
15 value. The d.c. generator has the advantage that because the voltage thereof remains substantially constant, the generator will sustain sparks even under conditions of high EGR, gas swirl load and extremely lean burn. If the spark demands a transitory high current, the voltage of the
20 generator can deliver the current without the voltage dropping below the arc sustaining voltage.

Also, because the generator will cease operation when the current exceeds a given maximum value thereof, the generator will not pump a heavy current into a short circuit,
25 and thus dangers to maintenance engineers who accidentally touch the spark plug leads, are reduced substantially. Also, in the event of an output short circuit, the generator will not overheat or fail.

In accordance with a preferred feature of the invention,
30 the d.c. generator develops its output voltage across a capacitor which is shunted by resistance elements to allow the capacitor to discharge when the generator is inoperative. In this way, the capacitor will dissipate the charge which might otherwise give an electrical shock to a maintenance
35 engineer.

From another aspect the invention provides an apparatus for producing spark ignition of an internal combustion

engine in which the spark sustaining voltage produced by the d.c. generator is of a selectively variable level, the level being alterable in dependence upon operating parameters of the engine, with the advantage that relatively
5 high spark energies need only be used for extreme combustion conditions and lower spark energies can be used at other times, so that spark plug electrode erosion is reduced.

From yet another aspect the invention provides an
10 improved ignition system on a stratified charge lean burn engine, particularly but not exclusively a PROCO engine, in which sparks across spark plugs in combustion chambers in the engine are initiated by electrical pulses and are thereafter sustained by the use of a d.c. generator
15 which applies a spark sustaining voltage to the plugs. In accordance with this aspect of the invention only one spark plug per combustion chamber is provided, since in accordance with my invention satisfactory ignition can be achieved with only one spark plug, without any reduction
20 in fuel economy and with an improvement in exhaust pollution reduction. Furthermore, with my invention the stratified charge engine can operate at high EGR rates without the occurrence of substantial harsh running.

Further features objects and advantages of my invention will appear from the following description of
25 embodiments thereof given by way of illustrative example with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a schematic diagram of an apparatus for
30 producing spark ignition in accordance with the invention;

FIGURE 2 illustrates in more detail the circuit diagram of a d.c. generator shown in FIG. 1;

FIGURE 3 shows waveforms illustrative of operation of the d.c. generator; FIG. 3A showing the current in the
35 primary winding of the transformer T1 of FIG. 2; FIG. 3B showing the voltage induced in the secondary winding of the transformer T1; and FIG. 3C illustrating the voltage

current output characteristic of the generator 7;

FIGURE 4 illustrates a modification of the apparatus of FIGS. 1 and 2 in which the voltage produced by the generator 7 is controlled in dependence on operating parameters of the engine to reduce spark plug erosion;

FIGURES 5 to 7 illustrate alternative arrangements to the circuit of FIG. 4;

FIGURE 8 is a schematic circuit diagram of an arrangement permitting a separate inductance to be connected in series with the spark plugs;

FIGURE 9 is a schematic arrangement which allows the d.c. generator to be used as an add-on unit for a conventional ignition system.

FIGURE 10 is a sectional view of a cylinder of a PROCO engine;

FIGURE 11 is a schematic top plan view of the cylinder head of the PROCO engine;

FIGURE 12 is a schematic sectional view of a PROCO engine adapted to have an ignition system according to the invention, and which has only one spark plug per cylinder; and

FIGURE 13 is a schematic diagram of another example of the invention which utilises a conventional alternator.

DESCRIPTION OF PREFERRED EMBODIMENTS

Referring to FIGURE 1 there is shown a spark pulse generating means which includes an ignition coil 1, having primary and secondary windings 1a, 1b, a current control means 2 which controls a low voltage current flow-
5 ing in the primary winding, and an engine driven spark timing control means 3 which drives the current control means 2. The current control means 2 is adapted to produce a rapid rate of change of current flow in the primary winding 1a in response to operation of the timing control means 3,
10 so as to induce in the secondary winding 1b a high voltage pulse of typically 20-40 KV. This high voltage pulse is capable of producing spark ignition in an internal combustion engine and the pulse is applied through a distributor 4 which may be any of the well known types, to spark plugs 5
15 installed in cylinders of the engine (not shown).

The current control means 2 and the timing control means 3 may be constituted by a conventional contact breaker driven by a cam in the distributor 4, which switches a nominally 12 volt supply from the engine's usual battery/alternator
20 arrangement (not shown) on line 6, to interrupt the current flow and produce a rapid rate of change of current in the primary 1a. Alternatively, the current control means can be a semiconductor switch, which may operate to discharge a capacitor through the primary winding 1a. Also, the spark
25 timing control means 3 may be constituted by a known photoelectric, infra-red or like detector responsive to the angular position of rotation of the engine.

Thus, in operation of the spark generating means, high voltage pulses are produced in the coil's secondary winding 1b in response to successive operations of the spark
30 timing control means 3, these pulses being appropriately applied by the distributor 4 to successive ones of the spark plugs 5 so as to establish sparks in successive ones of the cylinders and thereby ignite fuel/air mixture in the cylinders.

35 Additionally, a d.c. generator 7 is provided, connected in series with the secondary winding 1b. The generator 7 applies to the spark plugs 5 a d.c. voltage capable of

sustaining a spark across the spark plugs after the high voltage spark initiating pulse produced by operation of the circuit 2 has died away to a level incapable of maintaining the spark. The d.c. generator 7 comprises
5 a d.c. to d.c. converter arranged to generate a high voltage output of nominally 3KV from the low voltage supply on line 6. The generator 7 produces a rectified d.c. output on line 8, which is fed through the secondary 1b of the coil to the distributor 4 and hence to the spark
10 plugs 5. The output voltage of the generator 7 is of a magnitude selected to sustain but not initiate a spark across one of the spark plugs 5, and the generator is per se capable of producing a continuous voltage of such a magnitude. Once the spark has been initiated by a high voltage pulse
15 produced by operation of the current control means 2, the spark can be sustained by a somewhat lower voltage, and the d.c. generator 7 is suitable for providing such a sustaining voltage. The fact that the spark sustaining current is supplied by a separate generator 7 provides the advantage
20 of allowing much greater spark currents to be established for longer periods of time, which provides for improved fuel burning and results in improved fuel economy and/or a reduction in pollutant emission.

In the forms of the invention described herein the
25 generator 7 develops a continuous output voltage and each spark is extinguished either by operation of the distributor to disconnect the applied sustaining voltage and connect it to a subsequent spark plug, or by virtue of the increased gas pressure produced in the cylinder by the combustion
30 initiated by the spark. The increased gas pressure presents an increased electrical impedance to the arc established between the spark plug electrodes, and the voltage level produced by the generator 7 can be appropriately selected so that the increased gas pressure will
35 cause the spark automatically to extinguish when the gas pressure rises to a given level indicating that satisfactory combustion has occurred in the cylinder. Thus, when the given pressure level is reached in the cylinder, the voltage

produced by the generator 7 is insufficient to maintain the spark, and the spark will terminate automatically.

In an alternative arrangement, the d.c. generator 7 is switched off and on again so as to terminate the spark.

5 Because the generator 7 is per se capable of producing a continuous high voltage output, the period that the generator 7 can be switched to supply the spark sustaining voltage to the sparks, can be selected independently of the characteristics of the circuit of the generator 7 and
10 thus the duration of the output voltage can be selected for example to be from a few milliseconds to an effectively infinite duration. This arrangement allows the spark duration to be controlled independently of the characteristics of the circuit, and allows the current flowing
15 through the arc established across the spark plug to be substantially constant during the entire period that the spark is sustained by the voltage from the generator 7. Accordingly, the system of the invention allows the spark duration to be extended and energy to be increased which
20 improves engine combustion.

The d.c. to d.c. converter circuit of the generator 7 will now be described in more detail with reference to FIGURE 2. The circuit of the generator 7 is shown within a hatched outline and its interconnections to the rest of
25 the ignition circuit are shown schematically. The circuit comprises an oscillator stage 9 which drives a step up transformer T1, the output of the transformer being fed to a voltage multiplier and rectifier stage 10.

The oscillator stage 9 is powered from the low voltage
30 12 volt supply line 6 through an interference filter network comprising capacitors C1 to C3 and an inductor L1. The filter network prevents spurious transients on the line 6 from disturbing the oscillatory condition of the oscillator stage 9. The transformer T1 has a primary winding with
35 winding portions 11a, 11b and a centre tap CT, a feedback winding 12, a secondary winding 13 and a saturable core 14. Transistors TR1 and TR2 are arranged to control the current

flowing from the rail 6 in the primary winding portions 11a, 11b respectively, the bases of the transistors receiving a bias switching voltage derived from the feedback winding 12, through a biasing resistor R1 and diodes 5 D1 and D2.

Operation of the oscillator will now be described with reference to the waveform diagrams of FIGURES 3A and 3B. Assume that the transistor TR1 is conducting. A current flows from the line 6 through the winding portion 11a from the centre tap CT, the current building up substantially linearly at a rate determined substantially by the inductance of the winding portion 11a. The resulting current ramp in the winding portion 11a is shown at 15 in FIG. 3A. The effect of this substantially constant rate of change of current in the winding is to induce in the feedback winding a generally constant voltage which is of such a polarity to bias the base of transistor TR1 appropriately to hold the transistor in a conducting state. As the current flowing in the winding portion 11a builds up, the core 14 becomes saturated with magnetic flux, and the current can increase no further. As a result the voltage across the feedback winding rapidly collapses, and the bias voltage to the transistor TR1 decreases, which decreases the current flow in the winding portion 11a, 25 thereby inducing an opposite polarity bias voltage across the feedback winding 12. This opposite polarity bias voltage rapidly switches on transistor TR2 and turns off the transistor TR1. The current then builds up in an opposite sense in the winding portion 11b until the 30 core 14 saturates, in the manner shown at 16 in FIG. 3A, at which time transistor TR1 will again switch on and transistor TR2 will switch off. The circuit will oscillate in this manner. The current ramps such as 15 and 16 induce in the transformer secondary winding respective 35 positive and negative voltages, such as 17 and 18 shown in FIG. 3B, the voltages being stepped up relative to the voltage applied to the primary winding portions 11 in dependence of the turns ratio of the primary winding

portions and secondary windings 11, 12. Under a no load condition for the converter 7, switching transients occur in the oscillator which result in voltage spikes 19 (FIG. 3B) occurring on the voltage waveform of the secondary winding 12.

5 The voltage multiplier and rectifier 10 comprises fast recovery diodes D3, D4 which respectively pump charge into series connected capacitors C4, C5 during opposite polarities of the voltage on the winding 13. Thus, when the output voltage across winding 13 is positive diode D4 conducts and
10 charges capacitor C5, and when the output voltage is negative capacitor C4 is charged through diode D3. Since the capacitors are series connected, the output across both of them constitutes a doubling of the positive voltage swing across the winding 13. A final output capacitor C6 is connected in
15 parallel with the capacitors C4, C5 for smoothing purposes. Connected in parallel with the final output capacitor is a resistor chain R2, R3 which contributes to smoothing the output and which also provides a discharge path for the final output capacitor C6. A function indicator 20, typically a
20 neon tube, is connected in parallel with the resistor R3 to indicate that the generator 7 is operative.

 The voltage current characteristic of the output of the generator 7 that is fed to the line 8, is shown in FIG. 3C as a curve 21. It will be seen that the generator 7 delivers
25 a substantially constant voltage over a predetermined range of current. Thus when a spark is struck across a spark plug 5, the generator 7 will maintain a constant voltage irrespective of the current demand defined by the impedance of the arc, up to a maximum value of current 22 (FIG. 3C).
30 The current value 22 is defined by the point at which the bases of TR1 and TR2 no longer saturate, this being adjustable by adjusting the value of resistor R1. Currents above the value 22 indicate a short or other fault condition at the spark plug, and the generator is arranged to shut down
35 operation automatically if such a condition occurs. The occurrence of such a short circuit is reflected back to the output winding 13 of the transformer T1 (FIG. 2) such as to alter the inductance of _____

the transformer and prevent the oscillator 9 from working. Another useful feature of the generator 7 can be seen from FIG. 3C. Before a spark is struck across one of the spark plugs, substantially no current is drawn on line 8 from the generator 7. Under such a condition, the capacitor C6 (FIG. 2) becomes charged to a voltage substantially equal to twice the value of the voltage spikes 19. This relatively high voltage from the generator 7 aids in striking the sparks at the spark plugs 5, since this voltage adds itself to the high voltage pulses induced in the secondary winding 1b of the coil. After the spark has been struck, current is drawn from the generator 8 and the voltage spikes 19 become integrated by the capacitors C4 to C6 with the result that output voltage on line 8 drops onto a substantially constant plateau depicted in FIG. 3C, and which is substantially equal to twice the voltage level the waveform 17 (FIG. 3B).

The voltage current characteristic of the generator 7 has the advantage of enabling the generator to sustain the spark under conditions of extreme lean burn combined with substantial rates of EGR and gas swirl within the cylinders of the engine. Under such conditions the impedance of the arc can undergo substantial transitory fluctuations, so as to draw an increased current from the generator 7. I have found that to sustain the arc in these extreme conditions, the generator must be able to deliver an appropriate current to the arc without allowing the voltage applied to the arc to drop. If the voltage drops below a certain level, even momentarily, the arc will become extinguished and will not be re-kindled unless another 20 KV pulse is applied from the ignition coil. In FIG. 3 there is shown in hatched outline the voltage current characteristic of generators of the type described in the prior Birchenough U.S. Patent No. 4,033,316. It will be seen that if the arc momentarily demands a relatively high current, the voltage applied by the generator will drop. Thus, the arc would either become extinguished or if the generator of

Birchenough were designed to operate satisfactorily under these conditions, it would consume much more power and would normally deliver unnecessarily high voltages to the spark plugs.

5 It is to be noted that the generator 7 has a low component count and is therefore cheap to produce and more reliable.

Another advantage of the generator 7 is that in the event of an engineer touching the spark plug lead to produce a short circuit, the oscillator 9 of the generator becomes
10 damped and ceases operation. In this way a condition is avoided in which the generator pumps a heavy current into the short circuit. Clearly such a condition would be hazardous to the engineer and would also be likely to cause the generator to overheat and fail.

15 A further safety feature of the generator 7 is that the output capacitor C6 (FIG. 2) is shunted by resistors R2, R3 so that its charge can dissipate when the engine is turned off.

Without this shunt the capacitor C6 would retain its
20 charge for a considerable period of time so that if an engineer was to work on the engine, he could receive an electric shock from the capacitor C6 through the ignition leads. Also with the present generator 7, the neon 20 will readily indicate to him not only if the system is
25 operative but also if a charge remains on the capacitor C6.

A feature of the ignition system just described is that substantially increased mean spark energies are achieved compared with a conventional contact breaker
30 ignition, by means of the currents injected into the sparks by the generator 7. When substantial EGR or extreme lean burns are utilized in an engine, the spark energies need to be substantial if reliable ignition is to be achieved. A disadvantage that can occur is that the
35 increased spark energies can cause unacceptable erosion rates of the spark plug electrodes and the electrodes of the distributor 4. In accordance with a feature of my

invention the energy level of the sparks can be selected in dependence upon operating parameters of the engine such that higher energy sparks are only produced when extreme conditions occur. In this way, the mean energy of the sparks can be reduced without detracting from the improved engine running characteristics that result from the invention. An example of such an arrangement is shown in FIGURE 4. This Figure shows the generator 7 coupled in series to the ignition coil, much as shown in FIGURE 2, but additionally shows a relay 23 which is used to switch the voltage applied to the oscillator 9. The relay 23 has a coil 24, and contacts 25 which are shunted by a voltage dropping resistor R4. Normally the contacts 25 are open as shown in the drawing, such that a portion of the 12V supply to the oscillator 9 is dropped across the resistor R4, thereby reducing the voltage developed across the primary winding 11 to a value less than 12 volts. As a result the high voltage d.c. output developed on line 8 is reduced below its maximum value. However, when the contacts 25 of the relay close, the resistor R4 is shorted out and the voltage applied to the oscillator 9 increases with the result that the d.c. output voltage on line 8 achieves its maximum value.

The relay is controlled by a logic circuit 26 which typically provides a switching path to earth for current to flow through the relay coil 24. The logic circuit is responsive to sensed operating parameters of the engine shown schematically at 27. The logic circuit 26 determines when operating parameters of the engine indicate that extreme combustion conditions occur, and the circuit 26 switches the relay 23 accordingly. As shown in FIGURE 4, the engine is provided with an EGR system in which the gas flow rate is controlled selectively by a control 28. As will be appreciated by those skilled in the art the EGR rate is typically controlled as a function of inlet manifold vacuum level. The logic circuit 26 is responsive

to the EGR rate.

The logic circuit 26 is also responsive to a fuel control 29 which determines the fuel mixture strength. In an engine aspirated by a conventional carburettor, the logic circuit would be responsive to the setting of the conventional choke whereas with a stratified charge engine provided with fuel injectors, the flow rate of fuel to the injectors would be monitored.

The logic circuit 26 is also responsive to the engine temperature as sensed by a temperature sensor 30. Thus, when these parameters jointly or severally define a condition known to represent extreme combustion conditions, the relay 23 is switched to provide a maximum output voltage on line 8, but otherwise the output voltage is switched to a lower level, with a consequential minimization of spark plug electrode erosion.

FIGURES 5 to 7 illustrate alternative ways in which the relay 25 can be connected to the d.c. generator 7. In FIGURE 5, the dropping resistor R⁴ is connected in the 12 volt supply rail 6 rather than in the earth return. In FIGURE 6, the dropping resistor is connected in the high output voltage line 8 of the generator 7. In FIGURE 7 the dropping resistor is connected in the earth reference line of rectifier output stage 10 of the generator.

In the above described embodiments of the invention, the d.c. generator 7 is connected in series with the secondary winding 1b of the ignition coil. This arrangement has the advantage that the inductance of the secondary winding 1b acts to increase the sustaining voltage above the level set by the generator 7 in response to increased arc impedance that occurs for example during high gas swirl. In certain circumstances, the inductance of the secondary 1b may not be sufficient for this purpose and it may be desirable to use a separate inductor to define the ballast.

FIGURE 8 shows an arrangement in which a separate inductor coil L2 is connected in the line 8 rather than using the coil winding 1b as the ballast inductance. A

voltage isolating means 31 is provided in series with the coil's secondary winding 1b in order to prevent the d.c. current from the generator 7 from flowing through the winding to earth in preference to flowing to the spark
5 plugs through the distributor 4.

The voltage isolating means 31 is also adapted to allow operation of the ignition coil 1 such that a high voltage pulse induced in the secondary winding relative to earth can flow to the spark plugs. The voltage isolating means 31 in one form comprises a capacitor which
10 blocks direct current flow from the generator 7 to earth through the winding 1b. The voltage isolating means can also comprise a spark gap across which pulses induced in the secondary 1b will jump, or a high voltage diode.

15 In the above described embodiments, the ignition coil 1 is shown to have four terminals, two for each winding. Such a coil can be made at low cost by adapting the manufacture of a conventional ignition coil. A conventional ignition coil has three terminals such that one end of each
20 of the primary and secondary windings are provided with a respective terminal and the other ends thereof are connected to a common terminal for connection to earth. If it is desired to use the dc generator 7 as an add-on unit for an existing conventional ignition system, the circuit arrangement
25 as shown in FIGURE 9 may be used.

In FIGURE 9 a conventional three terminal coil 32 is shown, having primary and secondary windings 32a, b each with their own terminal 33, 34, and a common earthed terminal 35. The d.c. generator 7 is coupled to the
30 conventional coil and distributor 4 by means of the ballast inductor L2 and the aforesaid voltage isolating means 31 connected in series between the generator 7 and the coil's secondary winding 1b. The voltage isolating means 31 serves to direct the current from the generator 7 to the
35 distributor 4 and hence to the spark pulgs rather than allowing it to flow through the secondary coil 32b to earth. The voltage isolating means 31 however allows the

high voltage pulses induced in the winding 32b to pass to the distributor 4. As previously stated, the isolating means can for example comprise a capacitor, a spark gap or a diode.

5 It will be appreciated that different combinations of the circuit features just described can be utilized. For example any of the voltage level switching arrangements shown in FIGURES 4 to 7 could be used with the circuits of FIGURES 8 or 9.

10 The generator 7 thus can be used with conventionally aspirated engines to achieve improvements in fuel economy and pollutant emission reduction, as will be illustrated by example hereinafter, and also provides for similar improvements with engines provided with EGR, which may or may not
15 be conventionally aspirated with a carburettor.

As previously mentioned, one aspect of the invention concerns stratified charge engines and an example of the invention will now be described in relation to the Ford PROCO engine in order to illustrate the advantages achieved
20 thereby.

Development of the Ford PROCO engine can be seen from "Exhaust Emission Control by the Ford Programmed Combustion Process - PROCO" SAE Paper No. 720052 January 1972, and from the previously mentioned SAE Paper No. 780699 - "The Ford
25 PROCO Engine Update".

A schematic illustration of the PROCO engine is shown in FIGURES 10 and 11. The engine has a high compression ratio of typically 11:1 and operates with a lean fuel to air ratio of typically 15:1. Referring to FIGURE 10,
30 which shows a sectional view of one cylinder of the engine, an engine block 36 is bored with a cylinder 37 which receives a piston 38 formed with a dished combustion chamber 39. A cylinder head 40 is bolted onto the block 36. The head 40 receives two spark plugs 41, 42 and also a fuel injector
35 43 that injects fuel directly into the cylinder such as to establish a stratified charge therein. The engine has a EGR system (not shown) in order to reduce NO_x emission.

The layout of the cylinder head in plan view is shown schematically in FIGURE 10, from which it will be seen that the head includes inlet and outlet valves 44, 45 for air and EGR, and an inlet manifold 46. The inlet manifold 46 and the inlet valve are arranged to establish a swirling gas motion within the cylinder, the gas motion being indicated schematically by the arrows 47, 48.

It has been found necessary to use two spark plugs per cylinder with a PROCO engine because unsatisfactory combustion otherwise results at conditions of high load and high EGR. As a result a complex distributor is required and the overall cost of the ignition system is undesirably increased. Also, as can be seen from FIGURE 11, the cylinder head 40 becomes rather crowded with components, which makes it difficult to design an engine of this type with a capacity of less than 5 litres, since the size of the head then is too small to receive all of the required components.

I have found that a PROCO engine can be made to run satisfactorily with only one spark plug per cylinder when an ignition system of the kind shown in FIGURE 1 is used therewith. Such an arrangement according to the invention is shown in FIGURE 12 where it can be seen that the engine has been modified to have only one spark plug 42 which receives a spark initiating pulse from a spark generating means and a spark sustaining voltage thereafter from a d.c. generator, as described with reference to FIGURE 1 et seq. The improvement achieved can be seen from the results of a test given below, in which a single cylinder of a PROCO engine was run with a) two spark plugs b) one spark plug and c) one spark plug with the ignition system of the invention, the other plug opening being blanked off. In the results of test c) the system of the invention is referred to as the BWU ignition system. The tests were performed without attempting to optimize the settings of the engine for the BWU system except that a 4° ignition timing retardation was introduced relative to the

the optimum setting for the 2 plug PROCO engine. It is believed that further improvements in HC(hydrocarbon) and CO(carbon monoxide) exhaust emissions can be achieved when further optimization of the engine operating parameters is achieved.

TABLE 1
Test Results - 5 Litre PROCO Engine
4000 LB I.W. 12 P.A.U. 2.75 Rear Axle

<u>Test Type</u>	<u>Emissions-GPM</u>			<u>Economy MPG</u>	<u>Remarks</u>
	<u>HC</u>	<u>CO</u>	<u>NO_x</u>		
Cold Start (C/H)	.24	.6	.68	16.9	PROCO dual plug baseline
Hot Start (H/S)	.11	.2	.52	17.7	X-5 plugs, .020" gap, 2 test average
C/H	.20	.3	.69	16.4	BWU system, X-7 O.B. plug
H/S	.12	.1	.57	16.9	Dummy I.B. plug, .035" gap, 1 test
C/H	.20	.2	.59	16.5	BWU system, same as above
H/S	.12	.1	.50	17.2	Configuration but ignition timing retarded 4° - 2 test average
H/S	.06	.1	.74	16.0	PROCO single O.B., X-7, .035" gap. Rough engine, weak drive, standard ignition timing
H/S	.11	.2	.53	17.7	BWU system, 4° retard
Hot Transient	.33	.4	.82	17.6	PROCO, single O.B. ignition, 4° retard
Hot Transient	.26	.4	.65	18.3	BWU system, 4° retard

Driveability Evaluation

	PROCO dual Plug (.020" gap)	PROCO single plug (.035" gap)	BWU system single plug (.035" gap)
Cruise	Steady	Slightly Rougher	Steady
Medium Load (10" servo vacuum)	Slight Roughness	Noticeably Rough	Steady to slight roughness
Heavy Load (5" servo vacuum)	Steady, slight harshness	Noticeably rough/weak	Steady, harsh with standard timing: only slight harshness with 4° retard

Test Conclusions

1. The BWU system is comparable to the standard PROCO 2 plug system on emissions and has a comparable fuel economy.
2. The BWU system is better than a PROCO single plug system on both emissions and fuel economy.
3. The BWU system is at least as good as the PROCO 2 plug system on driveability and a significant improvement compared to a PROCO single plug system.

The BWU system provides for increased EGR tolerance. On test the standard 2 plug PROCO engine would run to a predetermined minimum misfire rate limit with an EGR flow rate of 66% relative to the flow rate of fresh inlet gas. However with 1 plug and the BWU system, the PROCO ran to 103% EGR before the misfire limit was approached.

As previously mentioned, the ignition system of the invention also provides for substantial fuel economies with conventionally aspirated engines, with or without EGR. Given below in Table 2 is the results of tests performed with three different capacity conventional engines.

- 23 -

TABLE 2

<u>Test 1</u>	<u>2.3 litre engine</u>				
	<u>Emissions gpm</u>			<u>Fuel</u>	<u>Highway</u>
	<u>HC</u>	<u>CO</u>	<u>NOx</u>	<u>Consumption</u> <u>(m.p.g.)</u>	<u>Fuel</u> <u>Consumption</u>
Baseline	.172	3.48	1.12	18.40	24.75
BWU Ignition S.H.U.	.160	3.17	1.16	19.81 (+8%)	25.91 (+5%)
BWU Ignition T.O.O.	.301	2.29	1.82	21.09 (+15%)	28.30 (+14.43%)
<u>Test 2</u>	<u>3.3 litre engine</u>				
	<u>Emissions gpm</u>			<u>Fuel</u>	<u>Highway</u>
	<u>HC</u>	<u>CO</u>	<u>NOx</u>	<u>Consumption</u> <u>(m.p.g.)</u>	<u>Fuel</u> <u>Consumption</u>
Baseline	.289	1.71	1.28	18.30	23.14
BWU Ignition S.H.U.	.52	2.28	1.11	19.06 (+4%)	23.57 (+2%)
BWU Ignition T.O.O.	.25	1.46	1.73	19.97 (+9%)	25.03 (+8%)
<u>Test 3</u>	<u>5.0 litre engine</u>				
	<u>Emissions gpm</u>			<u>Fuel</u>	<u>Highway</u>
	<u>HC</u>	<u>CO</u>	<u>NOx</u>	<u>Consumption</u> <u>(m.p.g.)</u>	<u>Fuel</u> <u>Consumption</u>
Baseline	.383	2.15	.99	16.97	21.97
BWU Ignition S.H.U.	.341	2.32	.70	17.06 (+5%)	23.35 (+6.28%)
BWU Ignition T.O.O.	.347	2.48	.73	19.11 (+12.6%)	24.92 (+10.15%)

S.H.U.: Straight hook only (no other alterations).

T.O.O.: Timing optimizing only.

The tests were performed over 4,200 miles. The figures in brackets show the overall fuel economy improvement given by the BWU system in percentage terms relative to a baseline defined by a comparable run of the engine with its conventional ignition system.

An advantage of the d.c. generator 7 described with reference to Figure 2 et seq is that it is eminently suitable to manufacture in mass production. It has a high conversion efficiency of greater than 90% which is achieved with
5 a low component count.

Another practical form of the d.c. generator 7 is shown in FIGURE 13. This form of the generator derives the high voltage applied to sustain the sparks, directly from the usual alternator fitted to the engine to power the
10 usual ancillary engine circuits. Referring to FIGURE 13, an engine 50 is shown driving an electrical alternator 51 by means of a belt 52, in a conventional manner. The alternating voltage from the alternator 51 is fed to the usual rectifier and voltage regulator shown schematically
15 at 53, which supplies a normal 12 volt d.c. supply to ancillary electrical circuits 54, such as for example the low voltage circuits connected to the primary winding 1a of the coil 1. Additionally, and in accordance with the invention, the output of the alternator 51 is fed to an isolating and
20 step up transformer 55 and thence to a rectifying and smoothing circuit comprising a diode D5, a capacitor C7 and a resistor R5. The rectifier arrangement provides an output voltage of nominally 3KV for application on line 8 through the secondary winding of the coil 1b to sustain the sparks,
25 in the manner described with reference to FIGURE 1.

Optionally, the circuit can include a voltage level switching arrangement, much as described with reference to FIGURE 7. Thus, referring to FIGURE 13, there is shown a logic circuit 26 which switches current to operate the
30 relay coil 24 and contacts 25 in the manner described with reference to FIGURE 7. Thus, normally, the voltage dropping resistor R4 reduces the output voltage on line 8, but when the relay operates to shut the contacts 25, the resistor R4 is shunted and the output voltage on line 8 is increased.

35 Clearly the arrangement of FIGURE 13 can be used with a conventionally aspirated engine, with or without EGR, and can also be used with a stratified charge engine such as the PROCO.

CLAIMS:

1. Apparatus for producing spark ignition of an internal combustion engine wherein combustion is effected by means of a spark plug in a cylinder of an engine, said apparatus comprising:

spark pulse generating means for applying to the spark plug an electrical pulse capable of initiating a spark across the spark plug; and

a d.c. to d.c. converter capable of producing a continuous output voltage for application to the spark plug to sustain sparks established by said spark pulse generating means, said converter being adapted to produce substantially constant voltage over a predetermined range of current values supplied by the converter to sustain the spark, said converter being arranged to substantially cease operation in the event that the current supplied by the converter exceeds a predetermined maximum value.

2. Apparatus as claimed in claim 1 wherein said d.c. to d.c. converter comprises:

- a) a step up transformer having a primary a secondary and a feedback winding, and a saturable core
- b) semiconductor switching means coupled to said primary winding and to said feedback winding so as to define an oscillator to produce an oscillatory current flow in said primary winding that saturates said core with magnetic flux whereby to induce an oscillatory stepped up voltage in said transformer secondary winding
- c) rectifying means coupled to said transformer secondary winding and arranged to produce a rectified output voltage for application to the spark plug, and
- d) the converter being so arranged that in the event said output voltage is shorted to earth the oscillator becomes damped and substantially ceases operation.

3. An internal combustion engine provided with a spark ignition system wherein combustion is effected by means of a spark plug in a combustion chamber of the engine, comprising:

- a) an ignition coil having primary and secondary windings the output of the secondary winding being arranged to supply high voltage pulses to the spark plug
- b) a relatively low voltage supply
- c) means responsive to said low voltage supply and arranged to produce in said primary winding a rate of change of current for inducing in said secondary winding voltage pulses suitable for initiating a spark at said spark plug, and
- d) a d.c. to d.c. converter capable of producing a continuous output voltage for application to the spark plug to sustain a spark established by one of said voltage pulses when the pulse is no longer capable of maintaining the spark, said converter comprising:

a step up transformer having a primary a secondary and a feedback winding, and a saturable core;
semiconductor switching means coupled to said primary winding and to said feedback winding so as to define an oscillator to produce an oscillatory current flow in said primary winding that saturates said core with magnetic flux whereby to induce an oscillatory stepped up voltage in said transformer secondary winding;

rectifying means coupled to said transformer secondary winding and arranged to produce a rectified output voltage for application to the spark plug;
and

the converter being so arranged that in the event said output voltage is shorted to earth the oscillator becomes damped and ceases operation.

4. An arrangement as claimed in claim 3 including a voltage multiplier stage connected to the output winding of the

transformer, to produce a rectified multiple of the oscillatory voltage developed across the output winding, an output capacitor arranged to be charged as a function of said rectified multiple voltage produced by the voltage multiplier stage, and resistor elements connected in parallel with said output capacitor to provide therefor a discharge path when the converter is inoperative.

5. An arrangement as claimed in claim 4, including function indicator means to indicate that said converter is operative.

6. An arrangement as claimed in claim 5 wherein said function indicator means comprises a neon tube connected in parallel with said output capacitor.

7. An arrangement as claimed in claim 3 including sensor means for providing an output indicative of an engine operating parameter, and means responsive to the output of the sensor means and arranged to control the magnitude of the output of said d.c. to d.c. converter such as to minimise spark erosion of the spark plug.

8. An arrangement as claimed in claim 3 wherein a separate inductor coil is connected in series with and between the output of said d.c. to d.c. converter and the secondary winding of said ignition coil, a spark plug output for connection to the spark plugs is taken at the series connection of said separate coil and said secondary winding of the ignition coil, and voltage isolating means is provided to permit said high voltage pulses induced in the secondary winding to pass to said spark plug output, said voltage isolating means also being adapted to cause current from the d.c. to d.c. converter to flow to said spark plug output rather than through said secondary winding of the ignition coil.

9. An arrangement as claimed in claim 8 wherein said

ignition coil has four terminals each of which is connected to a respective end of said primary and secondary windings, and wherein one terminal of the secondary winding is connected to earth through said voltage isolating means.

10. An arrangement as claimed in claim 8 wherein said ignition coil has three terminals, a first and a second of which are connected to respective ends of said primary and secondary coil windings, the third terminal being connected in common to the other two ends of said windings, said third terminal being earthed, and said voltage isolating means is connected to said second terminal and to said spark plug output,

11. An arrangement as claimed in claim 8 wherein said voltage isolating means comprises electrodes defining a spark gap.

12. An arrangement as claimed in claim 8 wherein said voltage isolating means comprises a diode.

13. An arrangement as claimed in claim 8 wherein said voltage isolating means comprises a capacitor.

14. An internal combustion engine including

- a) a combustion chamber;
- b) a spark plug for producing spark ignition in said chamber;
- c) spark pulse generating means for applying electrical pulses to the spark plug in a timed relationship dependent upon operation of the engine, said pulses being capable of initiating sparks across the spark plug;
- d) generator means capable of producing a continuous output voltage for application to the spark plug so as to sustain the spark established by the spark pulse generating means after the pulse generated thereby is no longer capable of maintaining the spark;

- 5 -

- e) sensor means for providing an output indicative of an operating parameter of the engine;
- f) means responsive to said output of the sensor means and arranged to control the magnitude of the output voltage of said generator means in such a manner as to tend to minimise spark erosion of said spark plug.

15. An engine as claimed in claim 14 including an EGR system and wherein said sensor means includes means responsive to the EGR rate of the engine.

16. An engine as claimed in claim 14 or 15 wherein said sensor is responsive to the strength of fuel mixture supplied to the engine.

17. An engine as claimed in claim 14, 15 or 16 wherein said sensor means is responsive to engine temperature.

18. An engine as claimed in claim 14 including a relatively low voltage supply, and wherein said generator means comprises a d.c. to d.c. converter including, a step up transformer having a primary and a secondary winding, semiconductor switching means coupled to the primary winding of the transformer so as to switch current from said low voltage supply and produce an oscillatory current flow in said transformer primary winding thereby to induce an oscillatory high voltage in the transformer secondary winding, and rectifying means coupled to transformer secondary winding and arranged to produce a relatively high rectified output voltage for application to the spark plug,

and including a voltage dropping impedance means arranged to reduce the voltage produced by said d.c. to d.c. converter,

and switching means responsive to said sensor means to disable operation of said voltage dropping impedance means.

19. An engine as claimed in claim 18 wherein said switching means comprises a relay having a coil and switching contacts, said relay coil being energised from said low voltage supply in dependence upon operation of said sensor means, and said voltage dropping means being shunted by said switching contacts.

20. An engine as claimed in claim 19 wherein said voltage dropping impedance means comprises a resistor connected to reduce the low voltage supply received by the converter.

21. An engine as claimed in claim 19 wherein said voltage dropping impedance means comprises a resistor connected to reduce the high output voltage produced by the d.c. to d.c. converter.

22. Apparatus for producing spark ignition of an internal combustion engine wherein combustion is effected by means of a spark plug in a combustion chamber of the engine, comprising:

spark pulse generating means for applying repetitively to the spark plug an electrical pulse capable of initiating a spark across the spark plug;

a d.c. to d.c. converter capable of producing a continuous output voltage for application to the spark plug to sustain a spark established by the spark pulse generating means after each spark initiating pulse therefrom is no longer capable of maintaining the spark, said converter comprising:

- a) a step up transformer having primary secondary and feedback windings, and a saturable core
- b) semiconductor switching means coupled to said primary winding and to said feedback winding in such a manner as to define an oscillator to produce an oscillatory current flow in said primary winding which produces a magnetic field that saturates said core whereby to induce an

oscillatory stepped up voltage in said secondary winding;

- c) rectifying means coupled to said secondary winding and arranged to produce a rectified output voltage for application to the spark plugs;
- d) the converter being so arranged that in the event of short circuit of said output voltage to earth said oscillator becomes damped and ceases operation.

23. Apparatus for producing spark ignition of an internal combustion engine wherein combustion is effected by means of a spark plug in a combustion chamber of the engine, comprising:

spark pulse generating means for applying repetitively to the spark plug an electrical pulse capable of initiating a spark across the spark plug

and a d.c. to d.c. converter capable of producing from a relatively low voltage supply a relatively high output voltage for application to the spark plug to sustain a spark established by the spark plug generating means after the spark initiating pulse therefrom is no longer capable of maintaining the spark, said converter comprising:

- a) a step up transformer having primary and secondary windings;
- b) semiconductor switching means coupled to said primary winding to produce therein an oscillatory current flow, whereby to induce an oscillatory voltage in said secondary winding;
- c) voltage multiplier and rectifier means coupled to said secondary winding and including an output capacitor across which a rectified multiple of said secondary winding voltage is developed in use thereof, and
- d) circuit element means defining a resistance path in parallel with said capacitor to allow it to discharge when the circuit is inoperative.

24. An internal combustion engine including:
- a) means defining a combustion chamber,
 - b) a single spark plug arranged to produce spark ignition in said combustion chamber,
 - c) fuel injection means for injecting fuel into said combustion chamber in such a manner as to establish a stratified charge of fuel in the chamber with a higher fuel concentration in a region adjacent the spark plug than in regions remote therefrom,
 - d) spark pulse generating means for applying to the spark plug an electrical pulse capable of initiating a spark across the spark plug, and
 - e) generator means arranged to produce a voltage for application to the spark plug so as to sustain the spark established by said pulse generating means after said pulse generating means is no longer capable of maintaining the spark.
25. An internal combustion engine according to claim 24 including a piston and cylinder assembly and a cylinder head, the cylinder head including an aperture which receives the spark plug, and an aperture which receives said fuel injection means, and said piston having a head that includes a central dished portion to define said combustion chamber.
26. An internal combustion engine as claimed in claim 25 including inlet and outlet valves mounted on said cylinder head, and an inlet manifold coupled to said inlet valve and arranged to produce within the cylinder a swirling motion of gas generally coaxial with the cylinder bore.
27. An internal combustion engine as claimed in claim 26 including an exhaust gas recirculation system coupled to said outlet and inlet valves.
28. An internal combustion engine as claimed in claim 27

wherein said generator means comprises a d.c. to d.c. converter for developing said sustaining voltage from a low voltage supply.

29. An internal combustion engine as claimed in claim 28 wherein said converter comprises:

- a) a step up transformer having a primary a secondary and a feedback winding, and a saturable core;
- b) semiconductor switching means coupled to said primary winding and to said feedback winding so as to define an oscillator to produce an oscillatory current flow in said primary winding that saturates said core with magnetic flux whereby to induce an oscillatory stepped up voltage in said transformer secondary winding;
- c) rectifying means coupled to said transformer secondary winding and arranged to produce a rectified output voltage for application to the spark plug, and
- d) the converter being so arranged that in the event said output voltage is shorted to earth the oscillator becomes damped and ceases operation.

30. An internal combustion engine as claimed in claim 24 including a dynamo electric machine driven by the engine and arranged to power said spark pulse generating means, and wherein said generator means comprises means arranged to derive from said dynamo electric machine an output for application to the spark plug so as to sustain sparks initiated thereby as aforesaid.

31. An internal combustion engine as claimed in claim 30 wherein said generator means includes a step up transformer coupled to said dynamo electric machine, and a rectifier connected to the transformer.

32. An internal combustion engine as claimed in claim 24 including sensor means for sensing at least one operating

parameter of the engine, and means arranged to control the voltage level produced by said generator means in response to said sensor means.

33. An internal combustion engine as claimed in claim 31 wherein said dynamo electric machine comprises an alternator.

34. An internal combustion engine including:

- a) a piston and cylinder assembly defining a combustion chamber;
- b) a single spark plug arranged to produce spark ignition in said combustion chamber;
- c) chamber inlet and outlet means to allow inlet and exhaust gases to enter and leave the chamber respectively;
- d) exhaust gas recirculation means to recirculate exhaust gas from said outlet means to said inlet means;
- e) spark pulse generating means for applying repetitively an electrical pulse to the spark plug, said pulse being capable of initiating an electrical spark across the spark plug;
- f) generator means capable of producing a continuous output voltage for application to the spark plug so as to sustain the spark established by the spark pulse generating means after the spark initiated thereby is no longer capable of maintaining the spark.

35. An internal combustion engine as claimed in claim 34 wherein said generator means comprises a d.c. to d.c. converter including:

- a) a step up transformer having a primary a secondary and a feedback winding, and a saturable core;
- b) semiconductor switching means coupled to said primary winding and to said feedback winding so as to define an oscillator to produce an oscillatory current flow in said primary winding that saturates said core with magnetic flux whereby

- to induce an oscillatory stepped up voltage in said transformer secondary winding;
- c) rectifying means coupled to said transformer secondary winding and arranged to produce a rectified output voltage for application to the spark plug; and
 - d) the converter being so arranged that in the event said output voltage is shorted to earth the oscillator becomes damped and ceases operation.
36. An internal combustion engine including:
- a) a combustion chamber;
 - b) a spark plug for producing spark ignition in said chamber;
 - c) spark pulse generating means for applying repetitively to the spark plug an electrical pulse capable of initiating an electrical spark across the spark plug;
 - d) an alternator driven by the engine and arranged to power said spark pulse generating means;
 - e) means for deriving from said alternator an output voltage for application to the spark plug so as to sustain the spark established by the spark pulse generating means after the pulse generated thereby is no longer capable of maintaining the spark.
37. An internal combustion engine as claimed in claim 36 wherein said means e) includes a transformer coupled to said alternator and a rectifier coupled to the transformer.

1/11

FIG. 1.





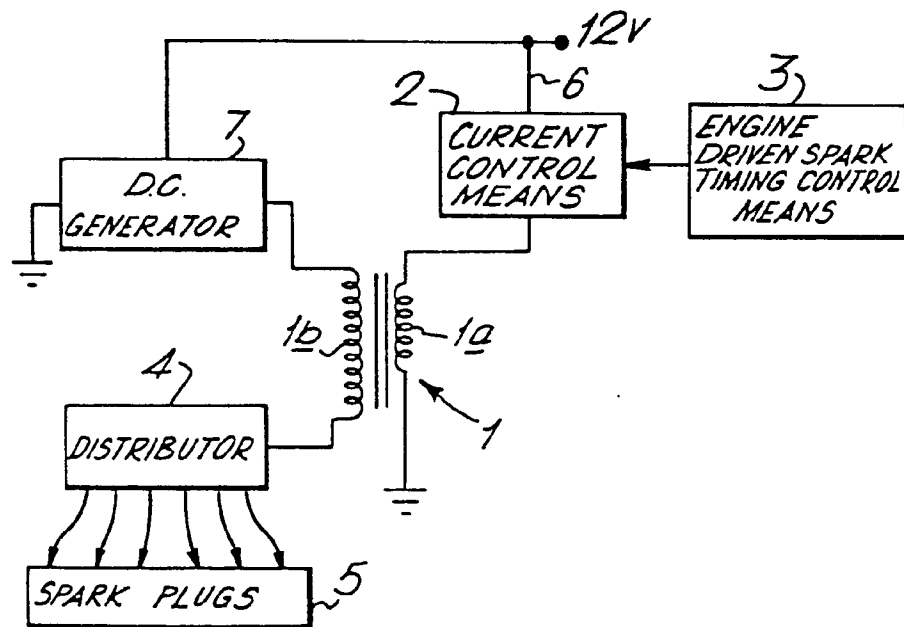



FIG. 2.

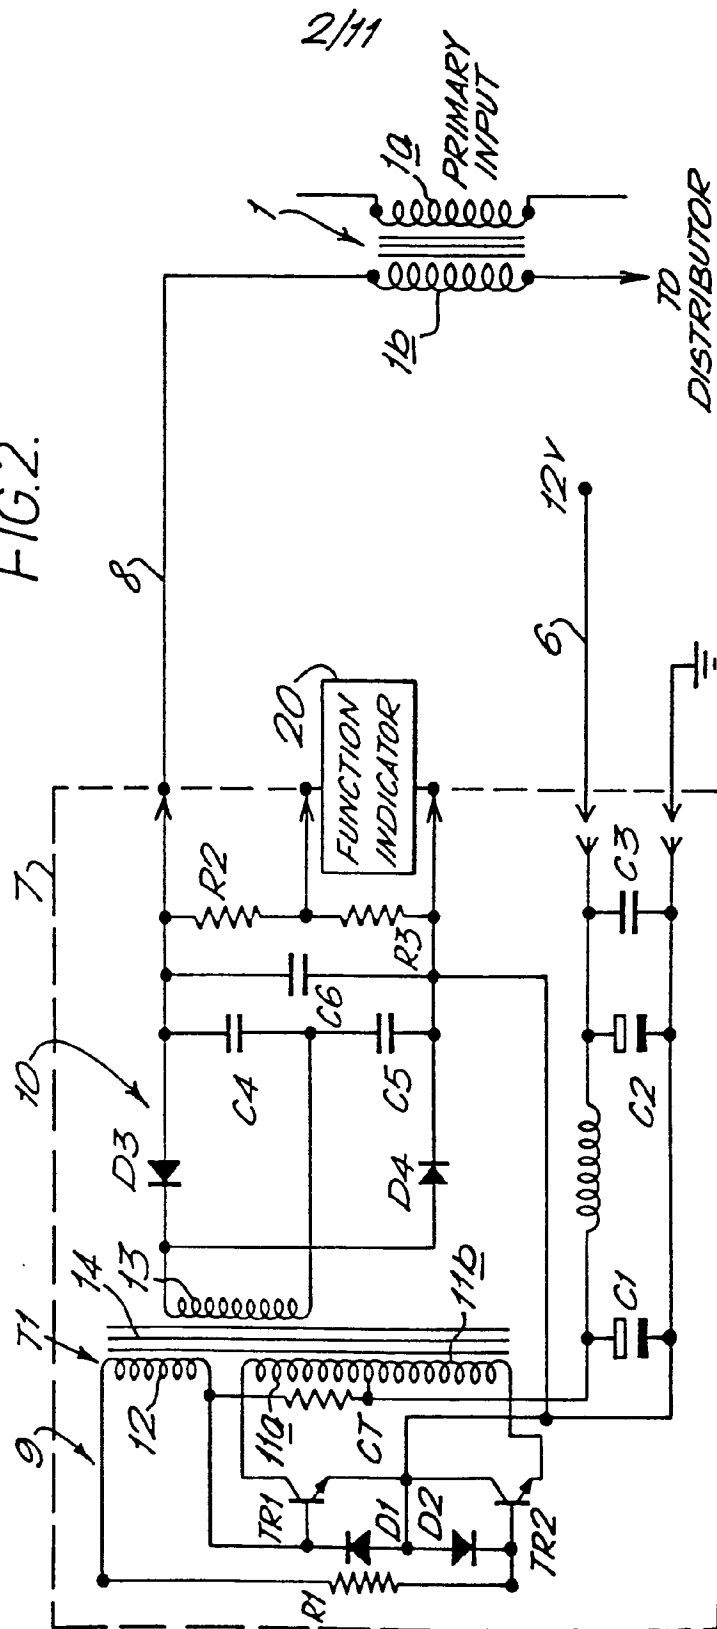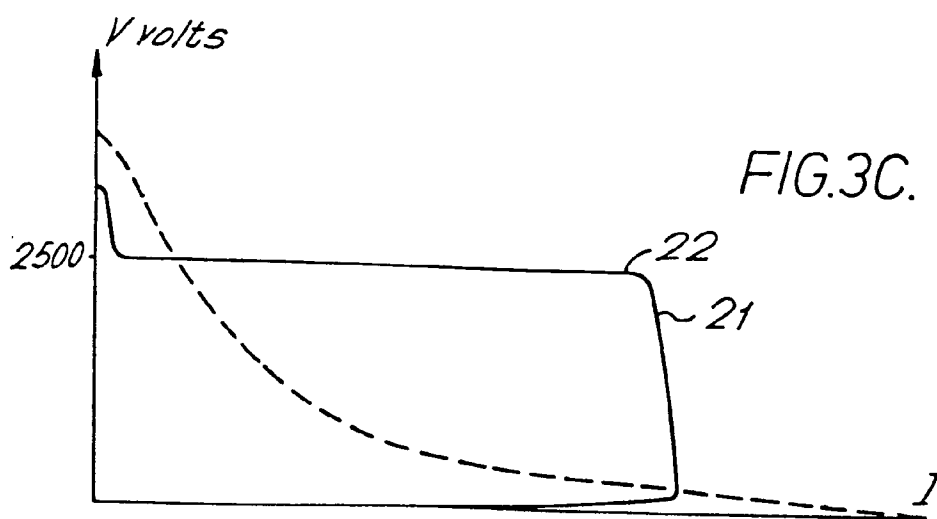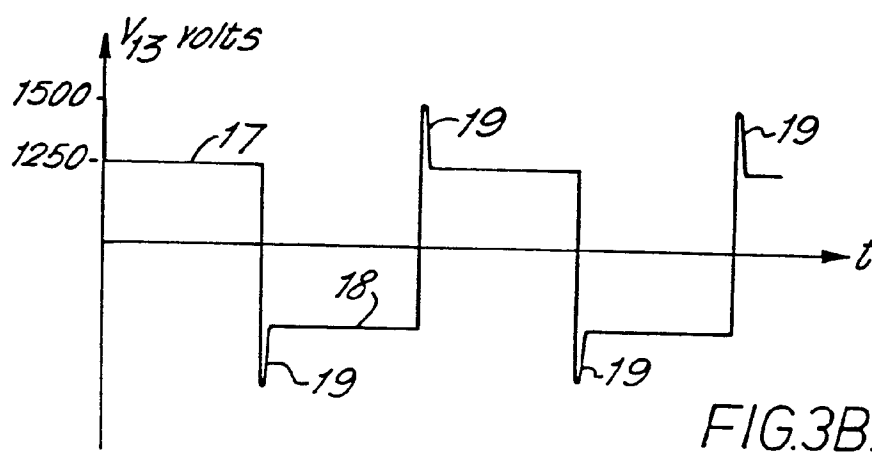


3/11

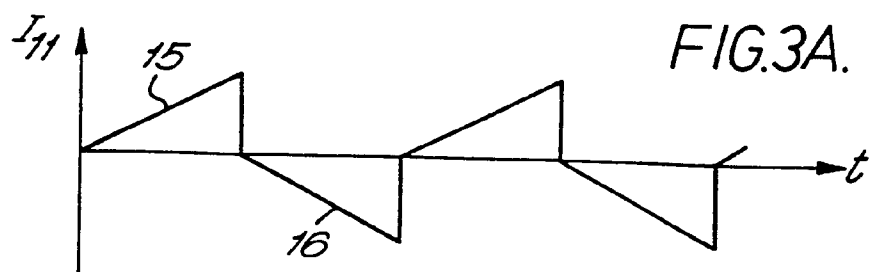

4/11

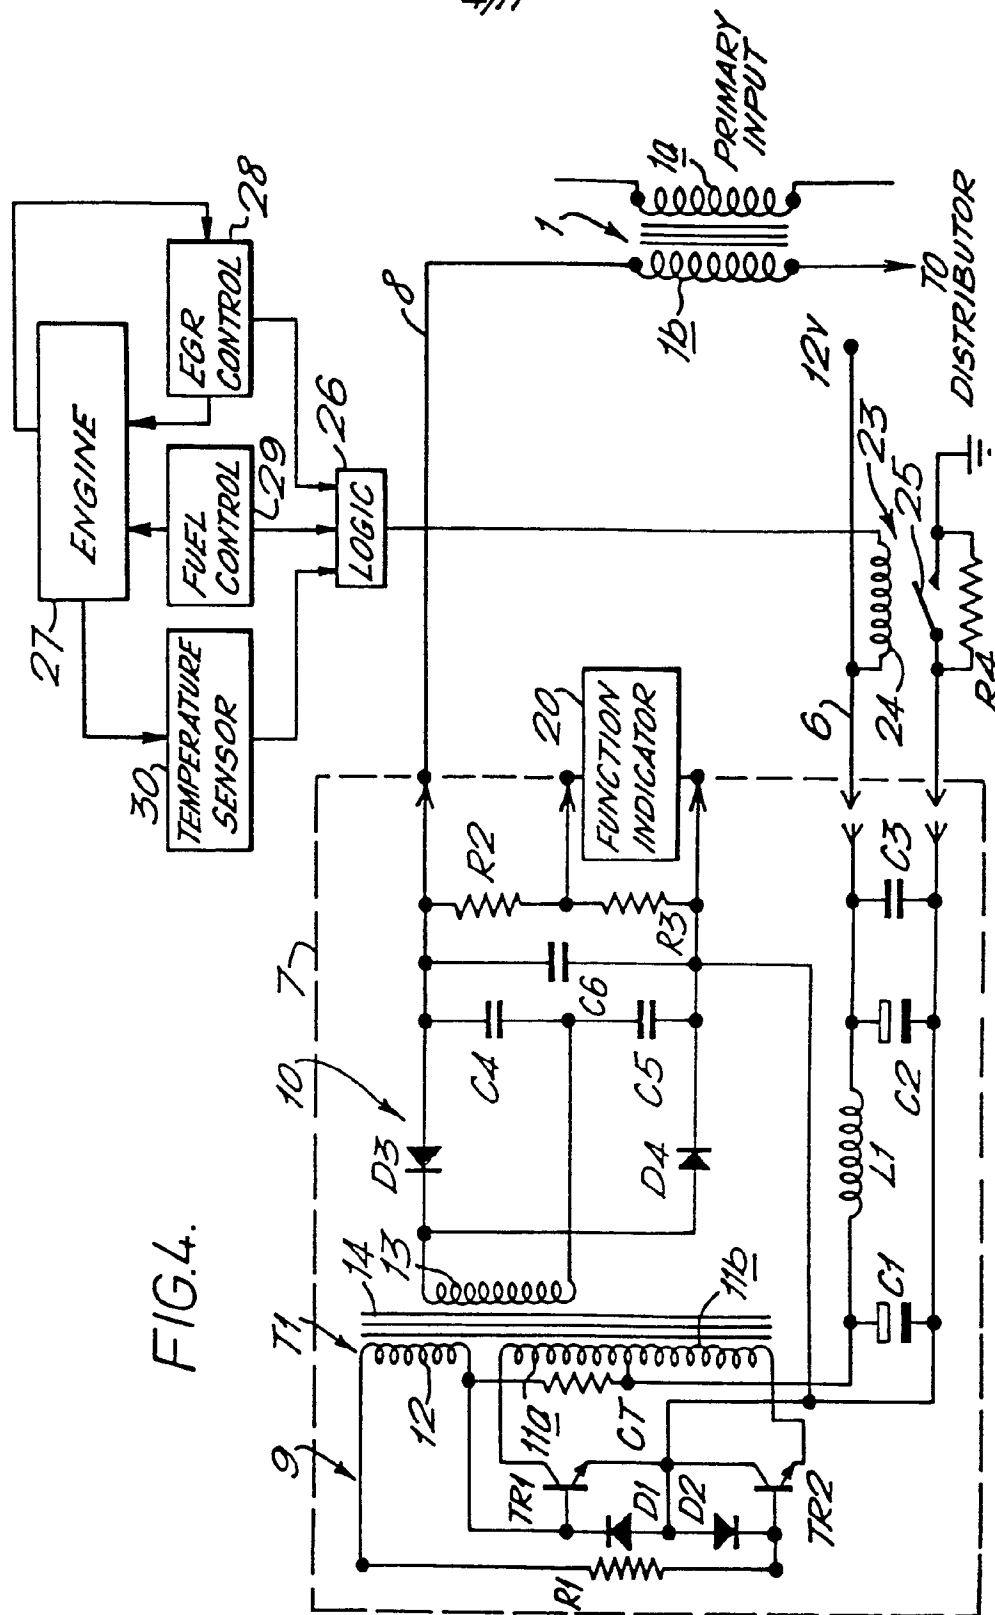

5/11

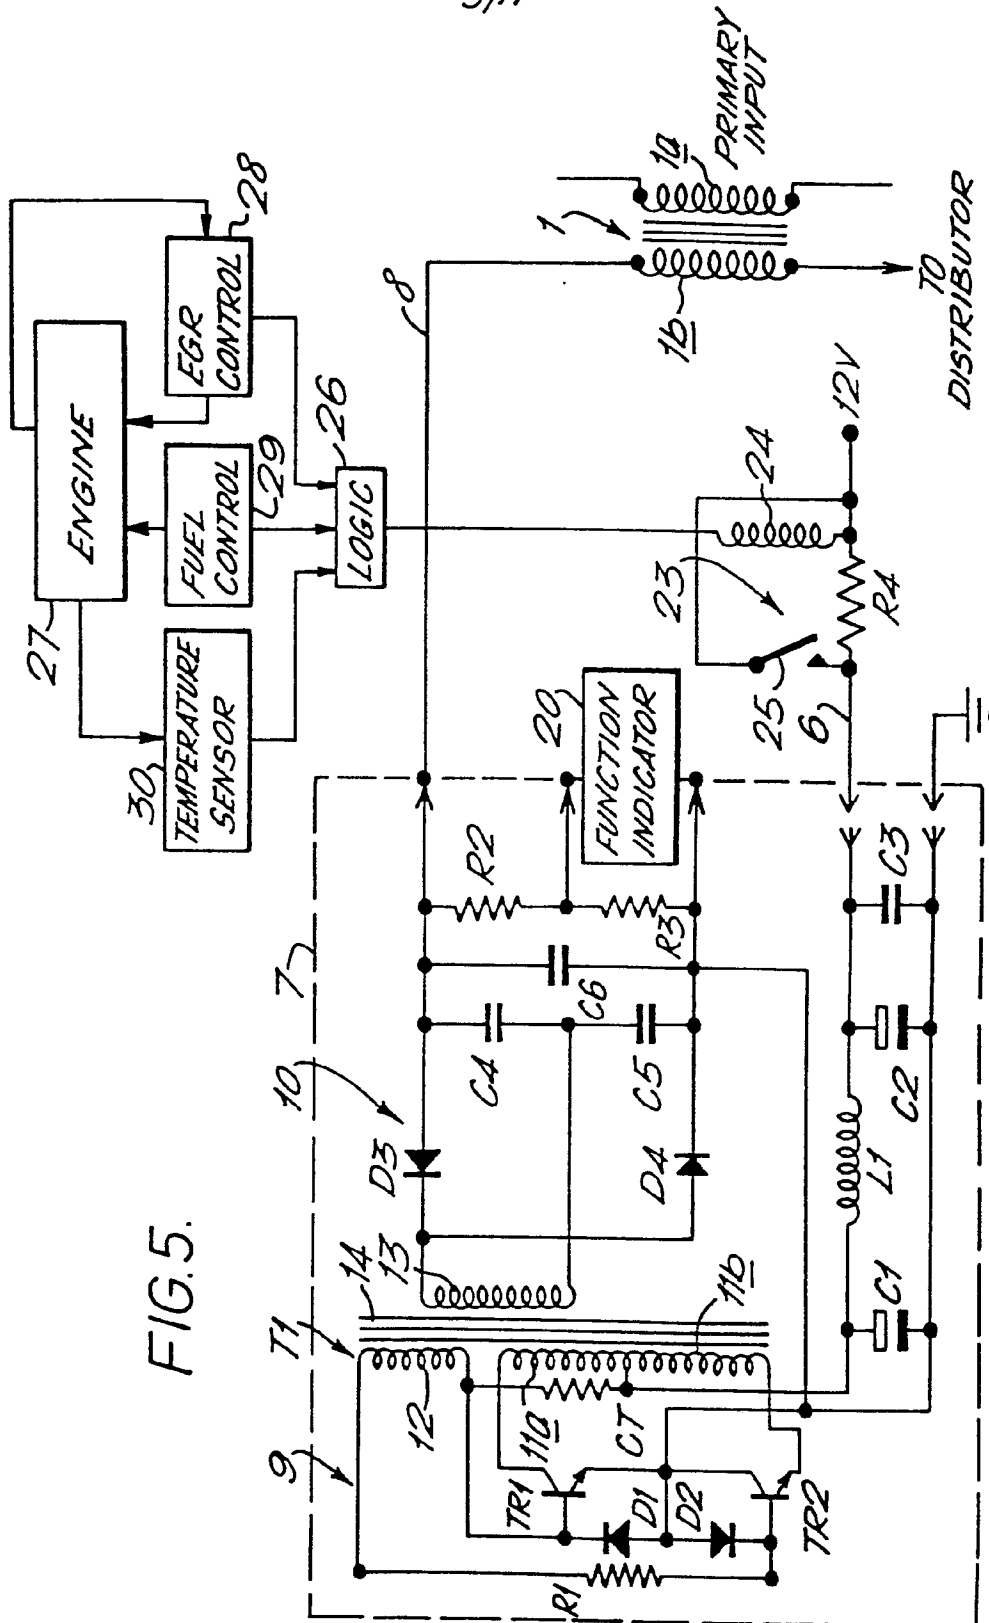

6/11

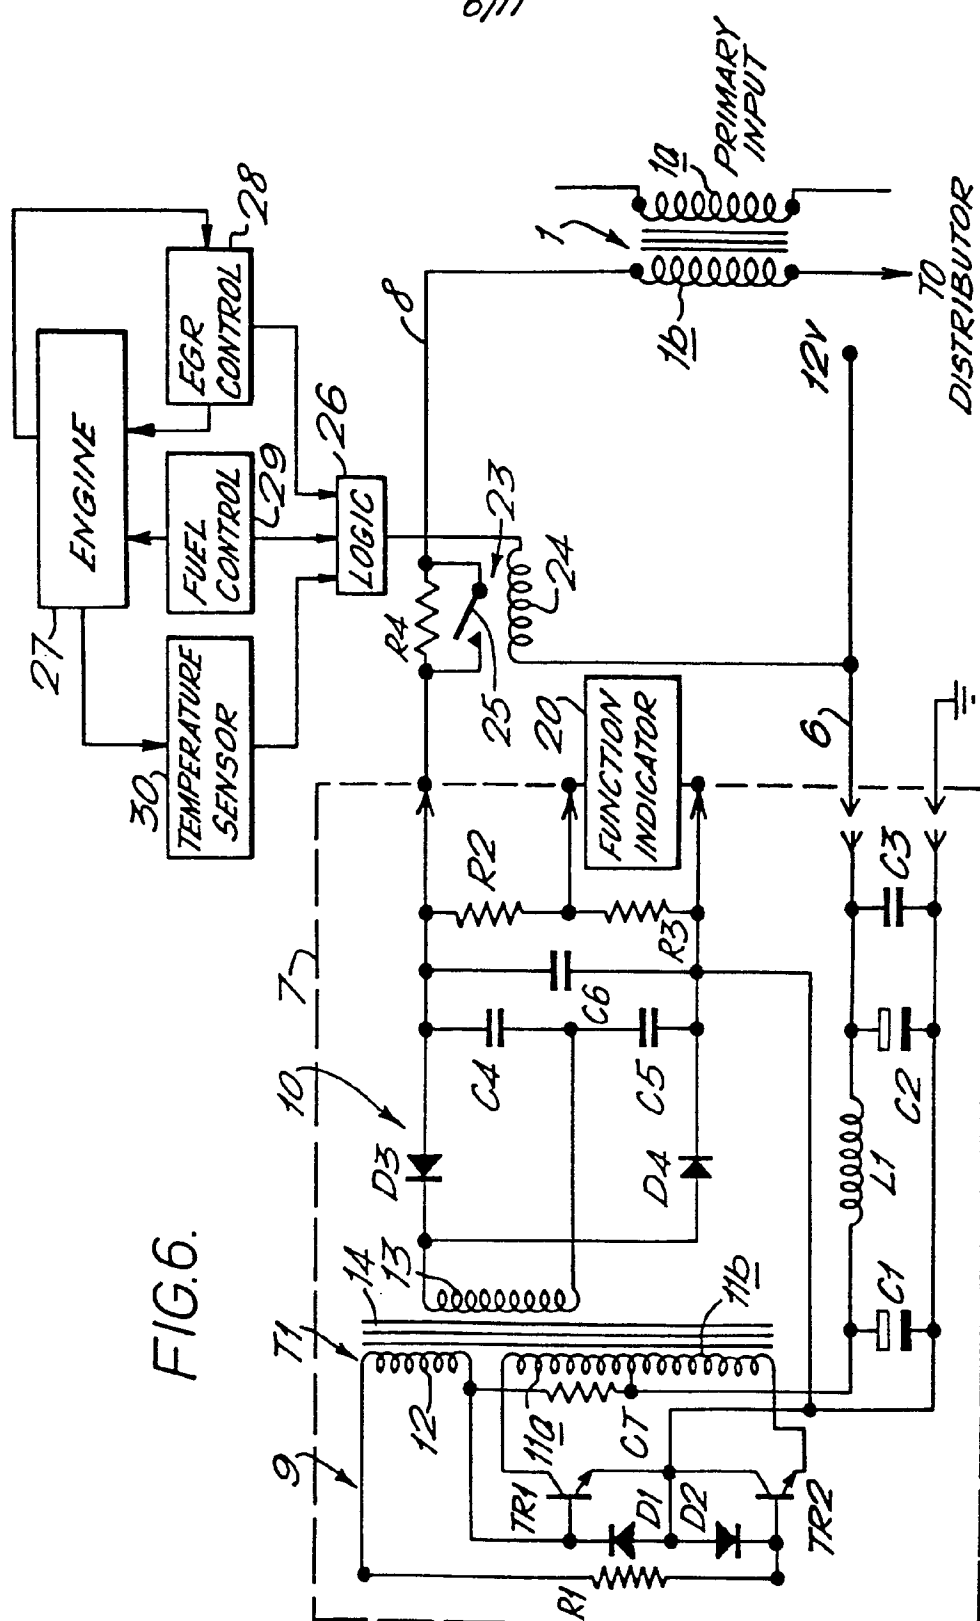


FIG. 6.

7/11

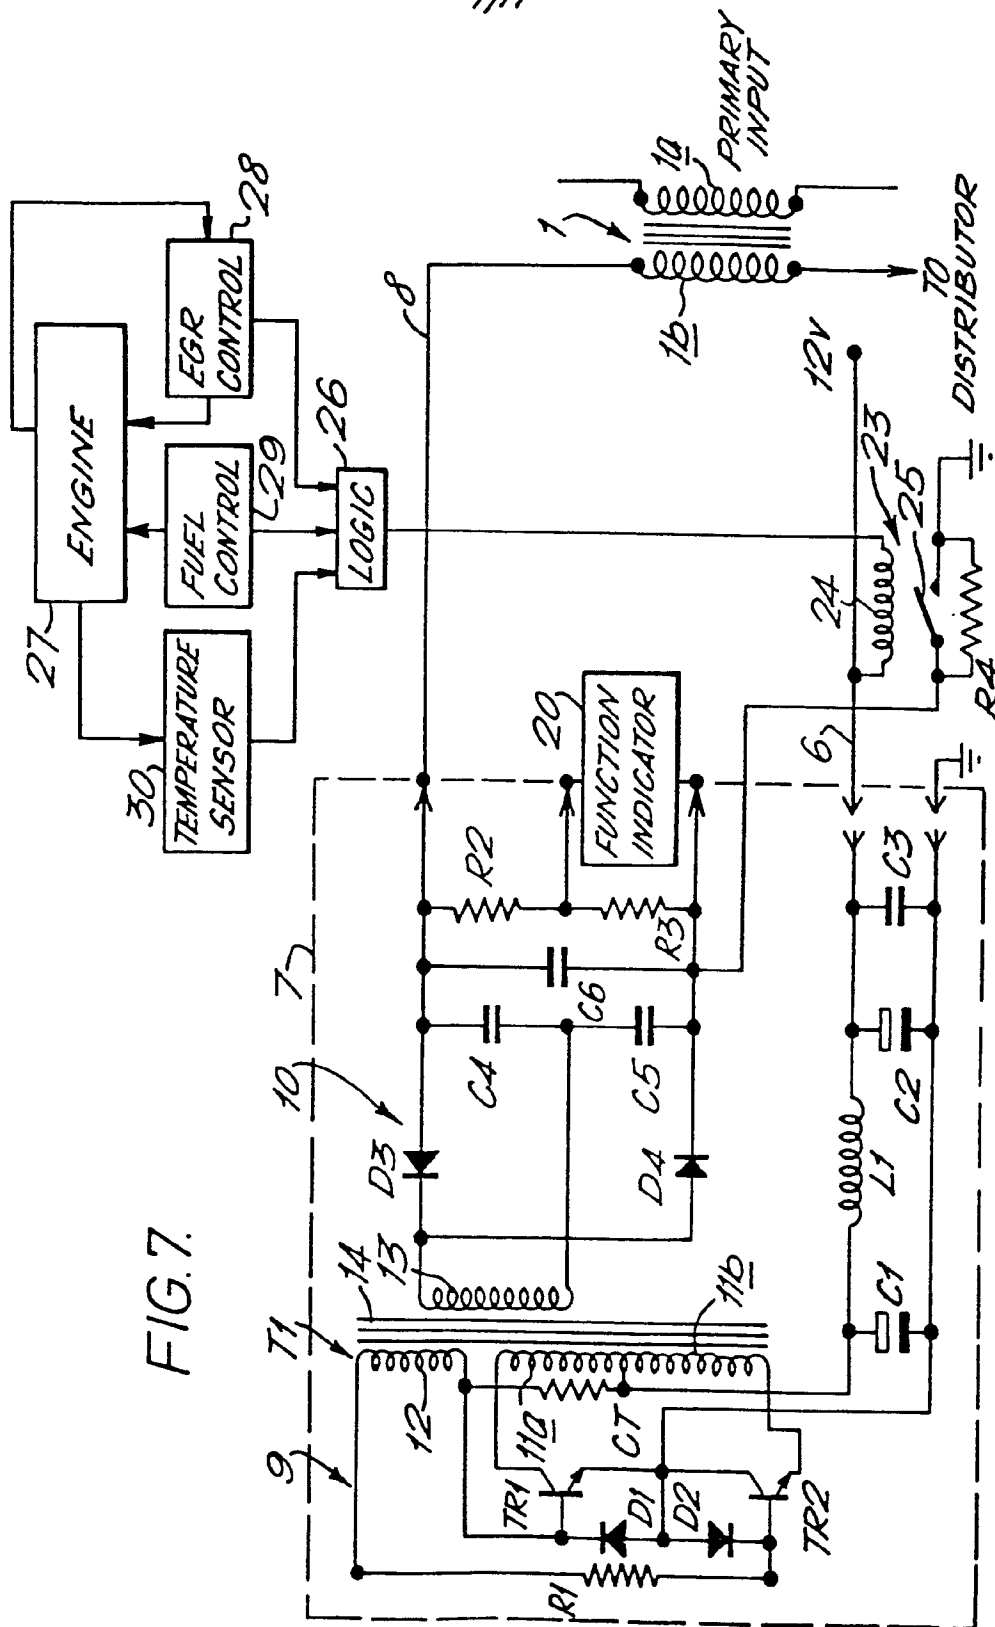


FIG. 8.


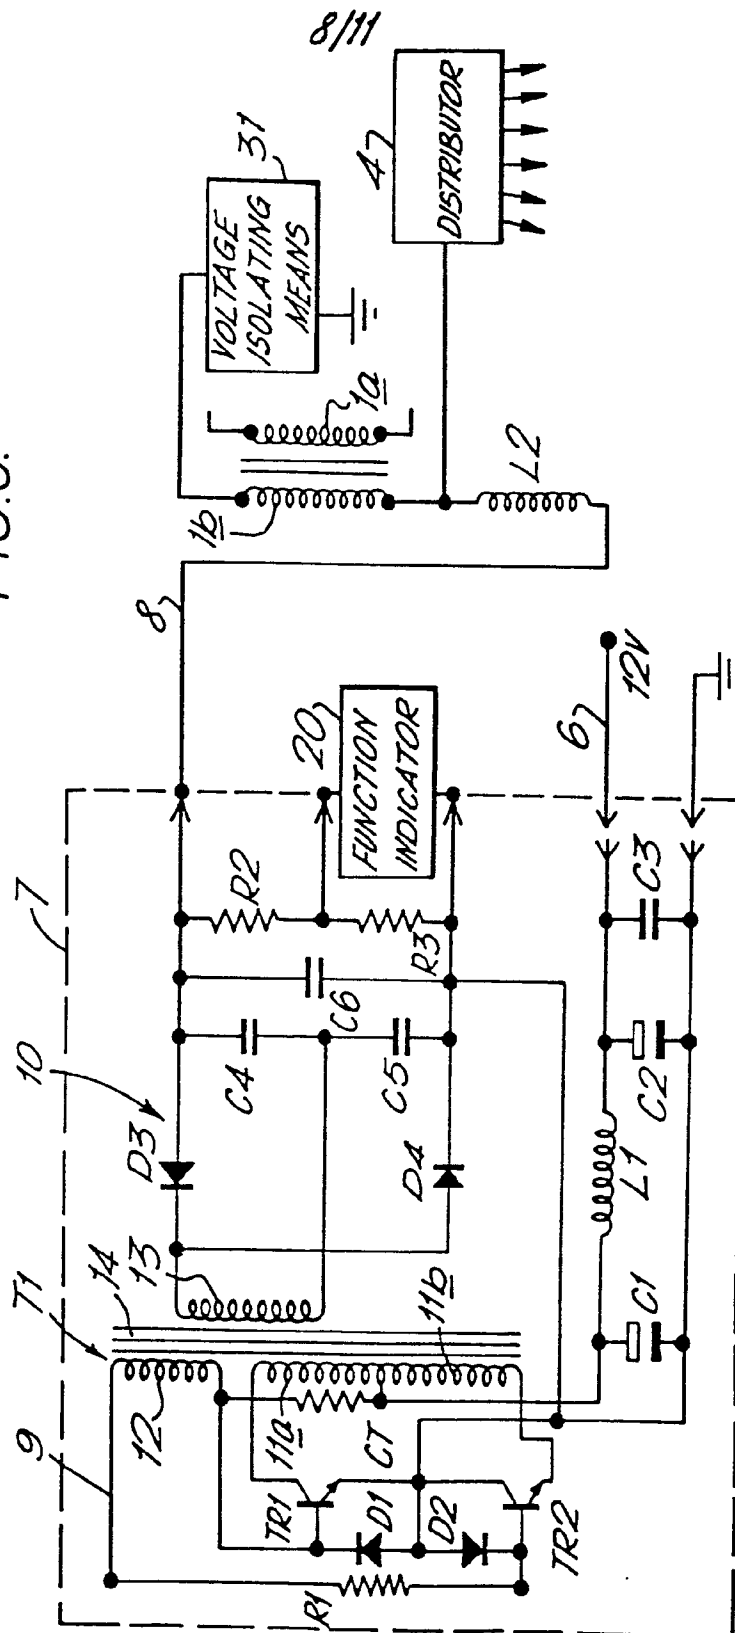


FIG. 9.

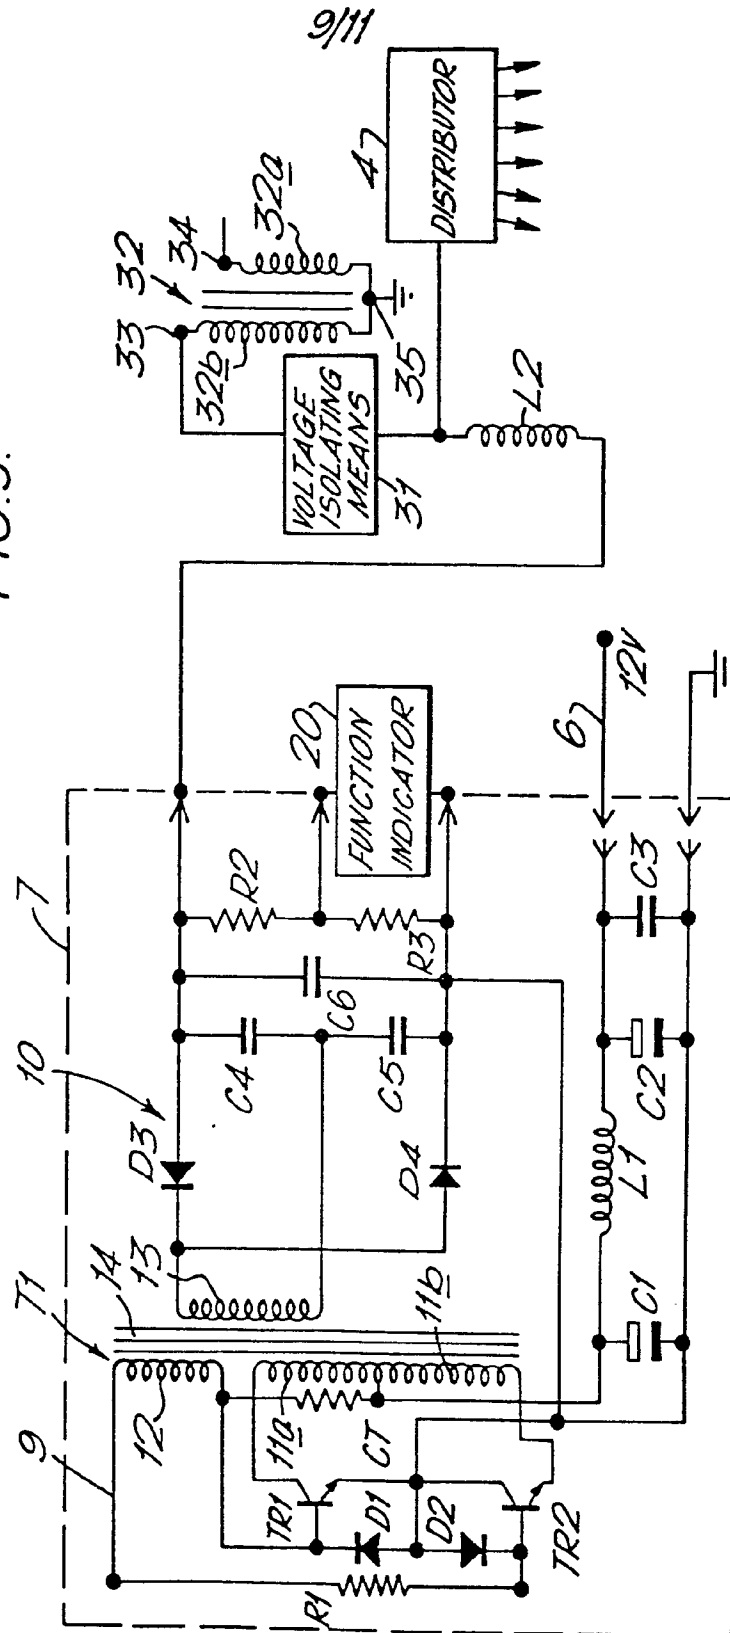

10/11

FIG.10.




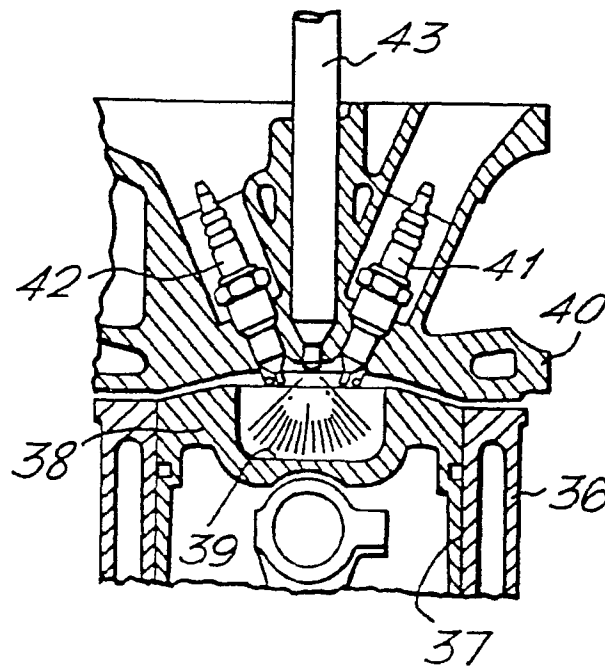


FIG.11.

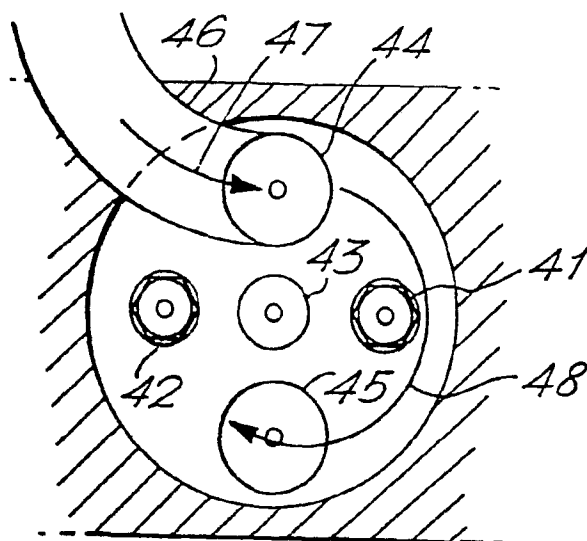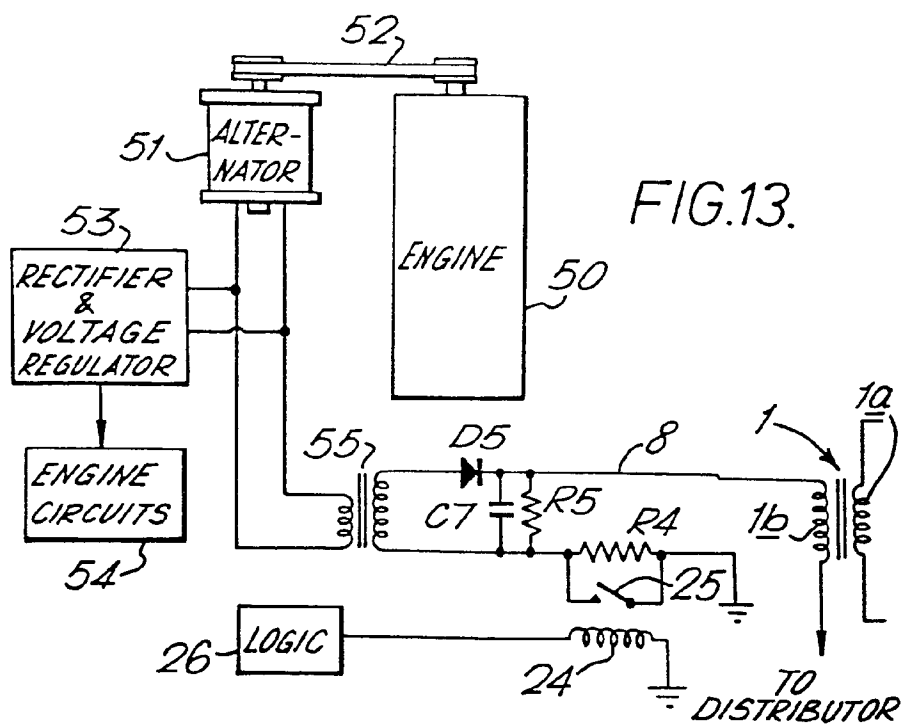

11/11

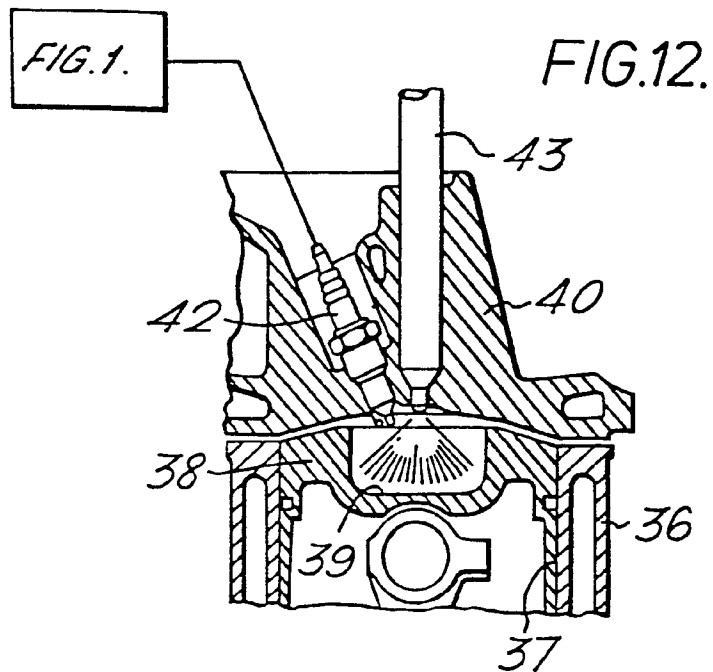

0028899



European Patent
Office

EUROPEAN SEARCH REPORT

Application number

EP 80 30 3805.8

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
X	EP - A1 - 0 001 354 (B.E. WAINWRIGHT) * the document in its entirety *	1,3,10, 14,18, 22-24, 29, 34-36	F 02 P 3/08 F 02 P 3/00
	FR - A - 2 149 929 (R. BOSCH GMBH) * the document in its entirety *	1,3,14, 18,22- 24,29, 34-36	
	US - A - 3 983 461 (R.J. JORDAN) * the document in its entirety *	1,2, 4-6	TECHNICAL FIELDS SEARCHED (Int. Cl. 3)
	US - A - 3 921 606 (R. HABERT) * the document in its entirety *	1	F 02 P 3/00 F 02 P 3/08
			CATEGORY OF CITED DOCUMENTS
			X: particularly relevant A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: conflicting application D: document cited in the application L: citation for other reasons
☒ The present search report has been drawn up for all claims			&: member of the same patent family, corresponding document
Place of search		Date of completion of the search	Examiner
Berlin		23-01-1981	BORRELLY