

**EUROPEAN PATENT APPLICATION**

Application number: **81200028.9**

Int. Cl.<sup>3</sup>: **B 21 B 39/00**  
// B21B45/02, B21B33/00,  
B21B1/18

Date of filing: **12.01.81**

Priority: **21.01.80 NL 8000356**

Applicant: **ESTEL HOOGOVENS B.V.**, Kesslerplein 2,  
IJmuiden (NL)

Date of publication of application: **29.07.81**  
Bulletin 81/30

Inventor: **Ferket, Florimond, Abelenlaan 15, Oudorp (NL)**  
Inventor: **Kuenen, Cornelis Anthonius, Junolaan 2,  
Heerhugowaard (NL)**


Designated Contracting States: **AT BE CH DE FR GB IT**  
**LI LU**

Representative: **van Buytene, Arie Jacobus et al, p/a**  
**Estel Hoogovens B.V. P.O.Box 10.000, NL-1970 CA**  
**IJmuiden (NL)**

**Method of rolling a length of metal bar or wire and apparatus for carrying out the method.**

At the end of a hot-rolling train a metal length (WS) (bar or wire) is passed through a final roll stand (W) and then through a cooling device (K). To keep the length under tension in the cooling device (K), it is pulled frictionally by an opposed pair of bridle rolls (R1, R2) which are driven, while the length is passing, with a power input which would in the absence of the

length, be sufficient to cause a peripheral speed of the bridle rolls (R1, R2) slightly higher than the rolling speed of the length. To prevent the leading end of the metal length being twisted or otherwise damaged on entry into the bridle rolls, the bridle rolls (R1, R2) are driven at a slightly higher peripheral speed immediately prior to the entry of the metal length.

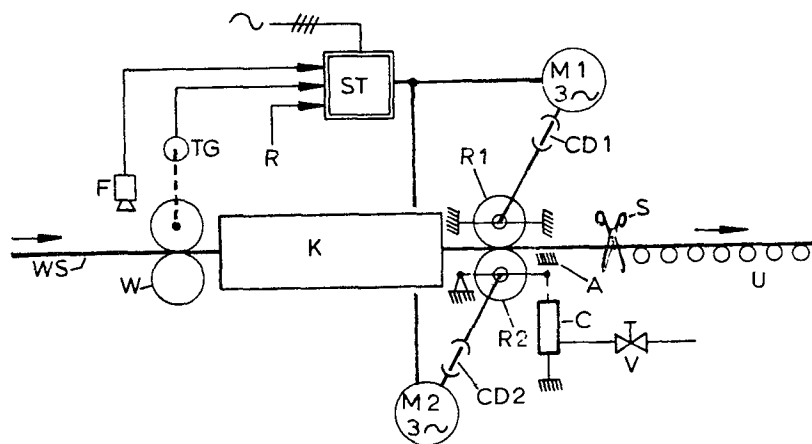

ACTORUM AG

## 1.

"Method of rolling a length of metal bar or wire and  
apparatus for carrying out the method"

This invention relates to a method of rolling a  
5 length of metal bar or wire, especially hot-rolled bar or  
wire, and is particularly concerned with the steps  
necessary to keep such a metal length stretched at the  
end of rolling when it passes through a cooling device  
after the final roll stand. The invention also relates  
10 to apparatus for carrying out the method. For ease of  
description, the metal length will generally be called a  
bar in the following description, but is not limited  
thereto.

It is known to keep a "continuous" metal bar or  
15 wire, which is passing through a finishing roll stand and  
subsequently through a cooling device, stretched by means  
of a set of bridle rolls (also known as pinch rolls)  
located after the cooling device, between which the bar  
is frictionally gripped. Typically the bridle rolls are  
20 driven by independent identical motors with a rated  
peripheral velocity exceeding the finishing rolling speed  
of the bar. See Dutch patent 154129, which discloses use  
of an adjustable parallelogram-shaped yoke in a plane at  
right angles to the passage of the bar, the yoke being  
25 supported by two fixed pivots above and below the rolls.

The rolls turn in bearings in the upstanding sides of the parallelogram-shaped yoke. The motors are fitted in the said upstanding sides.

In practice, it has been found that, possibly  
5 owing to the large inertial mass involved, the first part of the bar becomes twisted or buckled in the cooling device. This is apparently caused by some difficulty of entry of the leading end of the bar into the bridle rolls, or some slippage in the grip of the bridle rolls,  
10 and occurs notwithstanding the slightly higher speed of the bridle rolls at entry of the bar. This higher speed arises from the power input to the motors of the rolls which is selected so that the rolls exert a drawing on the bar to keep it under tension. Bar ends damaged in  
15 this way have to be scrapped, which is costly.

The object of the present invention is to avoid this disadvantage.

According to the invention, the power input to the bridle rolls is temporarily increased, so that,  
20 immediately before entry of the bar into the bridle rolls, their peripheral speed is greater than the peripheral speed corresponding to the normal power input used during passage of the bar. For instance the power input is briefly increased as the leading end of the bar  
25 approaches, so that the bridle rolls are rotating at the

## 3.

higher speed at the moment of entry. Thereafter, or even before the moment of entry, the power input is reduced to the level used while the bar is passing. It appears that the extra peripheral speed of the bridle rolls causes a  
5 considerably greater tensile force on the bar as the bar begins to pass through them, and this greater force virtually eliminates twisting or buckling of the head of the bar.

Preferably the bridle rolls are driven  
10 independently by permanently fitted motors by means of Cardan shafts, but a single drive to the two rolls is possible.

In order to obtain a good grip on the bar material, the gap between the bridle rolls before entry  
15 of the bar should preferably be about 2 mm smaller than the thickness of the bar concerned.

Since a certain amount of time is required to increase the speed of the bridle to the higher level, it is preferred that the approach of the leading end of the  
20 hot-rolled bar towards the finishing roll stand is observed optically, to provide an electric signal which is used to cause the temporary increase in power input.

An embodiment of the invention will now be described by way of example and with reference to the  
25 accompanying drawing.

In the drawing,

Fig. 1 is a diagrammatic side view of a finishing roll stand, cooling device, bridle rolls, shear and run-out table, to which the method according to the invention  
5 is applied;

Fig. 2 is a double graph to clarify the operation of the method.

In Fig. 1 is shown part of a mill train for the hot-rolling of bar and wire material WS. The finishing  
10 roll stand W is followed by a cooling device K, and by a pair of bridle rolls R1 and R2, between which the "continuous" bar is frictionally gripped, relatively lightly. S indicates a shear and U the run-out table or cooling bank for the material which is cut to measure by  
15 the shear.

The bridle rolls R1 and R2 are driven independently through Cardan shafts CD1 and CD2 by permanently fitted electric motors M1 and M2, which are supplied from a static frequency convertor ST. In one  
20 practical embodiment, the motors M1 and M2 are squirrel-cage rotor motors rated at 3.75 kVA each and the static frequency convertor has an output of 15 kVA with a yield of 90%. The convertor ST receives signals from a photo electric cell F which detects the presence of the hot bar  
25 material in the mill train before the finishing stand W,

the cell being located above the mill train before the stand W. The convertor also receives signals from a tachogenerator TG which determines the finishing rolling speed, being linked to the finishing stand W. Data are also entered, indicated by R in Fig. 1 relating to the diameter correlation and the drawing adjustment for the bar being rolled.

Fig. 1 shows, highly diagrammatically, that the upper bridle roll R1 is fixed while the bottom bridle roll R2 is movable since the frame in which the roll R2 is fitted can swing round a pivot located "upstream" with respect to the bar travel. An adjustable stop A determines the minimum gap between the two rolls R1 and R2. This gap is set at about 2 mm less than the thickness or diameter of the bar to be drawn. An air cylinder C, supplied from a compressed air network through a reducing valve V, normally presses the frame in which the roll R2 is fitted against the stop A (whose position is adjustable by means of a screw spindle). As soon as the bar arrives between the rolls R1 and R2, the frame leaves the stop and the air cylinder C ensures that the bar is spring gripped between the two rolls.

The gripping surface of the two rolls is profiled, e.g. by applying a pattern of recesses or holes and then hardened. When changing the rolls, e.g. because of wear

or to change to another diameter of roll, the top roll R1 can be placed in the correct position in the rolling line by adjusting the frame carrying it.

Fig. 2 shows how a temporary accumulation of energy can be used to keep the bar stretched when entering the bridle rolls. Time is indicated along the horizontal axis. In the upper graph, the rotational speed  $n(\text{rpm})$  of the bridle rolls is given on the vertical axis, and in the lower graph the control signal to the bridle roll motors is shown on the vertical axis. This control signal indicates the period of time for which a higher power input is applied. Power input can be accurately controlled by means of the static frequency convertor ST, using frequency control of the motors.

Fig. 2 thus shows that there is a temporary increase in the power input over a time period  $t_s$  which leads (see the upper graph) to an acceleration of the bridle rolls to a higher speed, this acceleration occurring over a time period of  $t_v$ . The initial speed of the bridle rolls (given as 800 rpm in this example) is the idling speed of the rolls at the normal power input which is used when the bar is actually passing; this idling speed is 5 to 10% higher than the actual rolling speed of the bar. When the bar is passing, the bridle rolls must of course run at a peripheral speed equal to

## 7.

the rolling speed of the final roll stand W, as indicated by the slightly lower speed (e.g. 760 rpm) at the right hand side of Fig. 2.

As mentioned above, when the approach of the  
5 leading end of the bar is signalled, the power input to the bridle roll motors is increased, leading to a rise in speed of about 25% in this case (to about 1000 rpm). This rise is synchronised so that the leading end of the bar arrives after the higher speed is reached. In this  
10 case, the moment of arrival of the bar corresponds with the end of the time period  $t_s$  and is followed by the decline in speed to the level corresponding to the final rolling speed. It is this initial tension applied to the bar which minimises the damage to the head of the bar.  
15 This leads to a considerable reduction in wastage of material.

A 25% increase in speed is indicated above (to 1000 from 800). Suitably, this increase is in the range 15% to 35%.

20 The time  $t_s$  during which the control signal is present is not fixed, nor is the time  $t_v$  over which the rotating parts are speeded up. Both depend on, inter alia the speed of the bar material. The time  $t_s$  is adjusted in dependence on the roll speed (via TG)  
25 automatically in ST.



There is a linear correlation between the supply frequency and the rotational speed  $n$  of the squirrel-cage rotor motor under zero load. As the frequency is briefly increased, the speed of the drive motors M1 and M2 rises  
5 from, in this example, 800 to 1000 rpm. As a result, more rotational energy is accumulated in the rotating parts, i.e. the rotors of the motors M1 and M2, the Cardan shafts CD1 and CD2 and the rolls R1 and R2.

If the photo-electric cell F is located at a  
10 distance of about 7 metres from the bridle rolls R1, R2, and the speed of the bar is about 14 metres per second, 0.5 seconds is available to increase the speed. On entering the rolls R1, R2, the head of the bar will be subjected to a considerable tensile force between the  
15 rolls owing to the difference in the speed between these rolls and the stand W, so that the head of the bar will remain straight.

Because also the gap between the rolls at the time of entry of the bar is about 2 mm less than the diameter  
20 of the bar, there is less slip on entry between the bridle rolls and the bar material, so that there is an additional advantage that the bridle rolls last longer.

CLAIMS

1. Method of rolling a length of metal bar or wire wherein the metal length (WS) is passed through a roll stand (W) and subsequently through at least one cooling device (K) and is maintained under tension in the cooling device (K) by means of an opposed pair of driven bridle rolls (R1,R2), located after the cooling device, which frictionally grip the metal length between them and which are driven, during passage of the metal length, with a power input which, if the metal length were absent would cause the bridle rolls to rotate at a first peripheral speed of the bridle rolls higher than the rolling speed of the metal length in the said roll stand (W),
- characterized in that:
- at the moment when the leading end of the metal length reaches the bridle rolls, the bridle rolls are rotating at a second peripheral speed higher than said first peripheral speed.
2. A method according to claim 1 wherein the bridle rolls are normally run, during passage of a metal length and in the intervals between the passage of metal lengths, at the said power input corresponding to the said first peripheral speed, and upon approach of the leading end of a metal length the power input is transitorily increased in order to cause the bridle roll speed to rise to said

second peripheral speed.



3. A method according to claim 1 or claim 2 wherein the two bridle rolls (R1,R2) are driven separately by respective electric motors, via Cardan shafts.

5 4. A method according to any one of claims 1 to 3 wherein before insertion of the metal length between the bridle rolls, there is a gap between the bridle rolls with a width of about 2 mm less than the thickness of the metal length.

10 5. A method according to any one of the preceding claims wherein the approach of the leading end of the metal length to the bridle rolls is detected by optical means (F) before the said roll stand (W), the output signal of the optical means being used to actuate a  
15 rise in the speed of the bridle rolls to said second peripheral speed.

6. Apparatus for carrying out the method of claim 4 having a roll stand (W), a cooling device (K), bridle rolls (R1,R2), drive motors (M1,M2) for the bridle rolls  
20 (R1,R2) in the form of squirrel-cage rotor motors supplied by a static frequency convertor (ST), a photo-electric cell (F) arranged to detect the presence of a hot metal length (WS) in front of the roll stand (W), and a tachogenerator (TG) linked to the roll stand (W) to  
25 determine the rolling speed therein of the metal length,

the output signals from the cell (F) and tachogenerator (TG) being fed to the frequency convertor (ST) for control of the motors (M1,M2) in dependence on those signals.

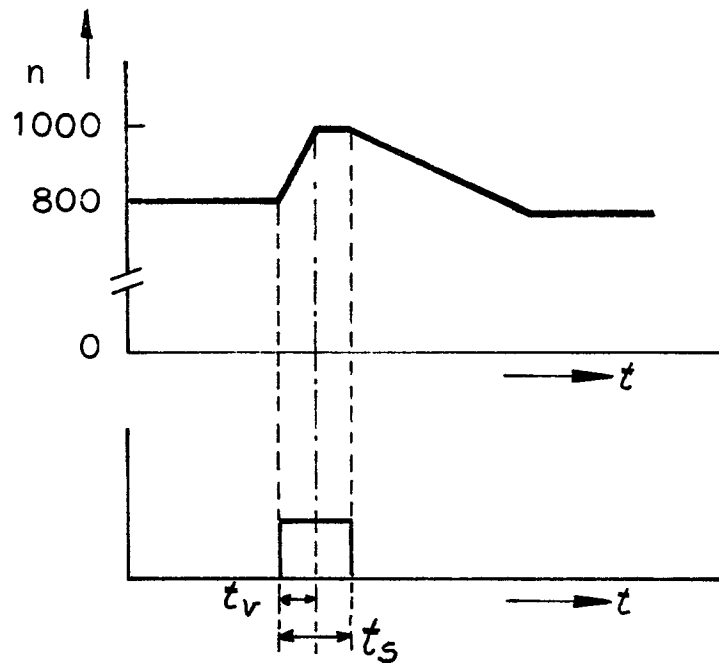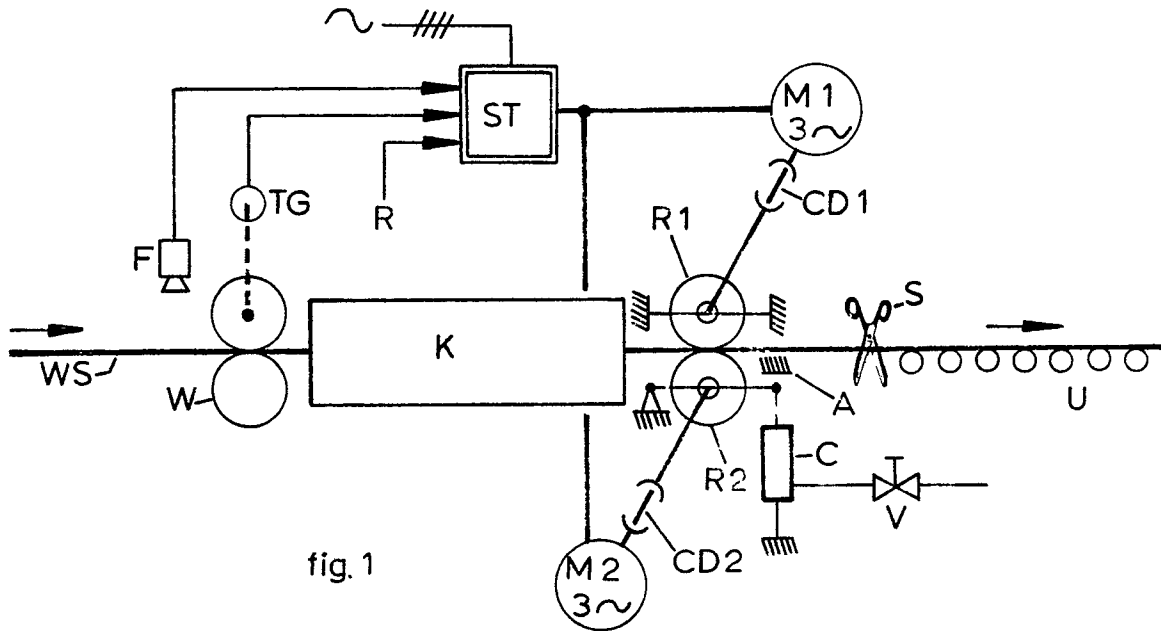



| DOCUMENTS CONSIDERED TO BE RELEVANT                                                            |                                                                                      |                       | CLASSIFICATION OF THE APPLICATION (Int. Cl. <sup>3</sup> )                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Category                                                                                       | Citation of document with indication, where appropriate, of relevant passages        | Relevant to claim     |                                                                                                                                                                                                                                                                                                           |
| D                                                                                              | NL - C - 154 129 (HOOGOEVENS)<br>& NL - A - 74 14028                                 | 1                     | B 21 B 39/00//<br>B 21 B 45/02<br>33/00<br>1/18                                                                                                                                                                                                                                                           |
| A                                                                                              | US - A - 2 756 169 (CORSON)<br>* Column 3, lines 18-37; figure 1 *                   | 1                     |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | --                                                                                   |                       |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | FR - A - 2 004 405 (SCHLOEMANN)<br>* Claims 1-4 *                                    | 1,2,5                 |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | --                                                                                   |                       |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | FR - A - 2 389 436 (SECIM)<br>* Page 3, lines 5-16; page 6, lines 16-19; figure 1 *  | 1,3                   | TECHNICAL FIELDS SEARCHED (Int. Cl. <sup>3</sup> )<br><br>B 21 B                                                                                                                                                                                                                                          |
|                                                                                                | --                                                                                   |                       |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | BE - A - 846 615 (C.R.M.)<br>* Claims 1-3 *                                          | 1,4                   |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | --                                                                                   |                       |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | GB - A - 1 162 859 (DEMAG)<br>* Page 2, lines 112-130; page 3, lines 1-39; claim 1 * | 1,5                   |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | --                                                                                   |                       |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | GB - A - 932 587 (SOUTH AFRICAN IRON)<br>* Claims 1,7,13; figure 1 *                 | 5                     | CATEGORY OF CITED DOCUMENTS<br>X: particularly relevant<br>A: technological background<br>O: non-written disclosure<br>P: intermediate document<br>T: theory or principle underlying the invention<br>E: conflicting application<br>D: document cited in the application<br>L: citation for other reasons |
|                                                                                                | --                                                                                   |                       |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | DE - C - 967 071 (SCHLOEMANN)<br>* Page 2, lines 84-119 *                            | 1,5,6                 |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | --                                                                                   |                       |                                                                                                                                                                                                                                                                                                           |
|                                                                                                | ./.                                                                                  |                       |                                                                                                                                                                                                                                                                                                           |
| <input checked="" type="checkbox"/> The present search report has been drawn up for all claims |                                                                                      |                       | &: member of the same patent family, corresponding document                                                                                                                                                                                                                                               |
| Place of search<br>The Hague                                                                   | Date of completion of the search<br>17-03-1981                                       | Examiner<br>VERMEESCH |                                                                                                                                                                                                                                                                                                           |



European Patent  
Office

# EUROPEAN SEARCH REPORT

0032766

Application number

EP 81 20 0028

-2-

| DOCUMENTS CONSIDERED TO BE RELEVANT |                                                                                                                                                            |                   | CLASSIFICATION OF THE APPLICATION (Int. Cl. <sup>3</sup> ) |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------------------------------------|
| Category                            | Citation of document with indication, where appropriate, of relevant passages                                                                              | Relevant to claim |                                                            |
| A                                   | <u>DE - A - 2 539 422</u> (BRITISH STEEL)<br>* Claims 1,8,10; figure 1 *<br><br>--                                                                         |                   |                                                            |
| A                                   | METALLURGIST, vol. 20, no. 5/6,<br>May/June 1976, pages 416-417<br>New York, U.S.A.<br>V.E. BELENKOV: "Auxiliary feeder<br>for a wire coiler"<br><br>----- | 1                 |                                                            |
|                                     |                                                                                                                                                            |                   | TECHNICAL FIELDS<br>SEARCHED (Int. Cl. <sup>3</sup> )      |
|                                     |                                                                                                                                                            |                   |                                                            |
|                                     |                                                                                                                                                            |                   |                                                            |