

12 **EUROPEAN PATENT APPLICATION**

21 Application number: 81305438.4

51 Int. Cl.³: **C 11 D 1/645**
D 06 M 13/46

22 Date of filing: 17.11.81

30 Priority: 18.11.80 US 207862

43 Date of publication of application:
26.05.82 Bulletin 82/21

84 Designated Contracting States:
AT BE CH DE FR GB IT LI NL SE

71 Applicant: **THE PROCTER & GAMBLE COMPANY**
301 East Sixth Street
Cincinnati Ohio 45202(US)

72 Inventor: **Burns, Michael Eugene**
9248 Sunderland Way
West Chester Ohio 45069(US)

74 Representative: **Brooks, Maxim Courtney et al,**
Procter & Gamble (NTC) Limited Whitley Road
Longbenton
Newcastle-upon-Tyne NE12 9TS(GB)

54 **Concentrated fabric softening compositions.**

57 An aqueous concentrated cationic fabric softening composition wherein the cationic softener system comprises a mixture of a mono nitrogen quaternary ammonium salt, a di(2-amidoethyl)methyl quaternary ammonium salt and an imidazolinium salt, the said cationic system having an Iodine Value of at least 4.2.

CONCENTRATED FABRIC SOFTENING COMPOSITIONS

This invention relates to fabric softening compositions and, in particular, to compositions in aqueous medium which contain a relatively high proportion of cationic fabric softening ingredients.

5 Conventional rinse-added fabric softening compositions contain fabric softening agents which are substantially water-insoluble cationic materials usually having two long alkyl chains. Typical of such materials are distearyl dimethyl ammonium chloride and imidazo-
10 linium compounds substituted with two stearyl groups. These materials are normally prepared in the form of an aqueous dispersion or emulsion, and it is generally not possible to prepare such aqueous dispersions with more than about 6% of cationic materials without taking
15 special precautions to ensure acceptable viscosity and stability characteristics. Indeed, with cationic levels in excess of about 8% the problems of physical instability and high viscosity become, in the case of
20 conventional fabric softening products, almost intractable. The formulation of fabric softener compositions with low levels of the active softener ingredients adds substantially to distribution and packaging costs.

In addition to shipping and packaging economy, another advantage of a more concentrated fabric softening composition is that it permits the consumer to exercise choice in the type of performance desired, in that the concentrated product can either be used as such or can be diluted to a conventional concentration before use. This opens up the possibility of supplying the concentrated fabric softening composition in a more economically packaged form intended for making up by the consumer into a conventional bottle.

The problem of preparing fabric softening compositions in concentrated form suitable for consumer use has already been addressed in the art, but the various solutions proposed have not been entirely satisfactory. U.S. Pat. No. 3,681,241, Rudy, issued August 1, 1972, utilizes a combination of quaternary ammonium softener, saturated imidazolinium softener, unsaturated imidazolinium softener and ionizable salts to formulate concentrated softeners, but the maximum concentration achieved in that patent is only 13%. The use of certain special processing techniques for reducing viscosity has also been suggested (for example, in U.S. Pat. No. 3,954,634, Monson, issued May 4, 1976) but again this does not provide a complete and satisfactory solution, and it is not an easy matter to adopt this type of process on a commercial scale.

In U.S. Pat. No. 4,155,855, Goffinet et al., issued May 22, 1979, concentrated fabric softeners are disclosed which comprise three active softening ingredients, one of which is a highly soluble cationic fabric substantive agent. While such compositions do allow a high concentration of active ingredient, their overall softening performance is less cost effective than is the case with compositions containing predominantly a water-insoluble cationic softener. In U.S. Pat. No. 4,149,978, Goffinet, issued April 17, 1979, mixtures of

cationic softener and paraffinic materials are proposed in a certain ratio which can allow the preparation of concentrated softening compositions when relatively high proportions of paraffinic materials are employed.

5 Paraffins are not essential components of the compositions of the present invention and are preferably absent therefrom. Dutch Patent Application No. 6706178 relates to viscosity control in fabric softening compositions with up to 12% of cationic softener, and suggests
10 the use of low molecular weight hydrocarbons for this purpose. British Patent No. 1,538,094, Hoechst, published January 17, 1979, discloses a complex softener/disinfectant composition in which a long-chain fatty alcohol used at a relatively low ratio of cationic
15 softener to alcohol is suggested as a solubilization aid. European Patent Application 0013780, published August 6, 1980, discloses concentrated aqueous fabric softener compositions comprising a cationic softener and a viscosity control agent selected from the group
20 consisting of hydrocarbons, fatty acids, fatty acid esters and fatty alcohols. European Patent Application 0018039, published October 29, 1980, discloses concentrated aqueous fabric softening compositions comprising an insoluble cationic softener, a water-soluble nonionic
25 or cationic surfactant and a hydrophobic adjunct selected from C_{12} to C_{20} paraffins and esters of C_{12} to C_{24} fatty acids and C_1 to C_8 fatty alcohols. Water-insoluble fatty nonionic materials are not essential to the compositions herein and are preferably absent
30 therefrom.

The object of the present invention is to provide highly concentrated aqueous fabric softening compositions, based on cationic softener systems, which do not require substantial quantities of materials
35 other than the cationic softeners to ensure physical stability and acceptable viscosity.


SUMMARY OF THE INVENTION

The invention relates to highly concentrated aqueous liquid fabric softener compositions which comprise a mixture of specific types of cationic softeners and an ionizable salt, wherein the mixture of cationic softeners has an Iodine Value of at least about 4.2.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In accordance with the present invention it has been found that when certain cationic softeners are formulated within certain proportions, highly concentrated aqueous fabric softening compositions can be prepared which contain in the order of 15% to 22.5% cationic softener ingredients. Specifically, the present invention is directed to concentrated aqueous fabric softener compositions which are pourable at 40°F, the said compositions comprising:

- A. from about 2% to about 11% of a quaternary ammonium salt having the formula

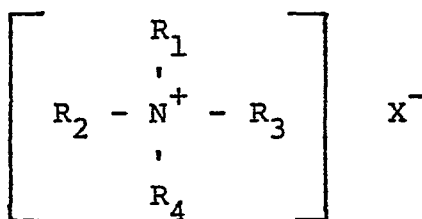


- wherein R_1 and R_2 can be the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl and alkenyl groups, R_3 and R_4 can be the same or different and are selected from the group consisting of C_1 to C_3 alkyl or $-(C_nH_{2n}O)_xH$ groups wherein n is 2 or 3, x is from 1 to about 3, and wherein X^- is an anion selected from halide, methylsulfate or ethylsulfate;
- B. from about 2% to about 14% of a di(2-amido-ethyl) methyl quaternary ammonium salt having


$$\left[R_5 - \overset{\overset{O}{\parallel}}{C} - \overset{\overset{H}{\mid}}{N} - C_2H_4 - \overset{\overset{R_7}{\mid}}{\underset{\underset{CH_3}{\mid}}{N^+}} - C_2H_4 - \overset{\overset{H}{\mid}}{N} - \overset{\overset{O}{\parallel}}{C} - R_6 \right] X^-$$

5

10

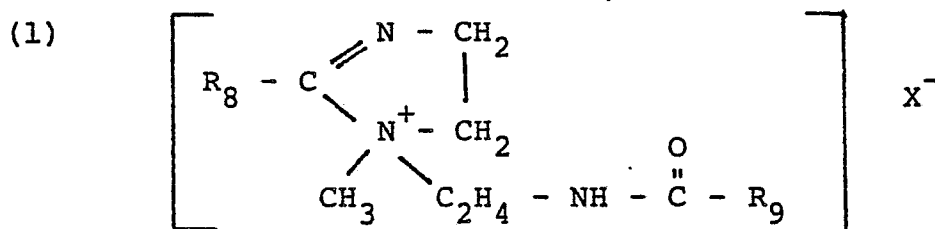


15

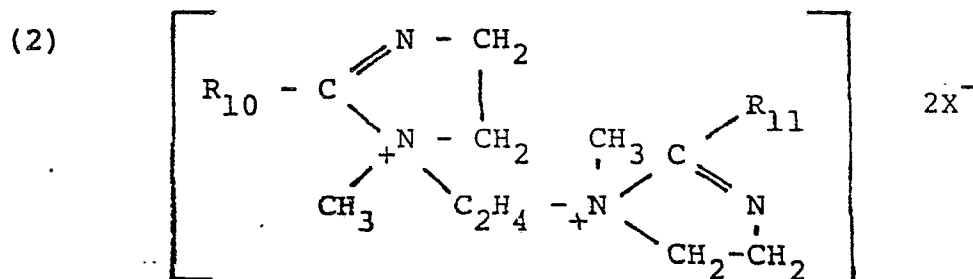

wherein R_{10} and R_{11} can be the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl and alkenyl and X^- is halide, methylsulfate or ethylsulfate;

5

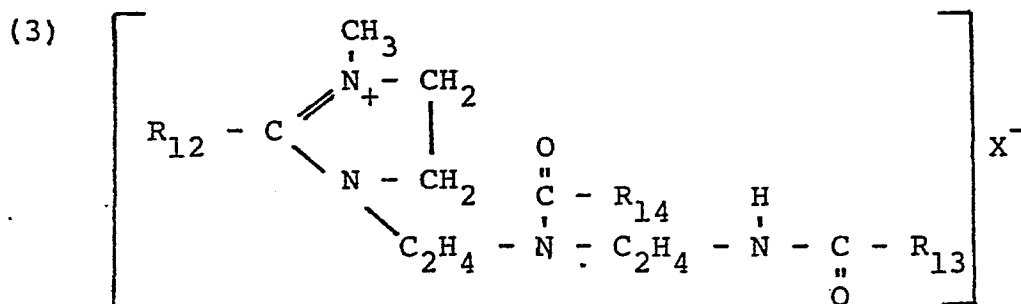

wherein R_{12} , R_{13} , and R_{14} are the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl or alkenyl, wherein X^- is halide, methylsulfate or ethylsulfate;

10

D. from about 0.05% to 0.6% of an inorganic water-soluble ionizable salt; and

E. water;

15

wherein the total amount of Components A + B + C is from about 15% to about 22.5% (preferably about 18% to about 21%), wherein there is unsaturation present on at least one of Components A, B or C such that the cationic active system has an Iodine Value of at least about 4.2, preferably at least about 10.5, and most preferably from about 10.5 to about 34.


20

The compositions of the invention are stable and pourable at normally encountered temperatures (40°- 100°F) and are easily dispersible in water. In the

25

context of the present invention, "pourable" means having a viscosity below about 5000 cP as measured by a Brookfield Synchro-lectric Viscometer with Spindle #4 at 60 rpm. The compositions provide excellent fabric softening and antistatic performance in laundry rinse solutions containing from about 25 ppm to about 90 ppm of the combination of Components A, B and C.

The mono nitrogen quaternary ammonium salt softener of the compositions herein has the structure:

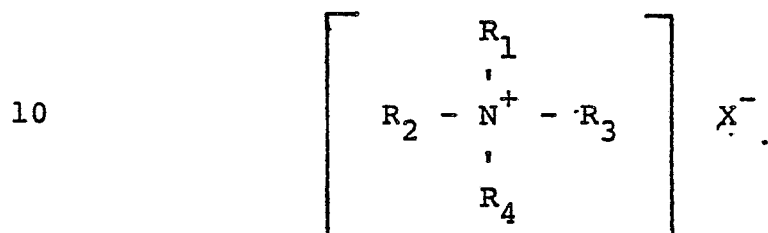

wherein R_1 and R_2 can be the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl and alkenyl groups and R_3 and R_4 are the same or different from each other and are selected from the group consisting of C_1 to C_3 alkyls, or $-(C_nH_{2n}O)_xH$ wherein n is 2 or 3, x is from 1 to about 3, and wherein X^- is halide, methylsulfate or ethylsulfate. It is preferred that X^- be halide, and the preferred halides are chloride and bromide. It is preferred that R_1 and R_2 be alkyl, i.e., it is preferred that the unsaturation in the cationic active system come from Components B or C, or mixtures thereof. Exemplary compounds are dimyristyldimethyl ammonium chloride, dipalmityldiethyl ammonium bromide, distearyl- dimethyl ammonium chloride, distearyldimethyl ammonium bromide, distearyldiisopropyl ammonium bromide, diar- achidyldimethyl ammonium chloride, distearyl-2-hydroxy- propylmethyl ammonium chloride, oleylstearyldimethyl ammonium ethylsulfate and distearyl-2-hydroxyethylmethyl ammonium methylsulfate. Preferably the R_1 and R_2

groups are derived from tallow and the R_3 and R_4 groups are methyl. The tallow can be hydrogenated or unhydrogenated. Hydrogenated (i.e., saturated) tallow is preferred, and halides are the preferred anions.

- 5 Accordingly, preferred mono nitrogen quaternary ammonium salt softener compounds herein are dihydrogenatedtallow-dimethyl ammonium chloride and dihydrogenatedtallow-dimethyl ammonium bromide. Hydrogenated tallow often has some residual degree of unsaturation such that the
- 10 Iodine Value of hydrogenated ditallowdimethyl ammonium salts can be up to about 5.

Exemplary commercial quaternary ammonium salts which are suitable for use as Component A in the compositions herein are dihydrogenatedtallowdimethyl ammonium chloride sold under the name Adogen 442, and


15 ditallowdimethyl ammonium chloride (I.V. about 20-30) sold under the name Adogen 470, both from Sherex Chemical Company.

The quaternary ammonium salts are used in the

20 compositions herein at levels of from about 2% to about 11%, preferably from about 5% to about 10%. (All percentages and proportions herein are "by weight" unless specified otherwise).

The di(2-amidoethyl) methyl quaternary

25 ammonium salt of the invention herein has the structure

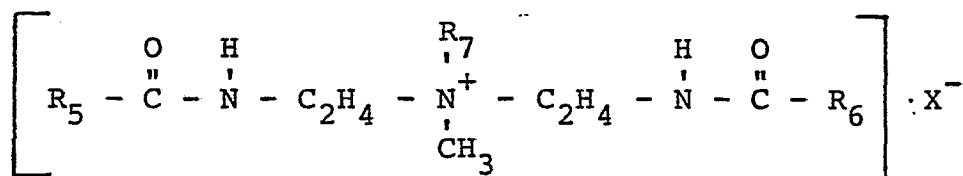

wherein R_5 and R_6 are the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl and alkenyl groups, wherein R_7 is selected


from H, methyl, ethyl and $-(C_nH_{2n}O)_xH$ wherein n is 2 to 3 and x is from 1 to about 5 (preferably 3), and wherein X^- is an anion selected from halide, ethylsulfate or methylsulfate. Preferably R_5 and R_6 are alkyl and R_7 is $-(C_nH_{2n}O)_xH$. These compounds are used at levels of from about 2% to about 14%, preferably from about 5% to about 10%, in the compositions herein. This class of compounds is disclosed in U.S. Pat. No. 4,134,840, Minegishi et al., issued January 16, 1979, incorporated herein by reference.

Exemplary compounds are di(2-hydrogenated-tallowamidoethyl) ethoxylated (2 ethoxy groups) methyl ammonium methylsulfate, di(2-hydrogenatedtallowamidoethyl) dimethyl ammonium ethylsulfate, di(2-palmityl-amidoethyl) hydromethyl ammonium chloride, di(2-oleyl-amidoethyl) propoxylated (3 propoxy groups) methyl ammonium bromide, di(2-palmitoleylamidoethyl) dimethyl ammonium ethylsulfate and di(2-stearyl-amidoethyl) propoxylated (2 propoxy groups) methyl ammonium methyl-sulfate.

Exemplary commercial materials suitable for use as Component B herein are di(2-hydrogenatedtallow-amidoethyl) ethoxylated methyl ammonium methylsulfate sold under the name Varisoft 110, and di(2-tallowamidoethyl) ethoxylated methyl ammonium methylsulfate (I.V. about 31) sold under the name Varisoft 222, both from Sherex Chemical Company.

Component C, which is present at a level of from about 2% to about 13% (preferably from about 3% to about 10%) of the compositions of the present invention is a cationic softener selected from a group consisting of three different types of imidazolinium salts. These Component C materials are designated herein as C.(1), C.(2) and C.(3).


Component C.(1) has the formula:

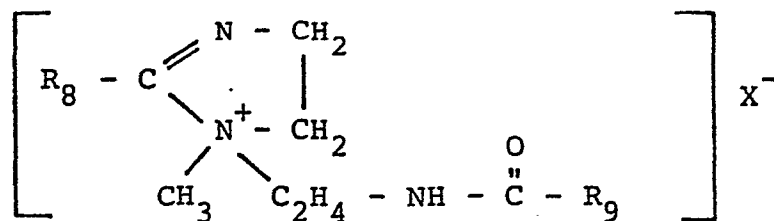

wherein R_8 and R_9 are the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl and alkenyl groups, wherein X^- is halide, ethylsulfate or methylsulfate. Preferably R_8 and R_9 are a mixture of alkyl and alkenyl groups such that Component C.(1) has an I.V. of from about 25 to about 125, more preferably from about 25 to about 45.

Exemplary compounds of this type are: 1-methyl-1-tallowamidoethyl-2-tallowimidazolinium methylsulfate, 1-methyl-1-oleylamidoethyl-2-oleylimidazolinium chloride, 1-methyl-1-palmitoleylamidoethyl-2-palmitoleylimidazolinium ethylsulfate, 1-methyl-1-soyaamidoethyl-2-soya-imidazolinium methylsulfate and 1-methyl-1-hydrogenated-tallowamidoethyl-2-hydrogenatedtallowimidazolinium methylsulfate. Exemplary commercial materials are 1-methyl-1-tallowamidoethyl-2-tallowimidazolinium methylsulfate (I.V. about 42) sold under the name Varisoft 475, and 1-methyl-1-hydrogenatedtallowamidoethyl-2-hydrogenatedtallowimidazolinium methylsulfate sold under the name Varisoft 445, both available from Sherex Chemical Company.

Component C.(2) has the formula:

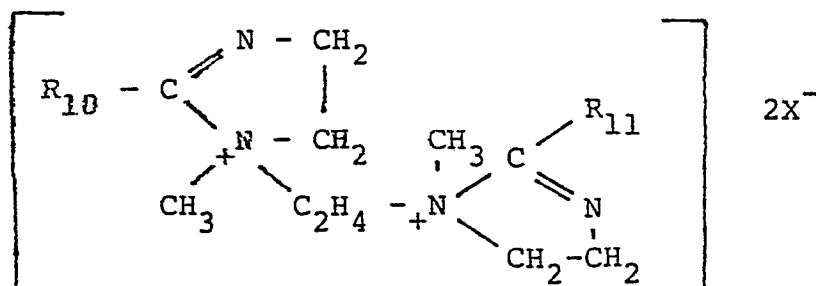


mixture of alkenyl and alkyl groups such that the compound has an I.V. of from about 25 to about 125. Preferably Components A and B will be saturated compounds and the weight ratio of Component C to Components A + B will be at least about 0.2:1 and the sum of Components A + B + C will be from about 15% to about 21%.

An essential feature of the compositions herein is that the cationic active system in the composition has an Iodine Value (I.V.) of at least about 4.2, i.e., a substantial amount of unsaturation must be present. In accordance with the invention it has been found that high active compositions which are based on substantially water-insoluble cationic softeners, such as those of the invention, cannot be made without having a substantial amount of unsaturation in the cationic active system. When using all-saturated active systems, the compositions will gel and become unusable at room temperature and below. Preferably the I.V. is at least about 10.5 and is most preferably from about 10.5 to about 34. The unsaturation can come from Component A, B or C, or any combination thereof. I.V. is a direct measure of the unsaturation and is based upon the reaction of iodine with unsaturated bonds in a molecule. The I.V. is defined as the number of decigrams of iodine which will react with one gram of the cationic active system. The standard technique for determining I.V. is well known in the art. If one knows the I.V. of the individual components which are used in the active system, then the I.V. of the system can simply be calculated by multiplying the I.V. of each component by the percentage of that component in the composition and then dividing by the total percentage of components in the composition. For example, in a composition of the invention which contains 10% Component A, 5% Component B and 5% Component C, wherein Components A and B have I.V.'s of 0 and Component C has an I.V. of 40, the I.V. of the cationic active system is 10 (i.e., $5 \times 40 \div 20$).

wherein R_{10} and R_{11} can be the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl and alkenyl and X^- is halide, methylsulfate or ethylsulfate.

Exemplary compounds of this type are: 1-ethylene bis(2-stearyl, 1-methyl, imidazolinium methylsulfate), 1-ethylene bis(2-oleyl, 1-methyl, imidazolinium methylsulfate) and 1-ethylene bis(2-tallow, 1-methyl, imidazolinium methylsulfate). The tallow derivative, in hydrogenated or unhydrogenated form, is commercially available from Sherex Chemical Company under the name Varisoft 6112. The unhydrogenated material has an I.V. of about 29.

Component C.(3) has the formula:

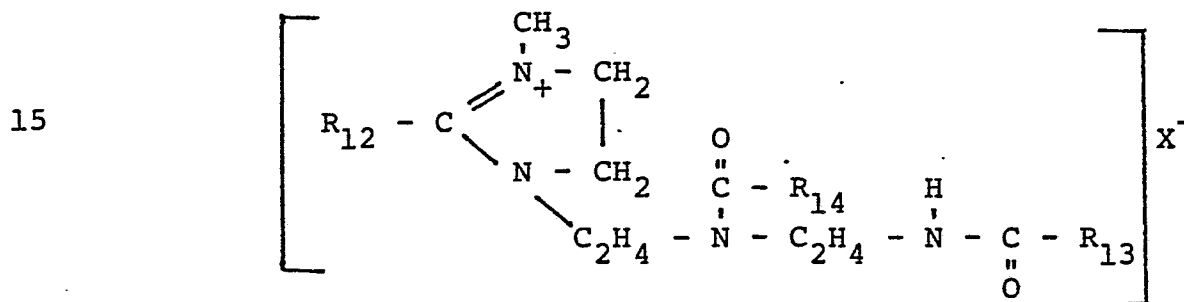

wherein R_{12} , R_{13} , and R_{14} are the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl or alkenyl, wherein X^- is halide, methylsulfate or ethylsulfate.

Exemplary compounds of this type are: 1-methyl-2-stearyl-3[(stearylamidoethyl-stearylamino)ethylene]imidazolinium ethylsulfate, 1-methyl-2-oleyl-3[(oleylamidoethyl-oleylamino)ethylene]imidazolinium ethylsulfate and 1-methyl-2-tallow-3[tallowamidoethyl-tallowamino]ethylene]imidazolinium ethylsulfate. The tallow derivative (I.V. about 32) is sold under the name Varisoft 3012 by the Sherex Chemical Company.

Components C.(1), C.(2) and C.(3) can be used singly or in mixtures with each other.

Preferably Component C in the compositions herein is Component C.(1), wherein R_8 and R_9 are a

It will be appreciated by those skilled in the art that not all possible combinations of Components A, B and C throughout the total active level range of 15% to 22.5% will produce 40°F-pourable compositions throughout the range of I.V.'s specified. Generally at the higher active levels, or at higher proportions of Component A in the system, higher I.V.'s are required. Also, if the unsaturation comes from Component A, a higher I.V. will be required than if the same quantity of unsaturation comes from Component B or C. Generally higher cationic system I.V.'s in the composition give a higher degree of pourability. However, excessively high I.V.'s (i.e., above about 40) should be avoided since these can result in gelling in some instances during the making process.

Some formulation guidelines are given below.

1. A minimum I.V. of 4.2 provides suitable 40°F-pourable compositions at 15% total cationic active when the ratio of Component A to Components B + C is from about 0.2 to about 1.14.
2. A minimum I.V. of 6.2 provides suitable 40°F-pourable compositions at 18% total cationic active when the ratio of Component A to Components B + C is from about 0.3 to about 1.25.
3. A minimum I.V. of 6.5 provides suitable 40°F-pourable compositions at 19% total cationic active when the ratio of Component A to Components B + C is from about 0.4 to about 1.1.
4. A minimum I.V. of 6.4 provides suitable 40°F-pourable compositions at 20% total cationic active when Component A constitutes one-fourth of the cationic active.
5. A minimum I.V. of 7.7 provides suitable 40°F-pourable compositions at 20% total cationic active when Component A constitutes 50% of the cationic active.

6. A minimum I.V. of 10.7 provides suitable 40°F-pourable compositions at 22.5% total cationic active when Component A constitutes 49% of the cationic active.

5 Examples of various compositions of the invention wherein the total cationic level and the source and amount of unsaturation are varied are illustrated in the following table.

TABLE I.

10	Component (%)	Formulas					
		1	2	3	4	5	6
	A (sat.)	10	10	10	7.5	10	5
	A (unsat. I.V. = 33.3)	-	-	-	2.5	-	-
15	B (sat.)	5	-	5	5	-	5.86
	B (unsat. I.V. = 30.9)	-	5	-	-	4	4.14
	C (sat.)	-	5	1.38	2.5	5	5
20	C (unsat. I.V. = 42.7)	5	-	3.62	2.5	-	-
	CaCl ₂ - ppm	3000	3000	4250	3000	2150	3500
	Alcohol	2.3	2.3	2.3	2.3	2.3	2.3
	Dye solution	0.5	0.5	0.5	0.5	0.5	0.5
	Perfume	0.75	0.5	0.5	0.5	0.5	0.5
25	Iodine Value	10.7	7.7	7.7	9.5	6.5	6.4

Component A is ditallowdimethyl ammonium chloride

Component B is di(2-tallowamidoethyl)ethoxylated methylammonium methylsulfate

30 Component C is 1-methyl-1-tallowamidoethyl-2-tallow imidazolinium methylsulfate

All compositions are adjusted to about pH 6 with NaOH or HCl as needed.

TABLE I (Contd)

		Formulas				
Component (%)		7	8	9	10	11*
5	A (sat.)	3.75	7.5	5	-	-
	A (unsat. I.V. = 33.3)	-	-	5	10	10
	B (sat.)	7.5	3.75	2.5	5	-
	B (unsat. I.V. = 30.9)	-	-	2.5	-	5
	C (sat.)	1.75	1.75	2.5	-	-
10	C (unsat. I.V. = 42.7)	2	2	2.5	5	5
	CaCl ₂ - ppm	500	1650	4500	4250	5500
	Alcohol	2.2	2.3	2.3	2.3	2.3
15	Dye solution	0.5	0.5	0.5	0.5	0.5
	Perfume	0.5	0.5	0.5	0.5	0.5
	Iodine Value	5.7	5.7	17.5	27.3	33.6

*Unsaturated Component A in this formula has an Iodine Value of 30.4

- 20 Component A is ditallowdimethyl ammonium chloride
 Component B is di(2-tallowamidoethyl)ethoxylated methylammonium methylsulfate
 Component C is 1-methyl-1-tallowamidoethyl-2-tallow imidazolinium methylsulfate
- 25 All compositions are adjusted to about pH 6 with NaOH or HCl as needed.

A wide variety of ionizable salts can be used as Component D in the compositions herein. The particular salt should be sufficiently soluble in the compositions to produce a concentration in solution of from


30 about 500 to about 6000 ppm (preferably about 500 to

about 4000 ppm) and should not adversely interact with the fabric softener compounds. Examples of suitable salts are the halides of the Group 1A and 2A metals of the Periodic Table of Elements, e.g., sodium chloride, potassium bromide, lithium chloride, calcium chloride and magnesium chloride. The ionizable salts provide viscosity control, particularly during the process of mixing the ingredients to make the compositions herein.

The water used in the compositions herein is preferably distilled or deionized water and is generally present at levels of from about 76% to 84%.


Preferred compositions of the invention are those wherein Components A and B are substantially saturated and Component C is unsaturated and is of the type identified herein as C.(1). These preferred compositions can be defined as follows:

- A. from about 3.75% to about 10.5% (preferably from about 5% to about 10%) of a quaternary ammonium salt having the formula

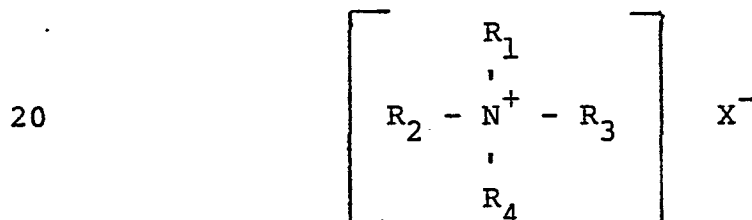


wherein R_1 and R_2 can be the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl groups, R_3 and R_4 can be the same or different and are selected from the group consisting of C_1 to C_3 alkyl groups and wherein X^- is halide;

- B. from about 3.75% to about 10.5% (preferably from about 5% to about 10%) of a di(2-amidoethyl) alkoxyated methyl quaternary ammonium salt having the formula

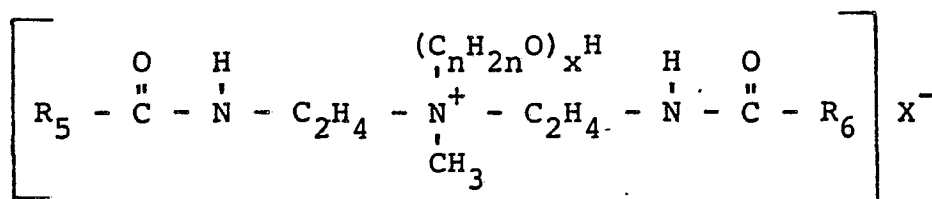

wherein R_5 and R_6 are the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl groups, wherein n is 2 or 3 and x is a number of from 1 to about 5 and wherein X^- is halide, ethylsulfate or methylsulfate;

- C. at least about 2.5% (preferably from about 3% to about 10%, and most preferably from about 3.75% to about 5.25%) of an imidazolinium salt having the formula

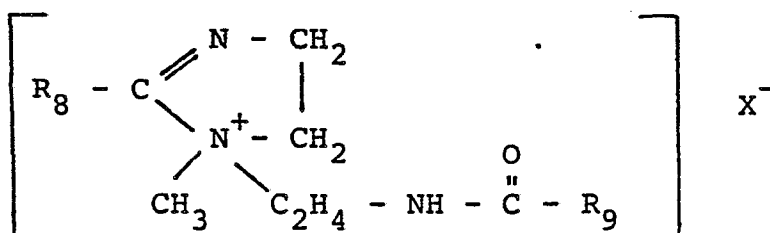


wherein R_7 and R_8 are the same or different from each other and are selected from the group consisting of alkenyl groups or a mixture of alkyl and alkenyl groups, each containing from about 14 to about 20 carbon atoms, wherein X^- is halide, ethylsulfate or methylsulfate, and wherein said Component C has an Iodine Value of from about 25 to about 125, preferably from about 25 to about 45;

- D. from about 0.05% to about 0.4% of an inorganic water-soluble ionizable salt; and

E. water;

5 Various optional materials such as are ordinarily used in fabric softening compositions can be used in the compositions herein. These include, for example, perfumes at 0.1% to 1.0%, antimicrobials at 0.01% to 0.1% and dyes at 0.001% to 0.01%.

30 Agents which facilitate recovery of the compositions to a stable homogeneous liquid condition after having been subjected to freezing can be included in the compositions. Preferred freeze-thaw recovery agents are the di-polyethoxy monoalkyl amines of the formula



wherein R_{19} is an alkyl or alkenyl group of from about 14 to 20 carbon atoms and the sum of $m + n$ is from about 10 to about 25. A preferred material is sold under the name Varonic T220 by Sherex Chemical Company

5 wherein R_{19} is unhydrogenated tallow and the sum of $m + n$ is about 20. Freeze-thaw agents are used in the compositions herein at levels of about 1%.

Care must be exercised in the preparation of the compositions herein. The order of addition and

10 manner of mixing the components can have a significant effect on the physical characteristics of the composition. A particularly preferred method of preparation is as follows. Components A, B and C (and dyes, if used) are heated and blended together to form a melt

15 at about 175-185°F. This melt is then added gradually to 110°F water with vigorous agitation. A portion of the ionizable salt is added to the water concurrently with the melted softeners at a rate necessary to keep the aqueous mix fluid and stirrable. Upon completion

20 of the addition of the melted softeners, the remainder of the ionizable salt is added to produce the desired viscosity. Optional ingredients such as perfume, etc., are added after the viscosity of the mix has been reduced by the addition of most of the ionizable salt.

25 After completion of the addition of ionizable salt the composition is cooled to room temperature before filling into containers.

It is desirable that the compositions herein have a pH of from about 5.5 to about 6.5. Acids such

30 as hydrochloric, sulfuric or citric or bases such as sodium hydroxide or sodium carbonate can be added, as needed, to the compositions to achieve the desired pH. Normally, only very small amounts of such pH adjusting agents are required.

35 The invention will be further illustrated by the following example.

EXAMPLE I

This example illustrates the preparation of a 200 lb. batch of a composition of the present invention.

Materials:

- 5 ¹23 lbs. 87% active dihydrogenated tallow dimethyl-
 ammonium chloride (DTDMAC)
- ²13.3 lbs 75% active di(2-hydrogenated tallow amido-
 ethyl) ethoxylated methyl ammonium methyl-
 sulfate (Varisoft 110)
- 10 ³11.1 lbs 90% active 1-methyl-1-unsaturated tallow-
 amidoethyl-2-unsaturated tallow imidazolinium
 methylsulfate (Varisoft 475, I.V. 42)
- 1.2 lbs. 1.35% solution of Polar Brilliant Blue
 dye in water
- 15 960 ml 25% w/v CaCl_2 in water
- 1.5 lbs. perfume
- 147 lbs. deionized water
- 120 g. 20% w/v NaOH in water
- ¹Contains 8% ethanol.
- 20 ²Contains 12% isopropanol.
- ³Contains 10% isopropanol.

Equipment:

- 20 gallon capacity steam-jacketed pre-mix tank
- 60 gallon capacity main-mix tank equipped with
- 25 vertically mounted, variable speed (50-500
 rpm) mixer with impeller

Procedure:

- The pre-mix tank was charged with the molten
- softener actives in the sequence DTDMAC, Varisoft
- 30 110, Varisoft 475. The resulting mixture was
- heated with stirring to 170°F, at which time the
- dye solution was added. Heating of the mixture

then continued until a temperature of 185°F was reached.

5 The main-mix tank was charged with 17.6 gal. (147 lbs.) of deionized water which was then heated to 110°F. The agitator was set at 150 rpm and the contents of the pre-mix tank (at 185°F) were pumped into the main-mix tank over a period of 5 minutes. During this 5 minute period the agitator speed was gradually increased to 275-300 rpm as
10 the main-mix thickened. Also, beginning at the point where about one-half of the premix had been added, the CaCl_2 solution was added in portions (see table below) at such a rate as to maintain a stirrable, flowable mixture. As the viscosity
15 decreased the agitator speed was gradually reduced back to 150 rpm. The 120 g. of 20% NaOH solution was added about 7 minutes after the start of addition of the active pre-mix to the main-mix tank. (This solution of NaOH serves to adjust the
20 final product pH to 6.0 and also reduces product viscosity.)

The perfume was added 20 minutes after the start of addition of the active pre-mix to the main-mix tank. Addition of CaCl_2 solution continued until
25 the viscosity of the warm product was 140 cP. This required a final concentration of 2650 ppm (0.265% CaCl_2). Upon cooling to room temperature the resulting 200 lbs. of product had a viscosity of 95 cP.

30 The following table records the chronology of CaCl_2 solution addition to the main-mix tank and corresponding viscosity readings, where taken.

	<u>Time</u> <u>(Min:Sec) *</u>	<u>Total ml CaCl₂</u>	<u>Viscosity (cP)</u>
	2:10	30	
	2:39	50	
5	2:55	100	
	3:25	115	
	3:40	200	
	4:00	225	
	4:10	260	
10	4:45	300	
	7:00	(add NaOH)	
	8:15	400	
	10:00	400	420
	15:00	550	235
15	20:00	650	173
	20:00	(add perfume)	
	25:00	700	213
	30:00	800	175
	35:00	900	155
20	40:00	960	140

*Time 0 is the point where addition of the contents of the pre-mix tank to the main-mix tank begins.

The composition above had the following approximate formula:

	<u>Component</u>	<u>Wt. %</u>
	Dihydrogenated tallow dimethyl ammonium chloride	10
30	Di (2-hydrogenated tallow amidoethyl) ethoxylated methyl ammonium methylsulfate	5
	1-methyl-1-tallow amidoethyl-2-tallowimidazolinium methylsulfate (I.V. 42)	5
35	Polar Brilliant Blue dye	80 ppm
	Calcium chloride	0.265
	Perfume	0.75
	Ethanol	0.92
	Isopropanol	1.36
40	H ₂ O	to 100


The Iodine Value of the total cationic active system was 10.5.

This composition exhibits excellent softening and antistatic performance and has excellent physical
5 stability and pourability between 40°F and 100°F. Another formula which exhibits comparable performance, physical stability and pourability is made as above except that the active system consists of 5% dihydrogenated tallow dimethyl ammonium chloride, 10% di(2-hydrogenated tallow amidoethyl)
10 ethoxylated methyl ammonium methyl sulfate and 5% 1-methyl-1-tallow amidoethyl-2-tallow imidazolinium methyl sulfate (Varisoft 475). This formula also has an Iodine Value of 10.5 for the total cationic active system.


CLAIMS

1. A concentrated homogeneous aqueous fabric softener composition which is pourable at 40°F, the said composition being characterized by:

- 5 A. from about 2% to about 11% of a quaternary ammonium salt having the formula

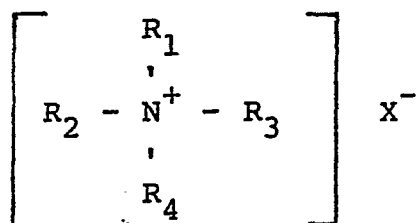


- 10 wherein R_1 and R_2 can be the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl and alkenyl groups, R_3 and R_4 can be the same or different and are selected from the group consisting of C_1 to C_3 alkyl and $-(C_nH_{2n}O)_xH$ groups wherein n is 2 or 3, x is from about 1 to about 3, and wherein X^- is an anion selected from
- 15 halide, methylsulfate and ethylsulfate;
- B. from about 2% to about 14% of a di(2-amido-ethyl) methyl quaternary ammonium salt having the formula

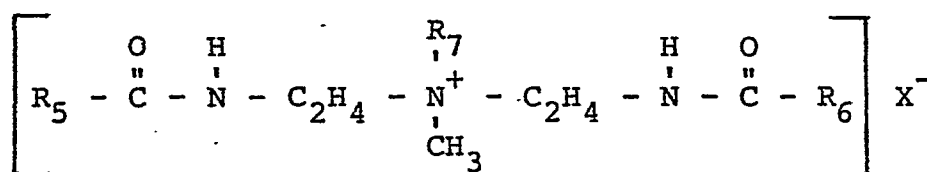


- 20 wherein R_5 and R_6 are the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl and alkenyl groups, wherein R_7 is selected from the group consisting of H, methyl, ethyl and $(C_nH_{2n}O)_xH$ wherein n is 2 or 3 and x is from 1 to about
- 25 5 and wherein X^- is selected from halide, ethylsulfate and methylsulfate;

C. from about 2% to about 13% of an imidazolinium quaternary salt having the formulas

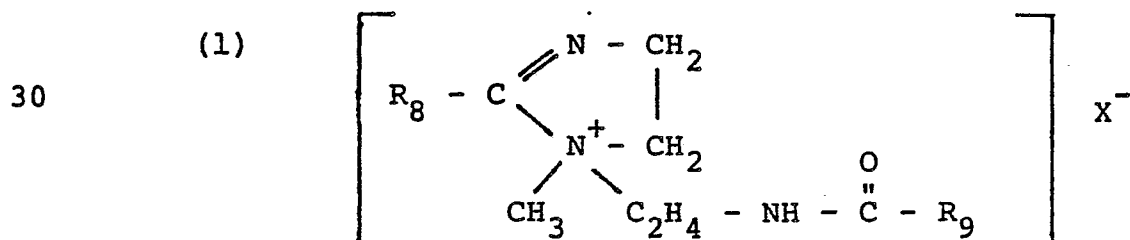


wherein R_8 and R_9 are the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl and alkenyl groups, wherein X^- is halide, ethylsulfate or methylsulfate;

35

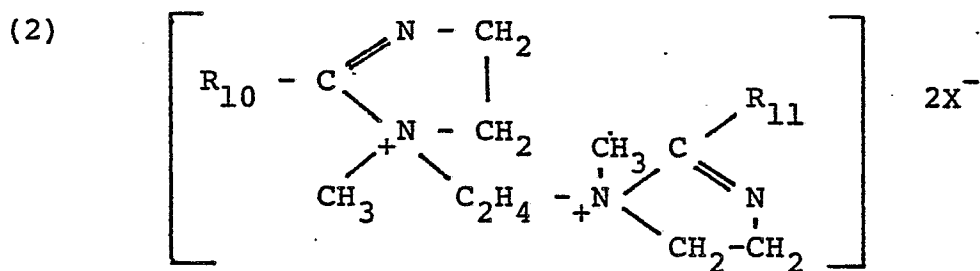

wherein R_{10} and R_{11} can be the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl and alkenyl and X^- is halide, methylsulfate or ethylsulfate; and

40

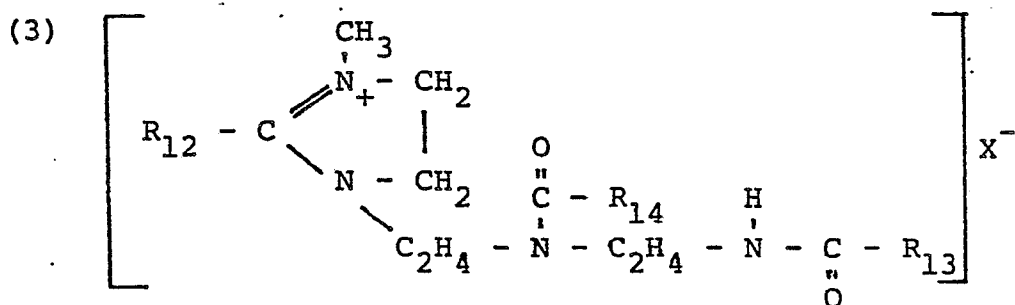

wherein R_{12} , R_{13} , and R_{14} are the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl or alkenyl, wherein X^- is halide, methylsulfate or ethylsulfate;

D. from about 0.05% to 0.6% of an inorganic water-soluble ionizable salt; and

E. water;

wherein the total amount of Components A + B + C is from about 15% to about 22.5%, wherein there is unsaturation present on at least one of Components A, B or C such that the cationic active system, Components A + B + C, has an Iodine Value of at least about 4.2.

2. A composition according to Claim 1 characterized in that the Iodine Value is at least 10.5, preferably from 10.5 to 34.

3. A composition according to Claim 1 or 2 characterized in that Component A is present in the composition at a level of from 5% to 10%.

4. A composition according to any of Claims 1 to 3 characterized in that R_1 and R_2 are C_{14} to C_{20} alkyl groups and R_3 and R_4 are C_1 to C_3 alkyl groups.


5. A composition according to any of Claims 1 to 4 characterized in that Component B is present in the composition at a level of from 5% to 10%, wherein R_7 is $-(C_2H_4O)_xH$ and wherein x is from 1 to about 5.

6. A composition according to any of Claims 1 to 5 characterized in that Component C is C.(1) and is present at a level of from 3% to 10%.

7. A composition according to any of Claims 1 to 6 characterized in that the ionizable salt is a halide of a Group 1A or Group 2A metal of the Periodic Table of Elements.


8. A concentrated aqueous fabric softener which is pourable at 40°F, said composition being characterized by:

- A. from about 3.75% to about 10.5% of a quaternary ammonium salt having the formula

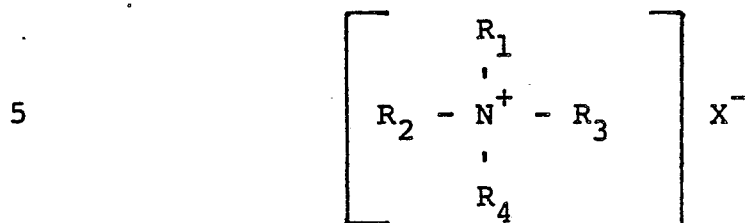


wherein R_1 and R_2 can be the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl groups, R_3 and R_4 can be the same or different and are selected from the group consisting of C_1 to C_3 alkyl groups and wherein X^- is halide;

- B. from about 3.75% to about 10.5% of a di(2-amidoethyl) alkoxyated methyl quaternary ammonium salt having the formula

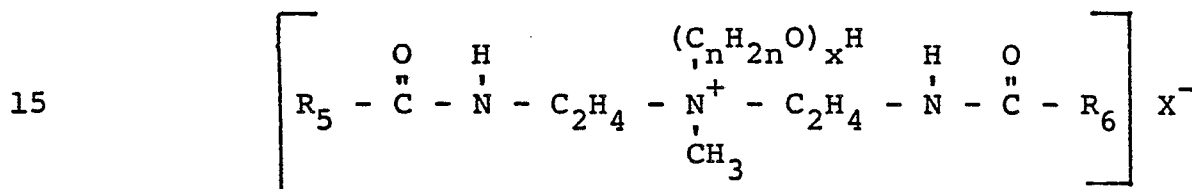

wherein R_5 and R_6 are the same or different from each other and are selected from the group consisting of C_{14} to C_{20} alkyl groups, wherein n is 2 or 3 and x is a number of from 1 to about 5 and wherein X^- is halide, ethylsulfate or methylsulfate;

- C. at least about 2.5% of an imidazolinium salt having the formula

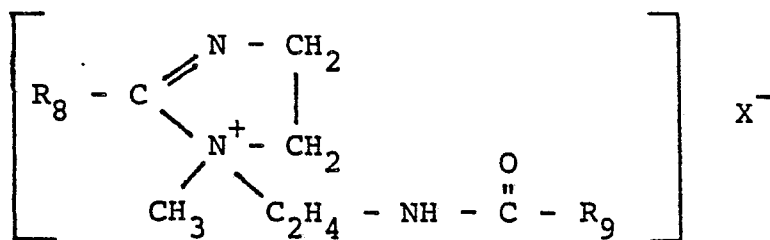

wherein R_7 and R_8 are the same or different from each other and are selected from the group consisting of alkenyl groups or a mixture of alkyl and alkenyl groups, each containing from about 14 to about 20 carbon atoms, wherein X^- is halide, ethylsulfate or methylsulfate, and wherein said Component C has an Iodine Value of from about 25 to about 125;

D. from about 0.05% to about 0.4% of an inorganic water-soluble ionizable salt; and

E. water;

the total amount of Components A + B + C in said composition being from about 15% to about 21% and the Iodine Value of the total cationic system being at least about 4.2.

9. A composition according to any of Claims 1 to 8 characterized in that the weight ratio of Component C to Components A + B is at least 0.2:1, preferably from 0.2:1 to 1:1.

10. A composition according to any of Claims 1 to 9 characterized in that Component A is dihydrogenatedtallow-dimethyl ammonium chloride, Component B is di(2-hydrogenatedtallowamidoethyl) ethoxylated methyl ammonium methylsulfate preferably having about 3 ethoxy groups, and Component C is 1-methyl-1-tallow-amidoethyl-2-tallowimidazolinium methylsulfate having an Iodine Value of about 40.



European Patent
Office

EUROPEAN SEARCH REPORT

0052517

Application number

EP 81 30 5438

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
DA	<u>US - A - 3 681 241</u> (J. RUDY) * Claims * -----		C 11 D 1/645 D 06 M 13/46
			TECHNICAL FIELDS SEARCHED (Int.Cl. 3)
			C 11 D 1/645 3/00 D 06 M 13/46
			CATEGORY OF CITED DOCUMENTS
			X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons
			&: member of the same patent family, corresponding document
<input checked="" type="checkbox"/> The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 08-01-1982	Examiner GOLLER