

(12) **EUROPEAN PATENT APPLICATION**

(21) Application number: 82300372.8

(51) Int. Cl.<sup>3</sup>: **D 03 D 39/02**  
**D 04 B 35/22, D 03 J 1/00**

(22) Date of filing: 26.01.82

(30) Priority: 05.02.81 GB 8103564

(43) Date of publication of application:  
25.08.82 Bulletin 82/34

(84) Designated Contracting States:  
BE DE GB NL

(71) Applicant: **BRINTONS LIMITED**  
Exchange Street P.O. Box 16  
Kidderminster Worcestershire DY10 1AG(GB)


(72) Inventor: **Lowe, Harry Frederick**  
Ridge End Lea Bank Bewdley Road  
Kidderminster Worcestershire(GB)

(72) Inventor: **Brinton, Charles Topham Cecil**  
Broncroft Castle Craven Arms  
Shropshire, SY7 9B1(GB)

(74) Representative: **Jennings, Guy Kenneth et al,**  
**GILL JENNINGS & EVERY** 53/64 Chancery Lane  
London WC2A 1HN(GB)

(54) **Production of patterned fabrics.**

(57) A yarn supply creel for a textile machine for producing a patterned fabric has the yarn positions defined by vertically extending containers of rectangular section each of which contains the calculated length of yarn required for the respective position in the pattern. The containers are mounted in rectangular arrays in trolleys 15 which are supplied with the calculated quantities of yarn before installation in the creel. For this purpose each trolley 15 is indexed beneath a row of filling heads 20 so that each container 21 in its turn is brought into register beneath an upper filling container 40 to which the yarn is supplied. Each individual yarn 27 is drawn from a package 25 and passes between a pair of metering rollers 30, 31 which are computer-controlled so as to feed the calculated length of yarn to the respective container 21. From the rollers 30 and 31 the yarn passes downwardly through an air injector jet 35 which blows the yarn into the container 40 and compacts it at the bottom of this container. When the calculated quantity of yarn has been delivered, a ram 42 driven by an air motor 53 and guided by a rod 51 compacts the yarn against the bottom of the container 40. The bottom of the container 40 is then opened and the continuing stroke of the ram 42 forces the yarn into the container 21. When all the containers 21 in a trolley 15 have been supplied with yarn in this way, the trolley is then transferred to the creel.

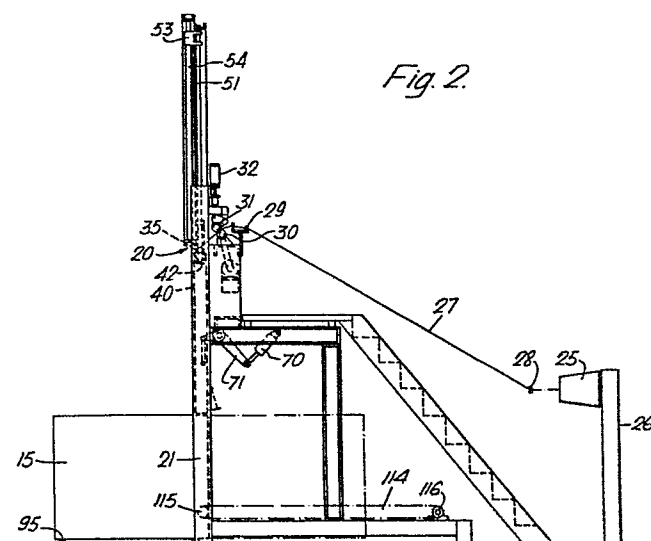

GJE/180/126BRINTONS LIMITED

- 1 -

Production of patterned fabrics

This invention relates to the production of patterned fabrics and is concerned with the problems which arise as a result of the different usage rates of the yarns of different colours.

5. These problems are associated with a wide variety of different production processes such as knitting, embroidery, lace-making, carpet making and so forth. The basic difficulty stems from the fact that at the end of a production run the quantity
10. of yarn remaining in the creel will differ widely from colour to colour and in the majority of cases this residual yarn will represent a source of waste which cannot normally be avoided.

- The operation of a gripper Axminster carpet loom provides a typical example of the problem referred to and the invention will therefore be described in terms of such a loom although it will be understood that the principles involved are also applicable to the other processes referred
15. to above and indeed to any process involving
20. different usage rates of different colours of yarn.

In a gripper Axminster carpet loom the tuft yarns are presented to the grippers by means of yarn carriers each of which carries a number of

- yarn ends corresponding to the number of different colours in the carpet, typically eight. Each yarn carrier is controlled by a Jacquard mechanism which brings each yarn carrier into the correct position to present to the respective gripper a yarn end of a selected colour in accordance with the pattern being woven. Since there has to be a yarn carrier for each tuft position across the width of the carpet, there are hundreds of such carriers for normal carpet widths and a total of thousands of ends of tuft yarns. Each individual tuft yarn is drawn from a package and the large number of packages involved are mounted in a creel.
5.                   The length of tuft yarn withdrawn from
10.                   each package depends on the frequency with which
- the colour in question appears at the respective
- point in the width of the carpet in accordance
- with the pattern being woven. If, for example,
- there is a predominant background colour, relatively
15.                   large quantities of the yarn of this particular
- colour will be withdrawn from the respective packages
- while colours which occur relatively infrequently
- at specific locations will cause the withdrawal
- of only very small quantities from the packages
20.                   in question. When a standard pattern is being
- woven and a loom produces this pattern for days
- or weeks on end, tuft yarn packages will need to
- be replaced periodically and if tag-ending is used,
- this can be done without any interruption of the
25.                   production. For the reasons already given, some
- packages will need to be replaced at frequent
- intervals while others will provide sufficient yarn
- 30.

- 3 -

for the whole of the production run. At the end of the run any unfinished packages can merely be returned to stock since if the colours are standard, they will be required again in due course.

5.                   The position is quite different, however, when carpet is being woven to the requirements of a specific contract. Such a contract may require both a non-standard pattern and non-standard yarn colours and will inevitably require a specific
10.                   length of carpet. In order to provide non-standard colours, the tuft yarns have to be specially dyed for the job in question and it is necessary to make at least a rough assessment in advance as to the weight of each colour required. By analysing a
15.                   single repeat of the pattern, it is possible to obtain a general indication of the weights of yarn of the different colours which will be required and to dye the different quantities of yarn accordingly.

- For the reasons already explained, however,
20.                   some packages of yarn in the creel will be completely used up and will have to be replaced, while others will be only partly used. Accordingly in order to allow for this it is necessary to dye appreciably more than the calculated weight of yarn for each
25.                   colour and at the end of the run this excess will represent waste since it is most improbable that the same colour yarn is likely to be required in order to supply a subsequent contract order. From an economic point of view the cost of this waste
30.                   yarn must be included in the price of the carpet and, as a consequence, any carpet which is specially woven to order is correspondingly more expensive.

- In a method according to the invention of producing a patterned fabric on a textile machine the pattern is analysed to determine the length of yarn required for each position in the pattern in order to produce a predetermined length of fabric and the required lengths of yarn are supplied to the positions in a creel, corresponding to the respective positions in the pattern. This involves making a much more detailed analysis of a single repeat of the pattern than that referred to above and instead of merely calculating the total weight of yarn of each colour required for that repeat, using the analysis to determine the quantity of yarn of each colour required for each individual tuft position across the width of the carpet, that is to say the quantity of each yarn colour which needs to be made available to each individual yarn carrier. This calculation having been made, a quantity of yarn equal to, or in practice very slightly in excess of the calculated amount of each colour of yarn, is placed at the appropriate point in the creel to supply the respective yarn carrier. As a consequence, when the production run is complete, all that is left remaining in the creel is any deliberate excess which is provided over and above the calculated quantity for each yarn carrier.

- While it is possible to provide exactly the calculated amount, this would lead to the risk that, owing perhaps to minor irregularities in the operation of the loom, one or more yarn ends might run out just before the end of the run and there

- would be no further yarn available of that particular colour. In other words, the slight excess is preferably provided in order to allow for minor irregularities either in operation of the loom or possibly in the calculation and this excess may be made as small as is found feasible in practice without involving any risk of any yarn end running out before the end of the production run. In this way it is possible to reduce any wastage to insignificant proportions and thus to reduce the cost of the carpet production accordingly.
- 5.
- 10.

- Although it is possible in theory to carry out the required analysis for the quantity of yarn of each colour required for each yarn carrier, merely by visual inspection and calculation, this is extremely time consuming and is a job which is carried out much more efficiently under computer control. One particularly suitable form of computerised system which is capable of being used to carry out such analysis is the pattern design system manufactured by Sci-Tex Corporation Limited.
- 15.
- 20.

- The system stores full details of a complete repeat of any required pattern in its memory and on this basis can make any required mathematical calculations based on that pattern. In particular, the system can calculate the total length of tuft yarn of each colour in each longitudinal row of the pattern, that is to say the total length of tuft yarn of each colour which needs to be made available to each yarn carrier, either for a single repeat or for the number of repeats required for any particular length of carpet. The results of the
- 25.
- 30.

- 6 -

- calculations may either be in the form of a print-out or in the form of an information store such as a punched tape or a magnetic tape or disc which can be used for the direct control of metering devices
5. whereby the required quantity of yarn may be provided at each respective position in the creel. Prior to supplying the yarn to the different creel positions, the total quantity of yarn of each colour may be calculated and the required quantity of yarn dyed
10. accordingly.

- When this method is put into practice in the production of a patterned fabric, it provides, in accordance with the invention, a yarn supply creel in which at least most of the yarn positions
15. are defined by individual containers each containing a length of yarn corresponding to that required for the position in the pattern to which the respective yarn is supplied. It is not essential that all the yarn positions in the creel should
20. be defined by containers. If, for example, a particularly large quantity of yarn is required at one or more positions, it is quite possible for this to be made up by several tag-ended packages either with or without a container to make up the
25. quantity of yarn to the exact amount required.

- Preferably each container is in the form of a cell of uniform cross section and having a vertical dimension at least several times as great as its horizontal dimensions. It is found in
30. practice that this facilitates the laying up of the yarn and its subsequent withdrawal.

In order to economise in space in fitting large numbers of these tubes together, each tube

- 7 -

- preferably has a rectangular, e.g. square, cross section and a group of containers may be formed as cells in an "egg crate" type of construction. The individual cells may be made from metal plate such as aluminium, or may be extruded from plastic such as polyvinyl chloride. Thus the cells may be formed individually or as a complete battery, with perforated base plates for the passage of air. In the creel the batteries of cells may be assembled together in a rectangular block and each block may be mounted on a wheeled trolley so as to be capable of insertion into the creel and subsequent removal.
- 5.
- 10.

- It is, of course, necessary to prepare a creel in advance in accordance with the particular pattern to be produced and this primarily involves supplying the correct lengths of yarn of the correct colours to the respective containers. This is preferably achieved by feeding each individual yarn between a pair of metering rollers followed by an air jet through which the yarn passes and which blows the yarn into the container and compacts it, the metering rollers being controlled to stop the feeding action when the required length of yarn has been supplied. It is found, surprisingly, that if no attempt is made to control the yarn after it leaves the metering rollers, so that it assumes an entirely random configuration in the container, it can nevertheless be withdrawn from the container without difficulty and without the risk of tangling. Thus, although the possibility of laying up the yarn in the container in a regular pattern is not excluded, it is found to be quite
- 15.
- 20.
- 25.
- 30.

unnecessary and the ability to dispense with it represents one important reason for the success of the invention.

5. It is found possible to increase the degree of compaction if the air pressure is increased periodically for short lengths of time, to produce pulses of higher pressure. The air flowing into each container needs to escape and to facilitate this, each container is preferably  
10. formed with air outlet openings.

The degree of compaction which is obtainable by air pressure is considerably less than the maximum which can be applied without introducing the risk of tangling. Accordingly,  
15. if the overall size of the individual containers represents a major factor in the operation of the loom, a stage of mechanical compression may be introduced after the feeding of the yarn is complete. This is most conveniently achieved by initially  
20. feeding the yarn to a first parallel-sided container which may be large enough to hold the required length of yarn when compacted only by air pressure. After filling, the yarn is compacted by mechanical pressure which forces it through the bottom of the  
25. container and into a second smaller container of similar cross section arranged below the first container. The second container can thus be of a height which is less than that of the first by a factor depending on the degree of compression.  
30. It is found in practice that the yarn can be compressed to about one third of its original volume and the height of the second container can therefore be

- 9 -

correspondingly reduced.

- In order to accommodate particularly large quantities of yarn it may be allowed to pass through the bottom of the first container and into the second container before the application of mechanical pressure. Thus when the first container is nearly full of yarn compacted merely by air pressure, the bottom of the container may be opened to allow the yarn to pass into the second container without interrupting the feeding of the yarn. When the feeding of the yarn is complete the yarn may then be mechanically compacted in the normal way.
- 5.
- 10.

- In order to expedite the filling of the large number of containers in a creel, a number of filling heads, each comprising a pair of metering rollers and an air jet may be arranged in a row and operated simultaneously to supply yarn to a corresponding number of containers in one row of a group, the row of filling heads and the group of containers being indexed in relation to one another after the filling of each number of containers in a row in order to fill a corresponding number of containers in a subsequent row. Since the containers in a row may be spaced more closely than the filling heads, the latter may be spaced so as to fill alternate containers in a row, the group of containers being indexed in relation to the filling heads which are stationary by a distance equal to the pitch of the rows and, when alternate containers in all the rows have been filled, the group of containers is indexed laterally by a distance
- 15.
- 20.
- 25.
- 30.

- 10 -

equal to the pitch of the containers in the rows and the sequence is repeated to fill all the remaining containers.

5. The apparatus for filling each container needs to include, in addition to the filling head, means for mechanically compacting the yarn, which is preferably in the form of a ram with a central opening for the passage of the length of yarn which is in the process of being fed, so that the
10. yarn is not broken by the descent of the ram. In order to allow the bottom of the first container to open it preferably comprises a pair of hinged gates having operating mechanism for opening the gates in synchronism with the descent of the ram.
15. The yarn may then be broken by the subsequent indexing movement by the inclusion of a gripper for holding the yarn extending from the top of each container in the creel after filling. A member for pressing each broken yarn end into a
20. slot at the top of the respective container may also be provided.

The invention will now be described in more detail, by way of example, with reference to the accompanying drawings, in which:-

25. Figure 1 is a diagrammatic view of an Axminster carpet loom showing the general arrangement of the associated yarn supply creel;

- Figure 2 is an elevation of apparatus for supplying yarn to groups of containers making
30. up the creel of Figure 1;

Figure 3 is an end view of the apparatus of Figure 2 seen from the left in that Figure;

- 11 -

Figure 4 is a sectional view to an enlarged scale of the upper part of the apparatus in Figure 2;

5. Figure 5 is a sectional view also to an enlarged scale of the lower part of the apparatus seen in Figure 2;

Figure 6 is a view similar to Figure 5 but showing a later stage in the operation;

10. Figure 7 is a plan view of a gripper mechanism seen in elevation in Figures 5 and 6;

Figure 8 is a view from the left hand side of the lower part of the apparatus seen in Figures 5 and 6, but with bottom gates in an open position;

15. Figure 9 is a plan view to an enlarged scale seen along the line IX - IX in Figure 4;

Figure 10 is a vertical section seen along the line X - X in Figure 9;

20. Figure 11 is a vertical section seen along the line XI - XI in Figure 9;

Figure 12 is a sectional plan view on the line XII - XII in Figure 11;

25. Figure 13 is a view to an enlarged scale of indexing mechanism forming the lower part of Figure 2;

Figure 14 is an enlarged sectional view of the bottom left hand corner of Figure 13;

Figure 15 is a sectional view seen from the left hand side of Figure 14;

30. Figure 16 is a view to an enlarged scale of cross-indexing apparatus forming part of the arrangement seen in Figure 13; and

Figure 17 is a plan view corresponding to Figure 16.

- 12 -

Turning first to Figure 1, a gripper Axminster carpet loom shown diagrammatically as 10 has a creel which, in accordance with normal practice is arranged in two levels, a floor level 11 and an upper level 12 mounted on a platform 13 extending above the loom. The tuft yarns held by the creel, instead of being wound in packages in the usual way, are held in vertical tubular containers arranged in rectangular groups each mounted in a wheeled trolley 15. The individual yarns extend upwardly from each trolley, being illustrated only in connection with the trolley identified specifically as 15A where they are indicated generally as 16. Each yarn passes upwardly into its own individual tube, groups of which extend downwardly to the loom 10 at 17. Similar tubes extend upwardly from above each trolley 15 as indicated diagrammatically at 18, and since there may be several rows of trolleys in the creel, very large numbers of tubes are involved. In a typical example, each trolley may include eighteen rows each of sixteen containers, giving a total of two hundred and eighty eight yarns per trolley. For a particular pattern of carpet, there may be as many as thirty two trolleys arranged in four rows of eight. When the creel is initially set up, the individual yarns have to be threaded along their respective tubes to the loom, but when the creel is periodically replenished, lengths of yarn can be left in the tubes 18 so that the leading ends of the fresh lengths of yarn merely need to be knotted to the

- 13 -

trailing ends of the lengths of yarn remaining in the tubes so that they can be pulled through the tubes and pieced up in the loom.

- Each individual yarn container supplies yarn to a respective point in the pattern to be woven and thus, in the case of a gripper Axminster loom, as illustrated, each individual yarn is supplied to a respective yarn carrier. As previously described, the length of yarn in each container is carefully controlled to correspond to that required for the respective position in the pattern and the remainder of the description is concerned with the apparatus used for supplying each container of a group mounted in a trolley with the appropriate length of yarn. Although the description of Figure 1 has been related specifically to a gripper Axminster carpet loom, it will be understood that similar principles apply to the production of other types of patterned fabric where individual yarn supplies are directed to respective points in the pattern. Although Figure 1 illustrates all the yarns as being held in containers, it is quite possible that at least a small proportion of the yarns, particularly where relatively large quantities are required, should be wound on packages in the usual way, but this is not illustrated in the drawings.

- Turning now to the feeding of the calculated lengths of yarn of the different colours to the individual containers of a group, Figure 2 shows the general arrangement of apparatus for this purpose. As already mentioned, a typical

- 14 -

arrangement of containers in a trolley 15 comprises eighteen rows, each of sixteen containers. As an indication of typical dimensions, each container may be 85 mm square and 1200 mm long with a wall thickness of 1.5 mm. Although it is possible to fill all sixteen containers in a row simultaneously, the apparatus seen in Figures 2 and 3 includes only eight filler heads, each indicated generally as 20 and only one of which is seen in Figure 2. As can be seen from Figure 3, the filler heads 20 are spaced so as to fill alternate containers 21 and in operation, a trolley 15 is indexed through the apparatus by means of mechanism to be described later so as to supply yarn to alternate containers in each of the eighteen rows (to quote the example referred to previously) and when this operation is complete, the trolley 15 is indexed laterally by a distance equal to the pitch of containers in the rows and the process is repeated so as to supply yarn to all the intervening containers.

The yarns supplied to the containers 21 are drawn from packages, one of which is seen at 25, mounted on a frame 26. The yarn shown as 27 passes through guides 28 and 29 and thence to a pair of metering rollers 30 and 31 seen in more detail in the enlarged view of Figure 4. The lower roller 30 is made of steel and is positively driven while the roller 31 is rubber covered to avoid slip and is pressed against the roller 30 by an air cylinder 32 seen in Figure 2. The metering action is performed by the upper roller 31 which is controlled by a computer produced tape or other form of information store corresponding to the respective position in the pattern. When the required length of yarn has been delivered, the

- 15 -

roller 31 is raised to stop the feed. If yarn is not required in any particular container, the respective roller 31 remains in the up position.

- After passing between the rollers 30 and
5. 31, the yarn 27 passes downwardly through an air injector jet indicated generally as 35 in Figure 4 and seen in more detail in Figure 10 which will be described later. The effect of the air jet is to maintain the downward movement of the yarn
10. 27 and, more importantly, to supply compressed air to the interior of a first or upper container 40 to which the yarn is supplied so as to have a compacting effect on the yarn as it accumulates towards the bottom of the container. There are,
15. of course, as many upper containers 40 as there are filler heads 20, that is to say eight in the present example, as can be seen from Figure 3. The yarn accumulates in random fashion at the bottom of each container 40 and the compacting
20. effect of the compressed air from the jet 35 is augmented by periodic pulses of higher pressure air. The pressure at the jet may be normally between twenty and thirty pounds per square inch ( $137-206 \text{ kN/m}^2$ ) but this is increased to a pressure of eighty pounds
25. per square inch ( $551 \text{ kN/m}^2$ ) for example at intervals of about two seconds. This sudden increase in pressure has the effect of acting on the top of the packed yarn and compacting the body of the yarn beneath. Although not
30. illustrated, the pulses of increased pressure may conveniently be obtained by charging an air reservoir at the increased pressure referred to and then

- 16 -

abruptly discharging the air by way of a valve into the main airstream of the jet.

5. The amount of yarn fed into each upper container 40 is controlled individually as described above, but in general (with an exception to be mentioned later) does not fill the container above a point just below the ram 42 seen in Figure 4 which is formed with a central opening 43 for the passage of the yarn. The ram 42 is carried by four vertical  
10. rods 44 passing through seals 45 in the top 46 of the container 40, as seen in Figure 11 and described in more detail later. The upper ends of the rods 44 are fixed to a crosshead 50 which slides vertically on a guide rod 51 extending downwardly from a support  
15. 52 and controlled by an air motor 53.

The air motor 53 runs on a vertical guide 54 extending between supports 55 and 56. Although the type of air motor used is by no means critical, a suitable type of such motor is one available  
20. commercially under the name ROL-AIR MOTA sold by Kay Pneumatics Limited. This motor operates on a peristaltic principle which utilises a pair of nipping rollers indicated diagrammatically as 58 which co-operate with an air hose constituting the  
25. guide 54. Air pressure is supplied to opposite ends of the hose by way of lines 59 and 60 connected to a reversing valve. When air is supplied to the bottom of the hose 54 the pressure acting beneath the nip of the rollers 58 drives the motor 53 up-  
30. wardly and the application of air pressure to the top of the hose drives the motor 53 downwardly. When the filling of the container 40 is complete, the ram 42 is brought into action and driven downwardly by the motor 53 to compact the yarn against the bottom  
35. of the container 40.

- 17 -

As seen in Figures 5 and 6, the bottom of each upper container 40 is constituted by a pair of gates 61 each extending from a bush 62 turning about an axle 63, the angular position of which is controlled by an arm 64, the other end of which is connected to the piston rod 65 of an air cylinder 66.

5. In the full line position of the gates 61, they resist the downward pressure exerted by the ram 42 so that the yarn is compacted as previously described. In

10. the position shown in Figure 5, the ram 42 has just operated to force the compacted yarn into a container 21 and has returned to its uppermost position (not seen). The position of the ram illustrated in Figure 6 corresponds to the maximum compaction of the quantity

15. of yarn which has been fed to the upper container 40 and at this point, the air cylinders 66 are operated to swing the gates 61 downwardly into the vertical positions shown in dotted lines as 61'. This allows the compacted body of yarn to pass downwardly into

20. the container 21 which is of the same cross section as the container 40 and is in register with it as a result of indexing movement of the trolley 15 on which it is mounted.

The downward movement of the ram 42 then

25. continues until all the compacted yarn has been forced into the container 21 except for a length of yarn which extends upwardly from the compacted mass, through the opening 43 into the ram 42 and back to the rollers 30 and 31. The ram 42 then returns upwardly to its

30. initial position and the gates 61 return to the full-line, closed position of Figure 5 so as to clamp the length of yarn between them. The individual rams 42 operate independently of one another, their time of operation depending on the quantity of yarn to be

- 18 -

transferred from an upper container 40 to a lower container 21. If no yarn at all is to be supplied to any particular container, the respective ram does not operate at all.

5. On the other hand, if any lower container 21 is required to accommodate a particularly large quantity of yarn, that is to say more than can be held by an upper container 40, a modified form of operation is necessary. As the yarn, compacted only
10. by air pressure approaches the top of the container 40, the gates 61 are opened without interrupting the feed of yarn. The yarn already in the container 40 is thus allowed to drop into the corresponding lower container 21, the movement being assisted by the
15. air pressure. Since each container 40 is considerably longer than the respective lower container 21, the plug of yarn spans the gap between the two containers and filling of the upper container 40 proceeds as previously. When the full required amount of yarn has
20. been delivered to the upper container 40, the ram 42 operates in the same manner as previously described, compressing the complete body of yarn and forcing it all into the lower container 21. The ram 42 then returns and the gates 61 close, as previously described.
25. The opening of the gates 61 is controlled on a time basis, i.e. by means of a signal from an electrical timer rather than in response to a signal that the correct amount of yarn has been supplied to the upper container. In practice, this timing
30. corresponds to a point when the container 40 is approximately two-thirds full. As mentioned previously, feeding of the yarn continues without interruption and the final operation of the ram 42 to compress all the

yarn into the lower container 21 takes place in exactly the same manner as previously described. This modified mode of operation represents the exception referred to above in which the total quantity of yarn supplied is greater than that which would normally fill a container 40 without mechanical compaction.

5. When all the rams have returned to their initial positions, the apparatus is ready for the indexing of the trolley which is represented by movement to the left as seen in Figures 5 and 6. Before this movement occurs, the containers 40 are raised slightly, e.g. by 25 mm, to provide working clearance with the tops of the containers 21. This upward movement is produced by an air cylinder 70 connected to one arm of a bell crank 71 pivoted to the frame at 72 and the other arm of which is connected to the assembly of containers 40, as seen in Figure 2.
- 10.
- 15.

20. The method of breaking the length of yarn extending from the gates 61 will now be described in more detail, with reference to Figures 5 to 7. As soon as the gates 61 have closed to clamp the yarn, the length of yarn extending between the gates and the top of the container 21 and indicated as 70 is engaged by a gripper mechanism indicated generally as 71 and seen in plan view in Figure 7
- 25.

- 20 -

- in relation to the container 21. The mechanism includes a fixed jaw 72 and a movable jaw 73 controlled by an air cylinder 74. Both jaws are supported by an L-beam 75 seen in dotted lines in Figure 7, which extends along the gripper mechanisms of all the containers 40. This in its turn is carried by an arm 78 pivoted at 79 and operated by a further air cylinder (not shown) so as to move from the position of Figure 5 to that of Figure 6. As a first stage in the operation, the jaw 73 is moved to the closed position to grip the yarn 70 and the mechanism 71 is then moved to the position of Figure 6 so as to break the yarn 70 between the gripper and the point where it is held by the gates 61. At the same time, the trolley 15 and hence the container 21 is indexed to the left as already described. As a consequence, the yarn below the gripper jaws 72, 73 is held above the left hand side of the container 21 which, as a result of the indexing movement is no longer beneath the corresponding container 40, the next container in the sequence having moved into this position.
- While the yarn 70 is held in this position a pusher member 82 mounted for vertical movement in guides (not shown) as indicated by the double headed arrow in Figure 6 is controlled to move from an upper position shown in Figure 5 to a lower position shown in Figure 6 in which a forked end portion 83 engages the length of yarn 70 and presses it into a small notch in the

- 21 -

- top of the wall of the container 21. Each container has such a notch, as can be seen at 84 in Figures 5 and 6. This notch is sufficiently narrow to grip the yarn end and the pusher member 82 is
5. then retracted to leave the yarn end held in position, after which it is released by opening of the jaws 72, 73 of the gripper mechanism 71. Each filled container 21 in the trolley 15 is thus left with a projecting yarn end held in the notch 84 and these ends are thus
10. readily available for joining to the yarn ends projecting from the tubes 18 of the creel, as previously described. After joining, it is a simple matter to pull each yarn through its tube for piecing up in the respective yarn carrier of the loom.
15. Figure 8 shows further details of the gates 61 in the open position indicated as 61' in Figure 5. As shown, the gates are perforated to allow free passage of the air which is blown into each upper container 40 to compact the yarn against the gate 61 at the
20. bottom of each container. The walls of the containers themselves are impervious and the air which flows downwardly through the compacted mass of yarn must therefore be able to escape freely through the gates 61.
25. Figures 9 to 12 show constructional details of the air jet 35 and the ram 42 at the upper end of each upper container 40. The injector air jet 35 includes a central passage 86 for the passage of yarn which broadens out at 87, air
30. being supplied to this broader part by an inclined passage 88 leading from an annular space 89. Air is supplied to the space 89 by

- 22 -

a line 90 provided with a screw connection 91. The flow of air down the passage 88 assists the movement of the yarn through the passage 86 and the resultant air pressure within the container 40 compacts the yarn at the bottom.

5.

The ram 42, as seen from Figures 9 and 12 is square in shape to match the shape of the cross section of the container 40 and has an appreciable clearance from the wall of the container to avoid the risk of compacted yarn becoming jammed. The central opening 43, however, is circular to avoid any corners which might trap the yarn.

10.

The remaining Figures illustrate the mechanism for indexing trolleys beneath the filling arrangement already described. As seen in Figures 1 and 2, each trolley is provided with a swivel castor 95 at each corner and remains supported on these castors during the successive stages of filling and indexing. For purposes of accurate location and indexing, each trolley is connected to an indexing frame 100 by means of a pair of pegs 101 which are moved upwardly to engage corresponding holes close to the forward corners of each trolley, best seen in Figure 13. Each peg 101 is mounted for vertical movement in a corresponding socket in structure 102 mounted beneath the frame 100 and is controlled for movement in its socket by connection to an arm 103 fixed to a shaft 104 which extends across the width of the indexing frame 100 to control both pegs 101. The shaft 104

15.

20.

25.

30.

- 23 -

is rocked between its two positions by means of an arm 105 which is itself operated by an air cylinder 106. Once the trolley has been coupled to the frame 100 by means of the pegs 101, it accurately follows the movements of the frame both from left to right as seen in Figure 2 and also in a direction at right angles to this.

5. The frame 100 is supported at each side by rollers 110 running between lower and upper rails 111 and 112 fixed to the main frame of the apparatus. The frame is indexed from left to right as seen in Figures 2 and 13 by means of a drive chain 114 passing around sprockets 115 and 116. The sprockets 116 on each side are driven in steps by a chain drive 117 by means of an electric motor 118 operating through a clutch /brake unit 119 and a speed reducing gear box 120 to produce the necessary indexing motion from left to right. To ensure accurate indexing, the position of the trolley 15 in relation to the frame 100 is constantly monitored by a detector arm 140 which is pivoted to the frame 100 and biased against the front of the trolley. The upper end of the arm 140 carries a micro-switch 141 which controls the clutch/brake 119 and co-operates with a bar 142 formed with spaced projections 143. The pitch of the projections 143 is equal to the required indexing distance and each time the plunger of the micro-switch engages a projection 143, indexing movement is interrupted.
10. 15. 20. 25. 30.
- The first step of movement brings the first row of containers 21 in the trolley 15 into register beneath the filling containers 40 and each

successive step of indexing brings the next row of containers 21 into this position. As described above, each step of indexing is associated with breakage of the yarns from the filled containers

5. so that, after the last row of containers has been filled, one further step of indexing is required in order to break the yarns from the last row of containers.

As described previously, only alternate

10. containers in a row are filled as a result of a single operation so that, after the trolley has completed one sequence of indexing, i.e. to fill alternate containers in all the rows, a second sequence is necessary in order to fill the inter-

15. vening containers. The trolley is accordingly indexed in the reverse direction to bring it back to its starting position and is then cross-indexed by a distance equal to the pitch of the containers in the rows so that the intervening, unfilled

20. containers are brought into register beneath the upper filling containers 40.

The cross indexing mechanism is illustrated in Figures 16 and 17. As seen from Figure 16, the structure 102 defining the socket for reception

25. of each peg 101 is mounted for horizontal sliding motion on a bar 121 extending between pairs of brackets 122 extending downwardly from the frame 100. The members 102 are inter-connected for this sliding movement by a bar 124 which slides through the

30. brackets 122 and has a projecting portion 125 to which is pivoted a connecting rod 126 driven by an eccentric 127. The eccentric 127 forms part of

- 25 -

- a gear wheel 128 meshing with a smaller pinion 129 which, in its turn, is driven by an electric motor 130 by way of a clutch/brake unit 131 and a speed reducing gear box 132. An angular displacement
5. of the eccentric 127 through approximately one quarter of a revolution in an anti-clockwise direction moves the connecting rod 126 to the position shown in dotted lines as 126', thus moving the bar 124 a corresponding distance to the right. This moves
10. the parts 102 also to the right to the position shown in dotted lines at 102' and hence indexes the trolley as a whole by a corresponding distance to the right on its swivel castors 95. The filling sequence is then repeated to fill all the remaining
15. containers and to break all the yarns, after which the trolley is again reverse-indexed and finally removed from the machine in readiness for transfer to the creel.
- 20.
- 25.
- 30.

C L A I M S

1. A yarn supply creel for a textile machine for producing a patterned fabric, in which creel at least most of the yarn positions are defined by individual containers each containing
5. a length of yarn corresponding to that required for the position in the pattern to which the respective yarn is supplied.
2. A yarn supply creel according to claim 1 in which each container is in the form of a cell
10. of uniform cross section and having a vertical dimension at least several times as great as its horizontal dimensions.
3. A yarn supply creel according to claim 2 in which the containers are of rectangular cross
15. section and are arranged in groups, each in the form of a rectangular array, consisting of a predetermined number of rows with a predetermined number of containers in each row.
4. A yarn supply creel according to claim 3
20. in which each array is mounted in a wheeled trolley.
5. A method of supplying yarn to a container for a creel according to any one of the preceding claims in which the yarn is fed between a pair of metering rollers followed by an air jet through which
25. the yarn passes and which blows the yarn into the container and compacts it, the metering rollers being controlled to stop the feeding action when the required length of yarn has been supplied.
6. A method according to claim 5 in which
30. the air pressure is increased periodically for short lengths of time, to produce pulses of higher pressure to assist compaction of the yarn.

- 27 -

7. A method according to claim 5 or claim 6 for supplying yarn to a container for a creel according to claim 2 or claim 3, in which the yarn in the container is subsequently compacted mechanically.
5. 8. A method according to claim 7 in which the yarn is fed initially to a first, parallel-sided container and is then compacted by mechanical pressure which forces it through the bottom of the container and into a second smaller container of similar cross section arranged below the first container.
10. 9. A method according to claim 8, in which the yarn compacted by air pressure is allowed to pass through the bottom of the first container and into the second before the application of mechanical pressure.
15. 10. A method according to any one of claims 5 to 9 for supplying yarn to a group of containers for a creel according to claim 3 or claim 4, in which a number of filling heads, each comprising a pair of metering rollers and an air jet are arranged in a row and are operated simultaneously to supply yarn to a corresponding number of containers in a row, the row of filling heads and the group of containers being indexed in relation to one another after the filling of each number of containers in a row in order to fill a corresponding number of containers in a subsequent row.
20. 11. A method according to claim 10, in which the filling heads are spaced so as to fill alternate containers in a row and the group of containers is indexed in relation to the filling heads which
- 25.
- 30.

- are stationary, by a distance equal to the pitch of the rows and, when alternate containers in all the rows have been filled, the group of containers is indexed laterally by a distance equal to the pitch of the containers in the rows and the sequence is repeated to fill all the remaining containers.
5. 12. A method according to any one of claims 5 to 9, in which on the completion of the filling of each container, the yarn extending from the top of the container is held by a gripper at one point and clamped at an adjacent point at the base of the filling container and the yarn between the two points is broken as a result of movement of the gripper, the broken end extending from the filled container being held in readiness for knotting to a corresponding length of yarn remaining in a tube of the creel from a previous weaving operation.
10. 13. Apparatus for supplying a predetermined length of yarn to a container for a creel according to any one of claims 1 to 4 comprising a pair of metering and feed rollers followed by an air jet injector for the yarn mounted above a support for the container, the rollers being controlled to stop their feeding action when the predetermined length of yarn has been injected into the container.
15. 20. 25. 14. Apparatus according to claim 13 for supplying yarn to a container for a creel according to claim 2, and including a mechanical ram for increasing the compaction of the yarn.
30. 15. Apparatus according to claim 14 and including a first container of uniform cross section mounted in fixed relation to the ram and

- 29 -

having a bottom capable of being opened to allow the ram to force yarn out of the first container and into a second container of similar cross section arranged below the first.

5. 16. Apparatus according to claim 15 in which the bottom of the first container comprises a pair of hinged gates having operating mechanism for opening the gates to allow yarn to pass from the first container into the second.
10. 17. Apparatus for supplying predetermined lengths of yarn to the containers of a creel according to claim 3 or claim 4 and comprising a row of filler heads each having a pair of metering rollers and an air jet injector arranged at a spacing dependent on that of the containers in the creel
15. and mechanism for indexing the group of containers in relation to the row of filler heads.
18. Apparatus according to claim 17 for supplying yarn to the containers of a creel according
20. to claim 4 in which the indexing mechanism operates to move the trolley step-by-step in relation to the row of filler heads.
19. Apparatus according to claim 18 in which the filling heads are spaced apart at double the
25. pitch of the containers in corresponding rows and the indexing mechanism also operates to move the trolley laterally by a distance equal to the pitch of the containers in the rows.
20. Apparatus according to claim 15 and any
30. one of claims 17 to 19 and including mechanism for producing relative movement in a vertical direction between the first containers and the second containers

- 30 -

so as to increase the separation between them during the indexing movement.

21. Apparatus according to claim 16 and any one of claims 17 to 20 in which each pair of gates operates to clamp the yarn between them and a movable gripper is provided for holding the yarn extending from each pair of gates after filling, whereby movement of the respective gripper serves to break each yarn between the gates and the gripper.
22. Apparatus according to claim 21 and including a member for pressing each broken yarn end into a slot at the top of the respective container.
23. A method of producing a patterned fabric on a textile machine in which the pattern is analysed to determine the length of yarn required for each position in the pattern in order to produce a predetermined length of fabric and the required lengths of yarn are supplied to the positions in a creel, corresponding to the respective positions in the pattern.
24. A method according to claim 23, in which the pattern is stored in a computer, to provide information as to the length of yarn required for each position in the pattern and this information is used to control metering devices for supplying yarn to each position in the creel.
25. A method according to claim 24 in which, for at least most of the positions in the creel, the metering devices supply the yarn to containers from which the yarn may subsequently be withdrawn

during the production of the fabric.

26. A method according to any one of claims 23 to 25 in which the fabric is pile fabric and the creel holds the yarns for forming the pile.

5.

10.

15.


20.

25.

30.


1/12

Fig. 1.

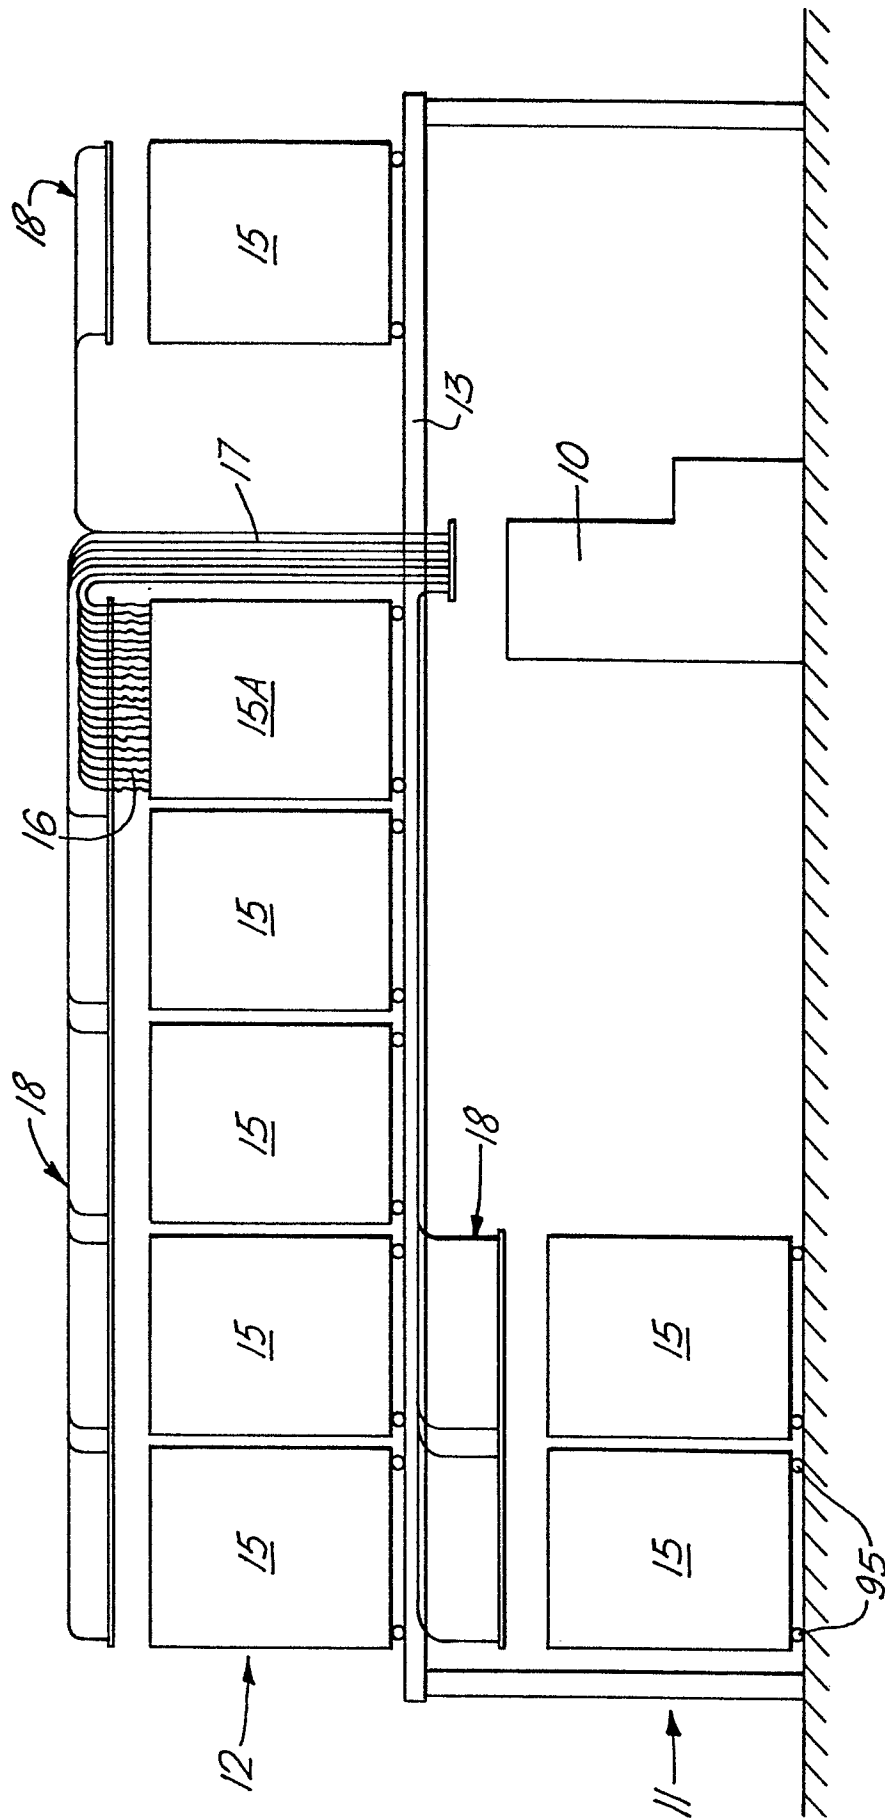


2/12

Fig. 2.

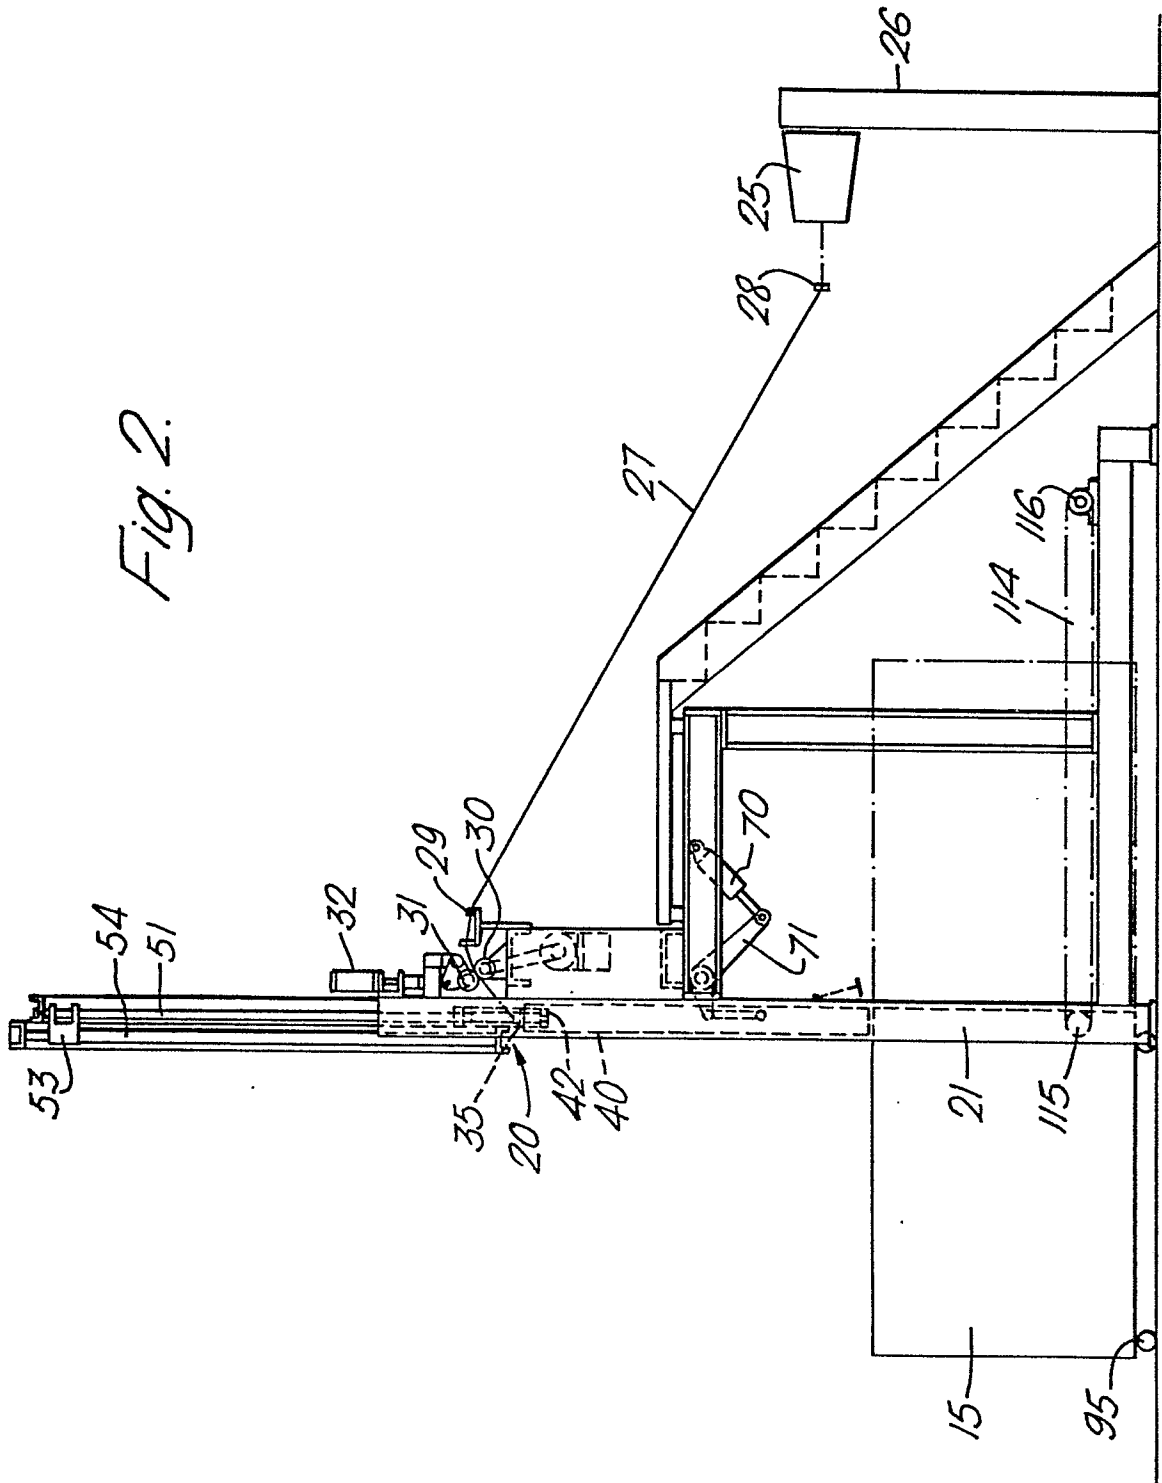


3/12

Fig. 3.

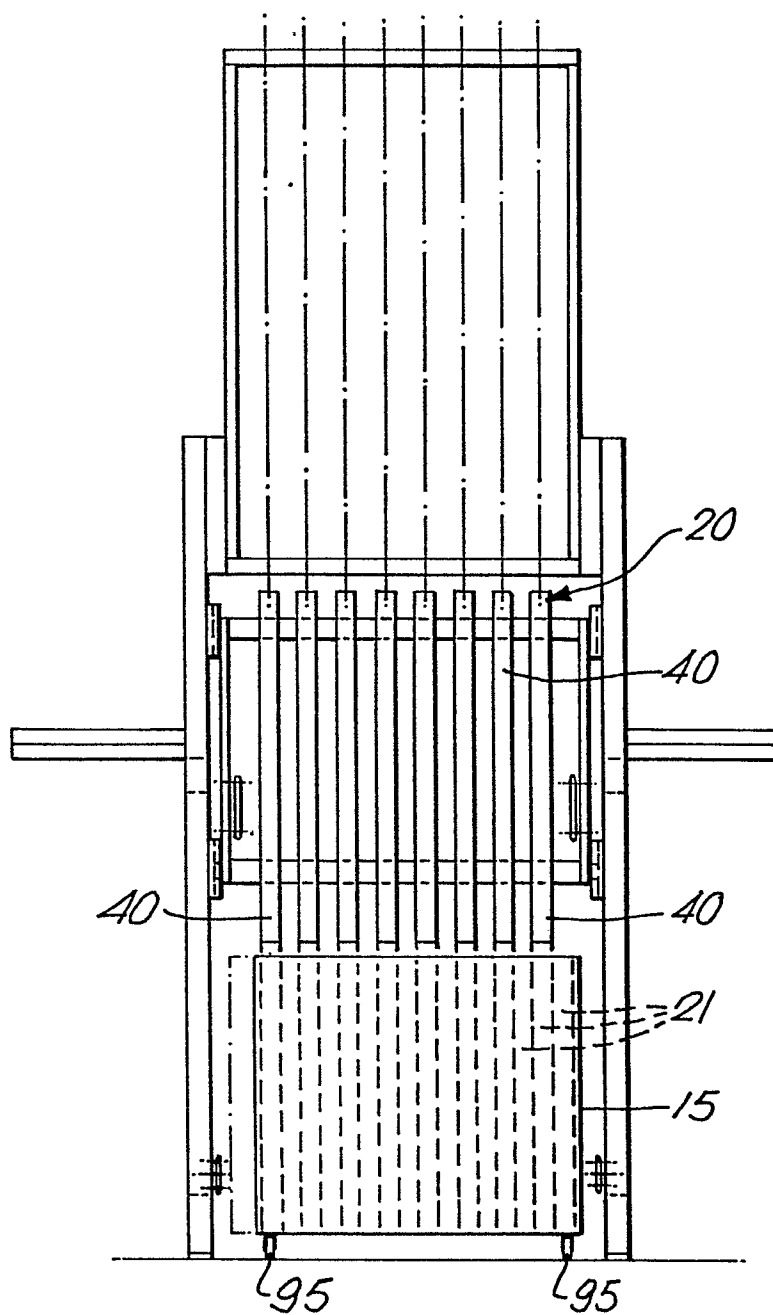

4/12

Fig. 4.

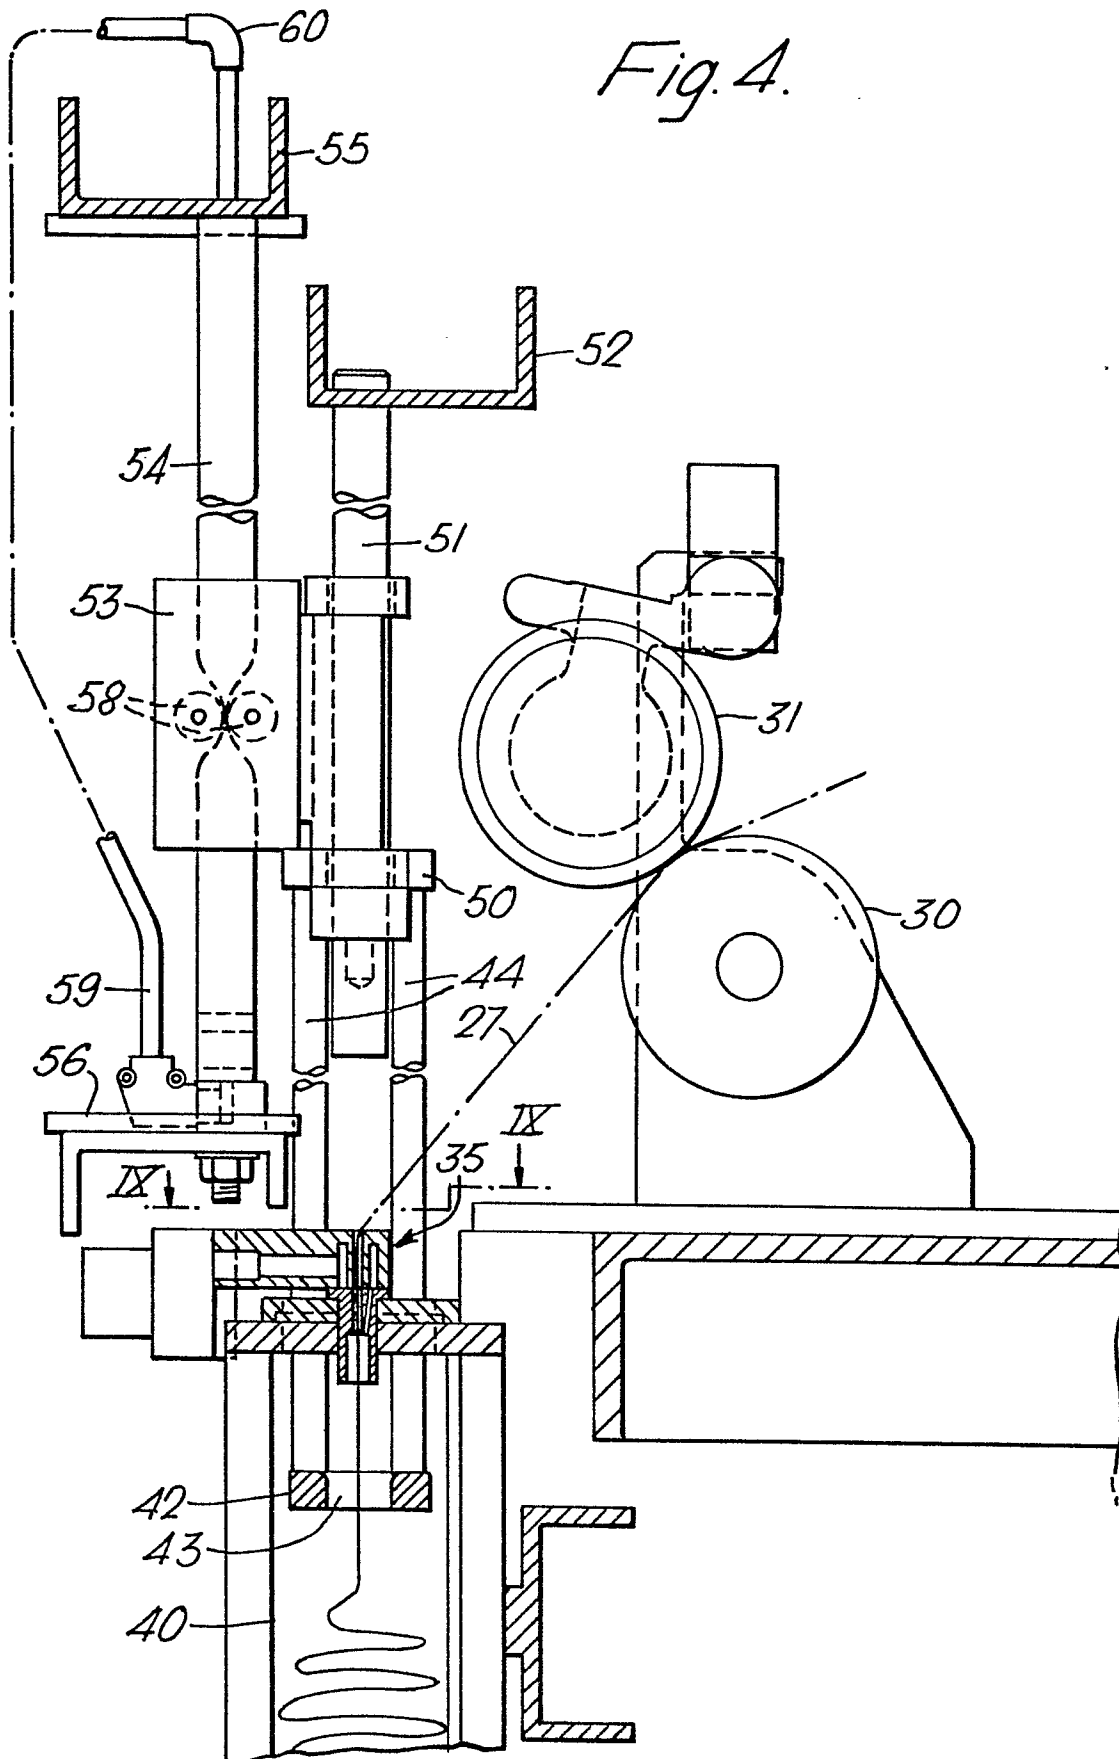

5/12


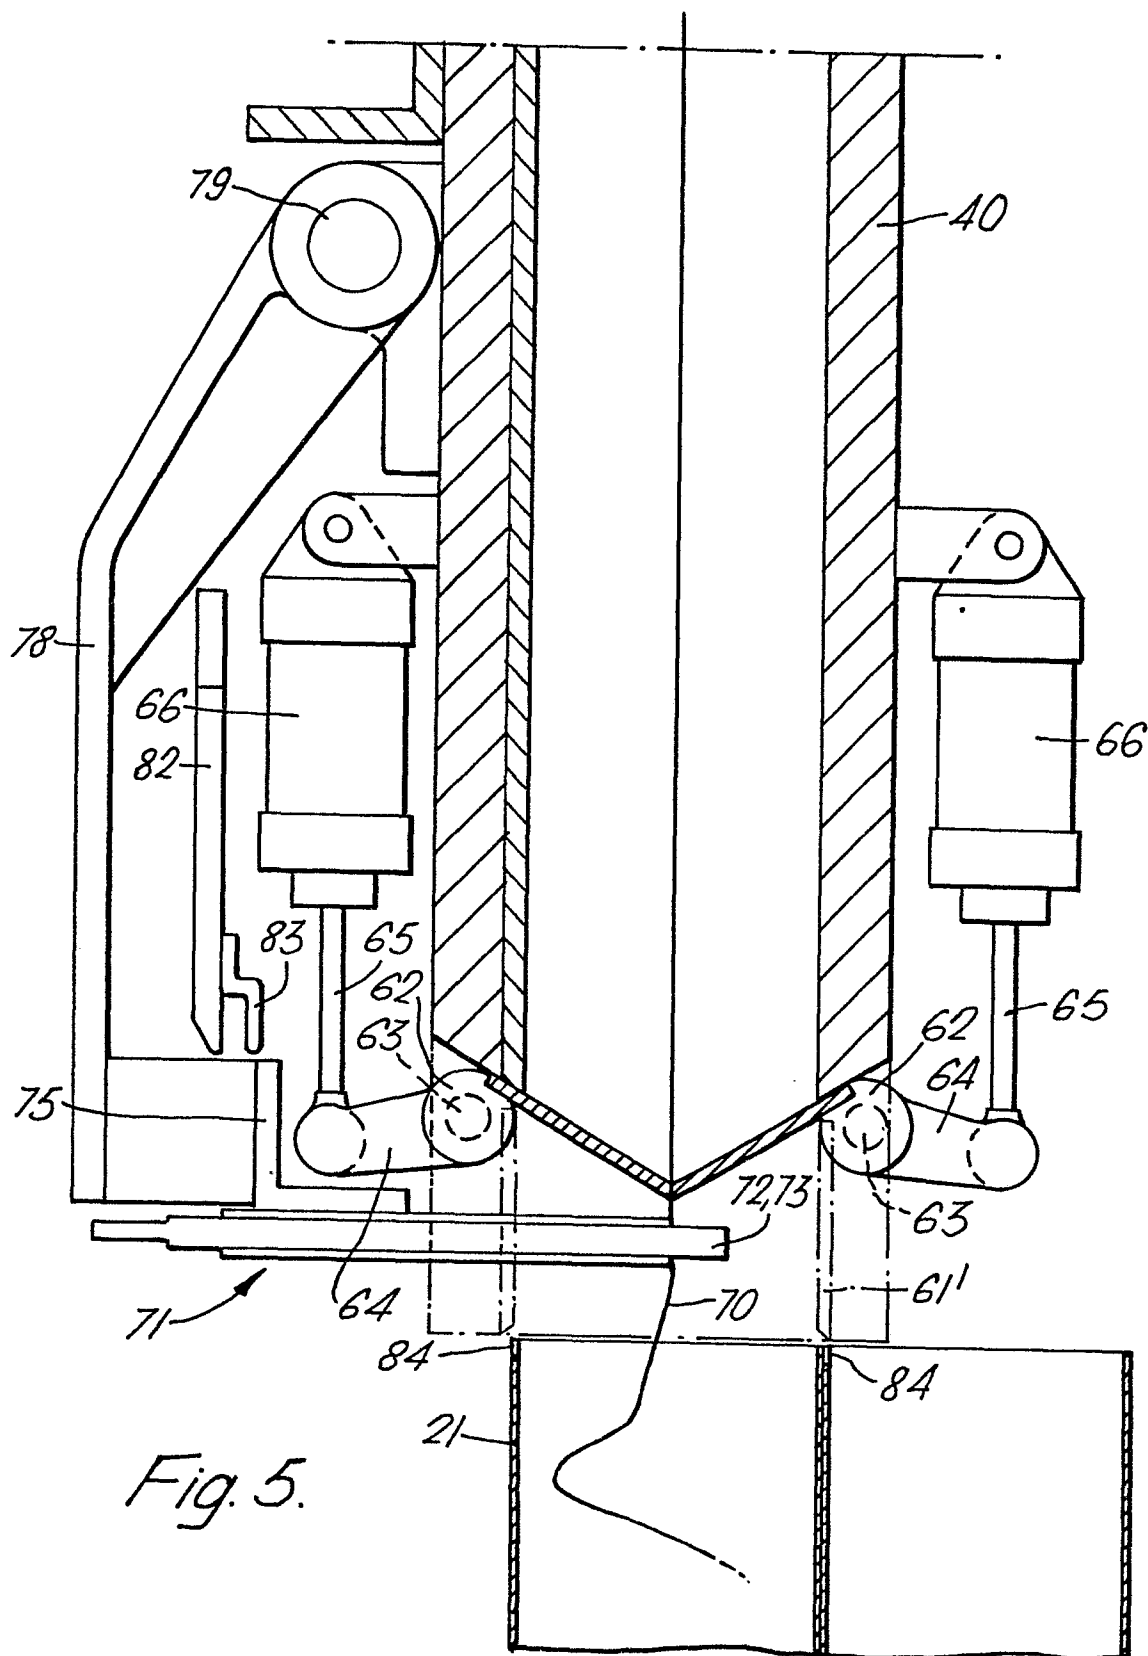




Fig. 5.

6/12

Fig. 6.

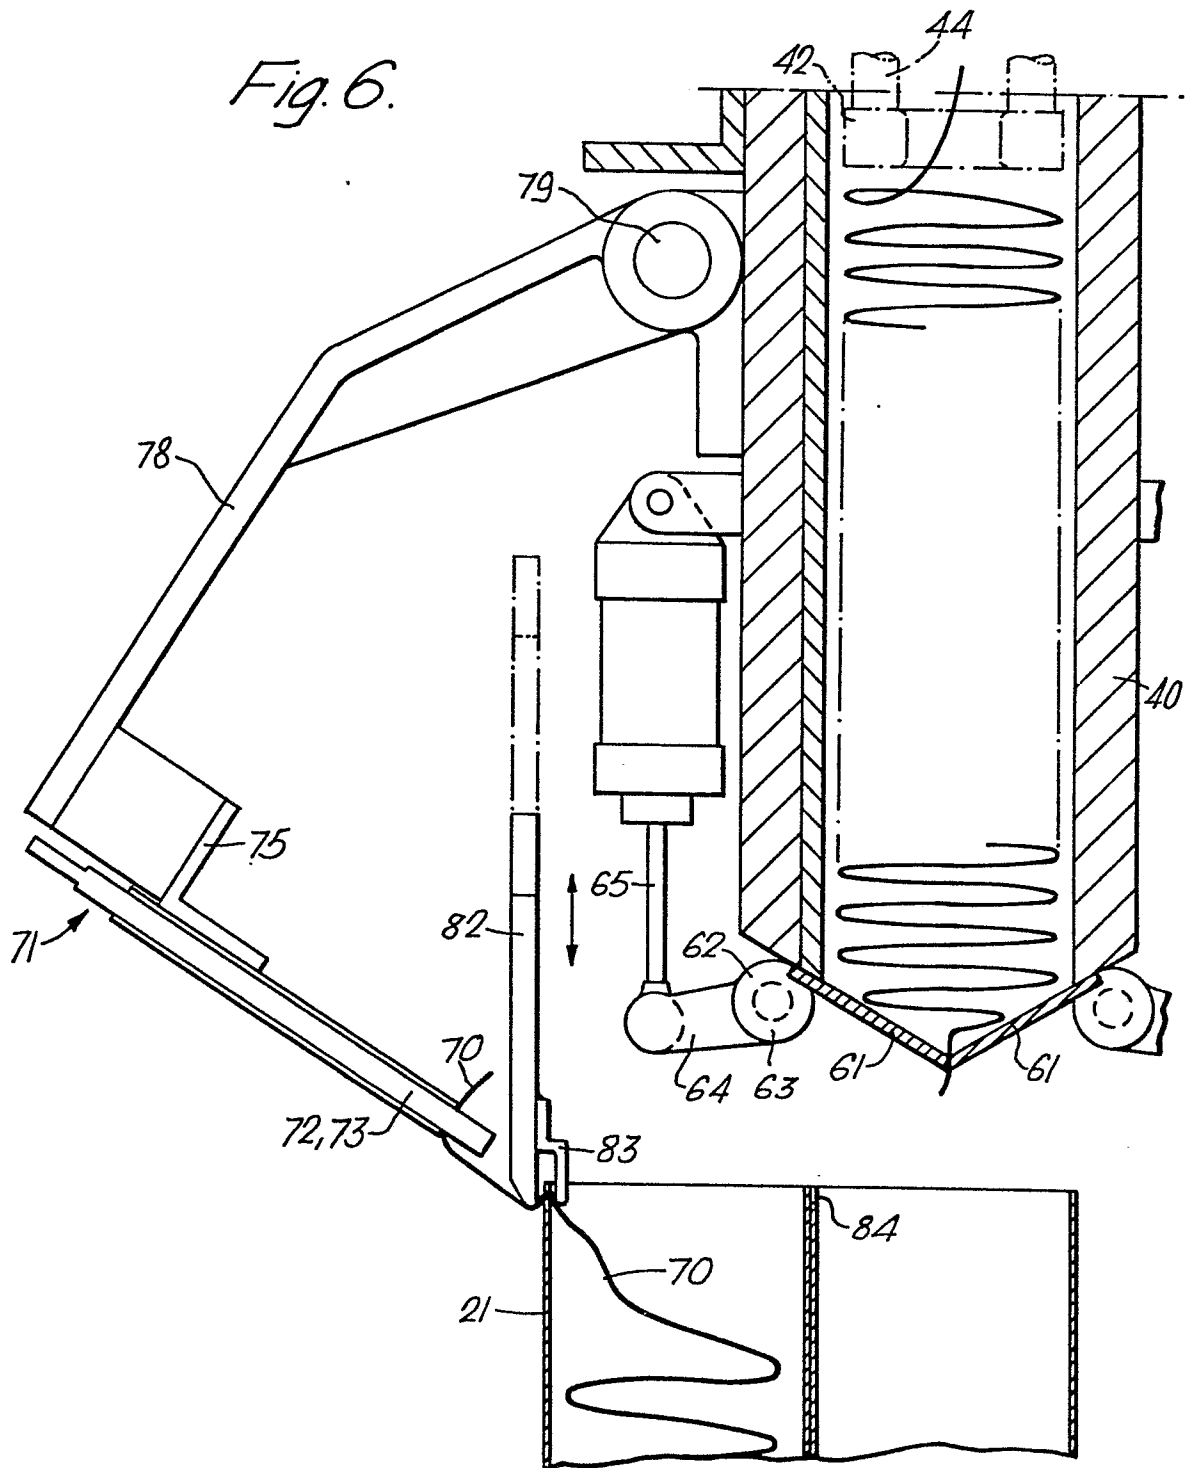

7/12

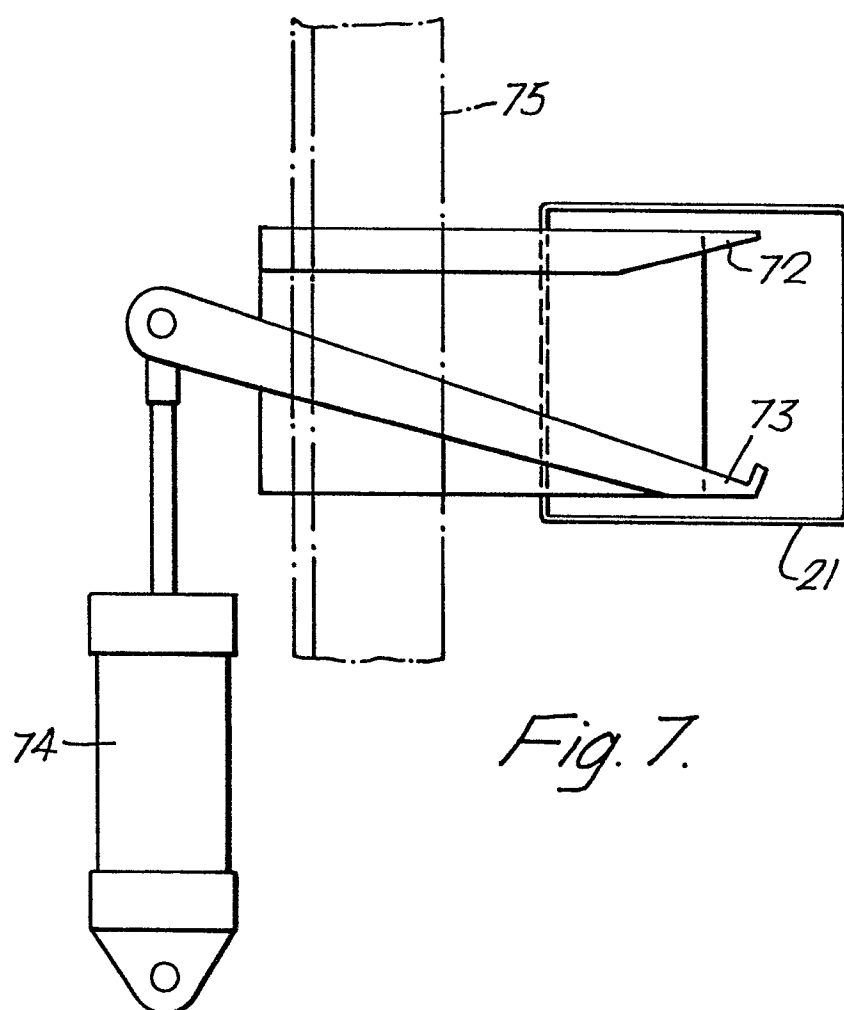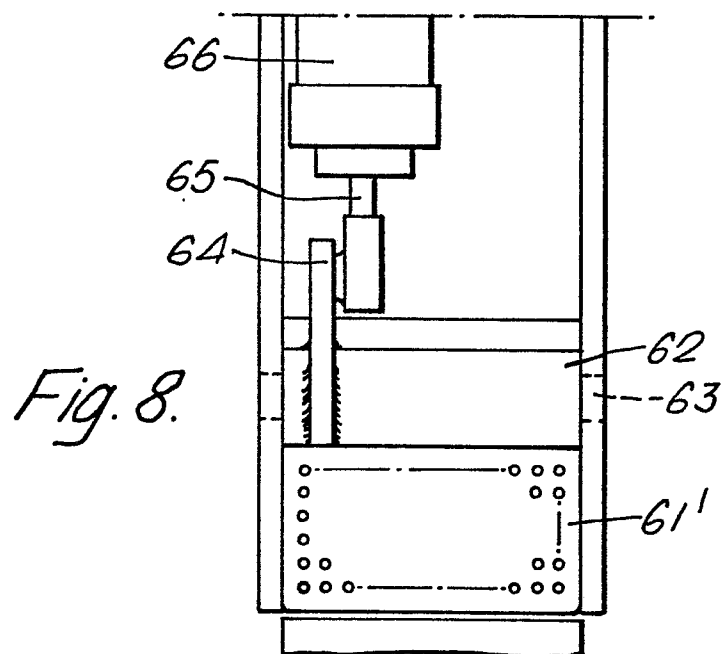

8/12

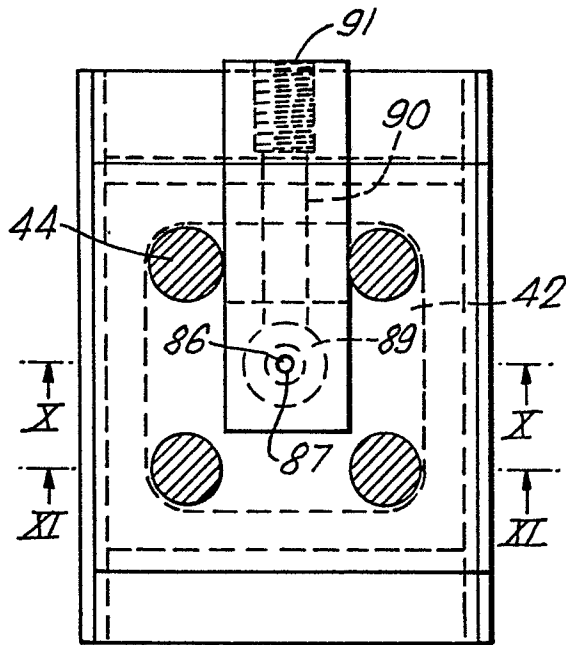


Fig. 9.

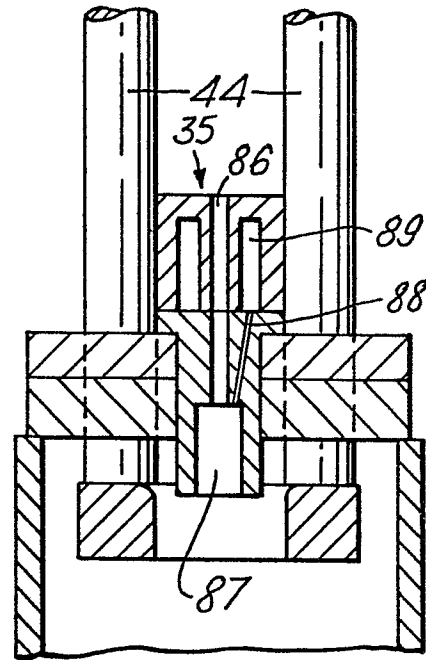


Fig. 10.

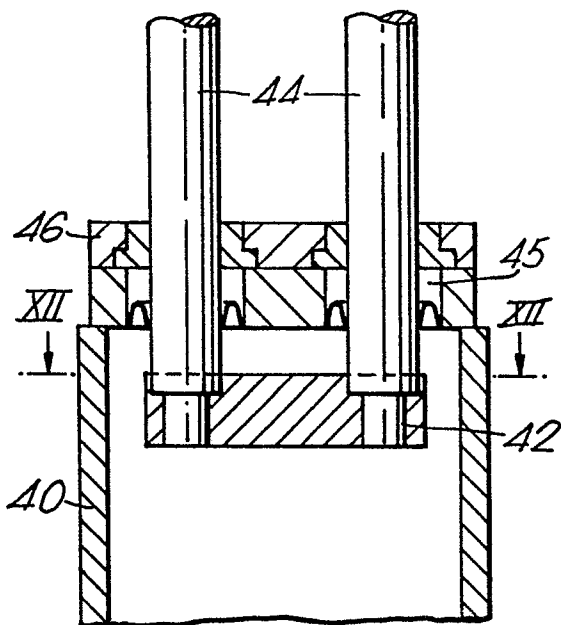


Fig. 11.

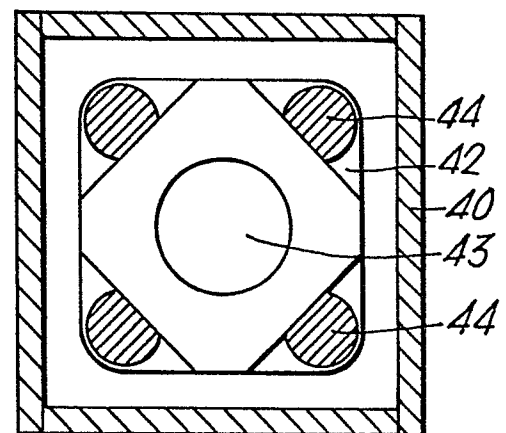


Fig. 12.



10/12

Fig. 14.

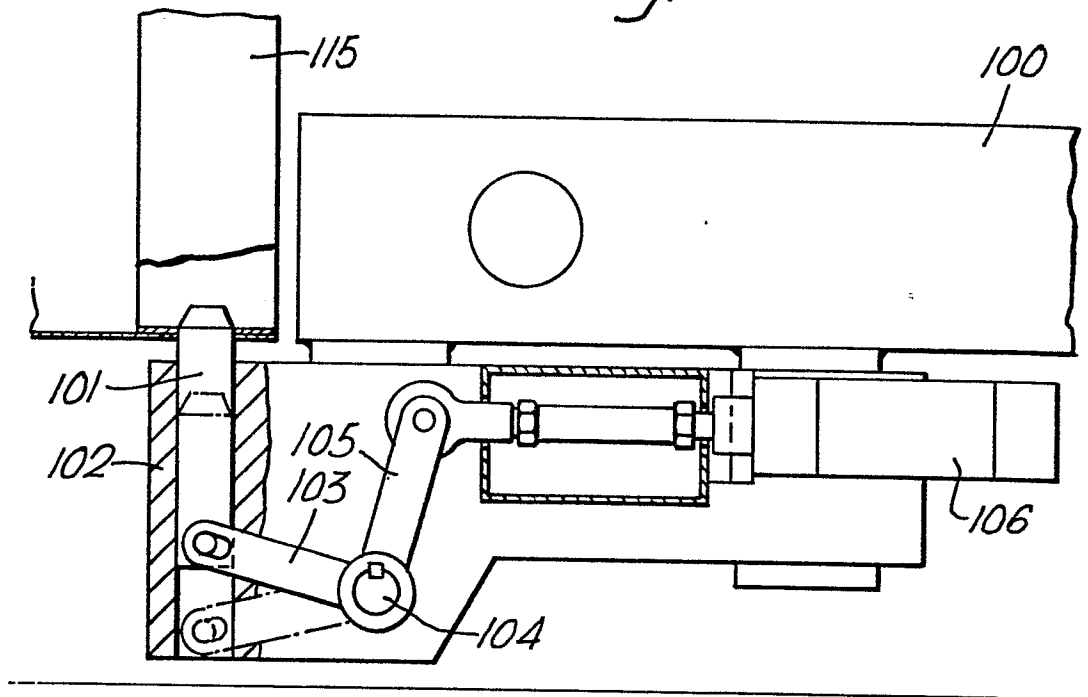


Fig. 15.



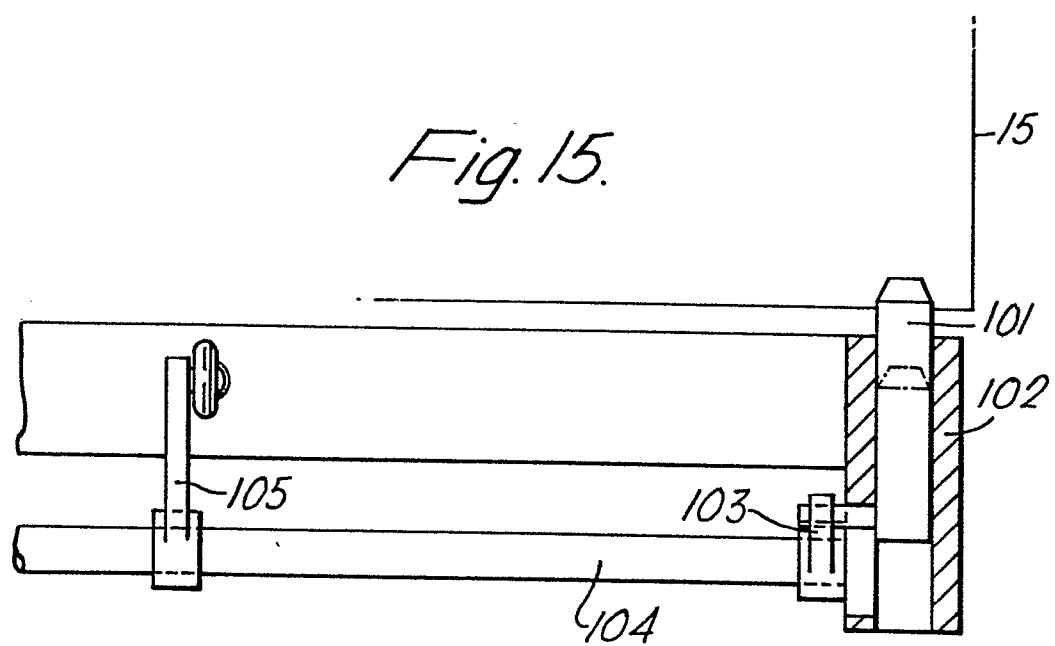


Fig. 16.

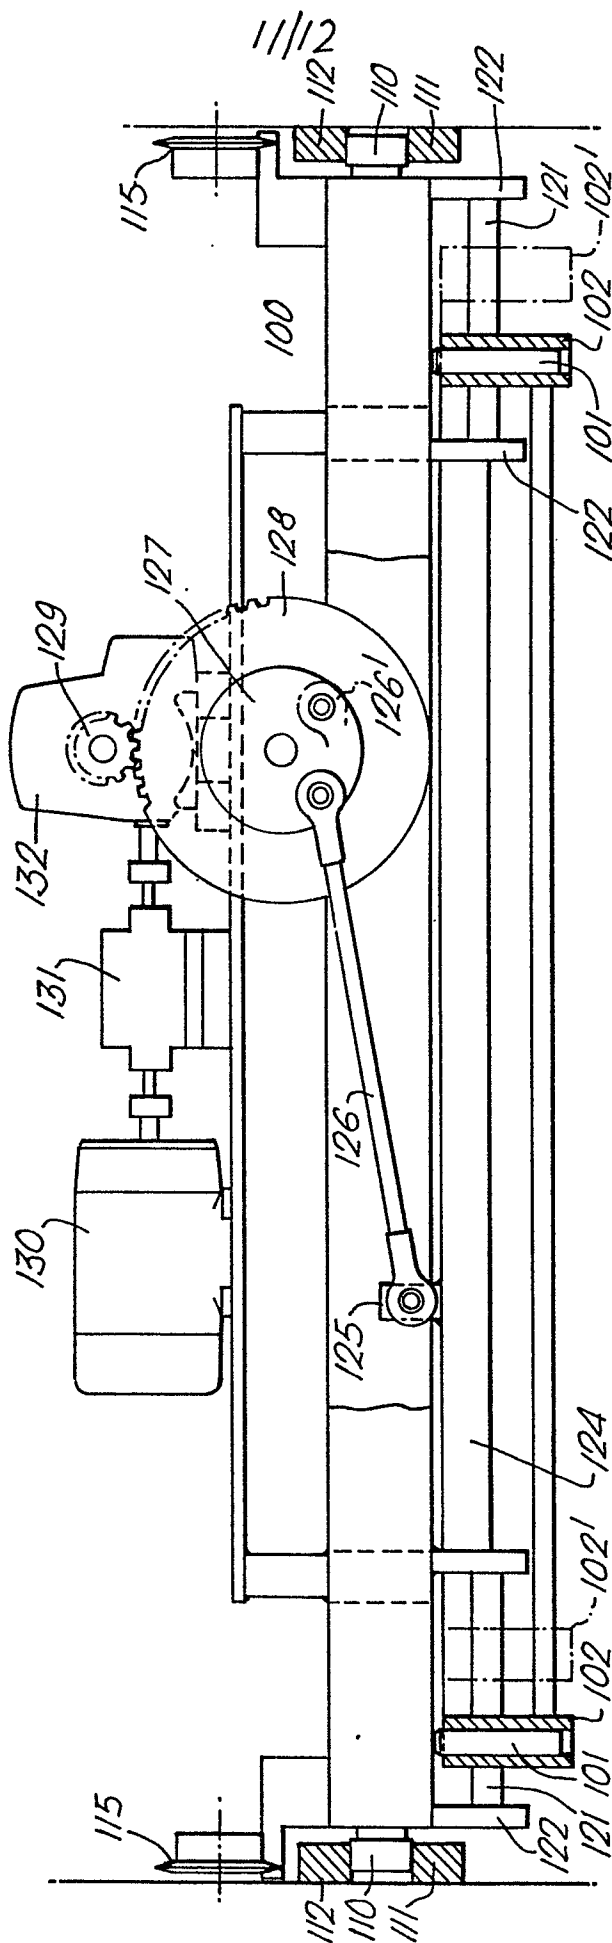

12/12

Fig. 17.

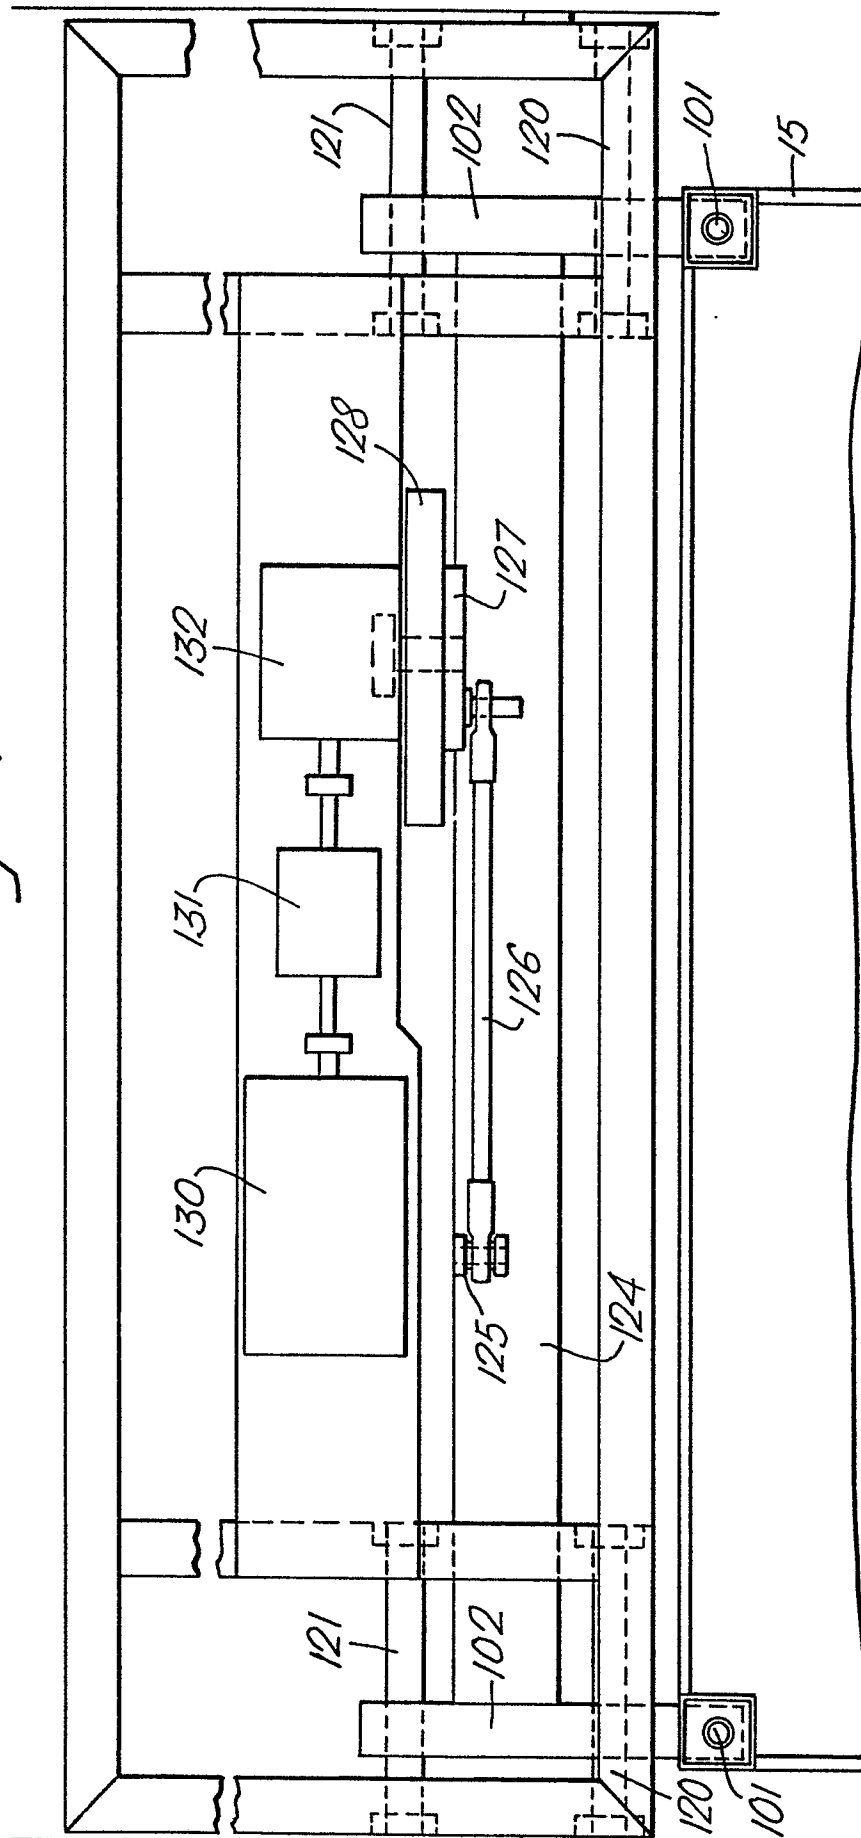



European Patent  
Office

# EUROPEAN SEARCH REPORT

0058478

Application number

EP 82 30 0372

| DOCUMENTS CONSIDERED TO BE RELEVANT                                                                                                                                                                                     |                                                                               |                                                                                                                                                                                                                                                                              |                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| Category                                                                                                                                                                                                                | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim                                                                                                                                                                                                                                                            | CLASSIFICATION OF THE APPLICATION (Int. Cl. <sup>3</sup> ) |
| A                                                                                                                                                                                                                       | GB-A-1 421 621 (BRITISH CARPETS)                                              |                                                                                                                                                                                                                                                                              | D 03 D 39/02<br>D 04 B 35/22<br>D 03 J 1/00                |
| A                                                                                                                                                                                                                       | US-A-4 244 309 (SPANEL)<br>-----                                              |                                                                                                                                                                                                                                                                              |                                                            |
|                                                                                                                                                                                                                         |                                                                               |                                                                                                                                                                                                                                                                              | TECHNICAL FIELDS SEARCHED (Int. Cl. <sup>3</sup> )         |
|                                                                                                                                                                                                                         |                                                                               |                                                                                                                                                                                                                                                                              | D 03 J<br>D 03 D<br>D 04 B<br>D 05 B                       |
| The present search report has been drawn up for all claims                                                                                                                                                              |                                                                               |                                                                                                                                                                                                                                                                              |                                                            |
| Place of search<br>THE HAGUE                                                                                                                                                                                            |                                                                               | Date of completion of the search<br>06-05-1982                                                                                                                                                                                                                               | Examiner<br>BOULEGIER C.H.H.                               |
| <b>CATEGORY OF CITED DOCUMENTS</b>                                                                                                                                                                                      |                                                                               |                                                                                                                                                                                                                                                                              |                                                            |
| X : particularly relevant if taken alone<br>Y : particularly relevant if combined with another document of the same category<br>A : technological background<br>O : non-written disclosure<br>P : intermediate document |                                                                               | T : theory or principle underlying the invention<br>E : earlier patent document, but published on, or after the filing date<br>D : document cited in the application<br>L : document cited for other reasons<br>& : member of the same patent family, corresponding document |                                                            |