

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 81200254.1

(51) Int. Cl.³: **D 06 F 25/00**

(22) Date of filing: 06.03.81

(43) Date of publication of application:
15.09.82 Bulletin 82/37

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

(71) Applicant: **ITT INDUSTRIES BELGIUM Société Anonyme**
Avenue Louise 489
B-1050 Bruxelles(BE)

(84) Designated Contracting States:
BE LU NL

(71) Applicant: **Deutsche ITT Industries GmbH**
Hans-Bunte-Strasse 19 Postfach 840
D-7800 Freiburg(DE)

(84) Designated Contracting States:
DE

(71) Applicant: **ITT INDUSTRIES, INC.**
320 Park Avenue
New York, NY 10022(US)

(84) Designated Contracting States:
CH FR GB IT LI SE AT

(72) Inventor: **Thysen, Albert Alfons Pieter**
Rodekruislaan 152
B-3744 Bilzen (Grote-Spouwen)(BE)

(72) Inventor: **Timmermans, Gilbert Lambert Joseph**
Ginstraat 43
D-3700 Tongeren ('s Herenelderer)(BE)

(74) Representative: **Rosenoer, Jacques**
BELL TELEPHONE MANUFACTURING COMPANY S.A.
Dépt.des Brevets Francis Wellesplein 1
B-2000 Anvers(BE)

(54) **Laundry handling machine, rotational speed reduction arrangement and rinsing device.**

(57) Laundry handling machine, such as a combined domestic washing and drying machine, including a vat (1) housing a drum (52) holding the linen and driven (122) about its horizontal axis by a motor (114) housed in the lid (2), with the help of a toothed ring (57) provided on one of the drum sidewall (55). A blower (183) projects heated air through the vat during the drying operation and is driven by the motor also during the washing operation, thereby performing a continuous motor cooling function and avoiding uncoupling means between the motor and the blower. A rotational speed reduction arrangement is used for timing the operations. The machine also features a rinsing device based on a siphon drain tube (99).

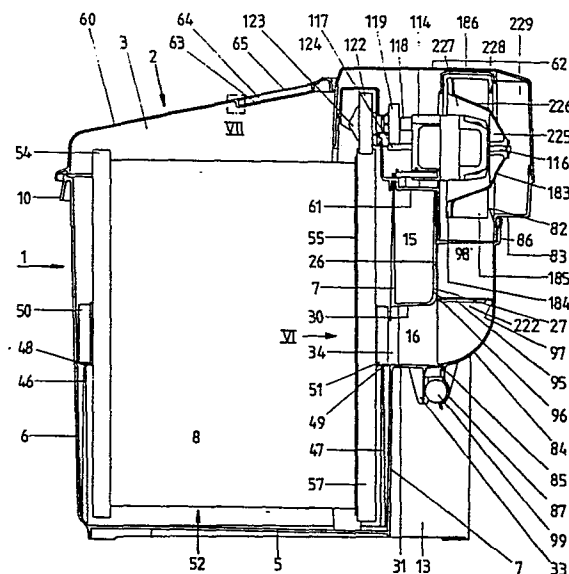


FIG. 5

-1-

Laundry handling machine, rotational speed reduction
arrangement and rinsing device

The present invention relates to a laundry handling machine
5 able to perform a washing operation and a drying operation and
including a vat, a laundry stirring member mounted in said vat,
a cover housing driving and control means which include a
blower and a motor driving said stirring member during both
said washing and drying operations and driving said blower
10 at least during said drying operation wherein heated air is
blown through said vat.

Such a laundry handling machine is already known from
Belgian patent N° 867 508 -----, In this
15 known machine means are provided to disconnect the blower from
the motor during a washing operation in order to decrease to
some extent the relatively high power then consumed by this
motor and diminish the heat developed in the cover. Indeed,
this power is higher during a washing operation than during
20 a drying operation. But notwithstanding this measure the
heat developed in the cover remains considerable and adver-
sely affects the condition of the motor and of the various
other components of the driving and control means mounted in
this cover.

25

It is therefore a first object of the present invention to

-2-

provide a laundry handling machine wherein less heat is developed in the cover and which does not require the use of blower connection/disconnection means.

- 5 According to the invention this object is achieved due to the fact that said blower is driven by said motor during both said washing and drying operations in order to then cool said motor.
- 10 In this way the motor is continuously cooled and because the blower remains coupled to the motor no connection/disconnection means are required between the motor and the blower.

- Another characteristic feature of the present laundry handling machine is that said blower has an outlet and is able to simultaneously produce two separate air streams, a first of said air streams flowing over said motor and a second of said air streams flowing over a heatable member, and to expell both said air streams simultaneously through said outlet into the atmosphere either directly during a washing operation or via said vat during a drying operation.
- 15
- 20

- Thus the motor cannot be adversely influenced by the second air stream which is heated during a drying operation.
- 25

- Still another characteristic feature of the present laundry handling machine is that it includes flow rate regulating means to make the flow rate of both said air streams flowing through said outlet smaller during said washing operation than during said drying operation.
- 30

Due to the decreased flow rate of the air stream during a washing operation the motor then consumes less power to drive the blower, without means being required to uncouple

-3-

the blower from the motor.

The present invention also relates to a rotational speed reduction arrangement for reducing the rotational speed of
5 a rotatable driving member, said arrangement including a speed reduction device comprising a one-way clutch mechanism, with a rotatable input member and a rotatable output member, and a restoring member, said rotatable driving member when making a predetermined rotation in a predetermined direction
10 communicating to said input member an angular displacement from an initial position over a fraction of said predetermined rotation and in an opposite direction, said output member being thereby angularly displaced in said opposite direction by said input member, and said restoring member being then
15 able to rotate said input member back into said initial position, said output member thereby remaining in the position previously attained.

Such an arrangement is already known from Belgian patent
20 N° 858 672 ----- . Therein the output member has a rotational speed which is considerably smaller than that of the driving member and is used for timing the duration of a washing operation.

25 Another object of the present invention is to provide an arrangement of the above type but having an output member with a further reduced speed of operation.

According to the invention this object is achieved due to
30 the fact that it includes a second said speed reduction device comprising a second one-way clutch mechanism, with a second input member and a second output member, and a second restoring member, said second input member being driven from said output member of said first speed reduction device.

-4-

Thus the second output member has a considerable smaller rotational speed than the rotatable driving member.

The present invention also relates to a laundry handling
5 machine including a washing operation timing device and a drying operation timing device.

Such a laundry handling machine is known from the above mentioned Belgian patent N° 867 508 .

10 Therein both timing devices are constituted by individual units adapted to individually time the full washing and drying operations respectively.

An object of the present invention is to provide a laundry
15 handling machine of the above type but wherein the timing can be performed in a more economic way.

According to the invention this object is achieved due to the fact that said drying operation timing device is
20 driven through said washing operation timing device.

In this way the washing operation timing device can be used either for timing a washing operation or in cooperation with the drying operation timing device for timing a drying
25 operation.

The present invention further also relates to a laundry handling machine with a vat, a cover for said vat, and driving and control means for said machine, said vat having
30 a front washing compartment separated from a rear part by a partition wall and said cover comprising a front lid giving access to said washing compartment and a rear casing housing at least part of said means.

-5-

Such a laundry handling machine is well known in the art, e.g. from US patent 3 046 543. In this known machine a substantial part of the casing of the cover is located above the washing compartment of the vat so that the driving and control means located in this casing as well as the casing itself are subjected to the heat developed in the washing compartment during a washing operation.

Still another object of the present invention is to provide a laundry handling machine of the above type but which avoids such an effect thereby facilitating manufacture and/or reducing wear.

According to the invention this object is achieved due to the fact that the plane of said partition wall separates said washing compartment from said casing.

In this way the casing of the cover as well as the driving and control means housed therein are mounted behind the washing compartment of the vat and cannot be significantly affected by the heat developed therein during a washing operation.

The present invention also relates to a rinsing device for a vat and more particularly to a rinsing device for the vat of a laundry handling machine.

A characteristic feature of the present rinsing device is that said vat is coupled on the one hand with a supply conduct for a rinsing liquid and on the other hand with a siphon drain tube which has a larger cross-section than said supply conduct.

In this way, when the vat is filled with a rinsing liquid

-6-

via the supply conduct this liquid rises in the vat until the siphon action starts, as a consequence of which the vat is emptied via the siphon drain tube more rapidly than it is filled again via the supply conduct. This operation is
5 repeated as long as fresh rinsing liquid is supplied to the vat via the supply conduct.

The above mentioned and other objects and features of the invention will become more apparent and the invention itself
10 will be best understood by referring to the following description of an embodiment taken in conjunction with the accompanying drawings in which :

Fig. 1 is a top view of a laundry handling machine
15 according to the invention;

Fig. 2 is a side view of this machine in the direction of arrow II of Fig. 1;

20 Fig. 3 is a rear view of this machine in the direction of arrow III of Fig. 1;

Fig. 4 is a perspective top view of the rear part of the vat of this machine;

25 Fig. 5 is a cross-sectional side view along line V-V in Figs 1 and 14 and at the scale of Fig. 1, however, with some parts removed;

30 Fig. 6 is a side view in the direction of arrow VI of part of the drum of the machine of Fig. 5;

Fig. 7 is a detailed cross-sectional view at an enlarged scale of part VII of Fig. 5;

-7-

Fig. 8 is a cross-sectional side view along line VIII-VIII in Figs. 1 and 14 after some parts have been removed and at the scale of Fig. 1;

5 Fig. 9 is a cross-sectional view along line IX-IX in Fig. 8;

Fig. 10 is a cross-sectional side view along line X-X in Fig. 9 but at an enlarged scale;

10 Fig. 11 is a cross-sectional side view along line XI-XI in Fig. 3 but at an enlarged scale;

15 Fig. 12 is a cross-sectional view along line XII-XII in Fig. 11;

Fig. 13 is a cross-sectional side view at an enlarged scale through part of the vat bottom and drum of the machine of Fig. 1;

20 Fig. 14 is a top view at an enlarged scale of part XIV of Fig. 1 after the cover of the machine has been removed;

25 Fig. 15 is a cross-sectional side view along line XV-XV in Figs. 1 and 14 at an enlarged scale;

Fig. 16 is a perspective exploded view of parts of Fig. 15 at a different scale;

30 Fig. 17 is a schematic view of an electric control circuit for the machine of Figs. 1 to 16.

The laundry handling machine shown includes a vat 1 which has

-8-

an open top and which is closed by a cover 2. Vat 1 comprises a front washing compartment 3 (Fig. 5) and a rear part or supporting structure 4. The washing compartment 3 is delimited by a bottom wall 5, a front wall 6, a rear wall 7 and side walls 8 and 9, the upper edge of all these walls being located in a same plane parallel to the bottom wall 5. The walls 6, 8 and 9 have a downwardly inclined rim 10 and the side walls 8 and 9 are provided with handgrips 11 and 12 (Fig. 1). The supporting structure 4 comprises two lateral downwardly tapering hollow columns 13 and 14, a central box-shaped vertical air channel 15 and a central air conduct 16 disposed below the air channel 15. Hollow column 13 (Fig. 4) is delimited by portions of rear wall 7 and side wall 8 and by two further walls 17 and 18 which have a height smaller than that of these wall portions and which are parallel thereto. Hollow column 13 is fully separated from the washing compartment 3 by portion 19 of rear wall 7. Likewise hollow column 14 is delimited by portions of rear wall 7 and side wall 9 and by two further walls 20 and 21 which have a height smaller than that of these wall portions and which are parallel thereto. Hollow column 14 is subdivided by a partition wall 22 into a closed compartment 23 and a float compartment 24 the partition wall 22 being parallel to rear wall 7 and having the same height as this rear wall 7. The float compartment 24 communicates with the front washing compartment 3 as the rear wall 7 is interrupted at a certain distance from the side wall 9 where there only remains a small strip 25. The central air channel 15 has an open top and comprises a rear wall 26, disposed at a distance from the vat rear wall 7 and provided with an opening 27, side walls 28 and 29 (Fig. 3) and bottom wall 30 (Fig. 5). The latter bottom wall 30 forms the top wall of the adjacent air conduct 16 which has moreover side walls (not shown) and a bottom wall 31 provided with two downwardly

-9-

directed fingers 32 and 33 (Fig. 3). Air conduct 16 communicates with the washing compartment 3 through opening 34 which has an area equal to about three times that of opening 27.

5

The hollow float compartment 24 (Figs. 8, 9) houses a float 35 comprising a block of polystyrene foam 36 press fitted into a U-shaped holder 37 which is integral with an upstanding rod 38. At its upper end the latter rod 38 is bent at 90°
10 so as to form a portion 39 which extends through an opening 40 in the vat side wall 9, the latter portion 39 being again bent at 90° so as to form a horizontal level indicating finger 41 (Fig. 2) located outside vat 1 and parallel to side wall 9. This finger 41 is visible from the outside through
15 a removable window 42 clipped in an opening 43 in vat wall 9 and in part 44 (Fig. 2) of opening 40. Vat wall 9 is also provided with an overflow opening 45 (Fig. 8) to permit the evacuation of e.g. foam out of the float compartment 24.

20 Inside the washing compartment 3 front wall 6 and rear wall 7 are provided with upstanding ribs 46, 47 (Fig. 5) on which semi-circular bearings 48 and 49 are fixed respectively. These bearings 48 and 49 rotatably support cylindrical axle portions 50 and 51 of a laundry stirring member constituted
25 by a washing drum 52. This drum 52 which is only schematically represented but which is substantially similar to the one used in the above mentioned laundry handling machine (Belgian patent 858 672) comprises a cylindrical casing 53 and two circular side walls 54 and 55, side wall 55 having a plurality
30 of radial slots 56 of constant width (Fig. 6). Drum 52 may be driven due to the peripheral part of its side wall 55 being provided with a toothed ring 57, as will be explained later. As shown in Fig. 13 the bottom 58 of the washing compartment 3 is constituted by part of a cylinder and the lower part of

-10-

the cylindrical drum 52 is mounted at a distance from this cylindrical bottom 58. The drum 52 has a smaller radius than this bottom 58, the axes of the drum and of the bottom being parallel and located in a same vertical plane. Thus there is
5 formed between drum 52 and bottom 58 a free space 59 the cross-section of which gradually increases from the middle of the bottom of the washing compartment 3 to the side walls 6 and 7 thereof. This has been done in order to prevent the rotation of the drum 52 from being hindered by objects such as buttons
10 which have been separated from the laundry and brought in the free space 59.

The above mentioned cover 2 comprises a front lid 60 covering the washing compartment 3 and a rear casing 61, 62 supported
15 by the rear supporting structure 4 and more particularly by the columns 13 and 14 and the air channel 15 thereof.

The casing comprises a mounting plate 61 (Fig. 5) and a cap 62 to which the front lid 60 is hinged in a way shown in Figs. 9 and 10 and to be described later. The mounting plate
20 61 only covers a central portion of the open top of the air channel 15, and lateral portions (not shown) of this top communicate with the atmosphere.

Front lid 60 is provided with an opening 63 into which a
25 filter element 64 comprising a grid 65 and a piece of filter paper 66 is clipped by clips such as 67 (Fig. 7). It is also provided with a handgrip 68 (Fig. 1) on its forward end and both its relatively resilient side walls are hingedly connected to the cap 62. One of these side walls is provided
30 with a cylindrical protrusion (not shown) engaged in a blind hole (not shown) of the cap 62. The other side wall is provided at its inner side with a pivot pin 69 surrounded by a cylindrical portion 70 and rotatably engaged in a blind hole of a cylindrical stud 71 provided in the center of a cup-shaped

-11-

circular end 72 of a lever arm 73. This arm 73 has a substantially U-shaped cross-section and is provided with a lateral protrusion 74. The stud 71 is rotatably engaged in an opening of the last mentioned other lateral wall of the cap 62, this opening being delimited by a moisture ingress preventing lip 75 located between the cylindrical stud 71 and the annular portion 70, on the one hand, and between this annular portion 70 and the outer flange of the cup-shaped end 72 of the lever arm 73 on the other hand. The cup-shaped end 72 of lever arm 73 is also provided with a further cylindrical stud 76 around which a wire spring 77 is mounted in such a way that the ends thereof make contact with the top wall of the cap 62 and with the lateral protrusion 74 on the arm 73 respectively. This spring 77 continuously urges the lever arm 73 in clockwise direction (Fig. 8). The latter lever arm 73 forms part of a security device which will be described later. The cross-sections of the pivot pin 69 and of the blind hole in the cylindrical stud 71 are not fully complementary (Fig. 10) so that the lever arm 73 is only rotated together with the lid 60 after the latter has been rotated over a certain angle. It should be noted that in case lid 60 has been removed the spring 77 pivots lever arm 73 into contact with the adjacent side wall of the cap 62 (Fig. 8).

The top wall of cap 62 is provided with two openings through which selection knobs 78 and 79 (Fig. 1) protrude. Knob 78 is a washing programme selection knob permitting the selection of the duration of a washing operation and knob 79 is a drying programme selection knob enabling the selection of the duration of a drying operation. Cap 62 is further laterally provided with slightly resilient flaps 80 and 81 (Fig. 1) which cooperate with the peripheral rim 10 of the vat 1 to fix the cap 62 thereon.

-12-

The above mentioned mounted plate 61 is partly supported by upper edges of wall 7, hollow columns 13, 14 and air channel 15 and its non supported portion is provided with a plurality of air inlet openings 196 (Fig. 14) some of which
5 are located above column 13. At its rear side the mounting plate 61 on the one hand has a downwardly tapering part 82 (Figs. 3, 5) which is open at its lower end and on the other hand has an adjacent part 83 which has a shape clearly shown in Fig. 3 and which is delimited at one side by a substantially
10 vertical wall 230 (Fig. 14). The latter part 83 forms with the adjacent part of the casing 61 an air inlet space 229 (Fig. 5).

The mounting plate 61 is secured to the vat 1 by means of
15 a rear cover member 84 (Fig. 3, 5) and a sealing member 85 is used to ensure water tightness. This rear cover member 84 has an upper collar 86, a lower central retaining clip 87, two lower lips 88 and 89, two lateral ears 90 and 91, a lateral housing 92 and a lateral substantially U-shaped
20 attachment member 93-94 with lips 93 and 94. The cover member 84 carries a manually rotatable bistable shutter member 95 (Fig. 5) fixed on a pivot axle 96 and normally resting with its edge on an inner lip 97 and closing an opening 222. The upper collar 86 of the cover member 84
25 fits on the lower end of tapering part 82 of the mounting plate 61 and forms with the rear wall 26 of the air channel 15 an outlet pipe 98 able to communicate either with the air channel 15 via opening 27 or with the washing compartment 3 via opening 222, air conduct 16 and opening 34, depending
30 on the position of shutter member 95. The cover member 84 is fixed on the vat 1 by means of screws screwed in the lips 88 and 89 and in the ears 80 and 91. The inlet of a siphon drain tube 99 (Fig. 3) is fixed on the vat at 100 close to the bottom thereof and in operation its outlet is located below

-13-

its inlet, as shown in Fig. 3. The tube 99 is engaged between the fingers 33 and 34 on the one side and the retaining clip 87 on the other side. A water supply conduct 101 is fixed to the vat 1 at 223 and is engaged between the lips 93 and 94 of the attachment member 93-94. The diameter of drain tube 99 is larger, e.g. two times, than that of supply conduct 101. At a certain distance below conduct 101 the vat has an overflow opening (not shown). The ears 90 and 91 serve for winding up an electricity supply cable 102.

10

The lateral housing 92 (Figs. 3, 11) of the cover member 84 houses a U-shaped lever 103 with lateral arms 104 and 105 and a transverse arm 106. An axle 107 and the above axle 96 are integral with the free ends of the arms 104 and 105 respectively and are located in the prolongation of each other. Arm 105 is provided with a lateral protrusion 108 engaged in the channel of a substantially U-shaped guide piece 109 which is integral with the lower end of a control rod 110 protruding through an opening 111 in the mounting plate 61.

20

The transverse arm 106 of the U-shaped lever 103 is attached to a wall of housing 92 by means of a spring 112. At its one end the axle 96 carries the above shutter member 95 mounted in the outlet pipe 98. At its other end protruding through an opening 220 in the side wall 9 of the vat the axle 96 carries a rotatable dry/wash selection knob 113. This knob 113 is used to bring the shutter member 95 against the action of spring 112 either in a horizontal or in a vertical stable position wherein the outlet pipe 98 communicates with the air channel 15 or with the air conduct 16 respectively.

30

A driving and control device for the machine is mounted on the mounting plate 61 for driving the washing drum 52 and for controlling a washing operation timing mechanism, of the type disclosed in the above mentioned Belgian patent 858 672,

-14-

and a drying operation timing mechanism. These mechanisms are intercoupled by a rotation reversal device and are driven by a same motor 114 the direction of rotation of which is alternately reversed. This motor 114 has a frame which is
5 fixed on plate 61 by screws such as 115, and a horizontal drive shaft 116-117 (Fig. 5) which protrudes at both sides of the motor. A blower generally indicated by reference numeral 183 is directly fixed on the one end 116 of this drive shaft 116-117 the other end 117 of which is constituted by
10 a worm. The motor frame is further provided with a fixed axle stud 118 (Figs. 5, 14) which extends in parallel to the worm 117 which engages with a worm wheel 119 rotatably mounted on the fixed axle stud 118 and having a hub 120. The latter hub 120 is united by axial pressure to the hub 121 of a
15 drive wheel 122 which is also rotatably mounted on the axle stud 118 and which engages with the toothed ring 57 of the drum 52 the axis of which is parallel to drive shaft 116-117. Both this axis and shaft are substantially located in a same vertical plane. At its end away from the worm wheel 119 a cap
20 123 is secured to the axle stud 118. The hub 121 of the drive wheel 122 fits into an opening of a skirt 124 fixed on plate 61 by means of screws such as 125. A toothed drive belt 126 is arranged around the hub 120 of the worm wheel 119 and in the peripheral groove of a pulley 127 which is integral with
25 a worm 128, both the pulley 127 and the worm 122 being rotatably mounted about a horizontal axle 129 fixed in supports 130 and 131 formed on the mounting plate 61. This worm 128 engages with a worm wheel 132 which is rotatably mounted around a vertical axle 133 and which forms part of the above mentioned
30 washing operation timing mechanism. This wheel 132 which simultaneously forms a driving member and a restoring member bears a vertical stud 134 adapted to cooperate with a radial control arm 135 of a lower clutch member or input member 136 of a one-way clutch mechanism (Figs. 14, 15) which further

-15-

comprises an upper clutch member or output member 117. Both the clutch members 136 and 137 and a motor rotation reversal control member 138 are fixed on a vertical frusto-conical peg 139 formed on the mounting plate 61. This vertical peg 5 139 has a lower portion with a larger diameter than its upper part and thus delimits a peripheral shoulder supporting an annular friction ring 140. The control member 138 which rests on the friction ring 140 has a lateral cam member 141 with a radius variable over an angle of about 60° and controls the 10 movable armature 142 of a microswitch 143. The control member 138 also has an upper surface with an annular groove housing the bottom part of a coiled spring 144. The upper part of this spring is located in a similar annular groove in the bottom part of lower clutch member 136. The bottom part 15 of this lower clutch member 136 is provided with protrusions (not shown) fitting in recesses (also not shown) of the control member 138. On its upper side the lower clutch member 136 is provided with teeth (not shown) which cooperate with regularly spaced teeth (also not shown) on the underside 20 of the ring-shaped base of the upper clutch member 137. This ring-shaped base is also provided with a lateral cam member 145 having a radius variable over an angle of about 60° and controlling the timing of a washing operation through the intermediary of the movable armature 146 of a change-over 25 contact of a microswitch 147 mounted on top of microswitch 143. This cam member 145 also carries two control pins 148 and 149. The upper clutch member 137 further has a dome-shaped upper portion on which the hollow cylindrical stem 150 of the washing programme selection knob 78 is engaged. This dome portion is fixed 30 on the vertical peg 139 by means of washer 151 and screw 152.

As described in the above mentioned Belgian patent 858 672, when the rotatable driving member 132 which alternately rotates in two directions makes a full rotation in anti-

-16-

clockwise direction (Fig. 14) it communicates to the lower clutch member 136 an angular displacement from an initial or rest position over a fraction of this full rotation and in an opposite direction. Thereby the upper clutch member 137
5 is angularly displaced in this opposite direction by the lower clutch member 136. Afterwards when the driving member 132 makes a full rotation in the opposite direction it rotates the lower clutch member 136 back into its initial position. Thereby the upper clutch member 137 however remains in the
10 position previously attained due to friction.

From the above it follows that the washing operation timing mechanism includes a speed reduction device, mainly including elements 132, 136, 137, which reduces the rotational speed
15 of the driving member 132 and the output member 137 of which controls change-over contact 146.

The above mentioned rotation reversal device (Figs. 14, 15, 16) includes a frusto-conical peg 153 formed on the mounting
20 plate 61. The peg 153 has a lower portion with a larger diameter than its upper part and thus delimits a peripheral shoulder which supports a frusto-conical rotation reversal member 155 fixed on the peg 153 by means of a washer 170 and a screw 171. The member 155 has an upper lateral arm
25 156 and a lower lateral arm 157 with a downward lip 158. On its bottom side the rotation reversal member 155 has a finger 159 able to cooperate with an abutment 160 on the lower part of the peg 153.

30 The above mentioned drying operation timing mechanism includes a vertical peg 154 formed on the mounting plate 61. This peg 154 has a lower portion with a larger diameter than its upper part and thus also delimits a peripheral shoulder. This shoulder has an outer annular groove 161 and two inner

-17-

arcuate recesses 162 and 163 which are concentric with and are deeper than the annular groove 161. The latter groove 161 houses the bottom end of a coiled spring 164 the upper end of which is located in a similar groove 165 in the bottom part
5 of a lower clutch member or input member 166 of a clutch mechanism which is similar to the above described one and which further comprises an upper clutch member or output member 167. The spring 164 tends to prevent a rotation of the lower clutch member 166 which is similar to the lower
10 clutch member 136 and is likewise provided with a control arm 172 having a longitudinal groove 168. On its bottom side the lower clutch member 166 is provided with two opposite protrusions of which only one i.e. 169 is visible on Fig. 16 and which fits in the above mentioned recesses 162 and 163
15 respectively. On its upper side the lower clutch member 166 is provided with four teeth such as 173 at 90° interval which cooperate with 24 regularly spaced teeth (not shown) on the underside of the base 174 of the upper clutch member 167 which is fixed on the peg 154 by means of spring washer 175, washer
20 176 and screw 177 tending to prevent a rotation of the member 167. The stem 178 of the drying programme selection knob 79 is slidden on this upper clutch member 167. The teeth of the lower clutch member 166 are disposed on an inner ring portion of the underside of the base 174 the periphery of which is
25 shaped so as to form a cam 179 which controls the timing of a drying operation through the intermediary of the make contact 182 of microswitch 181. A further tooth 180 which is much larger than the first mentioned ones is provided on an outer ring portion of the underside of the base 174. This
30 tooth 180 is normally engaged in the groove 168 of the control arm 172 which is connected to the body of the microswitch 181 by means of a coiled spring 221 which constitutes a restoring member.

-18-

The above mentioned blower 183 (Fig. 5) which is directly mounted on one end 116 of drive shaft 116-117 is located in a housing 186 which is open at both sides and the lower end of which communicates with the tapering outlet 82 of the mounting plate 61. The blower 183 comprises a cup-shaped wheel 226 provided at its periphery with radial vanes 184 and 185 and at its bottom with vanes 225. The surface of the vanes 185 is much larger than that of the vanes 184. This wheel subdivides the housing 186 into a first part 227 which encloses part of the motor 114 and which contains the vanes 184 and 225 and into a second part 228 which contains the vanes 185 and communicates laterally with the above mentioned air inlet space 229.

A vertical small frame structure 188 (Fig. 14) is fixed on cylindrical studs such as 189 of the mounting plate 61 close to the air inlet space 229. This structure 188 includes two plates 190 and 191 which carry a heatable member constituted by an electric resistance 192 connected in series with a thermo-limiter 193. These plates 190 and 191 extend through cooling apertures 194 and 195 of the structure 188. The mounting plate 61 which is provided with the air inlet openings 196 carries a capacitor 197 and microswitches 198 and 199. Microswitch 198 is provided with a make contact 200 controlled by rod 110 (Fig. 14) the vertical position of which is itself dependent on the angular position of the wash/dry selection knob 113, as already explained above. Microswitch 199 (Fig. 8, 9) together with lever arm 73 form the above mentioned security device. This switch 199 is provided with a security make contact 201 and rests on a raised part 204 of the mounting plate 61. The latter plate 61 is also provided with a plurality of vertical stems 205, 206, 207 and 208 for supporting corresponding studs such as 209 (Fig. 8) on the cap 62.

-19-

The above mentioned electric motor 114 (Fig. 17) has two windings 210 and 211 which are connected at their one ends to the mains 212 shunted by capacitor 197 and at their other ends to a capacitor 213. These other ends are further
5 individually connected via protecting resistors 214 and 215 to stationary contact members 216 and 217 which together with the above mentioned movable armature 142 forms the change-over contact of microswitch 142. This movable armature 142 is connected to the movable armature 146 which together
10 with stationary contact members 218 and 219 forms the change-over contact of microswitch 147 controlled by the washing programme selection knob 78. The stationary contact member 219 is connected to one terminal of the mains 212 via the security make contact 201 of microswitch 199 and the
15 stationary contact member 218 is connected to the same terminal via the series connection of make contact 200 of microswitch 198 controlled by the wash/dry programme selection knob 113, make contact 182 of microswitch 181 controlled by the drying programme selection knob 79, and the
20 security make contact 201 of microswitch 199. The stationary contact member 218 is also connected to the other terminal of the mains 212 via the heating resistance 192 and the thermo-limiter 193.

25 To be noted that various electric interconnections between the elements are only shown in Fig. 17.

From the above it follows that the vertical plane of the wall 7 separates the washing compartment 3 from the casing
30 61, 62 which protrudes beyond this vertical plane only to such an extent that it is able to drive the washing drum 52. Thus the casing and the driving and control means mounted therein are not adversely affected by the heat developed in the washing compartment 3.

-20-

The operation of the above described washing machine is as follows.

At the start of a washing operation the cover front lid 60
5 is opened and a washing product is introduced in vat 1 which
is afterwards filled with water either directly or via the
water supply conduct 101 until the washing solution reaches
a wanted level indicated by the float level indicating
finger 41 which is visible through the window 42. By the
10 opening of the cover front lid 60 the security make contact
201 is opened thus preventing the electric motor 114 from
being energized (Fig. 17). The washing programme selection
knob 78 is then turned into a position corresponding with
a predetermined duration of a washing operation, whilst the
15 dry/wash programme selection knob 113 is brought in the
washing position. The dry programme selection knob 79 is
preferably turned into its zero position but this is not a
necessity. After laundry has been introduced in vat 1 the
front lid 60 is again closed, thus producing the closure of
20 security make contact 201.

When rotating the wash/dry selection knob 113 in the washing
position against the action of spring 112, shutter member
95 is brought in the horizontal stable position shown in
25 Fig. 5 wherein it closes opening 222 and brings the outlet
pipe 98 via opening 27 in communication with the air channel
15 which at its top communicates with the atmosphere, as
described above. The rotation of knob 113 also entails an
upward movement of the control rod 110 which produces the
30 opening of make contact 200 of switch 198 (Fig. 17) thus
preventing the resistance 192 from being heated.

The rotation of the washing programme selection knob 78 in a
position corresponding with a predetermined duration of a

-21-

washing operation entails the rotation of the upper clutch member 137. The latter is thus brought in a predetermined angular position wherein the cam member 145 does not operate the movable armature 146 of microswitch 147 so that this
5 armature 146 makes contact with the stationary contact member 219. This angular position is located at a predetermined angle from a final position wherein the cam member 145 will bring the movable armature 146 into contact with the stationary contact member 218.

10

The possible rotation of the drying programme selection knob 79 into its zero position opens make contact 182 of micro-switch 181 (Fig. 17), but the position of this contact has no influence on the washing operation.

15

The movable armature 142 of microswitch 143 is in contact with one of the stationary contact members 216 and 217 so that when the mains 212 is switched-on the electric motor 114 is energized in an operating circuit comprising the
20 mains 212, one of the motor windings 210, 211, one of the resistances 214, 215, armatures 142 and 146 of switches 143 and 147 respectively, and security make contact 201 of switch 199. Hereby the motor 114 and therefore also the drum 52 and the blower 183 are rotated in the one or other direction
25 depending on the position of the armature 142 of the switch 143. This position is controlled by cam member 141 which alternately brings the movable armature 142 in contact with the stationary contact members 216 and 217 and thus changes the direction of rotation of the motor 114 and of the drum 52
30 and the blower 183 coupled therewith. Cam member 145 is displaced in a stepwise manner in clockwise direction (Fig. 14) and after a number of angular steps, i.e. after a predetermined duration corresponding to the washing programme selected by means of the knob 78, it brings the movable armature 146 of

-22-

the microswitch 147 in a position wherein this armature 146 makes contact with the stationary contact member 218. Due to this the above operating circuit of the motor 114 is opened and this motor is nearly immediately stopped mainly due to
5 the weight of the laundry in the drum.

During the washing operation air is sucked by the blower 183 via the air inlet openings 196. By the action of the smaller radial vanes 184 and of the vanes 225 a cooling first air
10 stream is made to flow over the motor 114 into the first housing part 227 and then radially expelled into the outlet pipe 98. Likewise, by the action of the larger radial vanes 185 a second air stream is led over the resistance 192 into the air inlet space 229 and the second housing part 228 and
15 then expelled into the outlet pipe 98. From there both these air streams flow via opening 27 and air channel 15 upwardly and laterally into the atmosphere. Due to the opening 27 being relatively small the total air flow rate is relatively small so that the electric energy consumed by the blower
20 during a washing operation is relatively small.

To be noted that although the motor is alternately rotated in opposite directions the air flow is in the same direction because the vanes 184 and 185 are radial vanes. It should
25 also be noted that during the clockwise rotation of the cam member 145 the pins 148 and 141 thereof impart an angular motion to the rotation reversal member 155 as they successively come into contact with the lateral arm 156 of the latter member 155. However this has no influence on the relative
30 position of the lower and upper clutch members 166 and 167 as the tooth 180 of the member 167 remains engaged in the groove 168 of the control arm 172.

After the washing operation is finished the washing solution

-23-

is drained off whereafter the laundry is rinsed. To do this it is sufficient to bring the siphon tube 99 in the position shown and to admit water in the vat 1 through the water supply conduct 101 with a suitable flow rate. Indeed, when this is
5 done the washing compartment 3 becomes gradually filled and the water level rises therein as well as in the siphon drain tube 99. When it reaches a sufficiently high level the siphon action is triggered and water is thereby drained off the washing compartment 3. By a suitable choice of the ratio of
10 the diameters of the siphon tube 99 and of the water supply conduct 101 and by a suitable water flow rate in the latter conduct 101 the water level in the washing compartment 3 thereby gradually decreases. At a certain moment the siphon action therefore stops so that the water level will then again
15 rise in the vat. In this way the washing compartment 3 is rinsed as long as water is admitted in the vat 1. After the rinsing operation and possibly after most of the water has been removed from the laundry the latter can be dried in the drum. To do this the selection knobs 79 and 113 are
20 both turned in their drying position, the washing programme selection knob 78 being already in its zero position since the end of the washing operation.

By the rotation of the wash/dry selection knob 113 in its
25 drying position the above mentioned shutter member 95 is rotated in its vertical position wherein it closes opening 27 and establishes a communication between outlet pipe 98 and the vat washing compartment 3 via opening 222, air conduct 16 and opening 24. Also make contact 200 (Fig. 17) of switch
30 198 is closed.

The clockwise rotation of the drying programme selection knob 79 in a position corresponding with a predetermined duration of a drying operation entails the rotation of the

-24-

upper clutch member 167. The latter is thus brought in a predetermined angular position wherein the cam member 179 closes make contact 182 of switch 181 (Fig. 17). This angular position is located at a predetermined angle from a final position wherein the cam member 179 will open make contact 182.

The movable armature 142 of the microswitch 143 is in contact with one of the stationary contact members 216 and 217 and the movable armature 146 of the microswitch 147 is in contact with the stationary contact member 218 so that the motor 114 is again energized in an operating circuit comprising the mains 212, one of the resistances 214, 215, armatures 142 and 146 of switches 143 and 147 respectively and make contacts 200, 182 and 201 of switches 198, 181 and 199 respectively. Hereby the motor 114 and therefore also the drum 52 and the blower 183 are again alternately rotated in the one and other direction depending on the position of the armature 142 of the switch 143, this contact being alternately brought in contact with the stationary contact members 216 and 217 under control of the cam member 141. Also the electric resistance 192 is heated since a current flows through it via contacts 201, 182, 200 and 193. Air is sucked by the blower 183 via the air inlet openings 196 and by the action of the smaller radial vanes 184 and of the vanes 225 a cooling first air stream is made to flow over the motor 114 into the first housing part 127 and is then radially expelled into the outlet pipe 98. Likewise, by the action of the larger radial vanes 185 a second air stream is led over the thus heated resistance 192 into air inlet space 229 and second housing part 228 and is then expelled into the outlet pipe 98. From there both these air streams flow via the central air conduct 16 and openings 34 and 56 into the drum 52 and from there into the atmosphere through filter grid 64-66

-25-

mounted in opening 63 of the lid 60. Thus the motor 114 is continuously cooled by the cooling first air stream and is not adversely affected by the heated second air stream. Due to the opening 34 being relatively large when compared with opening 27 the air flow rate during a drying operation is much larger than during a washing operation.

From the above it follows that by the openings 27 and 34 and the shutter member 95 the flow rate of the air streams flowing through the outlet pipe 98 of the blower is regulated.

During the first portion of a full rotation of cam member 145 of the upper clutch member 137, i.e. as long as the cam member 145 makes contact with the movable armature 146 of the microswitch 147, the latter armature 146 remains in contact with the stationary contact member 218 so that the motor 114 remains energized in the last mentioned operating circuit. Hereby the laundry is dried by the heated air stream expelled by the blower 183. As soon as this cam member 145 leaves the movable armature 146 of microswitch 147 this armature 146 comes into contact with the stationary contact member 219 so that the motor 114 is then energized via the armature 146 and via make contact 201 of switch 199. However the heating resistance 192 remains connected to the mains 212 via the closed make contact 201, 182, 200 and 193 so that the laundry continues to be dried by heated air.

During the further rotation of the cam member 145 the pin 149 thereon pivots the rotation reversal member 155 in counterclockwise direction (Fig. 14) as it engages with the lateral arm 156 thereof. As a consequence the member 155 is rotated in counterclockwise direction and by the engagement of lip 158 of the lateral arm 157 of this member 155 with the control arm 172 the lower clutch member 166 is rotated in

-26-

clockwise direction. By engagement of its teeth 170 to 173 with those of the upper clutch member 167 the latter is rotated over one tooth, in a clockwise direction, together with the selection knob 79, against the action of friction forces exerted by the washers 175, 176 and the screw 177. When at a certain moment the contact between the cam member 145 and the lateral arm 156 is broken the lower clutch member 166 is brought back into its rest position - its teeth slipping over those of the member 167 - by the action of spring 164 whereas the upper clutch member 167 and the knob 79 both remain in the position attained, especially due to friction.

In an analogous way as just described also the pin 148 entails a rotation of the upper clutch member 167 and of the knob 79 in clockwise direction. This means that during each rotation of the cam member 145 the upper clutch member 167 is displaced over two teeth.

After a number of such angular displacements, i.e. after a number of rotations of the driving member 32, the lower clutch member 166 and therefore also the cam member 179 arrives in its initial position, shown in Fig. 14 wherein make contact 182 is open. Thus resistance 192 is no longer heated. At that moment one of the pins 148 and 149 has just moved beyond arm 156 so that the cam member 145 still has to perform a certain angular displacement before it causes armature 146 to be brought into contact with the stationary contact member 218. During this displacement and because the heating resistance 192 has been disconnected from the mains 212 the drying operation is performed with cold air. At the moment the armature 146 comes into contact with the stationary contact member 218 the electric motor 114 is no longer energized as the make contact 182 is

-27-

open so that the movement of the various parts is then stopped, the drying operation being finished.

It should be noted that it is not absolutely mandatory to maintain the clutch mechanism 166, 167 and therefore the selection knob 79, substantially in their rest position (except for a small angular movement) during a washing operation. In this case the tooth 180 on the upper clutch member 167 is not required.

While the principles of the invention have been described above in connection with specific apparatus, it is to be clearly understood that this description is made only by way of example and not as a limitation on the scope of the invention.

Claims

-28-

1. Laundry handling machine able to perform a washing operation and a drying operation and including a vat, a laundry stirring member mounted in said vat, a cover housing driving and
5 control means which include a blower and a motor driving said stirring member during both said washing and drying operations and driving said blower at least during said drying operation wherein heated air is blown through said vat, characterized in that said blower (183) is driven by said
10 motor (114) during both said washing and drying operations in order to then cool said motor (114).

2. Laundry handling machine according to claim 1, characterized in that said blower (183) has an outlet and is able to
15 simultaneously produce two separate air streams, a first of said air streams flowing over said motor (114) and a second of said air streams flowing over a heatable member (192), and to expell both said air streams simultaneously through said outlet into the atmosphere either directly during a washing
20 operation or via said vat (1) during a drying operation.

3. Laundry handling machine according to claim 2, characterized in that it includes flow rate regulating means (27, 34, 95) to make the flow rate of both said air streams flowing through
25 said outlet smaller during said washing operation than during said drying operation.

-29-

4. Laundry handling machine according to claim 3, characterized in that said outlet of said blower (183) communicates with said vat (1) via an outlet pipe (98) in which a shutter member (95) is mounted and that said shutter member (95) enables
5 said first and second air streams to flow through a first opening (27) directly into the atmosphere during a washing operation when said shutter member (95) is in a first position or through a second opening (34) and said vat (1) during a drying operation, said first opening (27) having
10 a smaller area than said second opening (34) and said first and second openings and said shutter member forming said flow rate regulating means.

5. Laundry handling machine according to claim 2, characterized in that said cover (2) comprises a casing (61, 62) housing
15 said blower (183), said motor (114) and said heatable member (192) and having air inlet openings (196) and that said blower (183) has a housing (186) for a wheel (226) with a first (184) and a second (185) set of vanes, said housing
20 having said outlet and being divided by said wheel (226) into a first (227) and a second (228) housing parts, and said blower being able to produce by means of said first set (184) of vanes said first air stream which flows from said air inlet openings (196) over said motor (114) into said first
25 housing part (227) and from there through said outlet of said housing and to produce by means of said second set (185) of vanes said second air stream which flows from said air inlet openings (196) over said heatable member (192) into said second housing part (228) and from there through said outlet
30 of said housing (186).

6. Laundry handling machine according to claim 5, characterized in that said vat (1) has a front washing compartment (3)

separated from a rear part (4) by a partition wall (7) and said cover (2) comprises a front lid (60) giving access to said washing compartment (3) and said rear casing (61, 62) which has a first part supported by said rear part (4) of said vat
5 (1) and a second part not supported by said rear part (4) of said vat (1) and provided with said air inlet openings (196).

7. Laundry handling machine according to claim 1, characterized in that said stirring member comprises a drum (52) rotatably
10 mounted about its axis in said vat (1) and that said blower (183) is directly fixed on one end (116) of a shaft (116, 117) of said motor (114), said shaft being substantially parallel to said axis of said drum (52) and both said shaft (116, 117) and said axis being substantially located in a same vertical plane.

15

8. Rotational speed reduction arrangement for reducing the rotation speed of a rotatable driving member, said arrangement including a speed reduction device comprising a one-way clutch mechanism, with a rotatable input member and a rotatable output
20 member, and a restoring member, said rotatable driving member when making a predetermined rotation in a predetermined direction communicating to said input member an angular displacement from an initial position over a fraction of said predetermined rotation and in an opposite direction, said
25 output member being thereby angularly displaced in said opposite direction by said input member, and said restoring member being then able to rotate said input member back into said initial position, said output member thereby remaining in the position previously attained, characterized in that it
30 includes a second said speed reduction device (137, 166, 167, 221) comprising a second one-way clutch mechanism (166, 167), with a second input member (166) and a second output member (167), and a second restoring member (221), said second input

- 31 -

member (166) being driven from said output member (137) of said first speed reduction device (132, 136, 137).

9 . Rotational speed reduction arrangement according to claim

5 8, characterized in that said output member (137) of said first mentioned speed reduction device (132, 136, 137) is coupled with said second input member (166) through a rotatable rotation reversal device (155) in such a manner that when said output member (137) of said first speed reduction device
10 (132, 136, 137) makes a predetermined rotation in said opposite direction it communicates to said second input member (166) and via said rotation reversal member at least one angular displacement from an initial position over a fraction of said predetermined rotation and in said predetermined
15 direction, said second output member 1 (167) being thereby angularly displaced in said predetermined direction by said input member (166), and said second restoring member (221) being then able to rotate said second input member (166) back into said initial position, said second output member (167) thereby
20 remaining in the previously attained position.

10. Rotational speed reduction arrangement according to

claim 9, characterized in that said rotatable rotation reversal device comprises a rotatable arm (156, 157) having
25 one end (156) situated in the path followed by said output member (137) of said first speed reduction device (132, 136, 137), said second input member (166) being situated in the path followed by the other end (157) of said rotatable arm (156, 157).

30 11. Laundry handling machine including a washing operation timing device and a drying operation timing device, characterized in that said drying operation timing device is driven through said washing operation timing device.

-32-

12. Laundry handling machine according to claim 8,
----- characterized in that said washing
operation timing device includes said first speed reduction
device (132, 136, 137) and a change-over contact (146)
5 controlled by the output member (137) thereof which can be
manually brought in a first position, wherein said change-over
contact is in a first position (218), and in any of a number
of selectable second positions wherein said change-over contact
is in a second position (219), and that said drying operation
10 timing mechanism includes said second speed reduction device
and a second make contact (182) which is controlled by said
second output member (167) which can be manually brought in a
third position wherein said second make contact is in a first
position (open) and in any of a number of selectable fourth
15 positions wherein said second make contact is in a second
position (closed) and that said driving member is constituted
by a motor (114) coupled across the poles of an electric
source (212) in series with a parallel circuit with a first
branch including said change-over contact (146) in said first
20 position (218) in series with said second make contact (182)
and with a second branch including said change-over contact
(146) in said second position (219).

13. Laundry handling machine according to claim 12,
25 characterized in that said change-over (146) and second make
(182) contacts are brought in said first and second positions
at the start of a washing operation respectively and in said
second and first positions at the start of a drying operation
respectively and that said first (132, 136, 137) and second
30 (137, 166, 167, 221) speed reduction devices and said change-
over (140) and second make (182) contacts are so positioned
with respect to each other that when said second output
member (167) brings said second make contact (182) back into
said first position said output member (137) of said first
speed reduction device (132, 136, 137) still has to perform

- 33 -

a certain angular displacement before bringing said change-over contact (146) back into said first position (218).

14. Laundry handling machine with a vat, a cover for said vat,
5 and driving and control means for said machine, said vat having
a front washing compartment separated from a rear part by a
partition wall and said cover comprising a front lid giving
access to said washing compartment and a rear casing housing
at least part of said means, characterized in that the plane
10 of said partition wall (7) separates said washing compartment
(3) from said casing (61, 62).

15. Laundry handling machine including a vat with a washing
compartment, a cover comprising a hinged front lid giving
15 access to said washing compartment and a rear casing housing
driving and control means which include a driving motor for
said machine, characterized in that said driving and control
means include a security device which is controlled by said lid
(60) in such a way that the operation of said motor (114)
20 is prevented when said lid (60) which is removably connected
to said casing (61, 62) is removed from said casing (61, 62)
or is in a position wherein it permits access to said washing
compartment (3) and wherein the operation of said motor (114) is
enabled only when said lid (60) is in a position wherein it
25 closes said washing compartment (3).

16. Laundry handling machine according to claim 15,
characterized in that said security device includes a rotatable
lever arm (73) which is able to control a contact (201) coupling
30 said motor (114) to an electric source (212) and that said lid
(60) is hingedly and removably connected to said casing
(61, 62) by hinges at least one of which includes a pivot pin
(69) on said lid (60), said pivot pin being rotatably mounted
in a hole of a stud (71) provided in an end (72) of said lever

-34-

arm (73) which by spring means (77) is urged to rotate in a predetermined direction, said end (72) being rotatably mounted in a lateral wall of said casing (61, 62) and the cross-sections of said hole and of said pivot pin (69) being such
5 that a rotation of said lid (60) in a direction opposite to said predetermined direction entails a rotation of said lever arm (73) in said opposite direction.

17. Laundry handling device including a vat with a washing
10 compartment, characterized in that said washing compartment (3) communicates with a float compartment (24) housing a float (35) mounted at one end of a rod (38) provided at its other end with a level indicating finger (39) protruding through an opening
(40) in a wall (9) of said vat (1).

15

18. Laundry handling machine with a vat housing a rotatable washing drum, characterized in that said drum (52) is cylindrical and is mounted at a distance from a bottom (58) of said vat, said vat bottom (58) being constituted by part of a
20 cylinder which has a diameter larger than that of said drum (52) and the axes of said drum and of said cylinder being parallel and located in a same vertical plane.

19. Rinsing device for a vat, characterized in that said vat
25 (1) is coupled on the one hand with a supply conduct (101) for a rinsing liquid and on the other hand with a siphon drain tube (99) which has a larger cross-section than said supply conduct (101).

30 20. Rinsing device according to claim 19, characterized in that said diameter of said siphon drain tube (99) is about twice that of said supply conduct (101).



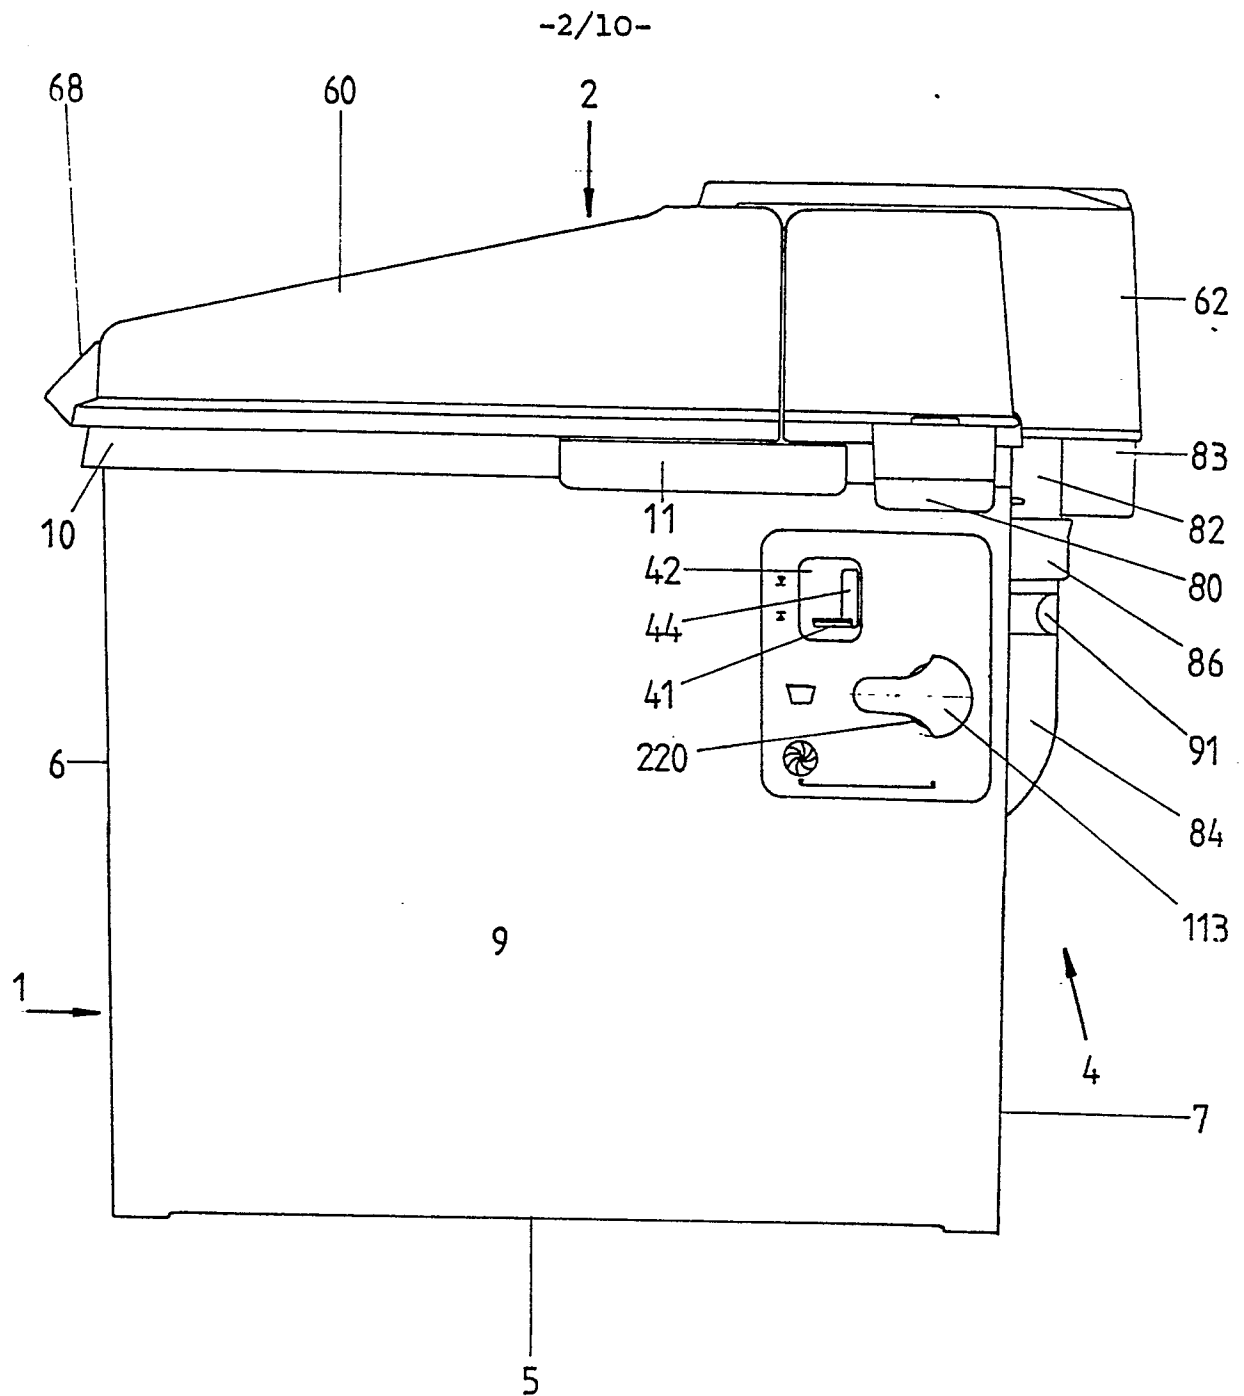


FIG. 2

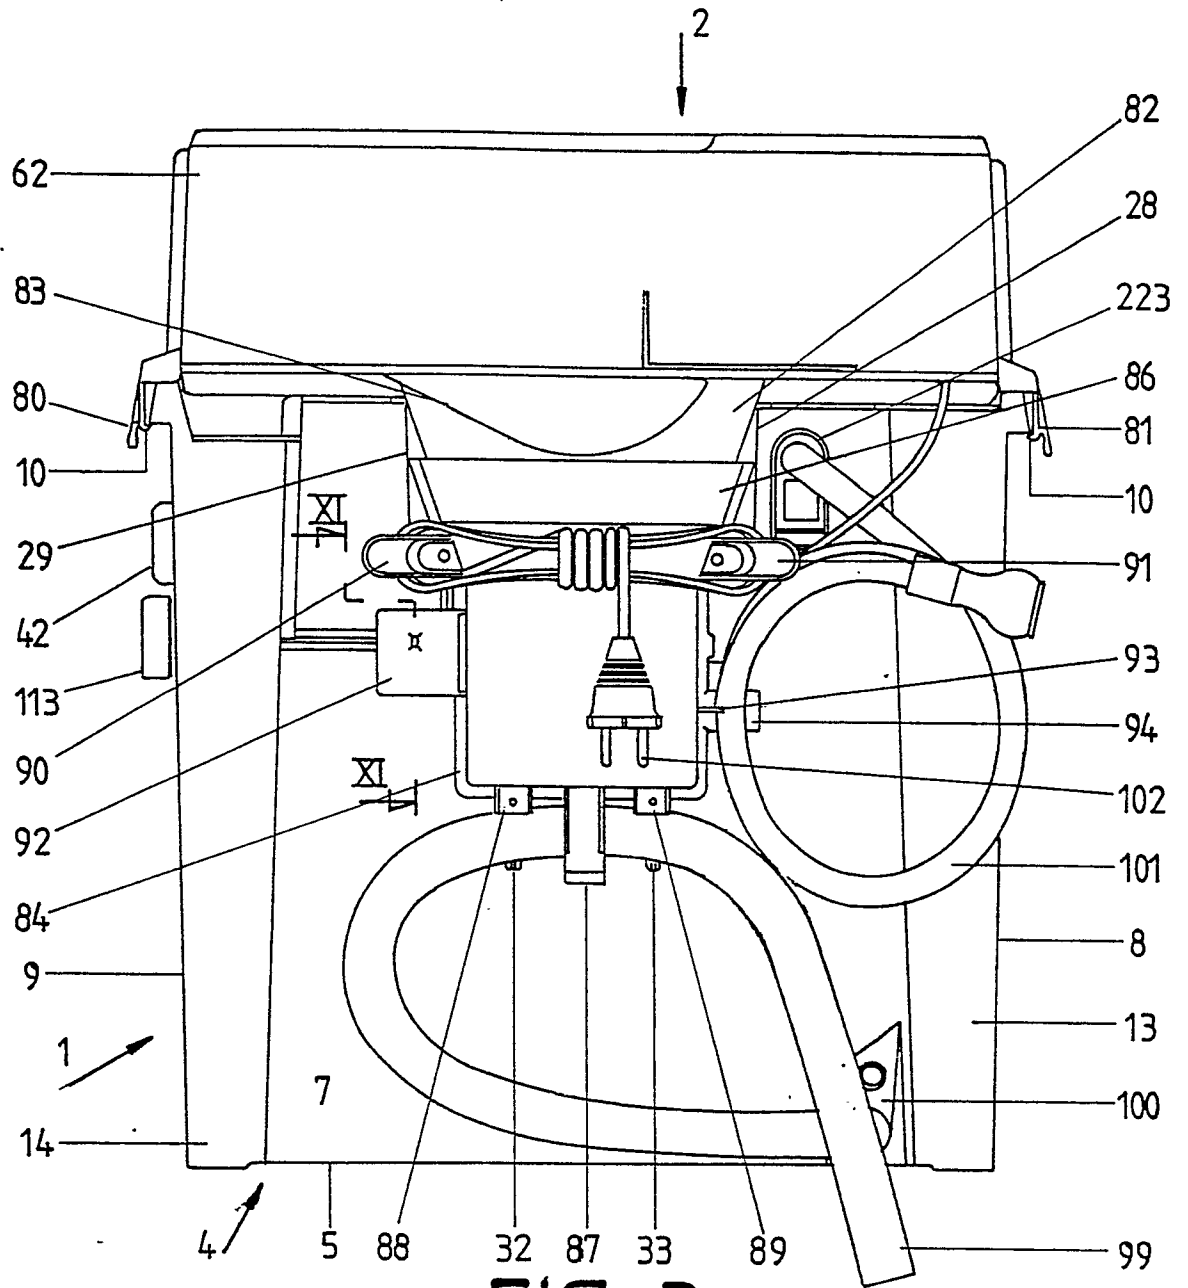


FIG. 3

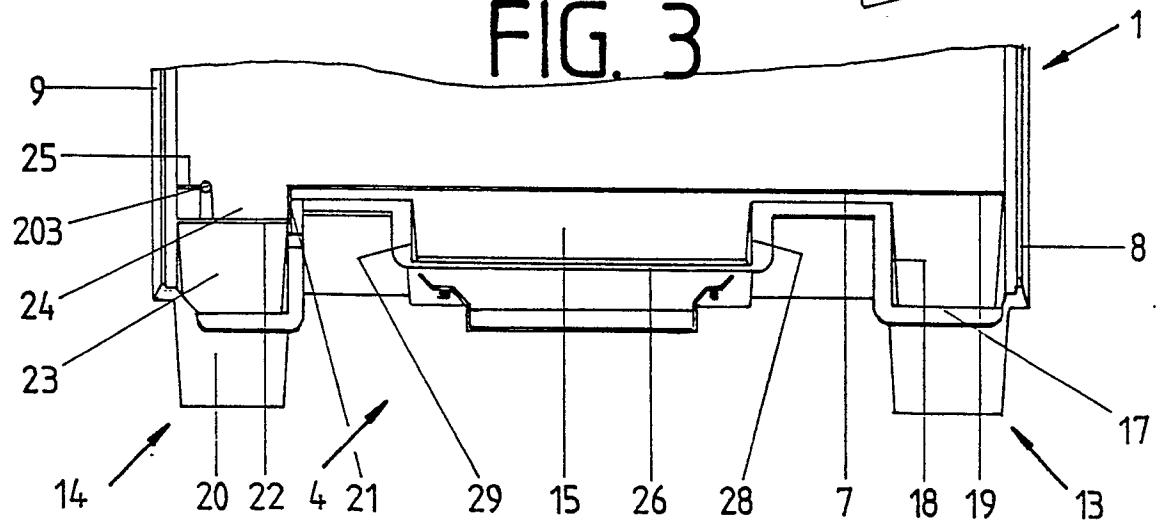


FIG. 4

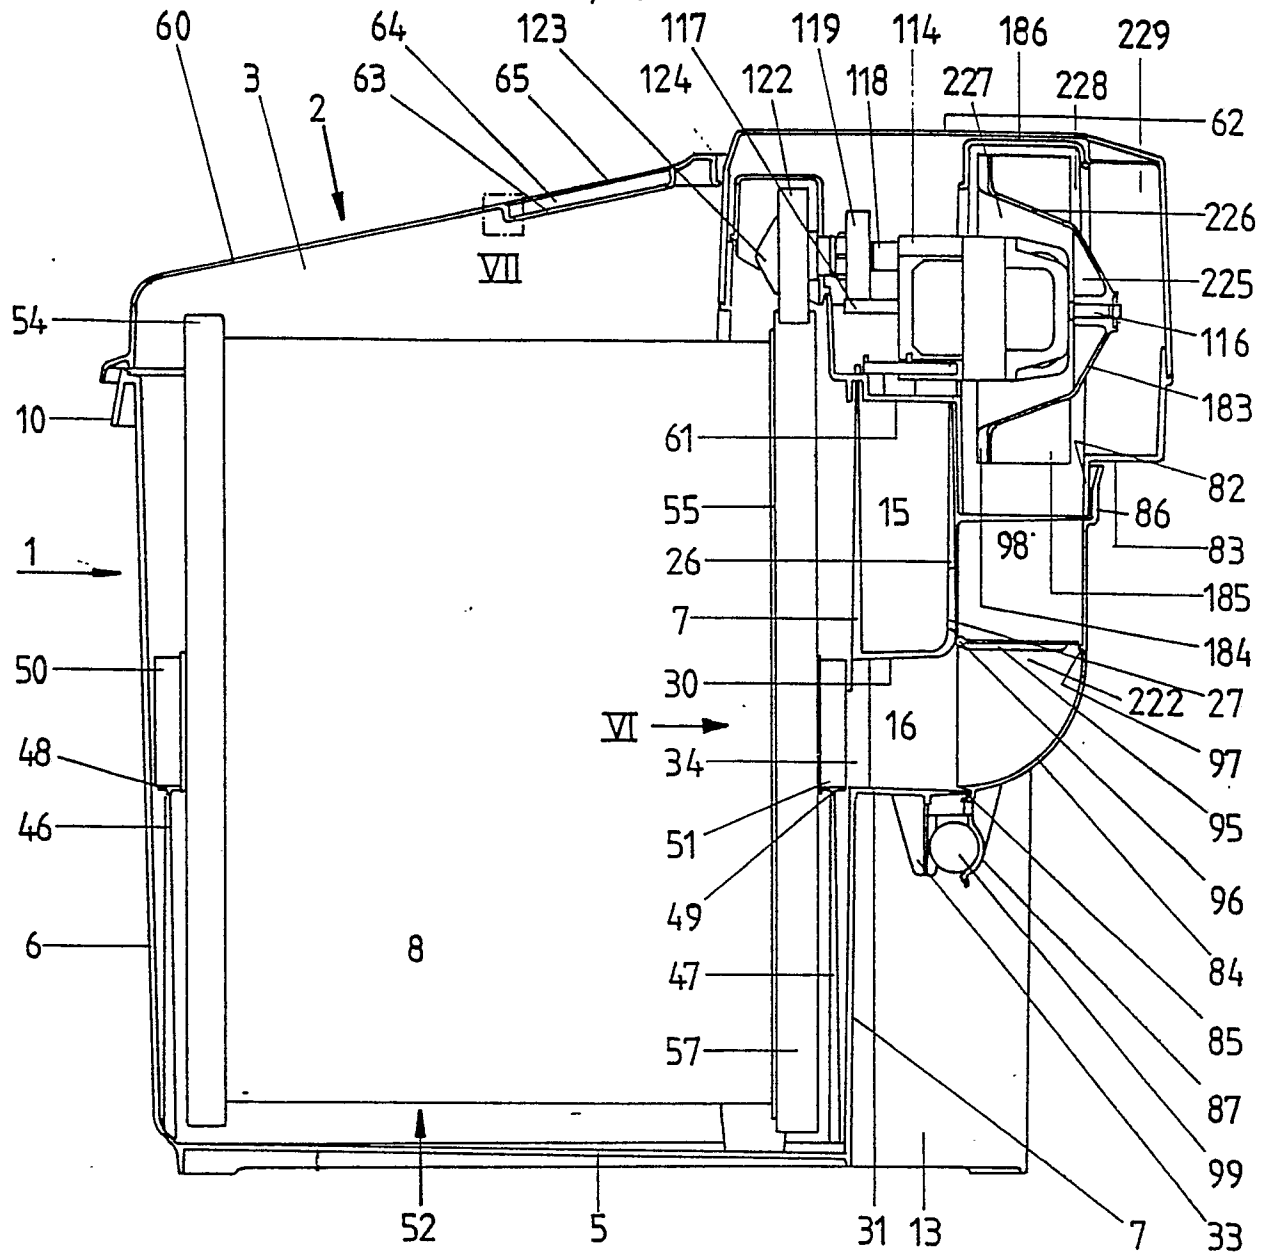


FIG. 5

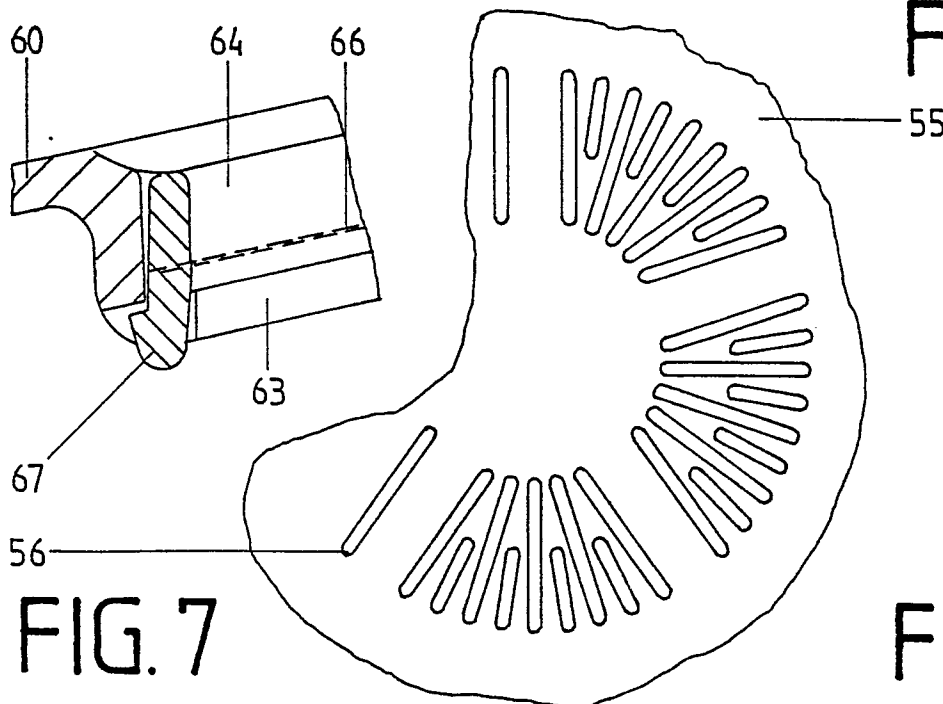


FIG. 7

FIG. 6

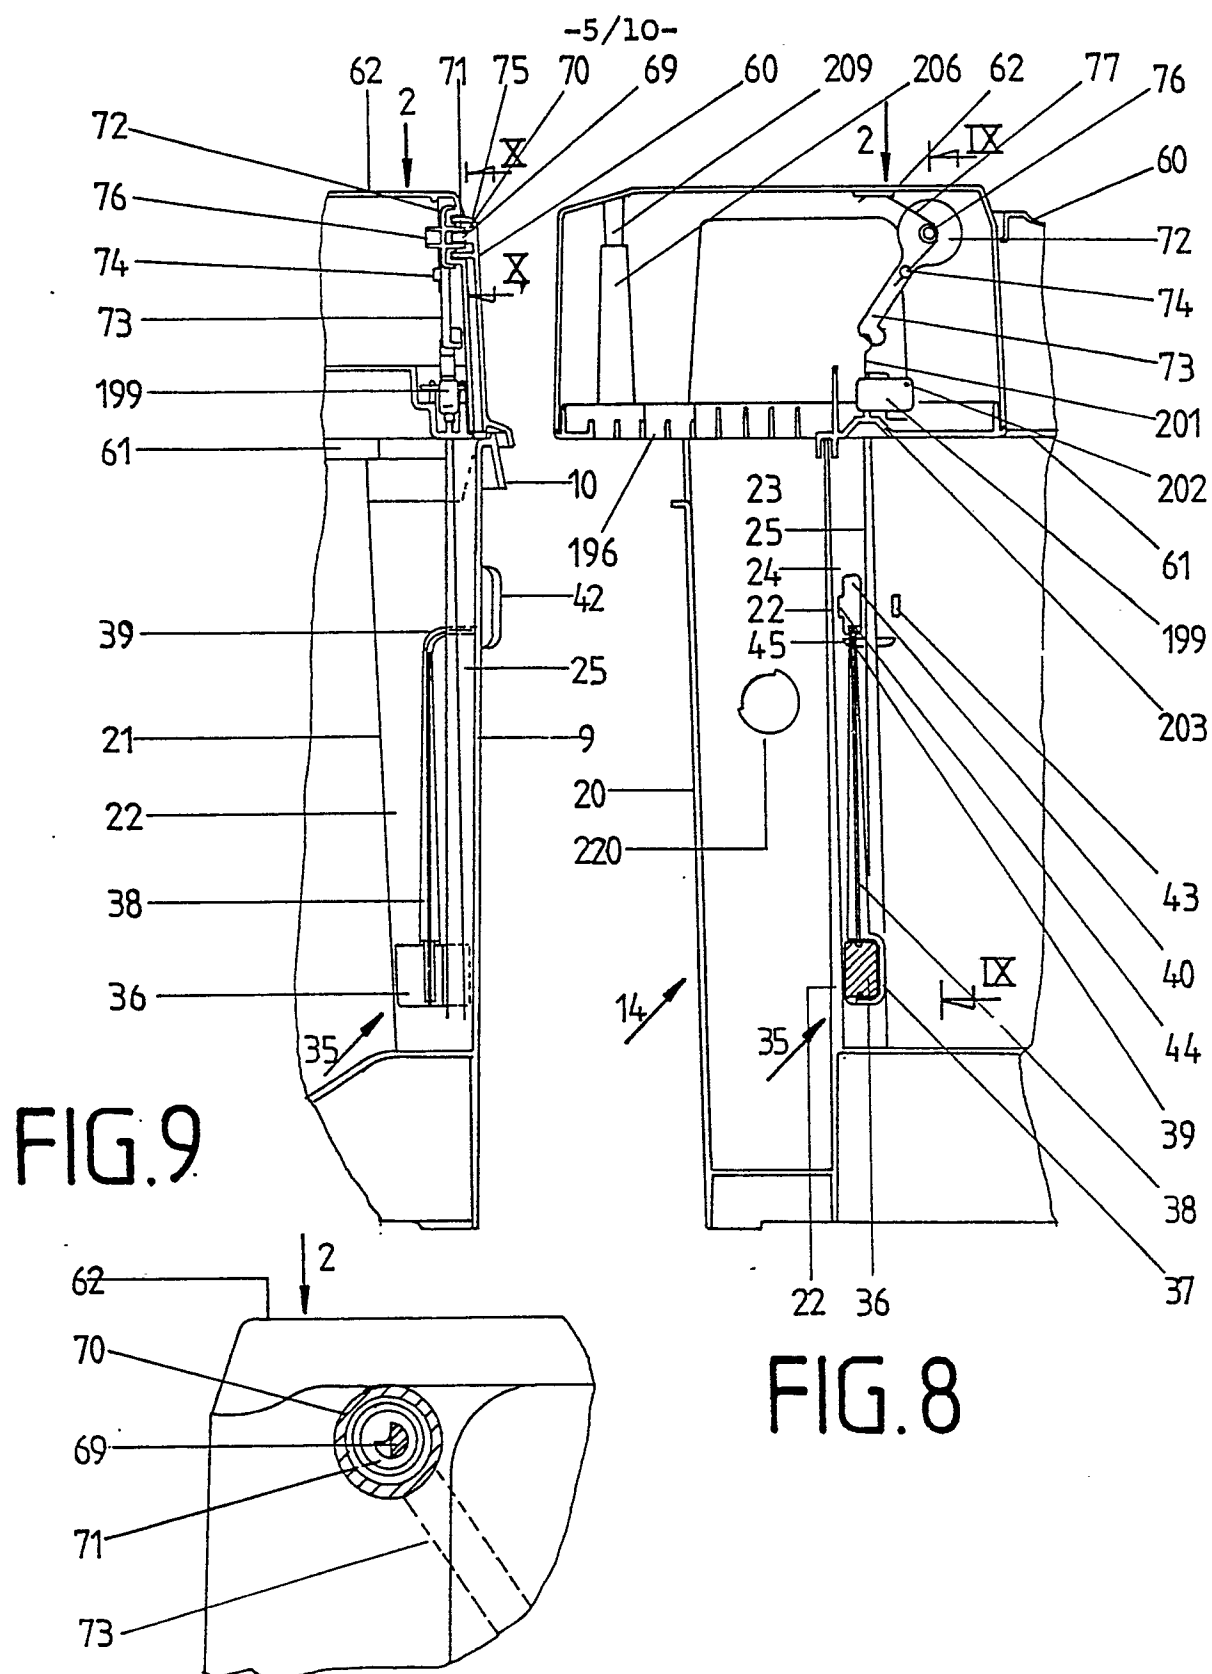


FIG.10

-6/10-


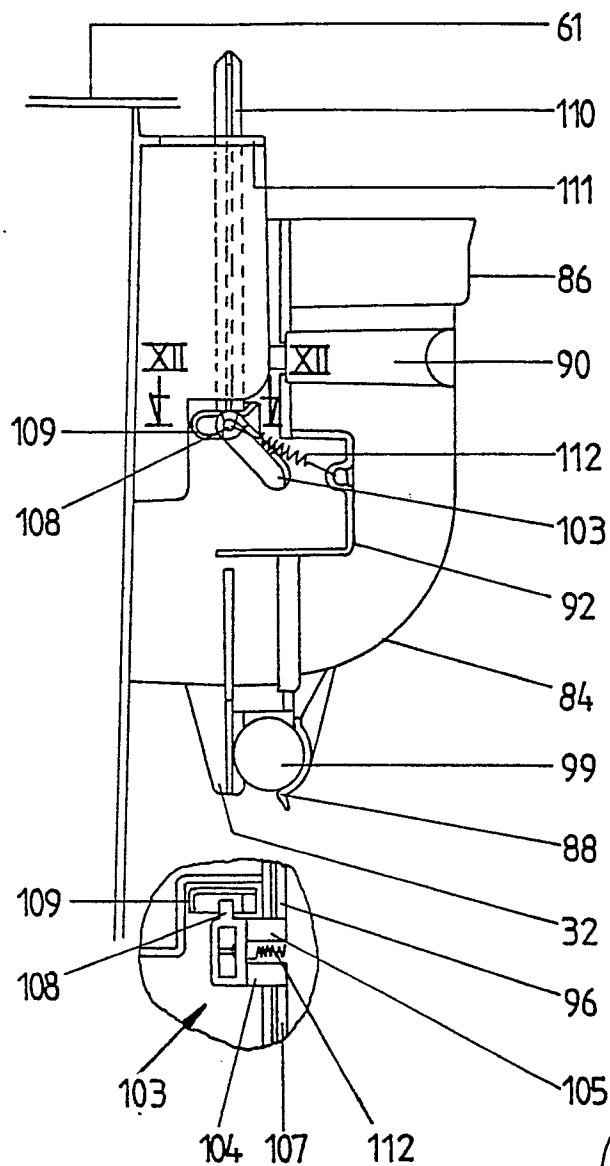


FIG. 11

FIG. 12

FIG. 13

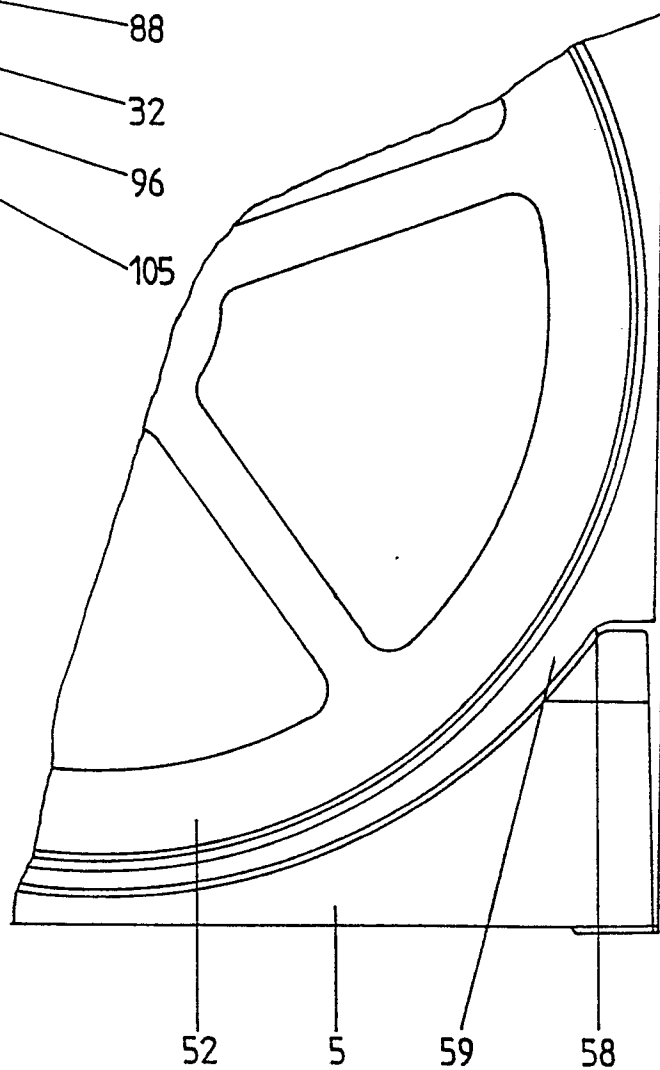

-7/10-

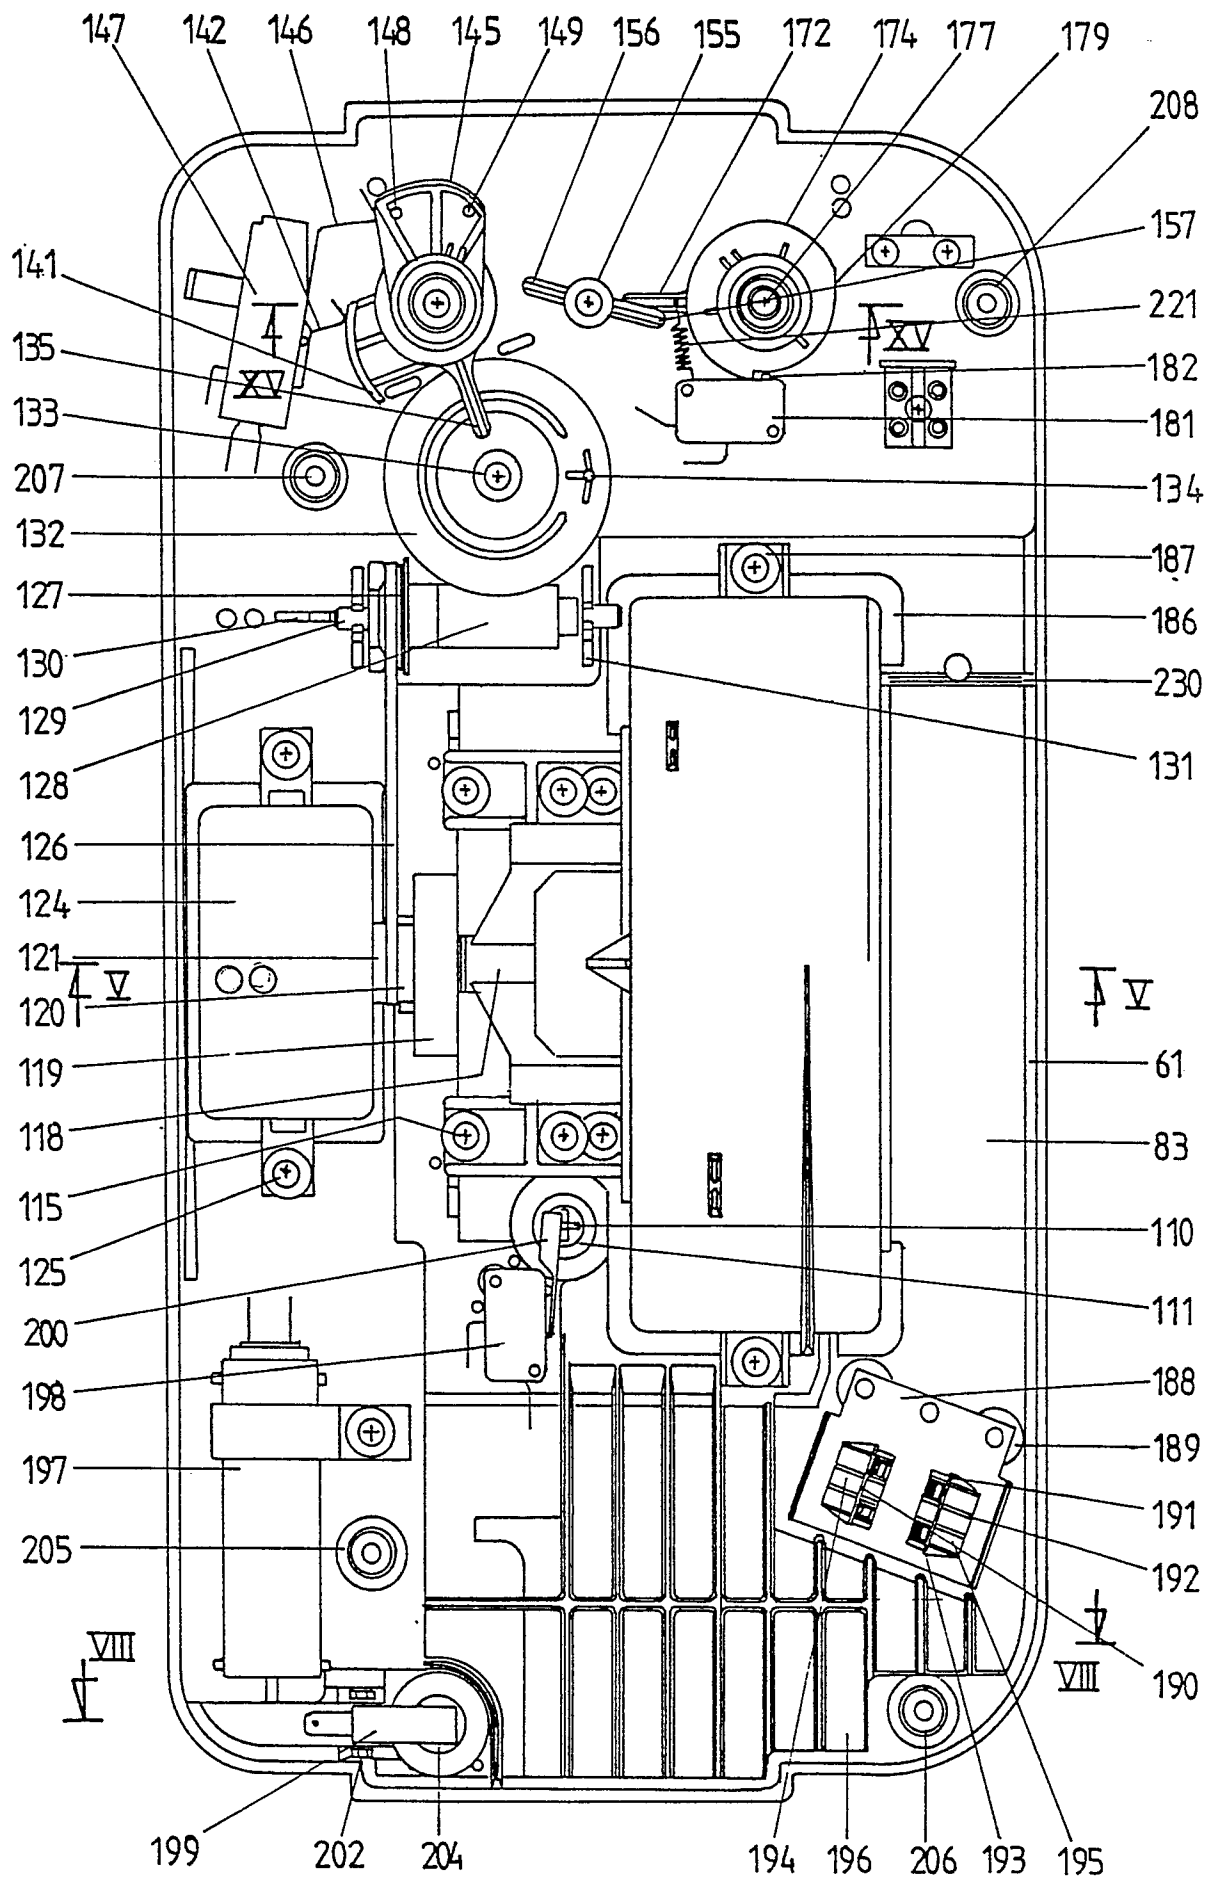


FIG. 14

-8/10-


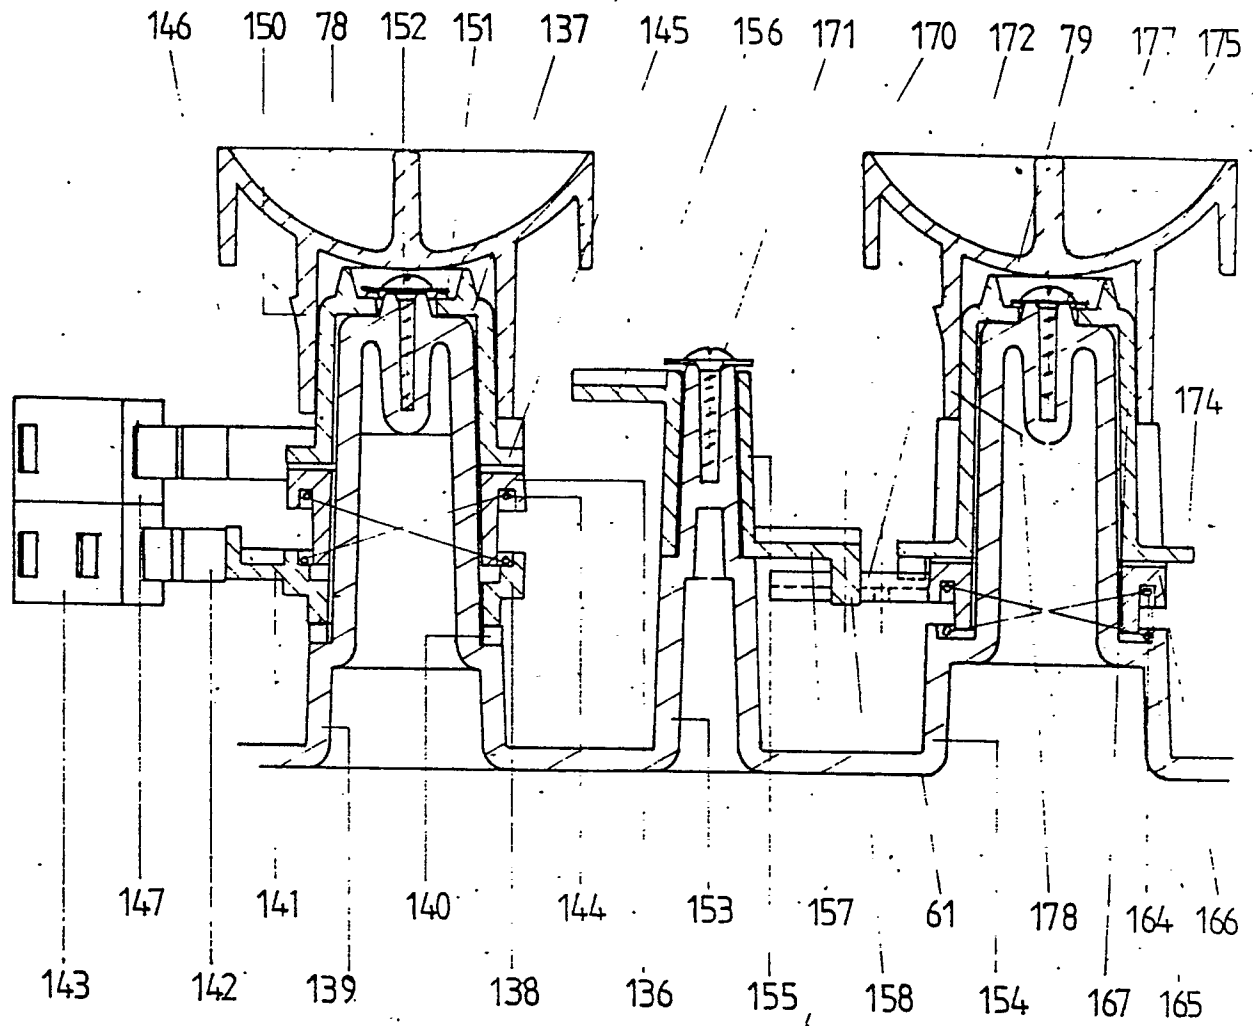


FIG. 15

-9/10-

FIG.16

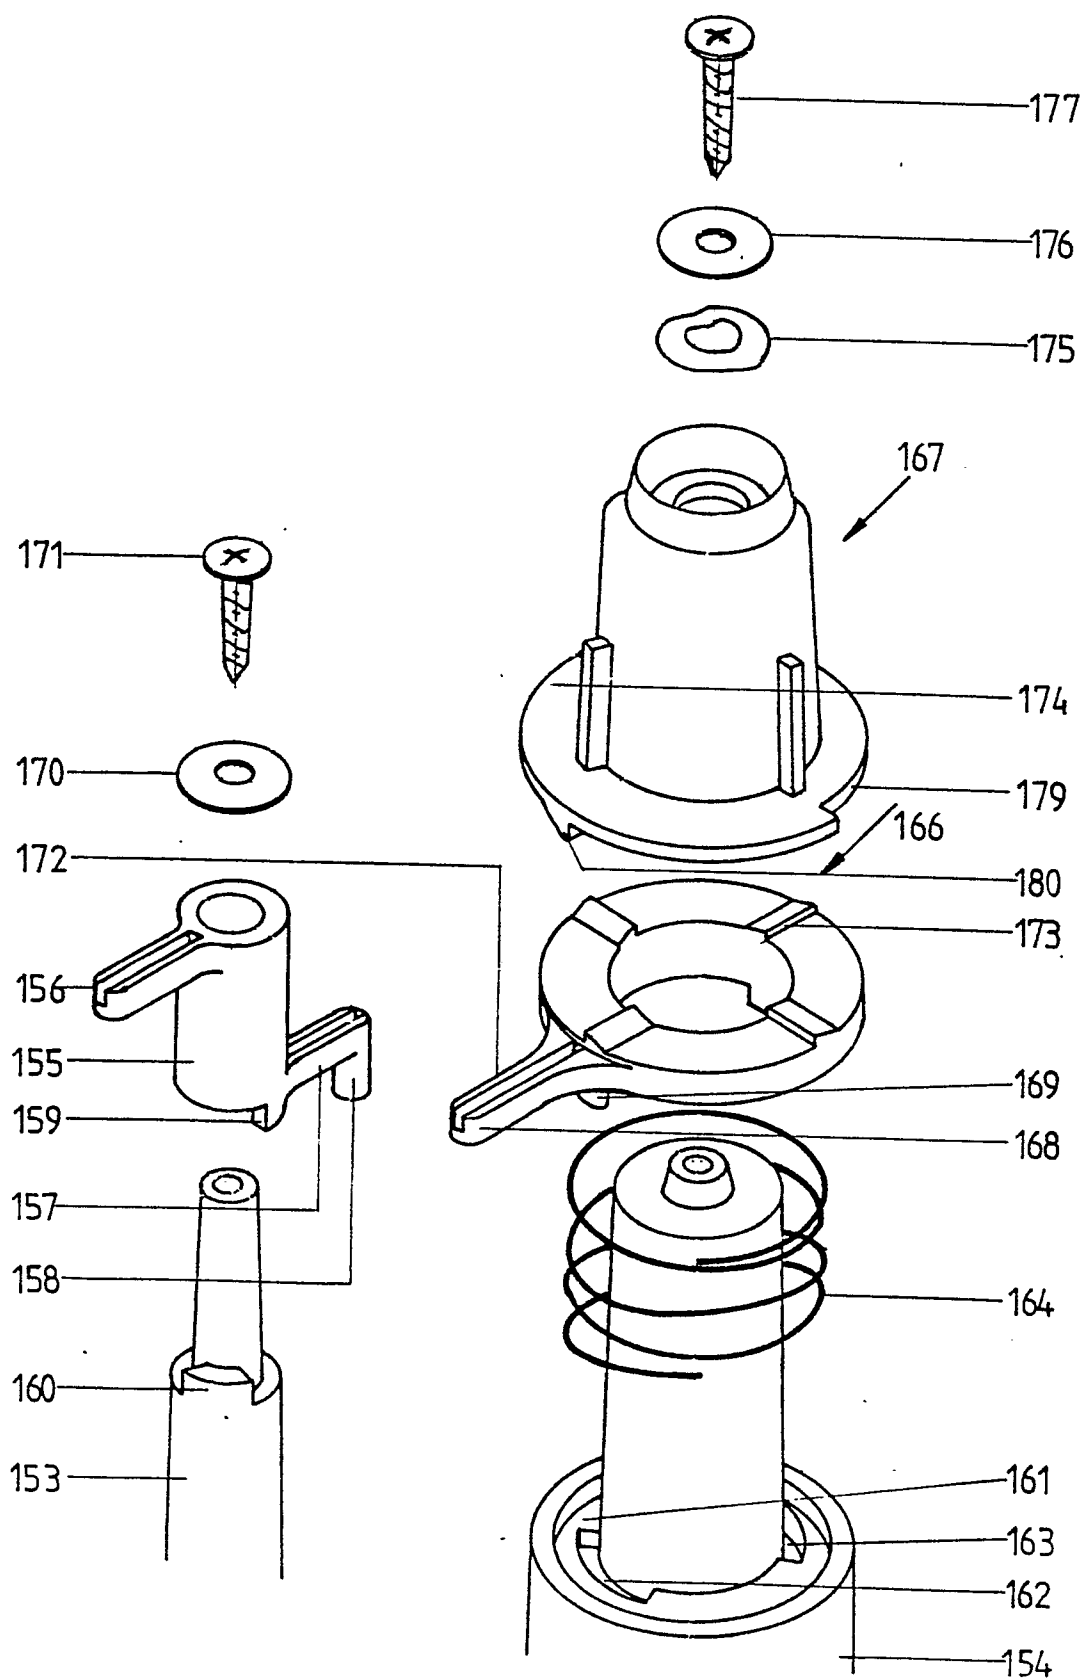

-10/10-

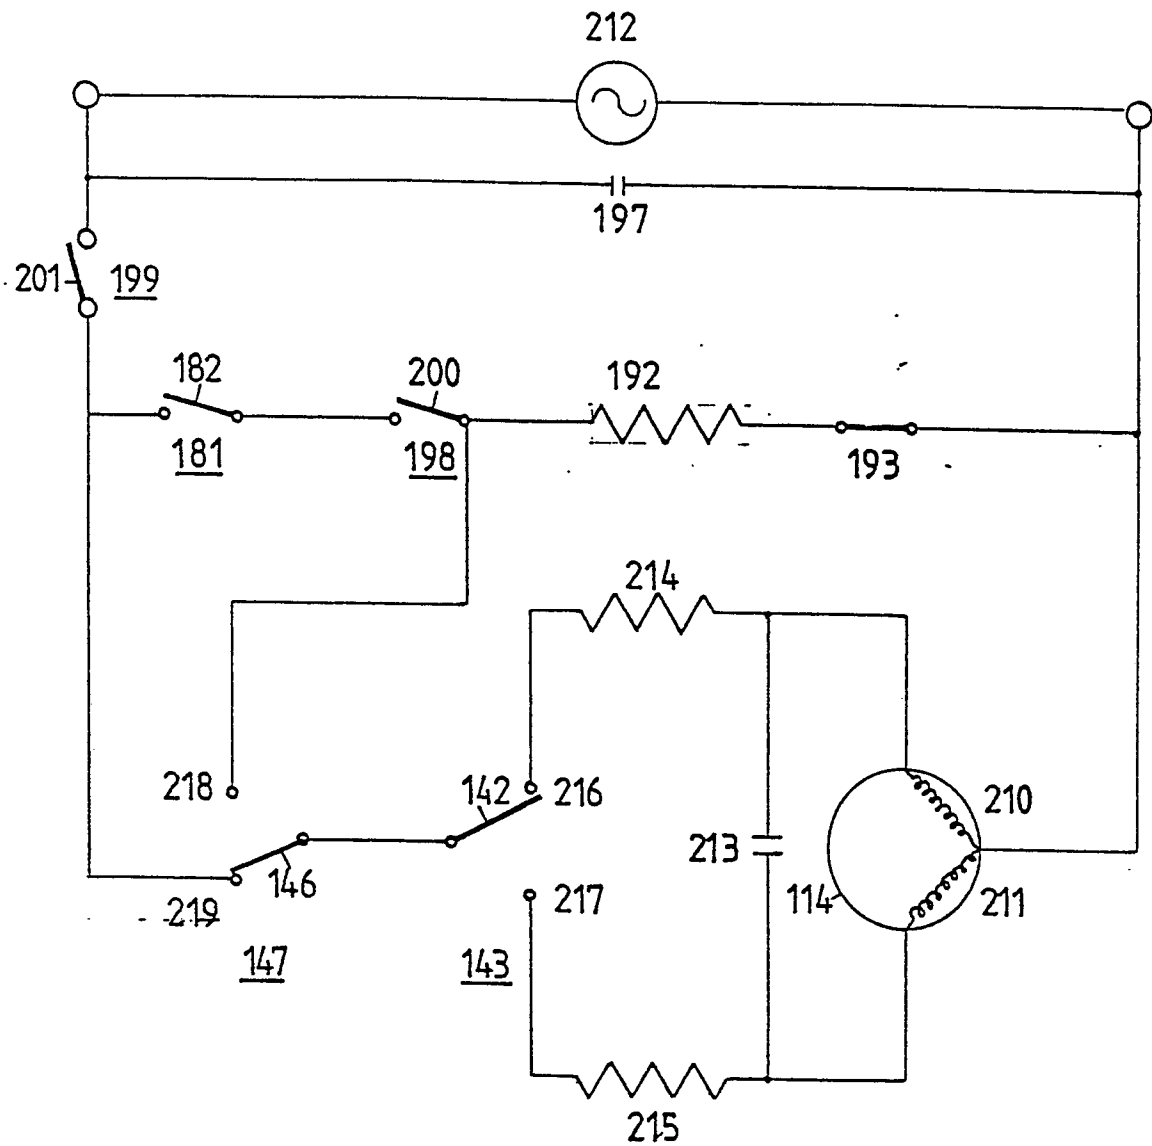


FIG. 17



DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. ³)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
A	DE - A1 - 2 531 042 (PHILIPS' GLOBILAMP-FABRIKEN) ---	8	D 06 F 25/00
A	CH - A - 470 516 (LICENTIA PATENT-VERWALTUNGSGMBH) ---		
A	US - A - 3 568 476 (SEYLER) ---		
D	BE - A - 858 672 (ITT) * fig. 8, 12 * & GB - A - 2 005 920 ---		TECHNICAL FIELDS SEARCHED (Int. Cl. ³)
A	DE - A1 - 2 724 390 (STANDARD ELEKTRIK LORENZ)		D 06 F 25/00 D 06 F 33/00
D	& BE - A - 867 508 -----		
☒ The present search report has been drawn up for all claims			CATEGORY OF CITED DOCUMENTS
			X: particularly relevant A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: conflicting application D: document cited in the application L: citation for other reasons
			&: member of the same patent family, corresponding document
Place of search Berlin		Date of completion of the search 08-10-1981	Examiner KLITSCH