

12

EUROPEAN PATENT APPLICATION

21 Application number: 81301834.8

51 Int. Cl.: **C 23 C 11/12**

22 Date of filing: 27.04.81

43 Date of publication of application: 03.11.82
Bulletin 82/44

71 Applicant: **AIR PRODUCTS AND CHEMICALS, INC., P.O. Box 538, Allentown, Pennsylvania 18105 (US)**

72 Inventor: **Kaspersma, Jelle Hillebrand, Hecksmann Lane Route No. 3 P.O. Box 717, Coopersburg Pennsylvania, 181036 (US)**
Inventor: **Peartree, Robert J., 24 Fretz Road Route No. 3 P.O. Box 247, Coopersburg Pennsylvania, 18036 (US)**

84 Designated Contracting States: **BE DE FR GB NL**

74 Representative: **Lucas, Brian Ronald, c/o Air Products Limited Hersham Place Molesey Road, Walton-on-Thames Surrey, KT12 4RZ (GB)**

54 **Process for carburizing ferrous metals.**

57 A process for carburizing steel in a furnace, using an atmosphere derived initially from decomposition of an oxygenated hydrocarbon containing up to three carbon atoms having a carbon to oxygen ratio of from 1 to 2 such as alcohols, aldehydes, ethers, esters and mixtures thereof injected into the furnace until the initial rapid stage of carburization is completed; then blending nitrogen into the oxygenated hydrocarbon atmosphere throughout the remainder of the process so as to minimize energy usage; and continually adjusting the carbon potential by addition of a hydrocarbon enriching or carburizing agent to maintain carbon potential of the furnace atmosphere within the desired limits during the entire carburizing cycle.

EP 0 063 655 A1

PROCESS FOR CARBURIZING FERROUS METALS

TECHNICAL FIELD

This invention relates to a process for gas carburization of ferrous metals and in particular to a process wherein a furnace atmosphere is created by injecting an oxygenated hydrocarbon into said furnace during the
5 period of rapid carburization followed by control of the atmosphere during the later stages of carburization by reducing the rate of injection of oxygenated hydrocarbon while maintaining volumetric flow through the furnace by injecting a nonreactive gas along with said
10 oxygenated hydrocarbon. Carbon potential of the furnace atmosphere is maintained during the carburizing cycle by the addition of controlled amounts of enriching or hydrocarbon carburizing agents to the mixture.


BACKGROUND OF PRIOR ART

15 Carburization is the conventional process for case hardening of steel. In gas carburizing the steel is exposed to an atmosphere which contains components capable of transferring carbon to the surface of the metal from which it diffuses into the body of the part.
20 A variety of atmospheres have been employed but the most commonly used one is the so-called endothermic (endo) atmosphere derived by partial combustion of natural gas in air. It is usually necessary to add a


relatively small quantity of another constituent, usually natural gas, to the atmosphere to raise the carbon potential.

A thorough discussion of the Prior Art can be found in the section entitled "Furnace Atmospheres and Carbon Control" found at pages 67 through 92, and that portion of the section entitled "Case Hardening of Steel" appearing at pages 93 through 128 of Volume 2 of the Metals Handbook published in 1964 by the American Society for Metals, Metals Park, Ohio. This particular volume of the Metals Handbook is entitled "Heat Treating Cleaning and Finishing. At pages 90 through 91 of the Metals Handbook, Volume 2, there is a discussion of determination of carbon potential of a furnace atmosphere pertinent to the invention set forth below.


U.S. Patent 4,049,472 also summarizes the prior art, the specification of which is herein incorporated by reference. The steel objects to be carburized are exposed at an elevated temperature, usually in the range of about 1600°F (871°C), until carbon penetration to a desired depth has been achieved. The metal can then be cooled to room temperature by various known methods such as furnace, air, and media quench to develop the desired physical properties and case hardness in the finished article. The basic endothermic atmosphere produced by the incomplete combustion of natural gas in air consists of approximately 40% N₂, 40% H₂, and 20% CO. The reaction by which carbon is generally believed to be deposited on the surface of the steel is represented by the following equation(1).





The water produced in equation (1) immediately reacts partially with more CO according to the well-known water gas shift reaction (2).




Equations (1) and (2) may be added together to yield reaction (3).



Thus, the net result of carburization by the endothermic atmosphere is the decomposition of nascent carbon on the surface of the metal and concurrent formation of an equivalent amount of CO_2 or H_2O . These two substances, CO_2 and H_2O , cause the reversal of reactions (1) and (3), and if allowed to accumulate would quickly bring the carburization process to a halt. The purpose of the added hydrocarbon mentioned above is to remove the H_2O and CO_2 and regenerate more active reactive gases according to reactions (4a) and (4b).



Another method of generating a carburizing atmosphere which has been developed relatively recently, involves decomposition of methanol, either alone or in combination with nitrogen, according to equation (5).



It will be noted that the ratio of H_2 to CO is 2 to 1, the same as that produced in the endothermic atmosphere by partial combustion of natural gas. By choice of appropriate quantities of nitrogen and methanol it is possible to generate a synthetic atmosphere which is essentially identical in composition to that produced by the partial combustion of natural gas. The advantages of using such a synthetic atmosphere are several fold. First, the need for an expensive and elaborate endo gas system is eliminated. The endo gas generator requires continuing maintenance and attention of an operator and furthermore it cannot be turned on and off at will. Once it is running it is necessary to keep it in operation even though the demand for the endothermic atmosphere may vary from maximum load to zero, thus the endo gas, and the natural gas required to produce it are wasted

during periods of low demand. The use of nitrogen and methanol on the other hand requires only those storage facilities adequate for liquid or gaseous nitrogen and liquid methanol until they are needed. Furthermore, the nitrogen and methanol can both be injected as such directly into the furnace without the need for a separate gas generator. The methanol is immediately cracked by the high temperatures encountered in the furnace. A further advantage of the methanol-nitrogen system is that the methanol is uniform in composition while natural gas contains, in addition to methane, widely varying amounts of ethane, propane and other higher hydrocarbons which affect the stoichiometry of the partial combustion reaction and may give rise to atmospheres of substantially varying composition which in turn leads to erratic and poorly controlled behavior of the carburization process itself.

It has been shown by others, for example in U.S. Patent 4,145,232, that methanol and nitrogen may be used to provide a carrier gas having essentially the same composition as endothermic gas. Others have shown, for example U.S. Patent 3,201,290, that pure methanol may be used to provide a carrier gas comprised essentially of only CO and H₂. A number of advantages are claimed for the latter atmosphere. First the carbon availability (the quality of carbon available for reaction per unit volume of atmosphere) is greater by a factor of 67% in the pure methanol-derived atmosphere than it is in the endothermic gas composition. This greater availability results in more uniform carburization of the workpiece since there is less likelihood of the atmosphere being depleted of carbon in regions where gas circulation is poor, for example in blind spots where several workpieces may obstruct the free flow of atmosphere in the furnace. A further advantage of the pure methanol-based atmosphere is that the kinetics of the carbon transfer are greatly enhanced. The rate at

which carbon can be transferred is given by the following equation:

$$R = k \times P_{CO} \times P_{H_2}$$

The rate of carbon transfer from a gas consisting of two-thirds H_2 , and one-third CO , is almost 2.8 times that of the endothermic atmosphere which contains only 40% H_2 and 20% CO . Thus, it is possible to achieve more rapid carburization and lowered cycle time by the use of the pure methanol carrier gas.

However, a pure methanol-based atmosphere is inherently more expensive both in terms of monetary value and the energy required to produce it, than is an atmosphere derived in part from methanol. For example, total energy requirement to produce 100 SCF of base gas nitrogen at 1700°F (927°C) is 37,200 BTU's, while to produce the same volume of a base gas consisting of two-thirds H_2 and one-third CO by decomposition of methanol 61,800 BTU's are required. These requirements include the energy necessary to heat the gas from ambient temperature to 1700°F (927°C), and in the case of nitrogen, the energy required to separate nitrogen from the air while in the case of methanol, the energy equivalent of the raw material to produce the methanol and the energy required in its synthesis and decomposition. The energy required to produce 100 SCF equivalent of synthetic endo gas from methanol and nitrogen is 51,900 BTU.

Thus it is evident that although the atmosphere derived from pure methanol is advantageous in insuring that carburization proceeds uniformly and at a rapid rate, it is more expensive and consumes more energy than does an atmosphere derived from a combination of methanol and nitrogen. The more rapid carburization achieved with the pure methanol atmosphere is desirable since it results in a shorter cycle time to achieve a given case depth, and thereby lowers the amount of energy lost through the furnace walls. However, this

gain in energy conservation is to some extent offset by the higher thermal conductivity of the pure methanol-derived atmosphere as compared to the synthetic endo atmosphere because of the greater hydrogen content of the former. It is estimated that this increased hydrogen concentration results in a heat loss rate ranging from about 9% to about 14% greater for the all-methanol derived atmosphere.

BRIEF SUMMARY OF THE INVENTION

10 It has been found that the use of an oxygenated hydrocarbon containing carbon, hydrogen, and oxygen having from 1 to 3 carbon atoms, no more than one carbon to carbon bond and a carbon to oxygen ratio of from 1 to 2 selected from the group consisting of
15 alcohols, aldehydes, ethers, esters and mixtures thereof, and in particular the pure methanol-derived atmosphere during the first part of a carburization cycle provides the advantage of initially high carburization rate which is manifested in a reduced total cycle time. But
20 it has also been found that after a period of time, part of the expensive methanol may be replaced by less expensive nitrogen without an accompanying increase in the time necessary to achieve a given case depth. Thus, the advantage of both types of atmospheres may be
25 combined in a single process with a resultant lowering of the overall energy requirement. Carbon potential of the atmosphere is maintained during carburization by addition of controlled amount of enriching or hydrocarbon agents (e.g. methane) to the furnace.


DETAILED DESCRIPTION OF THE INVENTION

30 In the conventional endo process, a carrier gas mixture is obtained by catalytic partial oxidation of hydrocarbons (e.g. natural gas) resulting in a mixture which consists mainly of 20% CO, 40% H₂ and 40% N₂.
35 Hydrocarbons (e.g. excess natural gas) are usually

added to provide the carbon required. The carbon potential, which determines the degree of carburization, is controlled by monitoring either the CO_2 or the H_2O concentration in the furnace gas. Theoretically, the proper control parameters are $\text{Pco}^2/\text{Pco}_2$ and $\text{PcoPH}_2/\text{PH}_2\text{O}$, but since Pco and PH_2 are kept virtually constant, one component control by Pco_2 or PH_2O is possible.

Instead of generating the carrier gas catalytically, it may also be generated by thermal cracking of mixtures of nitrogen and oxygenated hydrocarbons (e.g. methanol). All carbon-hydrogen-oxygen compounds containing up to 3 carbon atoms, but with no more than one carbon to carbon bond, and having a carbon to oxygen ratio of from 1 to 2 and a boiling point not greater than 100°C including alcohols, aldehydes, ethers, and esters are candidates for the atmosphere. Methanol is the preferred oxygenated hydrocarbon for this process however ethanol, acetaldehyde dimethylether, methyl formate and methylacetate have been shown to produce high CO and H_2 levels. So far efforts have been directed to imitating the composition of the endo gas mixture only, in order to achieve comparable results at temperature. This makes it possible to use exactly the same carbon control mechanism as used with the endo system, (i.e. conventional one component carbon control).

The present invention is directed toward improving the results obtained by the endothermic process, but at the same time at maintaining its simple carbon control mechanism. Better results are obtained by increasing the carbon transfer rate. This is achieved by higher CO and H_2 concentrations which enhance the rate of the main carbon transfer reaction:



Since most of the carbon is needed during the first part of the carburizing cycle when the rate of diffusion is very high due to a very steep carbon gradient, improvement can only be achieved during this

period. In the later part of the cycle, the diffusion rate becomes so slow that improving the carbon transfer rate by higher CO and H₂ concentrations does not make any difference. Therefore, the present invention
5 resides in maintaining CO and H₂ concentrations higher than endo composition in the first part of the cycle in order to speed up carbon transfer and to reduce CO and H₂ concentrations in the later part of the cycle to endo composition which will enable the use of conventional
10 one component control.

Higher CO and H₂ levels may be obtained by reducing the nitrogen content in a nitrogen-oxygenated hydrocarbon mixture to be thermally cracked.

For the tests summarized in Table I below, a
15 closed batch heat treating furnace having a volume of 8 cu. ft. (0.227 cu. m) was used. The furnace was equipped with a circulating fan and thermostatically controlled electric heater. Provision was made for introduction of nitrogen gas and methanol liquid, the latter as a
20 spray. The furnace was vented through a small pipe leading to a flare stack. There was also provision for admitting enriching gas (e.g. natural gas) to the furnace.

The exit line was fitted with a sampling device
25 and analytical means which permitted measurement of the concentration of carbon monoxide and carbon dioxide in the exit stream. The carbon potential of the exit gas was calculated according to well-known chemical equilibrium equations and the amount of the enriching gas
30 admitted to the furnace was varied so as to maintain a desired carbon potential (CP) in the furnace. An increase in enriching gas (e.g. natural gas) flow resulted in an increase in carbon potential while a decrease in enriching gas resulted in an corresponding
35 decrease in carbon potential.

In each of the tests the furnace was loaded with approximately 15 lb. of 1010 steel rivets, purged with

nitrogen, and brought up to a final temperature of 1700°F (927°C). Nitrogen and/or methanol was passed into the furnace at a combined rate corresponding to about 3-5 standard volume changes per hour of the
5 furnace atmosphere.

Three different basic atmospheres were used separately or in combination in the various tests. The first of these, called the 100% atmosphere, was generated by the introduction of methanol alone to the furnace, and
10 the furnace atmosphere consisted of a mixture of approximately 2/3 hydrogen and 1/3 carbon monoxide. The second atmosphere, known as the Endo atmosphere, was derived from a combination of two parts nitrogen and one part methanol vapor by volume, and had a final
15 composition of approximately 40% nitrogen, 40% hydrogen and 20% carbon monoxide. The third atmosphere, known as the 10% atmosphere, was generated by passing a mixture consisting of approximately 10% methanol and 90% nitrogen into the furnace. Its composition was
20 approximately 75% nitrogen, 16.7% hydrogen and 8.3% carbon monoxide.

In the several tests, natural gas was introduced at different times and concentrations, but the final segment of each test always involved control of the
25 natural gas introduction so as to maintain a targeted carbon potential in the furnace.

Each test involved a total time cycle of three hours including a heat recovery period after loading of thirty minutes. At the end of this time, the rivets
30 were discharged from the furnace, quenched and subjected to metallurgical testing to determine the case depth and hardness. The effectiveness of carbon potential control was determined by the analysis of a shimstock sample which had been placed in the furnace along with
35 the rivets.

In examples I-1 through I-5 natural gas was introduced at an initial rate corresponding to approximately

10% of that of the total gas flow, and was adjusted so as to give a target carbon potential of 1.0% when the furnace load had come to the final temperature of 1700°F (927°C). In the first three runs, the 100%,
 5 Endo, and 10% atmospheres were employed throughout the entire cycle. The decline in capability of effecting carbon transfer as the nitrogen content of the atmosphere is increased is evident from the case depth data. The Endo atmosphere is only about 87% as effective overall
 10 as is the 100% atmosphere, while the 10% atmosphere is only 64% as effective as the 100% atmosphere.

In tests, I-4 and I-5 the 100% atmosphere was employed for the first one hour of operation but then was replaced by Endo and 10% atmospheres, respectively.
 15 In test I-4, a combination of 100% and Endo atmospheres was almost as effective (96%) as the 100% atmosphere alone. In test I-5, the combination of 100% and 10% atmospheres was almost as effective (84%) as the Endo atmosphere alone.

20 Tests I-6 and I-7 indicate that under the conditions of these tests (10% natural gas during warmup) little is accomplished after the first 1.5 hours of operation with the 100% atmosphere. However, this is not the most energy efficient mode of operation.

25

TABLE I

<u>Test No.</u>	<u>Base Atmosphere</u>	<u>%C</u>		<u>Case Depth (inches)</u>	
		<u>Target</u>	<u>Shim</u>	<u>Effective</u>	<u>Total</u>
I-1	100% 3 hr.	1	0.99	0.0194	0.0405
I-2	Endo 3 hr.	1	1.01	0.0169	0.0368
30 I-3	10% 3 hr.	1	0.93	0.0125	0.0330
I-4	100% 1 hr. Endo 2 hr.	1	0.97	0.0186	0.0370
I-5	100% 1 hr. 10% 2 hr.	1	0.95	0.0163	0.0366

I-6	100% 1.5 hr.	1.1	1.11	0.0197	0.0406
	Endo 1.5 hr.				
1-7	100% 1.5 hr.	1.1	1.09	0.0205	0.0385
	10% 1.5 hr.				

5 Table II shows a pair of tests in which natural gas was introduced at a rate of 10% of the total flow for the first 1.5 hours of operation and then was adjusted to yield a carbon potential of 1.1%. In test II-1, the 100% base atmosphere was employed throughout the test while in test II-2 the Endo atmosphere was employed throughout the test. Again the Endo atmosphere is somewhat less effective (93%) than the 100% atmosphere. The final case depth in both tests is somewhat greater than in the first series of tests. This is probably due both to the longer time during which a high level of natural gas flow was maintained and the slightly higher target carbon potential employed.

TABLE II

20	Test No.	Base Atmosphere	%C		Case Depth (inches)	
			Target	Shim	Effective	Total
	II-1	100% 3 hr.	1.1	1.12	0.0209	0.0380
	II-2	Endo 3 hr.	1.1	1.14	0.0194	0.0370

25 Table III presents a series of tests in which an essentially 100% methanol atmosphere was maintained until the furnace temperature had reached 1600°F (871°C). At this time, natural gas was admitted at a rate such that a carbon potential of 1.1 was maintained.

TABLE III

30	Test No.	Base Atmosphere	%C		Case Depth (inches)	
			Target	Shim	Effective	Total
	III-1	100% MeOH 3 hr.	1.1	1.14	0.0220	0.0384
	III-2	Endo 3 hr.	1.1	1.13	0.0178	0.0351
	III-3	100% MeOH 1 hr. Endo 2 hr.	1.1	1.12	0.0204	0.0386
35	III-4	100% MeOH 1.5 hr. Endo 1.5 hr.	1.1	1.12	0.0224	0.0395

Tests III-3 and III-4 indicate that the degree of carburization which can be achieved with a combination of 100% and Endo atmospheres is virtually equal to that which is achieved with the 100% atmosphere alone.

5 The results obtained in the tests shown in Table III are in all cases superior to the corresponding results shown in Tables I and II where methane was introduced at a high level at the initial part of the cycle. It is believed that in the Table I and II
10 tests, soot deposition which inhibited carburization took place. In the Table III series of tests the surface remained clean because carbon potentials capable of depositing soot were never reached. No advantage is realized by introducing natural gas until the work has
15 approached the final carburizing temperature. Introduction of natural gas prior to this time results not only in wastage but also in sooting which inhibits further carburization.

 The degree to which the methanol is diluted by
20 nitrogen may also be varied. In tests III-1 thru III-4 (Table III) dilution to about endo gas composition was found desirable. In Tests I-4 and I-5 Table I dilution to below endo gas composition was found desirable. In
25 Tests I-4 and I-5 (Table I) dilution to below endo composition after only one hour of exposure to the 100% atmosphere lead to lower case depth, but in tests I-6 and I-7 (Table I) the 10% atmosphere was as effective as the endo atmosphere after 1.5 hours exposure to the 100% atmosphere.

30 The exact time and degree of dilution depends upon the carbon level desired at the surface of the workpiece, the case depth, and temperature at which carburization is carried out. In general, greater case depths and the correspondingly longer times involved, permit
35 greater dilution of the atmosphere. With longer times and greater case depths, the rate of diffusion of carbon from the surface declines and an atmosphere

capable of effecting rapid carbon transfer is not needed.

For practical purposes, dilution to less than about 10% H₂ and 5% CO is undesirable since it is
5 necessary to provide enough reactive gas to ensure scavenging of the small amount of oxygen which may leak into a conventional heat treating furnace. However, in all cases the use of an atmosphere based entirely on methanol at the beginning of the cycle, followed by
10 dilution with nitrogen during later stages will be found advantageous in reducing the length of the cycle while simultaneously conserving energy. A further refinement of the process involves step-wise increasing dilution of the atmosphere as the cycle progresses so
15 that the rate of carbon transfer to the surface is matched with the rate of carbon diffusion away from the surface.

Although the examples of the present inventions were taken from tests where the oxygenated hydrocarbon
20 was sprayed into the furnace in liquid form it can also be vaporized and injected into the furnace separately or with the nitrogen.

According to the present invention gaseous ammonia can be added to the atmosphere to achieve carbonitriding
25 of ferrous metal parts.

STATEMENT OF INDUSTRIAL APPLICATION

Processes according to the present invention can be used in place of existing gas carburizing processes in batch type furnaces and with proper furnace control
30 in continuous furnaces. Existing furnaces can be readily adapted to the present invention without altering systems used to measure carbon potential and with only minor furnace additions to accomodate the hydrocarbon and gas sources.

35 Having thus described our invention, what is desired to be secured by Letters Patent of the United States, is set out in the appended claims.

I Claim:

1. A method of carburizing a ferrous article comprising the steps of:

a. charging the articles to be treated into
5 a furnace maintained at a temperature in excess of 1500°F (816°C);

b. injecting into the furnace an oxygenated hydrocarbon containing up to three carbon atoms, having a carbon to oxygen ratio of from 1 to 2 and a boiling
10 point no greater than 100°C, said oxygenated hydrocarbon selected from the group consisting of alcohols, aldehydes, esters, ethers and mixtures thereof to react and form a carburizing atmosphere in said furnace;

c. establishing and maintaining a rate of
15 injection of said oxygenated hydrocarbon and adding an enriching gas to maintain a carbon potential of between 0.8 and 1.1% in said furnace atmosphere for at least that portion of the total carburizing process where rapid carburizing occurs;

d. subsequently reducing the rate of oxygenated hydrocarbon injection while maintaining a total injection rate by injecting nitrogen into said furnace to maintain said furnace atmosphere at a carbon potential similar to that for a conventional carburizing atmosphere and
25 for a period of time to complete carburization of said articles to the desired case depth; and.

e. discharging said articles from said furnace and cooling at a rate determined by the desired physical properties of said article.

30 2. A method according to Claim 1 wherein said furnace is maintained at a temperature of between 1550°F (816°C) and 1900°F (1038°C).

3. A method according to Claim 1 wherein said oxygenated hydrocarbon is selected from the group
35 consisting of methanol, ethanol, acetaldehyde, dimethyl-ether, methyl formate, methacetate and mixtures thereof.

4. A method according to Claim 1 wherein said oxygenated hydrocarbon is methanol.

5. A method according to Claim 1 wherein said oxygenated hydrocarbon is ethanol.

5 6. A method according to Claim 1 wherein said oxygenated hydrocarbon is acetaldehyde.

7. A method according to Claim 1 wherein said oxygenated hydrocarbon is dimethylether.

8. A method according to Claim 1 wherein said
10 oxygenated hydrocarbon is methyl formate.

9. A method according to Claim 1 wherein said oxygenated hydrocarbon is methylacetate.

10. A method according to Claim 1 wherein prior to charging said furnace the liquid equivalent of from
15 three to five volume charges per hour of oxygenated hydrocarbon is sprayed into said furnace to condition said furnace atmosphere resulting from previous carburizing runs.

11. A method according to Claim 1 wherein said
20 reduced rate of injection of oxygenated hydrocarbon is accomplished by injecting a ratio of from 2 to 1 to 10 to 1 nitrogen to oxygenated hydrocarbon to a total volume flow equal to the volume of oxygenated hydrocarbon injected in said preceding step.

12. A method according to Claim 10 wherein said
25 ratio of nitrogen to oxygenated hydrocarbon is 2 to 1.

13. A method of carburizing a ferrous article comprising the steps of:

a. charging the articles to be treated into a furnace maintained at a temperature of between 1500°F (816°C) and 1900°F (1043°C);

5 b. injecting into the furnace an oxygenated hydrocarbon selected from the group consisting essentially of methanol, ethanol, acetaldehyde, dimethylether, methyl formate, methylacetate and mixtures thereof to react and form a carburizing atmosphere in said furnace;

10 c. establishing and maintaining a rate of injection of said oxygenated hydrocarbon and adding thereto an enriching gas to maintain a carbon potential of between 0.8 and 1.1% in said furnace atmosphere for at least that portion of the total carburizing process where rapid carburizing occurs;

15 d. subsequently reducing the rate of oxygenated hydrocarbon injection while maintaining a total injection rate by injecting nitrogen into said furnace to maintain said furnace atmosphere at a carbon potential in said furnace similar to that for a conventional carburizing
20 atmosphere and for a period of time to complete carburization of said articles to the desired case depth; and

e. discharging said articles from said furnace and cooling at a rate determined by the desired physical properties of said article.

25 14. A method according to Claim 13 wherein said oxygenated hydrocarbon is methanol.

15. A method according to Claim 13 wherein prior to charging said furnace the liquid equivalent of from three to five volume changes per hour of oxygenated
30 hydrocarbon is sprayed into said furnace to condition said furnace atmosphere resulting from previous carburizing runs.

16. A method according to Claim 13 wherein said rapid carburization is effected by injection of said
35 oxygenated hydrocarbons to maintain a furnace atmosphere

of about two-thirds hydrogen and one-third carbon monoxide by volume.

17. A method according to Claim 13 wherein said reduced rate of injection of oxygenated hydrocarbon is accomplished by injecting a ratio of from 2 to 1 to 10 to 1 nitrogen to oxygenated hydrocarbon to a total volume flow equal to the volume of oxygenated hydrocarbon injected in said preceding step.

18. A method according to Claim 17 wherein said ratio of nitrogen to oxygenated hydrocarbon is 2 to 1.

19. A method according to Claim 17 wherein said ratio of nitrogen to oxygenated hydrocarbon is 9 to 1.

20. A method of carburizing a ferrous article comprising the steps of:

a. charging the articles to be treated into a furnace maintained at a temperature in excess of 1500°F (816°);

b. injecting methanol into the furnace to react and form a carburizing atmosphere in said furnace;


c. establishing and maintaining a rate of injection of said oxygenated hydrocarbon to maintain a carbon potential of between 0.8 and 1.1% in said furnace atmosphere for at least that portion of the total carburizing process where rapid carburizing occurs;

d. subsequently reducing the rate of oxygenated hydrocarbon injection while maintaining a total injection rate by injecting nitrogen into said furnace to maintain said furnace atmosphere at a carbon potential in said furnace similar to that for a conventional carburizing atmosphere and for a period of time to complete carburization of said articles to the desired case depth; and

e. discharging said articles from said furnace and cooling at a rate determined by the desired physical properties of said article.

21. A method according to Claim 20 wherein said furnace is maintained at a temperature of between 1550°F (816°C) and 1900°F (1043°C).

5 22. A method according to Claim 20 where gaseous ammonia is also added to the furnace in order to carbonitride the parts.

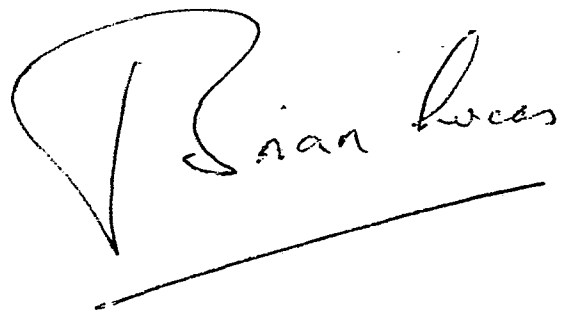A handwritten signature in cursive script, reading "Brian Lucas". The signature is written in dark ink and is positioned above a single horizontal line that extends to the right.



European Patent
Office

EUROPEAN SEARCH REPORT

0063655

EP 81301834.8

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. ³)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
X	<u>DE - A - 1 446 242</u> (SIEMENS AG) * Totality; especially pages 2,3; claims 1-5 * --	1-4,13, 14,22	C 23 C 11/12
X	<u>DE - B - 1 167 152</u> (REGIE NATIONALE DES USINES RENAULT) * Totality; especially column 5, ; claims * --	1-4,13, 14,22	
X	<u>DE - B - 1 110 675</u> (REGIE NATIONALE DES USINES RENAULT) * Totality; especially columns 2,3,5; claims * --	1-6,13, 14,22	TECHNICAL FIELDS SEARCHED (Int. Cl. ³) C 23 C
	<u>CH - A - 548 457</u> (MAAG-ZAHNRÄDER & MASCHINEN AKTIEN-GESELLSCHAFT) * Claims * --	1	
D,X	<u>US - A - 3 201 290</u> (U. WYSS) * Claims * -----	1-4,13, 14	
			CATEGORY OF CITED DOCUMENTS X: particularly relevant A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: conflicting application D: document cited in the application L: citation for other reasons &: member of the same patent family, corresponding document
X	The present search report has been drawn up for all claims		
Place of search VIENNA		Date of completion of the search 26-11-1981	Examiner SLAMA