

⑫ **EUROPEAN PATENT APPLICATION**

⑲ Application number: **82302161.3**

⑥① Int. Cl.³: **C 07 C 57/04, C 07 C 47/22,**
C 07 C 51/31, C 07 C 45/58,
B 01 J 23/88

⑳ Date of filing: **27.04.82**

③① Priority: **27.04.81 US 257675**

⑦① Applicant: **ATLANTIC RICHFIELD COMPANY, 515 South Flower Street, Los Angeles California 90071 (US)**

④③ Date of publication of application: **03.11.82**
Bulletin 82/44

⑦② Inventor: **Shum, Wilfried Po-Sum, 613 N. Swarthmore Avenue, Swarthmore, PA 19081 (TW)**
Inventor: **White, John Francis, 901 Parkes Run Lane, Villanova, PA 19085 (US)**
Inventor: **Beals, Eva Marie, Taylorsville Road, Washington Crossing, PA 18977 (US)**

⑧④ Designated Contracting States: **BE DE FR GB IT NL**

⑦④ Representative: **Cropp, John Anthony David et al, MATHYS & SQUIRE 10 Fleet Street, London, EC4Y 1AY (GB)**

⑥④ **Process for the oxidation of isobutylene oxide to methacrylic acid and methacrolein.**

⑥⑦ Direct synthesis of methacrylic acid and methacrolein from isobutylene oxide comprising the exposure of a mixture of isobutylene oxide and oxygen to a catalyst, preferably a heteropolyacid catalyst, under appropriate reaction conditions to produce a reaction product containing methacrylic acid and methacrolein.

OXIDATION OF ISOBUTYLENE OXIDE TO METHACRYLIC ACID
AND METHACROLEIN

The present invention relates generally to the field of syntheses of methacrylic acid and methacrolein, and more particularly to syntheses of such materials using heteropolyacid catalysts.

5 Methacrylic acid and methacrolein are chemical species which are fundamental to the plastics industry. Methacrylic species, such as methacrylic esters, are used in huge quantities worldwide for diverse employment in the formulation of structural, coating, aesthetic and other polymerizable resin systems. Accordingly, the efficient synthesis of methacrylic acid and other methacrylic species, such as methacrolein,
10 is greatly desired.

Isobutylene oxide is a readily available material having the requisite carbon atom structure for transformation into methacrylic acid and methacrolein species. Such transformation, however, requires both oxidation and dehydration. Accordingly, _____
15

catalytic agents which accomplish this transformation in a selective and efficient manner are highly desired.

Heteropolyacids are a recognized class of acids containing large amounts of oxygen and hydrogen, and multiple atoms of one or more elements, such as molybdenum or tungsten, surrounding one or more heteroatoms of another element, such as phosphorus. Polyanions of such acids consist primarily of octahedral MoO_6 or WO_6 groups, so that the conversion of $[\text{MoO}_4]^{2-}$ or $[\text{WO}_4]^{2-}$ into polyanions requires an increase in coordination number. Cotton and Wilkinson, "Advanced Organic Chemistry", 4th edition, pp. 852-861, Wiley & Sons, N.Y. (1980), disclose that heteropolyanions can be formed either by acidification of solutions containing the requisite simple anions, or by introduction of the hetero element after first acidifying the molybdate or tungstate. As indicated at Table 22-C-2 of Cotton and Wilkinson (pg. 857), various heteropolyanion formula types are known, including the well known Keggin and Dawson structures. Thus, as used herein, the term "heteropolyacids" refers to heteropolyacids and their salts, including heteropolyacids of the Keggin and Dawson structures, as well as organoheteropoly anions and heteropoly blues, as described in the aforementioned Cotton and Wilkinson article at pages 852 through 861, which publication is hereby incorporated by reference as if fully set forth herein.

It has long been known to use various heteropolyacids to catalyze certain organic reactions. For example, U.S. Patent 4,192,951, discloses vapor phase oxidation procedures utilizing various heteropolyacid catalysts, including heteropoly-molybdic catalysts containing vanadium, tungsten, tantalum or niobium act, which catalysts are used in the synthesis of such compounds as maleic acid and acetic acid.

- 3 -

Similarly, in U.S. Patent 4,146,574 entitled "Process For Preparing Heteropoly-Acids" various heteropoly-acid catalysts are disclosed. Such catalysts are described as facilitating the oxidative dehydrogenation of isobutyric acid to methacrylic acid, the oxidative dehydrogenation of methyl isobutyrate to methyl-methacrylate and methacrylic acid, the oxidative dehydrogenation of isobutyraldehyde to methacrolein and methacrylic acid, the oxidation of methacrolein to methacrylic acid, and/or the oxidative dehydrogenation of methylisopropyl ketone to methylisopropenyl ketone.

Vapor phase heteropolyacid catalized reactions, such as disclosed in U.S. Patent 4,146,574, are normally conducted using a mixture of gases, such as steam, oxygen, and/or nitrogen which are permitted to contact a catalytic substrate for preselected periods at preselected reaction temperatures.

Summary of the Invention

The present invention provides a novel direct synthesis of methacrylic acid and methacrolein from isobutylene oxide comprising the exposure of a mixture of isobutylene oxide and oxygen to a catalyst, preferably a heteropolyacid catalyst, under appropriate reaction conditions to produce a reaction product containing varying percentages of methacrylic acid and methacrolein. The preferred process results in a nearly 100% conversion of isobutylene oxide; the reaction produces combined yields of methacrylic species in the 50-68% range.

In accordance with the preferred method of the present invention, selectivity between methacrylic acid and methacrolein may be adjusted by varying the reaction temperature. At lower temperatures, such as about 280°C, relatively greater yields of

methacrolein are obtained, while at temperatures approaching 330°C relatively greater yields of methacrylic acid are produced.

Accordingly, a primary object of the present invention is the provision of a single step synthesis of methacrylic acid
5 and/or methacrolein from isobutylene oxide.

Another object of the present invention is the provision of a simple, vapor phase oxidation of isobutylene oxide to produce methacrolein and/or methacrylic acid.

A further object of the present invention is the provision of a heteropolyacid catalyzed method for converting isobutylene oxide into methacrylic acid and/or methacrolein.
10

These and other objects of the present invention will become apparent from the following, more detailed description.

Brief Description of the Drawing

15 Fig. 1 is a diagram of the laboratory apparatus utilized in performing a preferred embodiment of the method of the present invention.

Description of the Preferred Embodiments

While particular examples have been selected in the following description for the purposes of illustration, one of
20 ordinary skill in the art will recognize that various modifications can be made in the materials and methods described herein without departing from the scope of the present invention, which is defined more particularly in the appended claims.

25 While it is anticipated that the method of the present invention is useful with any of the heteropolyacid catalysts described above, the preferred catalyst for use in the present invention is 10-molybdo-2-vanadophosphoric acid which may be prepared as described by Tsigdinos and Hallada in Inorganic

Chemistry 7, 437 (1968). In particular, this catalyst, having the empirical formula $H_5PV_2Mo_{10}O_{40}$ was prepared as follows: Sodium metavanadate (24.4 grams) was dissolved in 100 milliliters of boiling water and then mixed with 7.1 grams of Na_2HPO_4 5 dissolved in 100 milliliters of water. After the solution was cooled, 5 milliliters of 98% sulfuric acid was added causing the resulting solution to develop a red color. An addition of 121 grams of $Na_2MoO_4 \cdot 2H_2O$ dissolved in 200 milliliters of water was then made while the solution was vigorously stirred. 85 milli- 10 liters of 98% sulfuric acid was then added slowly and the hot solution allowed to cool to room temperature. The 10-molybdo-2-vanadophosphoric acid was then extracted into 500 milliliters of diethyl ether. Air was passed through the heteropoly etherate (bottom layer) to free it from ether. The solid residue was 15 dissolved in water, concentrated to first appearance of crystals in a rotary evaporator, and then allowed to crystalize further. The red, crystalline product was filtered, washed with a little cold water, and air dried. The catalyst was calcined overnight at 220°C in an automatic furnace (Thermolyne type model 2000) 20 with a constant flow of air. The final catalyst acquired a reddish-brown color and gave a clear, red, acidic solution (pH of approximately 1) when dissolved in water.

Referring now to Fig. 1, a laboratory scale apparatus for use in performing the method of the present invention is 25 illustrated. This apparatus comprises a reactor designated generally 100 and a series of collection traps designated generally 102, 104, 106 and 108. Reactor 100 comprises a glass reactor vessel 110 which is fed through side arm 112 and which exhausts through output conduit 114. This reactor is fitted with an axi- 30 ally disposed thermometer well 116. Reactor vessel 110 contains

a catalyst bed 118 located within the reactor flow stream between glass bead packings 120 and 122. In a preferred embodiment, the catalyst bed comprises 50% $H_5PV_2Mo_{10}O_{40}$ deposited on a suitable silica substrate, such as Celite 408 silica which is sold by the
5 Johns-Manville Company, Denver, Colorado. During use, the reactor is submerged in a salt bath (not shown) filled with 60% $ZnCl_2$, 20% $NaCl$, and 20% KCl , heated to the desired temperatures. An Isco pump model 314 was used to feed a premixed aqueous isobutylene oxide solution to a pre-heater where the liquid feed was vaporized
10 and passed on to the catalyst bed. Oxygen and nitrogen were simultaneously fed into the reactor using a flow meter, model 10A1460, which may be obtained from Fisher and Porter.

The reaction products produced in reactor 100 were collected in the recovery train comprising traps 102, 104, 106
15 and 108. Condensation trap 102 comprises collection vessel 140 containing a dual port stopper 142 for receiving conduit 114 and tube 144 which are journaled therethrough. Collection vessel 140 is partially immersed in ice contained within beaker 146. Reaction products 148 are thus collected by condensation within
20 collecting vessel 140. Those products which do not condense as liquids within reaction vessel 140 are passed through tube 144 to collection trap 104, which similarly comprises collection vessel 150, stopper 152 and ice water container 154 for further facilitating the collection of condensed reaction products
25 158.

As shown in Figure 1, gaseous products not collected in trap 104 pass through conduit 156 to carbon dioxide collection trap 106. Carbon dioxide collection trap 106 similarly comprises a collection vessel 160 fitted with a dual apertured rubber stop-
30 per 162. Collection vessel 160 contains a sodium hydroxide solu-

tion for collecting carbon dioxide, the amount of which can be subsequently determined by back titrating with an acid. After passing through output tube 164 to a drying tube 168 for removing water vapor from the process stream, the stream is fed through input tube 170 to the collection vessel 172 of volatile products trap 108. Volatile products trap 108 further comprises a container 174 which holds a dry ice/acetone bath in which at least a portion of collection vessel 172 is immersed. The process stream is then vented through exhaust tube 180.

10 Total acids (isobutyric acid, acetic acid and methacrylic acid) recovered from traps 1 and 2 were then determined by titrating the aqueous solutions with 0.10 M NaOH using phenolphthalein as the indicator. As mentioned above, carbon dioxide collected in trap III (106) was determined by back titration such as with 0.10 N HCl. The reaction products collected by traps 1 and 2 were further subjected to gas chromatographic analysis to determine the percent conversion and, where appropriate, the percent selectivity of the reaction. Gas chromatographic analysis was also used to determine carbon dioxide, oxygen, and, where appropriate, carbon monoxide, using N₂ as the standard.

20 As used herein, percent conversion equals the moles of isobutylene oxide reacted divided by the moles of isobutylene oxide acid supplied times 100. In each instance, 100% conversion of isobutylene oxide was obtained. As used herein, percent selectivity refers to the number of moles of a given end product recovered divided by the number of moles of starting material (isobutylene oxide) reacted times 100. Since 100% of the isobutylene oxide utilized in the reactions described herein in fact reacted, the percent selectivity values equal the percent of given reaction product found in the reaction mixture.

Using the 50% $\text{H}_5\text{PV}_2\text{Mo}_{10}\text{O}_{40}$ /Celite 408 catalyst referred to above, runs of isobutylene oxide at various temperatures were conducted, which runs are summarized in Table I:

TABLE I*

Run #	Temp.	IBO	MAA	IBA	HOAc	MA	Acetone	HCHO	CO ₂
		Conversion							
104-24	278°C	100%	7%	1%	13%	53%	5%	9%	5%
104-28	280°C	100%	8%	1%	13%	60%	5%	3%	6%
104-30	280°C	100%	8%	1%	13%	59%	6%	3%	6%
104-36	290°C	100%	9%	1%	11%	54%	6%	3%	7%
104-40	300°C	100%	11%	1%	15%	52%	7%	6%	7%
140-44	305°C	100%	12%	1%	18%	41%	5%	6%	11%
104-46	326°C	100%	11%	0%	25%	37%	3%	2%	17%
104-48	330°C	100%	12%	0%	25%	38%	3%	4%	18%

*Reaction Conditions: Feed ratio $\text{IBO}/\text{H}_2\text{O}/\text{O}_2/\text{N}_2=1/75/2/8$ (moles); contact time = 1 second; all percents are percents of carbon content of substrate.

As seen from Table I, methacrolein is the major product, below 300°C, with less than 10% methacrylic acid being produced at that temperature. By increasing the temperature of the reaction to 330°C, greater percentages of acetic acid and carbon dioxide are obtained while the yield of methacrylic acid increases from 7 to 12%. Since methacrolein can be readily oxidized to methacrylic acid (for example through subsequent heteropolyacid catalytic oxidation), it is presently preferred to maximize the yields of methacrylic species (methacrylic acid and methacrolein). In Table I, such species are maximized at 280°C where such species comprise 68% of the reaction products.

- 9 -

From the foregoing description, one of ordinary skill in the art will recognize that the reaction of the present invention should be conducted at sufficient temperatures to facilitate the conversion of the subject substrate to the desired end product(s), but below the temperature at which substantial decomposition of the subject catalyst occurs. For example, at atmospheric pressures, the temperature of the bath in which the catalyst is contained should be maintained between about 280-350°C, and more preferably between 280-320°C. Additionally, the subject reactions may be run at pressures between 5-50 psig, preferably 10-30 psig. It is also preferred to use an inert diluent gas to bring the system up to proper operating pressures and to otherwise maintain favorable reaction conditions. Such inert diluents include any gas which is otherwise inert to the system, including, for example, argon, helium, nitrogen, carbon dioxide and excess steam. In any event, the subject reactions should be run with enough steam to stabilize the catalyst by, for example, maintaining the hydration of the catalyst. Contact time of the substrate with the catalyst should be controlled to achieve optimum percentages of conversion at desired selectivities. Such contact times typically range between 0.1-10 seconds preferably between 0.5-5 seconds. In performing the subject reactions, sufficient oxygen should be introduced to accomplish the desired oxidation. Generally, 0.1-25, preferably 1-12, molar equivalents of oxygen per mole of substrate should be introduced with the substrate to carry out the subject oxidation. One of ordinary skill will further recognize that various catalyst supports other than silica may be used with the disclosed catalyst. See for example, U.S. Patent 4,146,574, column 3, lines 47-66, which patent is hereby incorporated by reference.

One of ordinary skill will further recognize that while a heteropolyacid catalyst is preferred, other metal oxide catalysts may be used to accomplish the subject conversion. Such catalysts include oxides of the metals of Groups IV A, V A, VI A, VII A, 5 VIII, I B of the Periodic Table of Elements, as well as thallium, tin, lead, arsenic, antimony, bismuth, phosphorous, cerium, uranium and thorium.

As seen from the above, a novel method for converting isobutylene oxide to a reaction product comprising methacrolein 10 and methacrylic acid is provided, which, under preferred reaction conditions, approaches a combined yield of 70%, while producing side products comprising acetic acid, acetone, formaldehyde, carbon dioxide, and in some instances, a minor amount of isobutyric acid.

CLAIMS:

1. A method for producing methacrolein and/or methacrylic acid comprising:
contacting a catalyst with an isobutylene oxide vapor in the presence of oxygen to produce a reaction mixture containing said methacrolein and/or methacrylic acid.
2. The method of Claim 1 wherein said catalyst is a metal oxide catalyst.
3. The method of Claim 2 wherein said catalyst is a heteropolyacid catalyst or salt thereof.
4. The method of Claim 3 in which the catalyst comprises 10-molybdo-2-vanadophosphoric acid (in a salt thereof).
5. The invention of Claim 3 or Claim 4 wherein said method further comprises deposition of said heteropolyacid catalyst upon a supporting surface, and where said contacting is by introducing a regulated stream of said isobutylene oxide and said oxygen to said catalyst.
6. The method of Claim 5 wherein said regulated stream further contains H_2O and N_2 .
7. The method of any one of Claims 1 to 6 wherein said contacting is for a period of time sufficient to produce a substantially complete conversion of isobutylene oxide.

8. The method of any one of Claims 1 to 7 wherein said method is performed at a preselected temperature between 250-350°C.
9. The method of Claim 8 wherein said temperature is between about 278-330°C.
10. The method of Claim 9 wherein said temperature is between about 278°C and 290°C.

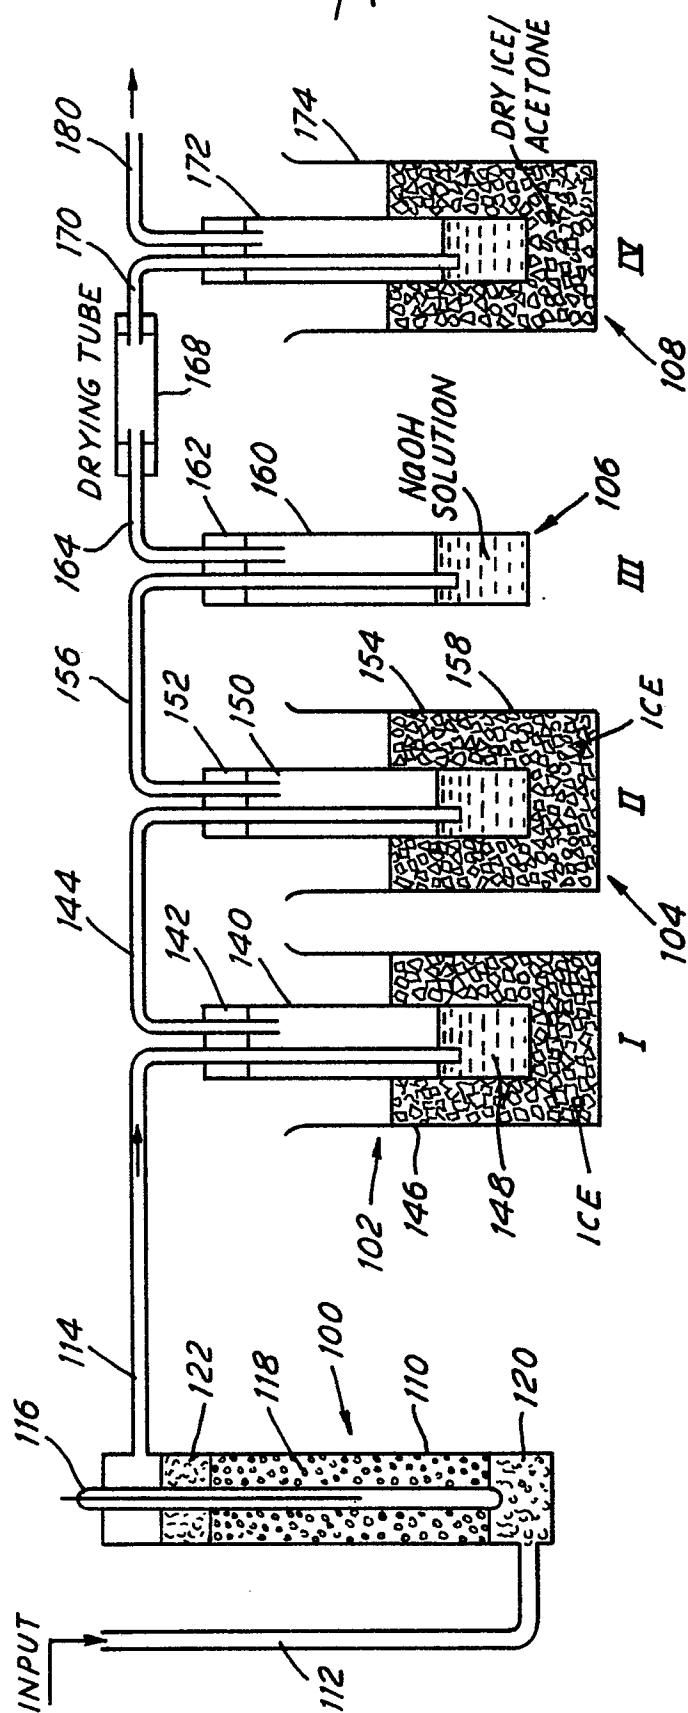


FIG. 1



European Patent
Office

EUROPEAN SEARCH REPORT

0063955

Application number

EP 82 30 2161

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 7)
Y	CHEMICAL ABSTRACTS, vol.87, no.23, December 5, 1977, page 597, abstract no.184352s, Columbus, Ohio (US) & SU - A - 560 873 (INSTITUTE OF CHEMICAL PHYSICS, ACADEMY OF SCIENCES, U.S.S.R.) (June 5, 1977) * claims *	1,2	C 07 C 57/04 C 07 C 47/22 C 07 C 51/31 C 07 C 45/58 B 01 J 23/88
A	EP-A-0 005 769 (NIPPON KAYAKU KABUSHIKI KAISHA) * claims 1-6; page 7, lines 12-14; page 5, lines 16-22 *	1-3,5, 6,8-10	
A	US-A-4 224 187 (VANDERSPURT) * claim 1; column 5, lines 14-37 *	1-3,5, 6,8-10	
A	US-A-4 065 507 (HARDMAN et al.) * claim 1; column 1, lines 50-63; column 3, lines 2-7 *	1-2	TECHNICAL FIELDS SEARCHED (Int. Cl. 7) C 07 C 57/00 C 07 C 51/20 C 07 C 45/00 C 07 C 47/00
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 17-06-1982	Examiner KLAG M.J.
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			