

EUROPEAN PATENT APPLICATION

Application number: 81303526.8

Int. Cl.³: B 65 D 41/04

Date of filing: 31.07.81

Date of publication of application:
09.02.83 Bulletin 83/6

Designated Contracting States:
DE FR GB

Applicant: Toeppen, Thurston H.
Lois Lane, R.D.3
Poughkeepsie, New York 12603(US)

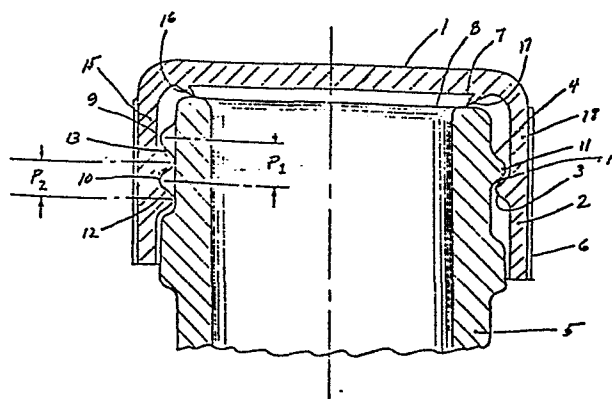
Inventor: Toeppen, Thurston H.
Lois Lane, R.D.3
Poughkeepsie, New York 12603(US)

Representative: Dowler, Angus Michael et al,
Abel & Imray Northumberland House 303-306 High
Holborn
London, WC1V 7LH(GB)

Thread construction for plastic closures.

A screw-type closure (1) moulded of resilient plastics with an internal thread (3) having an axial pitch spacing (P_2) smaller than the pitch spacing (P_1) of the mating external thread (4) of the container (5) with which it is used. The difference between the pitches of the two threads (3 and 4) compensates for variables affecting sidewall characteristics around the circumference of the closure (1), to secure more uniform application of sealing pressure.

Fig. 1



-2-

Screw-type closures molded of resilient plastic materials such as polyethylene or polypropylene have been widely used for sealing metal, glass, and plastic containers holding a variety of products. However, closures of this type have been of limited practicability for liquids under pressure, such as carbonated beverages. This limitation is due not only to the permeability of the pliable materials used, and to the unavoidable inaccuracies of the mating parts, both of which become more critical with increasing pressure, but may also be the unwanted side-effect of some effort to improve pressure retention. For

-3-

example, screwing the closure more tightly onto the container may deform the thread so much that it will be difficult for the user to unscrew. In addition, it may cause distortion of the closure, due to unbalanced loading of the screw thread, to the point where leakage is actually increased.

Separate sealing materials have sometimes been added to a basic closure to improve these conditions, but they add substantially to the cost. Also, many types of integrally-molded sealing lips have been designed for incorporation into the body of the closure, with the aim of reducing leakage. Some of these seal designs are arranged to bear on the inside or the outside of the rim of the container opening, in which case the amount of sealing pressure which can consistently be applied to them is restricted by the tensile strength and resilience of the material used, and by the unavoidable dimensional variations of the mating parts. Others are arranged to bear on the top surface or edges of the container rim. In this approach, the characteristics of the material and the dimensional variations of the parts are less critical, owing to the accommodative ability of the screw thread, but the sealing action becomes more sensitive to any distortion or cocking of the closure. It is this condition which the present invention is principally designed to improve.

-4-

In the conventional construction there is an inherent tendency toward distortion and cocking, due to the fact that both the closure and container threads always have the same axial pitch spacing.

5 Such exact matching may be correct practice in ordinary situations, but it results in uneven stresses when one of the mating parts is substantially more pliable than the other. In the case of resilient plastic closures for pressurized applications, the

10 thread is formed on a body of relatively pliable material, whereas the mating container thread is much more rigid. As a result, the point of thread contact nearest the seal elements receives a substantially greater proportion of the sealing load than the one

15 farthest away, the load on which is weakened by stretching of the additional plastic material above it. Between these two limits, there is a gradual reduction of the load assumed by each portion of the thread. The net result is that the portion of the

20 seal directly above the topmost contact point is compressed more heavily than desirable, while other portions of the seal are compressed more lightly. This results in a tendency for the closure to tilt. It may also lead to jamming of the thread at the

25 highest point of contact during installation, and in extreme cases to distortion or rupture of the plastic wall. These conditions in turn may lead to difficulty in manually removing the closure from the container.

-5-

SUMMARY OF THE INVENTION

A closure according to the invention is provided with an internal thread having a smaller axial pitch spacing than the mating external thread of the container, the difference between the two threads being designed to compensate for the normal variations in sidewall characteristics around the circumference of the closure. This will result in the more uniform application of axial sealing pressure at all points around the circumference of the sealing element, or elements, thereby maximizing the effectiveness of the closure seal and minimizing the influence of manufacturing irregularities.

The principal object of the invention is to provide improved sealing of resilient plastic screw-type closures when used in combination with relatively rigid containers.

Another object of the invention is to facilitate installation of the closure on the container by distributing thread friction more uniformly over the entire area of thread contact, in order to provide more consistent installation torque and to prevent localized stress concentrations which may lead to jamming of the thread and/or damage to the plastic.

-6-

Another object of the invention is to facilitate manual removal of the closure by preventing localized stress concentrations during installation and storage, which may so deform the closure thread as to impede the unscrewing operation.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a sectional side view of the central plane of a typical glass container top with a closure according to the invention, the closure being screwed down only to the point where its sealing element just makes contact with the surface of the container rim as the closure thread just makes working contact with the container thread.

FIG. 2 is a similar sectional side view, the same as FIG. 1 except that the closure has been screwed home so that the seal is fully deflected and the threads fully loaded.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

As shown in FIG. 1, the invention is embodied in a plastic, screw-type closure molded of polyethylene, polypropylene, or a similar resilient plastic. The closure comprises a circular crown 1, a cylindrical sidewall or skirt 2 which is integral with the crown,

-7-

an internal screw thread 3 to mate with a corresponding external thread 4 which is part of container 5, and external knurls or flutes 6 by which it may be gripped to rotate it on to or off of the container thread. One
5 or more circular sealing elements is provided, such as lip 7, to bear on the mating top surface 8 of the container. Alternatively, the sealing element may consist of a raised bead or a shoulder, and may bear on the inner or outer corner of surface 8, or on both.

10 Container 5 is of a conventional style, and may correspond to any of a number of designs which have been standardized by agencies of the container industry. As shown in Fig. 1 it has the general conformation of a glass container, but may equally well be made of plastic
15 or metal.

In order to best illustrate the principles of the invention, thread 4 in the figures is shown as if it consisted of exactly one turn, with the upper end 9 and lower end 10 of the thread shown at the left side
20 of Fig. 1, and the midpoint 11 of the thread shown in section at the right side. In practice, such threads are usually longer; however, the principles of the invention are most clearly shown in the single-turn example. Thread 3 is understood to be long enough to provide full contact
25 with thread 4 as the closure is rotated from the position of Fig. 1 to that of Fig. 2.

5 The axial spacing between successive turns of the same thread is known as the pitch, and is usually expressed either as the equivalent number of turns per inch or, conversely, as a certain fraction of an inch per turn. For example, a thread pitch equivalent to eight turns per inch would have an axial spacing between turns of one-eighth of an inch.

10 Referring to the left side of Fig. 1, the axial pitch of the container thread is indicated by the dimension P_1 , and the slightly smaller pitch of the closure thread by the dimension P_2 . Since the closure of Fig. 1 is shown just at the stage in its rotation where the thread makes working contact with the container thread at point 12, the pitch difference between P_1 and P_2 will appear as an axial clearance at point 13. At the halfway point 14 of the thread turn, the axial clearance is half of that at 13. In Fig. 1, the clearances are exaggerated to emphasize the principles.

20 As the closure is rotated beyond the stage shown in Fig. 1, thread 3 is forced downward at point 12 by the inclination of thread 4, thereby placing zone 15 of sidewall 2 in axial tension, and compressing area 16 of seal 7 against surface 8. However, the tension in zone 15 also operates in the opposite direction, immediately causing the contact area at point 12 to spread out and extend toward point 14 on account of the resilience of the plastic material. As the closure is tightened, the stretching of sidewall 2, the compression of seal 7, and the extension of the thread contact area all progress together around the closure, past point 14, until the progression has completed the full turn at point 13, to reach the condition shown in Fig. 2. At that stage, if the

-9-

difference between P_1 and P_2 has been correctly proportioned, the thread contact pressure per unit of contact length, the tension per unit in the sidewall above the thread, and the seal pressure per unit of contact length, will all be uniform around the closure. To express it in more general terms, the amount of divergence of the threads is designed to compensate for the changes in the effective length of the sidewall around the closure. Any additional tightening of the closure will increase all of the forces involved, but without significantly changing their relationship or their uniformity.

The exact amount of thread divergence required between P_1 and P_2 will vary according to the pitch of the container thread, the dimensions of the sidewall in the thread area, and the tension modulus, or extensibility, of the particular plastic used for the closure. It will also vary with the material and thickness of the container, but this effect is ordinarily so small that it can be neglected.

The principle of the invention may be more evident if it is pointed out that in the case of a conventional closure thread design, P_2 would be the same as P_1 , so that under the conditions of FIG. 1 the clearances at points 13 and 14 would be zero. Consequently, the closure thread would make initial contact with the container

-10-

thread at the same time along its entire length. Further rotation of the closure would then begin to apply equal increments of downward movement to each portion of the thread around the closure. However, at point 13
5 this increment would be transmitted to the corresponding point 16 of the seal by way of a relatively short length of sidewall at 15, whereas the same increment of downward movement at point 14 would be transmitted to its corresponding point 17 of the seal by way of a relatively
10 longer length of sidewall at 18. The greater length of sidewall stretch between points 14 and 17, for the same amount of thread movement, would of course result in a lower sealing pressure at 17.

The same effect would become even more pronounced
15 on moving down the thread toward point 12, until the nearness of point 13 would cause a rapid shift in the pressure distribution back to the maximum. The thread at point 12 itself would be sheltered by point 13, and would take very little of the load. It is evident that
20 the "sawtooth" pressure pattern produced by this combination of conditions, with its concentration of sealing force about point 13, a gradual weakening around the circle through point 14, and a sudden rise again near point 12, would result in tendencies toward weaker sealing at
25 certain points, overloading of the thread at point 13, and underloading of the thread near point 12.

I Claim:

1. A closure device of resilient material, in combination with a container having an external screw thread of less resilient material, comprising: a circular crown disc, a cylindrical sidewall or skirt depending from said disc and perpendicular to it, an internal screw thread within said sidewall to mate with said external screw thread, and sealing means integral with the inside surface of said crown disc for mating contact with the upper rim of the opening of said container; said internal thread having an initial axial pitch shorter than the initial axial pitch of said external thread by an amount proportional to the difference in the effective elasticities of said materials and to the axial pitch of said external thread.

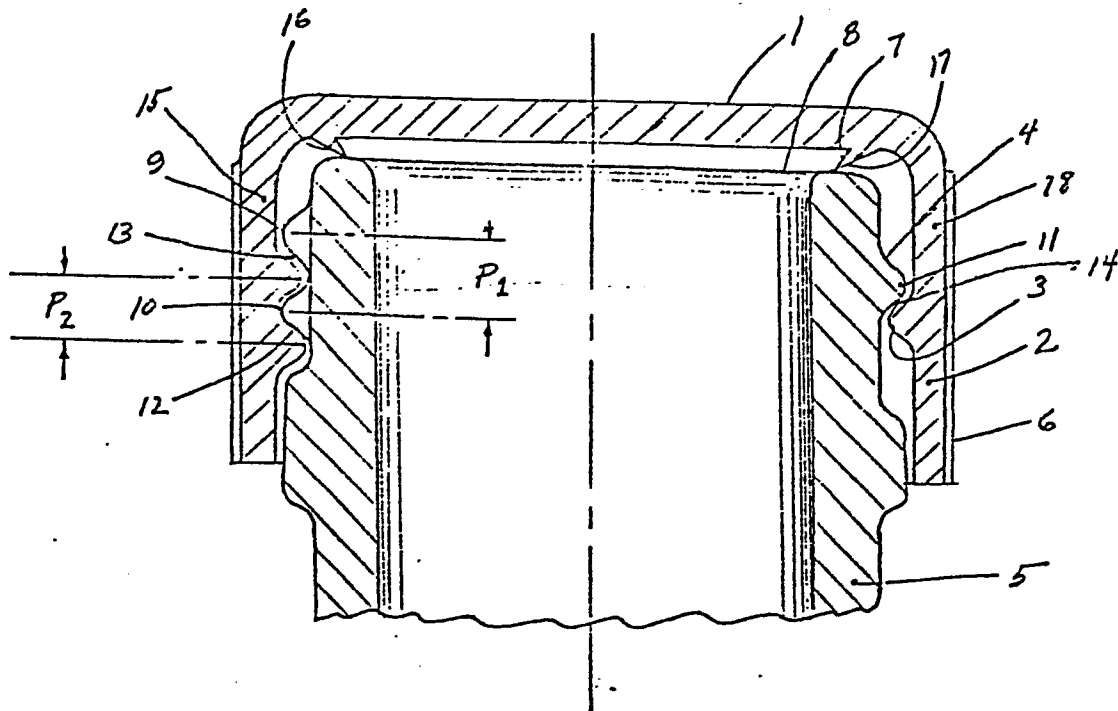
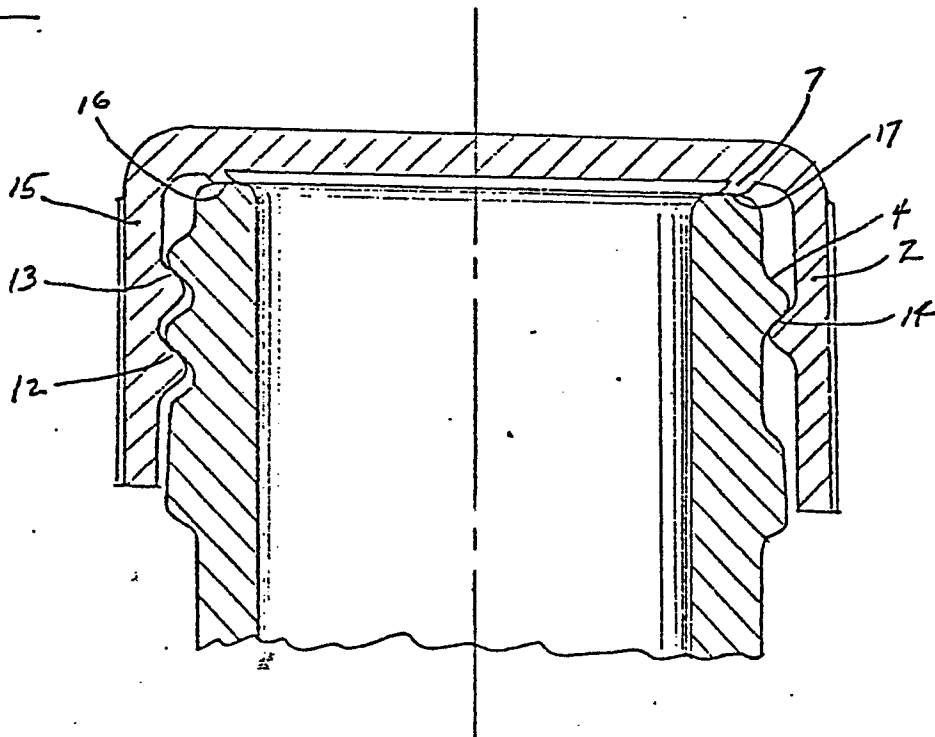
2. A closure device as in claim 1, in which said initially-different axial pitches of said threads become effectively equal after final installation of closure and concomitant deflections of said threads.

3. A closure device as in claim 1, in which the final axial pressure per unit of contact length between said sealing means and said upper rim is substantially equal around the circumference of said closure.

-12-

4. A closure device as in claim 1, in which the final axial pressure per unit of contact length between said threads is substantially equal around the circumference of said closure.

5. A closure device as in claim 1, in which the final axial tension per unit of cross-section area in said sidewall, between said internal thread and said seal, is substantially equal around the circumference of said closure.

FIG. 1FIG. 2



European Patent
Office

EUROPEAN SEARCH REPORT

0070935

Application number

EP 81 30 3526

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. ³)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
Y	GB - A - 876 636 (VAESSEN-SCHOEMAKER HOLDING) * page 1, lines 29-56; page 1, lines 66-90; page 2, lines 1-3; page 2, lines 61-66; figure 1; claims 1,2,5,6 * --	1-5	B 65 D 41/04
Y	GB - A - 788 148 (METAL BOX COMPANY LTD.) * claims; figures * --	1-5	TECHNICAL FIELDS SEARCHED (Int.Cl. ³)
A	GB - A - 1 082 440 (METAL BOX COMPANY LTD.) * the whole document * --	1-5	B 65 D
A	GB - A - 1 036 399 (METAL BOX COMPANY LTD.) * the whole document * -----	1-5	CATEGORY OF CITED DOCUMENTS
			X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons
☒ The present search report has been drawn up for all claims			&: member of the same patent family, corresponding document
Place of search The Hague		Date of completion of the search 12-03-1982	Examiner MASBOU