

(12) **EUROPEAN PATENT APPLICATION**

(21) Application number: 82108861.4

(51) Int. Cl.³: **C 23 C 1/14**
C 23 C 1/12, C 23 C 1/02

(22) Date of filing: 24.09.82

(30) Priority: 16.10.81 JP 165508/81

(43) Date of publication of application:
27.04.83 Bulletin 83/17

(64) Designated Contracting States:
DE FR GB

(71) Applicant: **KAWASAKI STEEL CORPORATION**
No. 1-28, 1-Chome Kitahonmachi-Dori
Fukui-Ku Kobe-Shi Hyogo 651(JP)

(72) Inventor: Iwanuma, Katsuhiko
6-1-2, Omiyada Chiba-shi
Chiba-ken(JP)

(72) Inventor: Yoshihara, Takahisa
3-12, Nitona-cho Chiba-shi
Chiba-ken(JP)

(72) Inventor: Shijima, Syoji
4-8-5, Chishirodaiminami Chiba-shi
Chiba-ken(JP)

(72) Inventor: Akiyoshi, Katsunori
1826-38, Haniya Sanbu-machi Sanbu-gun
Chiba-ken(JP)

(72) Inventor: Fujita, Yoshinori
2-20-6, Minami-cho Chiba-shi
Chiba-ken(JP)


(72) Inventor: Nemoto, Hiroshi
4-23-1, Suehiro Chiba-shi
Chiba-ken(JP)

(74) Representative: **Patentanwälte Henkel, Pfenning,**
Feiler, Hänzle & Meinig
Möhlstrasse 37
D-8000 München 80(DE)

(64) **System for producing one-side zinc hot dipped steel sheets.**

(57) A system for carrying out one-side zinc hot dipping process of the type wherein a steel sheet having a film of an anti-plating agent formed on one surface thereof is passed through a molten zinc bath to plate the other surface of the steel sheet with zinc, and the anti-plating film is then removed by peeling to produce a one-side zinc plated steel sheet, is arranged such that the anti-plating film on the steel sheet does not contact with any rigid member such as a deflector roll while the sheet is moved from the molten zinc bath to the anti-plating film peeling site, thereby preventing formation of dents in the sheets, which is otherwise caused by zinc particles entrained on the anti-plating film emerging from the zinc bath.

FIG. 2

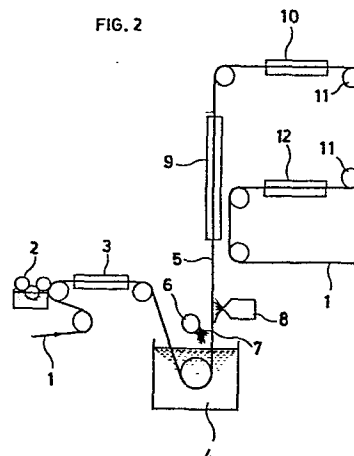

System for Producing One-Side Zinc Hot Dipped
Steel Sheets

BACKGROUND OF THE INVENTION

This invention relates to a system for producing one-side zinc hot dipped steel sheets or strips used in automobiles or the like.

It is well known in the motor industry that one-side zinc plated steel sheets are widely used as automobile body steel sheets which are substantially free of severe local corrosion in the interior and give an excellent painting appearance on the exterior of the vehicle body.

One-side zinc plated steel sheets are generally produced either by hot dipping process or by electrodeposition process. In general, the former process is advantageous in increased plating speed and thickness while the latter is suitable for producing thin coatings. Since the one-side plating, whether it is by the hot dipping or electrodeposition, encounters much technical difficulty as compared with usual both-sides plating, the cost of plating is not necessarily low irrespective of a one-half reduction in the quantity of zinc plated. Attempts have been made to produce one-side zinc plated steel sheets at low cost. Typical proposals include (1) one-side cutting process, (2) meniscus process, and (3) the use of an anti-plating agent.

The one-side cutting process is by plating the both

sides of a steel sheet followed by cutting off a zinc plating on one side. Apparently, this process is inefficient and expensive, and the sheet surface from which the zinc plating has been cut away is poor in quality. The meniscus process is designed so as to contact only one surface of a strip with molten zinc by the utilization of ultrasonic, electromagnetic pump, or other means. Temper color appears on the cold rolled surface of a strip since the strip is exposed to the ambient atmosphere before the strip temperature is sufficiently lowered. Pickling must be carried out to remove such temper color, resulting in products of non-uniform quality. The temper color is undesirably enhanced when the zinc plating must be subjected to an alloying treatment. Removal of such enhanced temper color is also a problem.

A number of proposals have also been made for the use of anti-plating agents, but none of them have enjoyed successful results in commercial production. Zinc remains in the form of entrained particles on the surface of an anti-plating film on a steel strip emerging from a molten zinc bath, resulting in a limited line speed. The entrained zinc particles are adhered or transferred to the surface of a carry/guide roll, causing dents in the steel strip.

In these years, the likelihood of entraining zinc particles was significantly reduced due to improvements in releasability of an anti-plating film and the use of a flame wiper.

SUMMARY OF THE INVENTION

An object of this invention is, therefore, to provide an improved system for producing one-side zinc plated steel sheets in such a manner that dent formation is thoroughly precluded even when a few zinc particles remain on the anti-plating film surface.

This invention is directed to a system for carrying out one-side zinc hot dipping process of the type wherein a steel sheet having a film of an anti-plating agent formed on one surface thereof is passed through a molten zinc bath to plate the other surface of the steel sheet with zinc, and the anti-plating film is then peeled and removed to produce a one-side zinc plated steel sheet. According to a novel feature of this invention, the system is arranged such that the anti-plating film on the steel sheet does not contact with any rigid member while the sheet is moved from the molten zinc bath to the anti-plating film peeling site.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of this invention will be more fully understood from the following description when taken in conjunction with the accompanying drawings, in which;

Fig. 1 is a schematic illustration of a prior art system for producing one-side zinc hot dipped steel sheets; and

Fig. 2 is a schematic illustration of the one-side zinc hot dipped steel sheet producing system according to this invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In order to facilitate understanding of the invention, reference is first made to a prior art system shown in Fig.

1. A strip or sheet 1 of steel which is previously cleaned is transported in the direction of an arrow to a roll coater 2 where an anti-plating agent is applied to one surface of the sheet. The steel sheet having the anti-plating agent applied thereon enters an annealing furnace 3 where it is heated for drying and baking to form an anti-plating film temporarily firmly adhered to the sheet. After cooling, the steel sheet 1 is immersed in a molten zinc bath 4 for zinc hot dipping. The steel sheet is turned around a sink roll in the bath and emerges vertically upward from the bath. The zinc dipped sheet, which possesses the anti-plating film on one surface 5 and a zinc plating on the other surface 7, passes across a flame wiper 6 immediately above the bath for wiping off zinc entrained on the anti-plating film 5, and then across a plating thickness control 8 in the form of a wiper for adjusting the thickness of the zinc plating 7. Subsequently, the sheet is passed through an alloying furnace 9 and a cooling unit 10, and then introduced into a peeling machine 12 through a deflector roll 11 where the anti-plating film is removed from the sheet by peeling. After washing, a one-side zinc plated steel sheet is obtained. The steps of coating and drying the anti-plating agent may, of course,

be previously carried out in a separate line.

Such a process of producing one-side zinc hot dipped steel sheets has the likelihood that zinc particles deposited or entrained on the anti-plating film 5 of the emerging hot-dipped sheet will make dents in the sheet, as described earlier. The inventors have found that such dent formation is caused by the contact of the anti-plating film 5 on the sheet with the deflector roll 11. As a result of such contact, zinc particles remaining on the anti-plating film surface are captured by the deflector roll 11 to form dent-causing projections on the roll surface.

To eliminate the cause of dent formation, the present invention guides the sheet 1 along a path from the molten zinc bath 4 to the peeling machine 12 while keeping the anti-plating film 5 on the sheet out of contact with any rigid member such as a deflector roll.

One preferred embodiment for such guiding is shown in Fig. 2. The system shown in Fig. 2 also includes the same steps applied to a steel sheet as described in connection with the prior art system shown in Fig. 1, that is, steps of applying an anti-plating agent to one surface 5 of a steel strip or sheet 1, drying and baking the anti-plating agent followed by cooling, zinc plating in a molten zinc bath 4, wiping off zinc entrained on the anti-plating film by means of a flame wiper 6, controlling the thickness of a zinc plating

by means of a thickness controller 8, optionally effecting an alloying treatment in an alloying furnace 9, cooling in a cooling unit 10, and removing the anti-plating film from the sheet by peeling through a peeling machine 12 followed by a suitable post-treatment. The system shown in Fig. 2 includes a reentrant way extending from the molten zinc bath 4 to the peeling machine 12 where the sheet 1 is turned around three guide rolls in the same direction. All the guide rolls are in contact with only the zinc plating 7 on the sheet 1. Differently stated, the system is arranged such that the anti-plating film 5 on the sheet 1 does not contact any rigid member such as a deflector roll while the sheet 1 is moved from the outlet of the molten metal zinc bath 4 to the inlet of the peeling machine 12. With this arrangement, formation of dents on the sheet surface is thoroughly precluded since zinc particles entrained on the anti-plating film 5 are no longer depressed onto the confronting sheet surface in the absence of any rigid roll in a line leading to the film peeling-off stage.

The peeling machine may be of any desired type including water cooling, mechanical bending, and brushing as well as any combination of these types. The position in which the peeling machine is disposed is not limited to the position shown in Fig. 2, and it may be disposed in the position of the cooling unit 10 or connected downstream of the cooling unit 10. Such peeling machines per se are well known in the

art and as such form no particular part of the present invention except in combination with the other elements thereof. It is critical for the present invention that the system is arranged such that the anti-plating film 5 on the sheet 1 does not contact any rigid member such as a deflector roll while the sheet 1 is moved from the molten zinc bath 4 to the peeling machine 12.

Since an anti-plating film on a steel sheet does not contact any rigid member such as rolls or experience any compression by such rigid members during passage of the sheet from a molten zinc bath to a film peeling machine, the present invention can effectively prevent dent formation even in the presence of zinc particles or deposits remaining on the anti-plating film. The prevention of dent formation is of great advantage in the commercial manufacture of one-side zinc plated steel sheets using anti-plating agents since significant improvements are accomplished including increased line speed, mitigated requirements for the flame wiper, and the use of a wider range of anti-plating agents.

WHAT WE CLAIM IS:

1. A system for carrying out one-side zinc hot dipping process of the type wherein a steel sheet having a film of an anti-plating agent formed on one surface thereof is passed through a molten zinc bath to plate the other surface of the steel sheet with zinc, and the anti-plating film is then removed by peeling to produce a one-side zinc plated steel sheet, characterized in that the system is arranged such that the anti-plating film on the steel sheet does not contact with any rigid member while the sheet is moved from the molten zinc bath to the anti-plating film peeling site.
2. The system according to claim 1 wherein the steel sheet is guided by means of at least one guide roll in contact with the zinc plating on the sheet while the sheet is moved from the molten zinc bath to the anti-plating film peeling site.
3. The system according to claim 1 wherein the steel sheet is moved along a reentrant way in respect to the zinc plating on the sheet.
4. The system according to claim 3 wherein the reentrant way includes three guide rolls in contact with the zinc plating on the sheet.


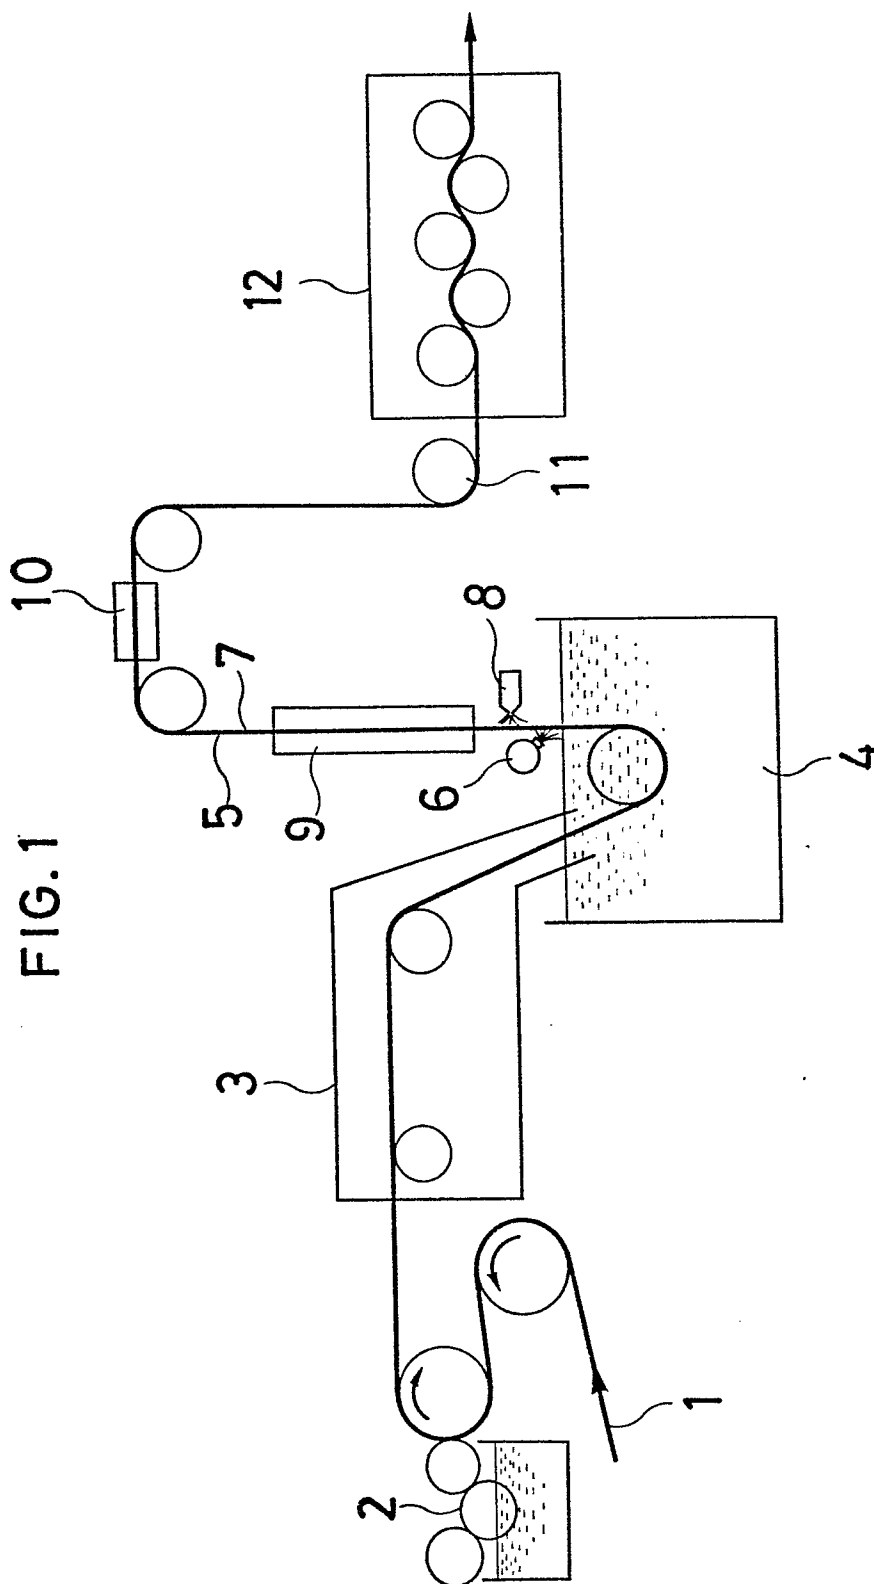


FIG. 2



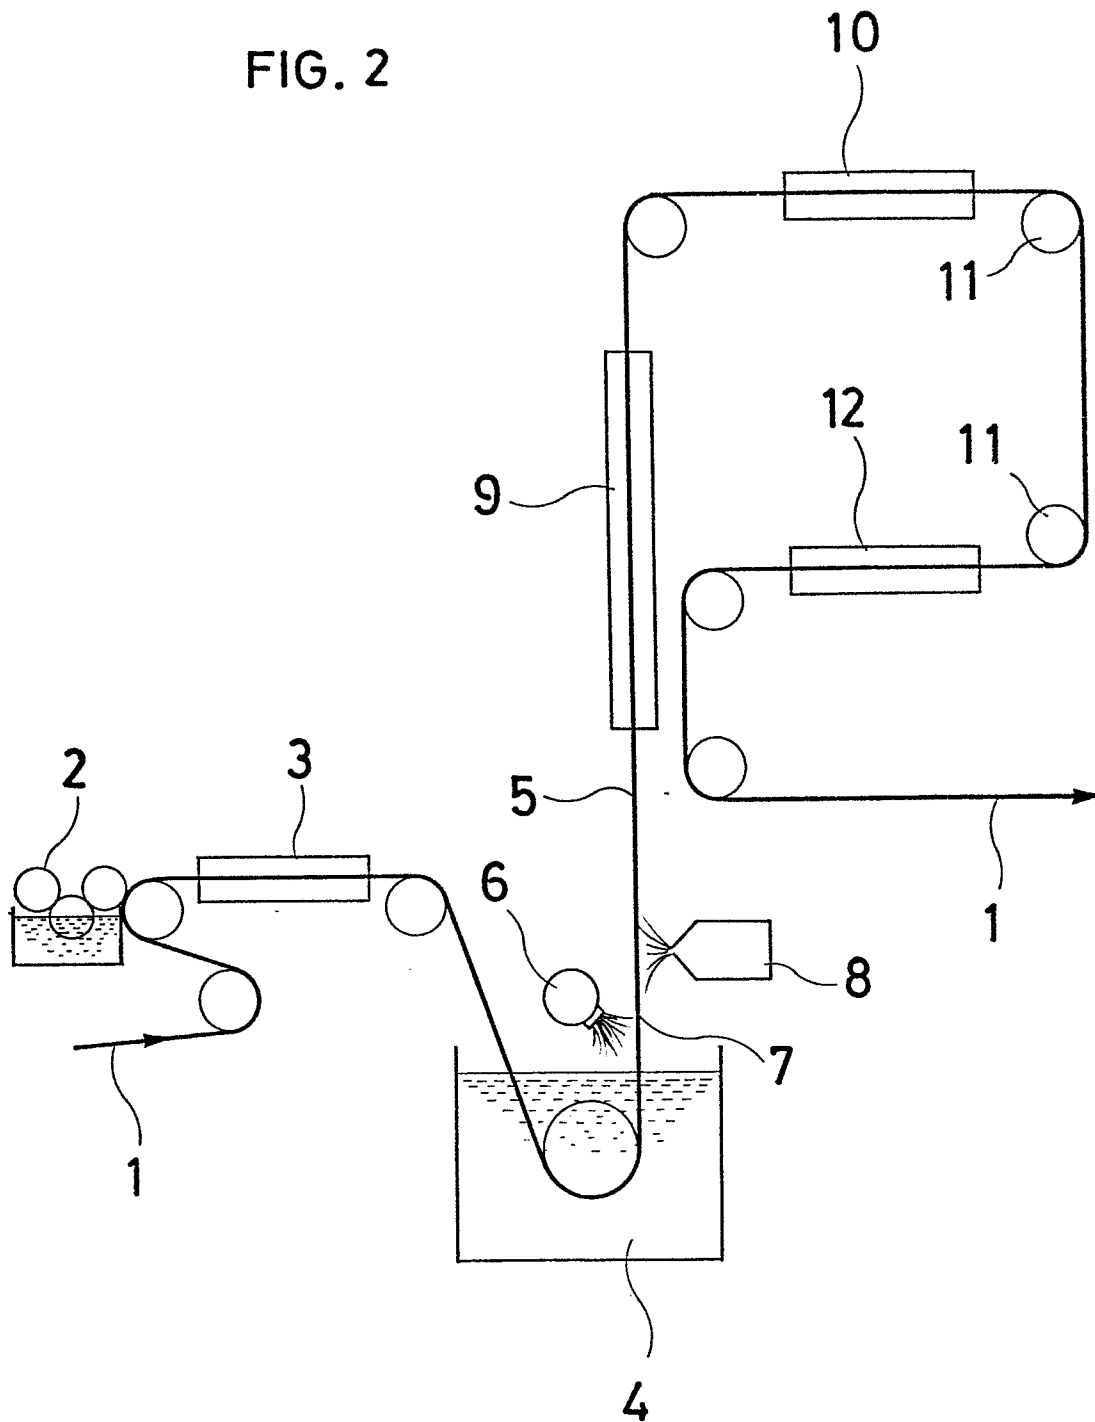

European Patent
Office

EUROPEAN SEARCH REPORT

0077473

Application number

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 82108861.4
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
X	US - A - 4 177 303 (R.H. CLIPSTON et al.) * Fig.; column 2, lines 5-24; claims * --	1-4	C 23 C 1/14 C 23 C 1/12 C 23 C 1/02
Y	US - A - 4 285 995 (D.W. GOMERSALL) (25-08-1981) * Fig.; column 6, line 35 - column 7, line 17 * ----	1-4	TECHNICAL FIELDS SEARCHED (Int. Cl. 3) C 23 C
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 10-12-1982	Examiner SLAMA
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			