

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: 81305307.1

(51) Int. Cl.<sup>3</sup>: **D 01 D 5/22**  
**D 04 H 3/16**  
**//D01D5/32, D01D5/34**

(22) Date of filing: 09.11.81

(43) Date of publication of application:  
18.05.83 Bulletin 83/20

(84) Designated Contracting States:  
CH DE FR IT LI NL

(71) Applicant: **MINNESOTA MINING AND  
MANUFACTURING COMPANY**  
3M Center, P.O. Box 33427  
St. Paul, MN 55133(US)


(72) Inventor: **Fowler, Anthony James**  
3, Dunvegan Close Coombe Park  
Coventry West Midlands(GB)

(74) Representative: **Hale, Stephen Geoffrey et al,**  
J.Y. & G.W. Johnson Furnival House 14/18 High Holborn  
London WC1V 6DE(GB)

(54) **Filamentary structure.**

(57) A filamentary structure 5 comprises a helical thermoplastic core filament 6 disposed within a thermoplastic sheath component consisting either of a tube or of at least three thermoplastic filaments 7, the sheath component being joined at 8 to the successive turns of the core filament 6. The core filament 6 and the sheath component may comprise the same or different thermoplastic polymers, suitable polymer being polyamides, polyesters and polyolefins.

The core filament 6 and the sheath component may be extruded together from a spinning jet, and a plurality of the filamentary structures 5 may be extruded side-by-side so that their sheath components are joined together to form a fabric structure.



- 1 -

Filamentary structure

This invention is concerned with the extrusion of thermoplastic polymers to form a novel filamentary structure.

According to the invention, a filamentary structure comprises a spiral thermoplastic core filament disposed  
5 within a thermoplastic sheath component which is joined to the successive turns of the spiral core filament.

The sheath component is preferably a cage formed by at least three thermoplastic filaments each of which is joined to the successive turns of the spiral core filament. Alter-  
10 natively, the sheath component may comprise a tube.

The invention includes a process for making such a filamentary structure comprising feeding molten thermoplastic polymer to a spinning jet having an inner jet hole ringed by outer jet holes, extruding the polymer through the inner  
15 jet hole at a greater velocity than polymer is extruded through the outer jet holes to form a spiral extrudate disposed within an extruded sheath component to which its successive turns are adhered, and cooling the extrudates to solidify them to a unitary structure.

20 The thermoplastic polymer may be any which can be melt spun into filaments including polyamides, polyesters and polyolefins. The polymer extruded through the inner jet hole to form the spiral core may be the same as or different from the polymer extruded through the outer jet holes to form  
25 the sheath component. Preferably it is the same in order to simplify spinning and ensure good adherence between the turns of the spiral core filament and the sheath component.

An elastic filamentary structure may be formed by making the spiral core filament from a non-elastomeric polymer  
30 and the sheath component from an elastomeric polymer.

The polymer extruded through the inner jet hole is re-

- 2 -

quired to have a greater velocity than that flowing through the outer jet holes in order that it will take up the desired spiral form. With a common supply of molten polymer, this greater velocity may be achieved by having the inner jet hole  
5 of greater cross-sectional area and/or of shorter capillary length than each of the outer jet holes. Preferably it is of greater cross-sectional area for two reasons: the first being that in the most desirable filamentary structure of the invention the cage filaments which comprise the sheath com-  
10 ponent are of smaller cross-sectional area than the spiral core filament; and the second being that jets having holes of a common capillary length are much easier to make.

The sizes and cross-sectional shapes of the jet holes determine the size and shape of the filaments extruded through  
15 them. The preferred shape is circular, particularly for the inner jet hole. For a given spacing between the inner jet hole and the outer jet holes, the pitch of the spiral core filament is determined by the relative polymer velocities through the inner and outer holes. That is, the pitch  
20 reduces as the velocity differential increases.

Preferably, the axes of the inner and outer jet holes are all parallel to one another so that, in the embodiment where the sheath component comprises a cage of filaments, these filaments are in substantially parallel alignment with  
25 the axis of the spiral core filament.

The diameter of the spiral of the core filament is determined by the sheath component which holds it in place and which stabilises it by adhering to its successive turns. When the sheath component comprises a cage of filaments it  
30 has been found that it is necessary to have at least three cage filaments for this purpose otherwise the core filament 'breaks out' and is uncontrolled. Preferably each cage filament is spaced apart from its adjacent cage filaments by substantially equal distances. This may be arranged by using  
35 a spinning jet with a central inner jet hole ringed by at

least three outer jet holes pitched at substantially equal angles to and substantially equidistant from the central inner jet hole.

The number of cage filaments can be increased to any  
5 desired number commensurate with the dictates of jet geometry. In the limit, each outer jet hole is positioned sufficiently closely to its adjacent outer jet holes that because of die swell the extruded cage filaments merge to form a tube. The outer jet holes are preferably of circular cross-section,  
10 although other suitable cross-sections may be used, for example arcuate slots which may be used to produce a tube as described.

The extruded structure may be cooled in air to solidify it, but it is preferred to stabilise it more quickly by  
15 quenching it in a liquid bath which is conveniently water.

The filamentary structure of the invention may be used as yarn, cord or twine, or as a reinforcement for a tube. In the embodiments described where the sheath component comprises a tube, it constitutes a reinforced tube itself.  
20 It may also be used to construct an abrasive pad such as a pan scrub.

The invention includes a fabric structure comprising a plurality of filamentary structures according to the invention joined to each other with the axes of the spiral filaments in  
25 substantially parallel relation. This fabric structure may be produced directly by extrusion using a bank of adjacent sets of jet holes from which adjacent filament structures are extruded. These merge and become adhered so that after being cooled to solidify them, they remain joined as a unit-  
30 ary fabric structure. The component filamentary structures may be arranged in a planar array by a corresponding arrangement of the adjacent sets of jet holes, to produce a planar fabric structure. Three-dimensional fabric structures may be made using appropriate groupings of the sets of jet holes

from which the component filamentary structures are extruded.

The fabric structure of the invention has a variety of uses including use as drainage, earth-support and other civil engineering fabrics, and as matting such as door mats.

5        In the embodiment of the invention where the sheath component comprises a cage of filaments, limited stretching of the filamentary structure produces elongation of the cage filaments between the successive points of adherence, with the result that after removal of the stretching forces and  
10 contraction of the spiral core, the cage filaments balloon out between the adherence points giving an expanded structure.

Greater stretching causes the cage filaments to break between the points where they are joined to the spiral core filament, close to those points, to produce a modified fila-  
15 mentary structure which is a further aspect of the invention. The broken cage filaments constitute fibrils which are substantially uniform in length, with the majority of the fibrils being raked in a common direction.

The modified filamentary structure has decorative qual-  
20 ities and may be used as fancy yarn, or twine, especially if coloured. The rake of the fibrils gives it a particularly distinctive appearance and also imparts good knot-tying properties. The roughness of the fibrils, particularly at the adherence points, gives the product abrasive properties  
25 making it suitable for the construction of scouring pads, for example.

The invention is illustrated by the accompanying drawings in which:-

Figure 1 is a plan of the face of a jet suitable for  
30 use in the process of the invention,

Figure 2 is a cross-section on the line II....II of .

- 5 -

Figure 1,

Figure 3 is an elevation of a filamentary structure in accordance with the invention,

Figure 4 is an elevation of a modified filamentary structure formed by stretching the structure of Figure 3,

Figure 5 is a sectional elevation of another filamentary structure in accordance with the invention,

Figure 6 is a plan, on an enlarged scale, of the face of a jet suitable for spinning the filamentary structure shown in Figure 5,

Figure 7 is an elevation of the structure of Figure 3 after being partially stretched,

Figure 8 is an elevation of a fabric structure in accordance with the invention,

Figure 9 is a plan, on an enlarged scale, of the face of a jet suitable for spinning the fabric structure shown in Figure 8, and

Figure 10 is a diagram of apparatus for spinning a filamentary structure in accordance with the invention.

Referring to Figures 1 and 2, a spinning jet 1 has a circular jet face 2 in which are drilled an inner jet hole 3 encircled by a ring of four outer jet holes 4. The jet holes have the same capillary length and the inner jet hole is shown as about twice the diameter of the outer jet holes.

Figure 3 shows a filamentary structure 5 spun from a jet similar to that shown in Figures 1 and 2, but comprising eight outer jet holes instead of four. The filamentary structure 5 comprises a spiral core filament 6 held within a cage of

eight finer filaments 7 which are joined to the successive turns of the spiral core filament at points 8.

Figure 4 shows a modified filamentary structure 9 produced by stretching the structure 5, whereby the cage filaments 7 have broken close to the points 8. The resulting fibrils 10 are regularly spaced and uniform in length. As shown they are raked in a common direction. The points at which they are joined to the core filament 6 lie on a generally spiral path around the core filament.

10 The filamentary structure 11 shown in Figure 5 comprises a spiral core filament 12 held within a tubular sheath 13 which is joined to the successive turns of the spiral core filament at points 14. The structure 11 may be spun from a jet of the type shown in Figure 6 in which the jet 15 has  
15 a central inner jet hole 16 ringed by two outer jet holes 17 in the form of two arcuate slots. The extrudates from the outer jet holes merge below the jet to form a tube enclosing the spiral core filament formed from the higher velocity extrudate from the inner jet hole.

20 Figure 7 shows a filamentary structure of the type shown in Figure 3 after being stretched to a degree which elongates the cage filaments without breaking them. On being allowed to relax, the spiral core filament 18 contracts and causes the elongated cage filaments 19 to balloon out as  
25 shown to produce an expanded filamentary structure 20.

The fabric structure 21 shown in Figure 8 comprises three filamentary structures of the type shown in Figure 3 with the axes of their spiral core filaments 22 parallel and adjacent cage filaments 23 fused together. This fabric structure may  
30 be produced by a jet of the type shown in Figure 9 which has a rectangular jet face 24 with three sets 25 of jet holes lying adjacent to each other in a line. Each set 25 comprises an inner jet hole 26 ringed by eight outer jet holes 27 of smaller diameter. The cage filaments extruded from the

- 7 -

adjacent pairs of outer jet holes 28, 29 and 30, 31, respectively, merge below the jet face to join the extruded filamentary structures together as a fabric.

The number of sets of jet holes may be extended beyond  
5 three to produce wider fabric structures, and may also be grouped other than in line, for example as a grid, to provide three-dimensional fabric structures.

In Figure 10, the apparatus shown diagrammatically comprises a spinning jet 32 from which a filamentary structure  
10 33 according to the invention is extruded downwardly into a water quench bath 34. The solidified structure is withdrawn from the jet by driven rollers 35 in a 'clover leaf' formation and located below the surface of the bath. The structure is withdrawn from the bath by a godet 36 and, if  
15 desired, stretched between the godet 36 and a further godet 37 to produce a structure as shown in Figure 4 or Figure 6 depending upon the degree of stretch.

The invention is illustrated by the following Examples:-  
Examples 1 to 6

20 Nylon 6 polymer was melted and extruded through various spinning jets as shown in Figures 1 and 2 of the drawings, some with four outer jet holes and some with eight outer jet holes with variations also in the pitch circle diameter (PCD) of the outer jet holes. The extrudates were quenched  
25 in a water bath at room temperature and collected either by free fall or by nip rollers. Samples were taken and stretched at two different percentage stretches, one simply to bulk the product and the other a greater stretch to break the cage filaments and produce the modified filamentary structure.

30 The following jet dimensions and process conditions were common to all six Examples. Other conditions which varied between Examples and the product properties are shown in the succeeding Table.



- 8 -

Inner jet hole diameter - 350  $\mu\text{m}$   
 Outer jet hole diameter - 175  $\mu\text{m}$   
 Capillary length of all jet holes - 437  $\mu\text{m}$   
 Head temperature of jet - 260°C  
 Polymer throughput - 13.46 g/min.

Table

Example	1	2	3	4	5	6
Number of outer jet holes	8	8	4	4	8	8
PCD of outer jet holes ( $\mu\text{m}$ )	844	844	900	900	1000	1000
Distance from jet face to quench bath (cm)	1.5	10	1.5	10	1.5	10
Take-up speed m/min	13.3	Free Fall	17.7	Free Fall	12	Free Fall
Diameter of extrudate (cm)	0.18	0.21	0.20	0.25	0.21	0.23
Diameter of spiral core filament (cm)	0.07	0.07	0.07	0.07	0.07	0.07
Pitch of spiral (cm)	0.21	0.17	0.31	0.30	0.22	0.21
Direction of spiral (cw or acw)*	acw	acw	cw	acw	cw	cw
Diameter of cage filaments (cm)	0.02	0.025 to 0.030	0.02	0.020 to 0.028	0.025	0.025
Weight/unit length of extrudate (g/m)	0.973	1.311	0.760	0.886	1.210	1.260
Stretch to bulk (per cent)	120	130	100	110	130	120
Stretch to break (per cent)	425	400	500	520	420	410
Percentage of fibrils raked						
- towards jet	95	70	95	95	90	95
- away from jet	5	30	5	5	10	5

\* cw = clockwise  
 acw = anticlockwise

- 9 -

CLAIMS

1. A filamentary structure characterised in that it has a spiral thermoplastic core filament (6, 12) disposed within a thermoplastic sheath component (7, 13) which is joined to the successive turns (8, 14) of the spiral core filament.

2. A filamentary structure as claimed in claim 1 characterised in that the sheath component comprises a cage formed by at least three thermoplastic filaments (7) each of which is joined to the successive turns (8) of the spiral core filament.

3. A filamentary structure as claimed in claim 2 characterised in that each cage filament (7) is spaced apart from its adjacent cage filaments by substantially equal distances.

4. A filamentary structure as claimed in claim 2 or claim 3 characterised in that the cage filaments (7) are in substantially parallel alignment with the axis of the spiral core filament (6).

5. A filamentary structure as claimed in any of claims 2 to 4 characterised in that each of the cage filaments (7) is of smaller cross-sectional area than the spiral core filament (6).

6. A filamentary structure as claimed in claim 1 characterised in that the sheath component comprises a tube (13).

7. A filamentary structure as claimed in any of claims 1 to 6 characterised in that the spiral core filament (6, 12) and the sheath component (7, 13) comprise the same thermoplastic polymer.

8. A filamentary structure as claimed in any of claims 1 to 7 characterised in that it is produced directly by extrusion.

- 10 -

9. A fabric structure characterised by a plurality of filamentary structures as claimed in any of claims 1 to 8 joined to each other with the axes of the spiral filaments (22, 23) in substantially parallel relation.

10. A fabric structure as claimed in claim 9 characterised in that the component filamentary structures are arranged in a planar array.

11. A fabric structure as claimed in claim 9 or 10 characterised in that it is produced directly by extrusion.

12. A process for making a filamentary structure characterised by feeding molten thermoplastic polymer to a spinning jet (1) having an inner jet hole (3, 16) ringed by outer jet holes (4, 17), extruding the polymer through the inner jet hole (3) at a greater velocity than polymer is extruded through the outer jet holes (4) to form a spiral extrudate disposed within an extruded sheath component to which its successive turns are adhered, and cooling the extrudates to solidify them to a unitary structure.

13. A process as claimed in claim 12 characterised in that each outer jet hole (4) is positioned sufficiently closely to its adjacent outer jet holes (4) that the extrudates from the outer jet holes merge to form a tubular sheath component.

14. A process as claimed in claim 12 or 13 characterised in that each of the outer jet holes (4) of the spinning jet is of smaller cross-sectional area than the inner jet hole (3).

15. A process as claimed in any of claims 12 to 14 characterised in that the filamentary structure produced is stretched and then allowed to relax to cause the cage filaments (19) which comprise the sheath component to balloon out between the points where they are joined to the spiral core filament (18) and thereby give an expanded structure (20).

- 11 -

16. A process as claimed in any of claims 12 to 14 characterised in that the filamentary structure (5) produced is stretched to the extent that the cage filaments (7) which comprise the sheath component break between the points (8) where they are joined to the spiral core filament (6) to produce a modified filamentary structure in which the broken cage filaments constitute fibrils (10) which are substantially uniform in length with the majority being raked in a common direction.

17. A process for making a fabric structure by a process as claimed in any of claims 12 to 16 characterised in that a plurality of filamentary structures are extruded adjacent to each other with the axes of the spiral core filaments substantially parallel whereby the extruded filamentary structures adhere to each other and after being cooled to solidify them remain joined as a unitary fabric structure.

18. A process as claimed in claim 17 characterised in that the filamentary structures are extruded as a planar array and become joined to each other in the form of a planar fabric.

AMENDED  
CLAIMS

- 9 -

CLAIMS

1. A filamentary structure characterised in that it has a spiral thermoplastic core filament (6, 12) disposed within a thermoplastic sheath component (7, 13) which is joined to the successive turns (8, 14) of the spiral core filament, *the Filamentary structure having been produced directly by extrusion.*

2. A filamentary structure as claimed in claim 1 characterised in that the sheath component comprises a cage formed by at least three thermoplastic filaments (7) each of which is joined to the successive turns (8) of the spiral core filament.

3. A filamentary structure as claimed in claim 2 characterised in that each cage filament (7) is spaced apart from its adjacent cage filaments by substantially equal distances.

4. A filamentary structure as claimed in claim 2 or claim 3 characterised in that the cage filaments (7) are in substantially parallel alignment with the axis of the spiral core filament (6).

5. A filamentary structure as claimed in any of claims 2 to 4 characterised in that each of the cage filaments (7) is of smaller cross-sectional area than the spiral core filament (6).

6. A filamentary structure as claimed in claim 1 characterised in that the sheath component comprises a tube (13).

7. A filamentary structure as claimed in any of claims 1 to 6 characterised in that the spiral core filament (6, 12) and the sheath component (7, 13) comprise the same thermoplastic polymer.

~~8. A filamentary structure as claimed in any of claims 1 to 7 characterised in that it is produced directly by extrusion.~~

AMENDED  
CLAIMS

0078869

- 10 -

~~8~~<sup>7</sup>. A fabric structure characterised by a plurality of filamentary structures as claimed in any of claims 1 to ~~7~~<sup>7</sup> joined to each other with the axes of the spiral filaments (22, 23) in substantially parallel relation, *the fabric structure having been produced directly by extrusion.*

~~9~~<sup>8</sup> ~~10~~. A fabric structure as claimed in claim ~~9~~<sup>8</sup> characterised in that the component filamentary structures are arranged in a planar array.

~~11. A fabric structure as claimed in claim 9 or 10 characterised in that it is produced directly by extrusion.~~

~~10~~ ~~12~~. A process for making a filamentary structure characterised by feeding molten thermoplastic polymer to a spinning jet (1) having an inner jet hole (3, 16) ringed by outer jet holes (4, 17), extruding the polymer through the inner jet hole (3) at a greater velocity than polymer is extruded through the outer jet holes (4) to form a spiral extrudate disposed within an extruded sheath component to which its successive turns are adhered, and cooling the extrudates to solidify them to a unitary structure.

~~11~~ ~~12~~. A process as claimed in claim ~~10~~<sup>10</sup> ~~12~~ characterised in that each outer jet hole (4) is positioned sufficiently closely to its adjacent outer jet holes (4) that the extrudates from the outer jet holes merge to form a tubular sheath component.

~~12~~ ~~14~~. A process as claimed in claim ~~10~~<sup>10</sup> ~~12~~ or ~~11~~<sup>11</sup> ~~13~~ characterised in that each of the outer jet holes (4) of the spinning jet is of smaller cross-sectional area than the inner jet hole (3).

~~13~~ ~~15~~. A process as claimed in any of claims ~~10~~<sup>10</sup> ~~12~~ to ~~11~~<sup>12</sup> ~~14~~ characterised in that the filamentary structure produced is stretched and then allowed to relax to cause the cage filaments (19) which comprise the sheath component to balloon out between the points where they are joined to the spiral core filament (18) and thereby give an expanded structure (20).

AMENDED  
CLAIMS

0078869

- 11 -

~~14~~ ~~16~~. A process as claimed in any of claims <sup>10</sup>~~12~~ to <sup>12</sup>~~14~~ characterised in that the filamentary structure (5) produced is stretched to the extent that the cage filaments (7) which comprise the sheath component break between the points (8) where they are joined to the spiral core filament (6) to produce a modified filamentary structure in which the broken cage filaments constitute fibrils (10) which are substantially uniform in length with the majority being raked in a common direction.

<sup>15</sup>~~17~~. A process for making a fabric structure by a process as claimed in any of claims <sup>10</sup>~~12~~ to <sup>14</sup>~~16~~ characterised in that a plurality of filamentary structures are extruded adjacent to each other with the axes of the spiral core filaments substantially parallel whereby the extruded filamentary structures adhere to each other and after being cooled to solidify they remain joined as a unitary fabric structure.

<sup>15</sup>~~16~~ ~~18~~. A process as claimed in claim <sup>15</sup>~~17~~ characterised in that the filamentary structures are extruded as a planar array and become joined to each other in the form of a planar fabric.

1/3

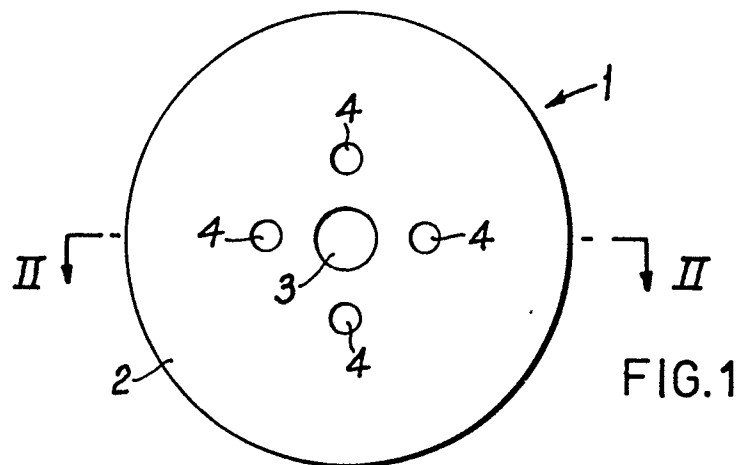


FIG. 1

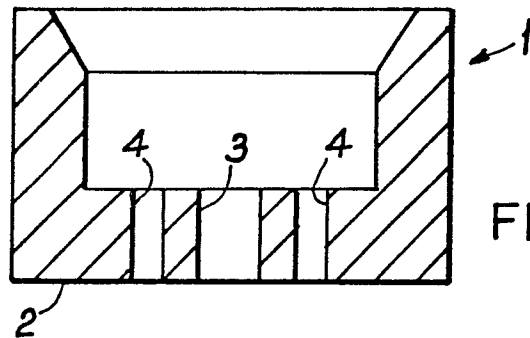


FIG. 2

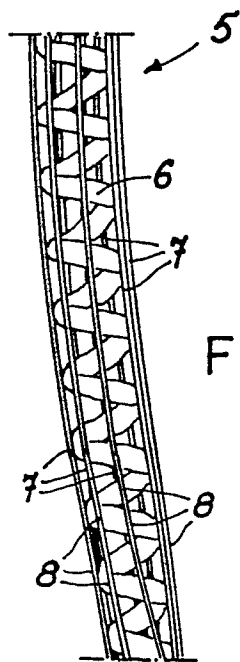


FIG. 3

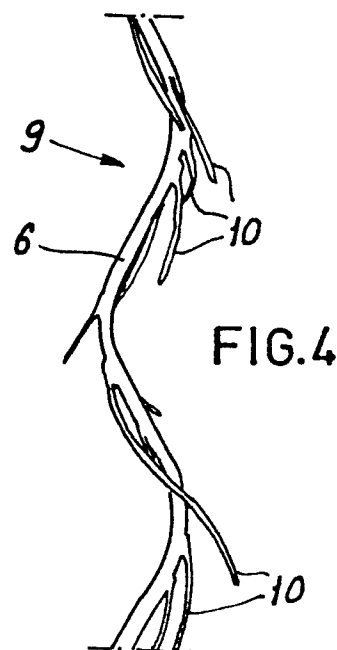


FIG. 4



2/3

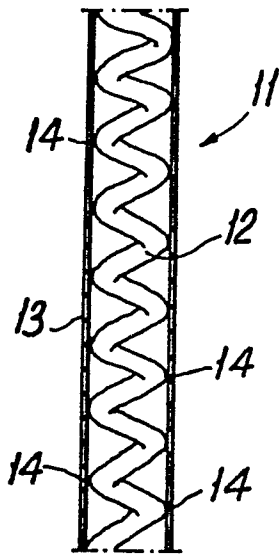


FIG. 5

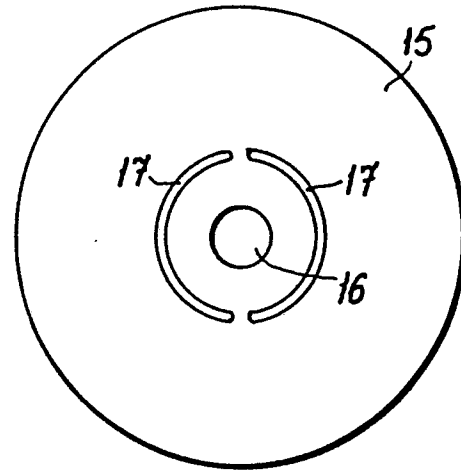


FIG. 6

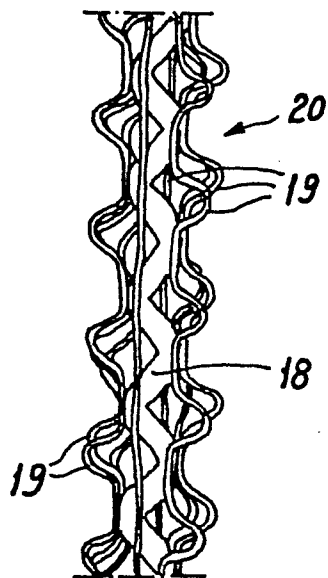


FIG. 7

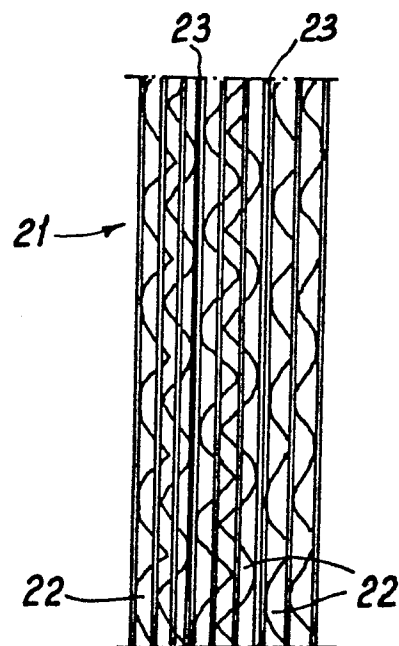


FIG. 8

3/3

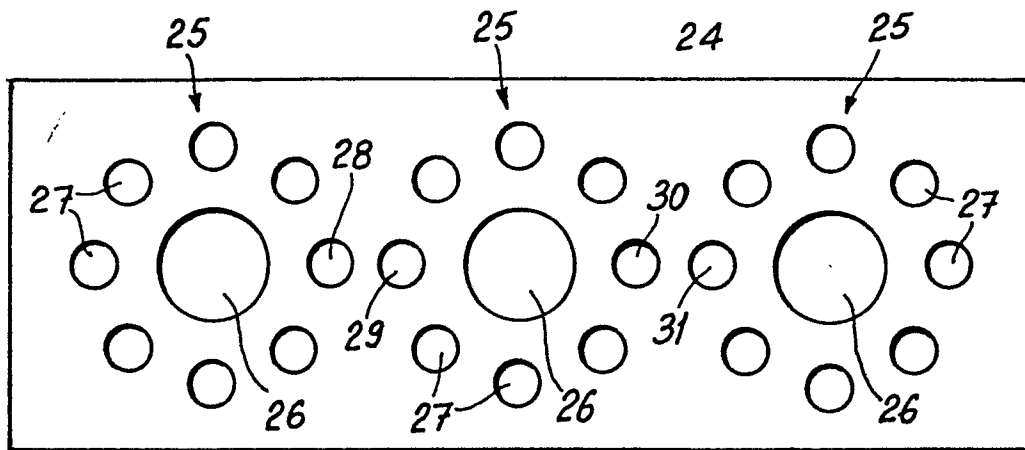


FIG. 9

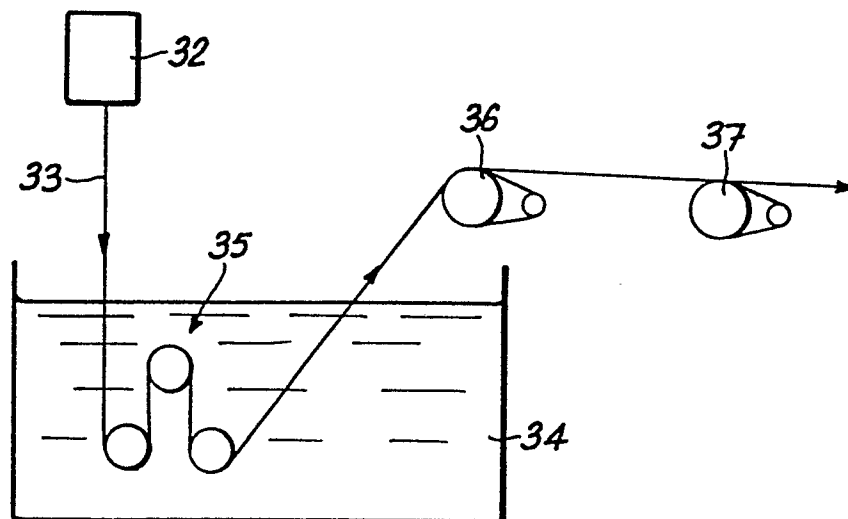


FIG. 10



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
X,Y	US-A-4 125 666 (INGRIP FASTENERS) *Claims 1,3,7; figures 7c,7d,7e; column 4, lines 49-68*	1,2,4, 9,10	D 01 D 5/22 D 04 H 3/16 D 01 D 5/32 D 01 D 5/34
Y	DE-C-1 214 193 (DIETZSCH) *Claim; column 1, lines 18-40; figures 1,3,4; column 5, lines 8-22*	9-11, 17,18	
A	US-A-2 804 645 (DU PONT DE NEMOURS) *Claim 1; figures 5,6,7; column 1, lines 30-39*	12,13	
A	US-A-2 058 551 (BEATTY) *Claim 1; figures 4,6*	12,14	
A	GB-A-2 003 423 (MONSANTO) *Claims 1,4,8; figures 2,5*	1,5,7, 8,12, 13,14	D 01 D D 04 H
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 15-07-1982	Examiner CATTOIRE V.A.
<b>CATEGORY OF CITED DOCUMENTS</b>			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	